

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[PICOSCOPE 9211](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

PicoScope 9000 Series


Sampling Oscilloscopes for Windows PCs

Telecoms
engineering

Production
testing

R&D

Semiconductor
characterisation

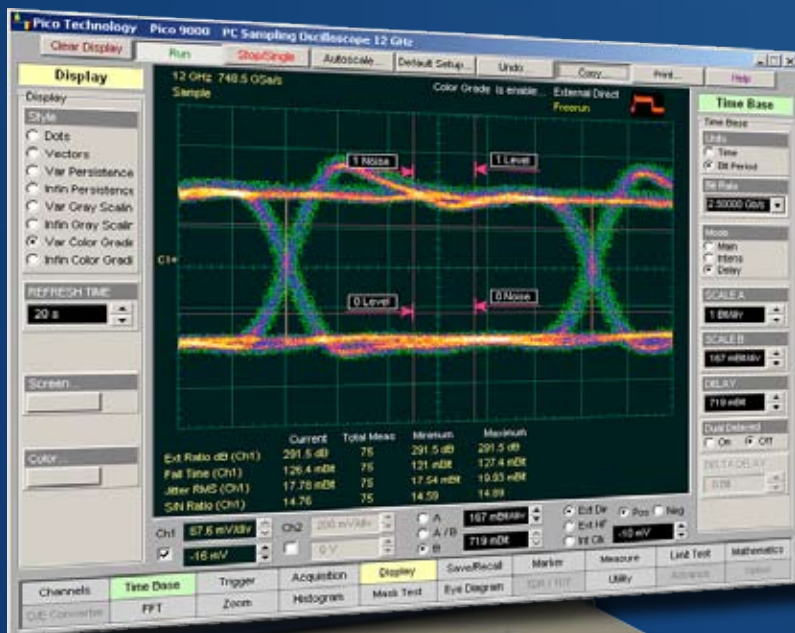

*A complete sampling oscilloscope
for your PC*



12 GHz bandwidth on 2 channels
Dual timebase from 10 ps/div
Up to 10 GHz trigger bandwidth
5 TS/s equivalent-time sampling rate

- High-resolution cursor and automatic waveform measurements with statistics
- Waveform processing including FFT
- Time and voltage histograms
- Eye-diagram measurements for NRZ and RZ
- Automated mask tests
- Intuitive Windows user interface
- Electrical standards compliance testing
- Semiconductor characterization
- Telecom service and manufacturing
- Timing analysis
- Digital system design and characterization
- Electronic mask drawing and display
- Automatic pass/fail limit testing
- High-speed serial bus pulse response



12 GHz bandwidth

The wide bandwidth specification provides acquisition and measurement of fast signals with a rise time of 50 ps or faster. Timebase stability, accuracy, and resolution of 200 fs allow characterisation of jitter in the most demanding applications.

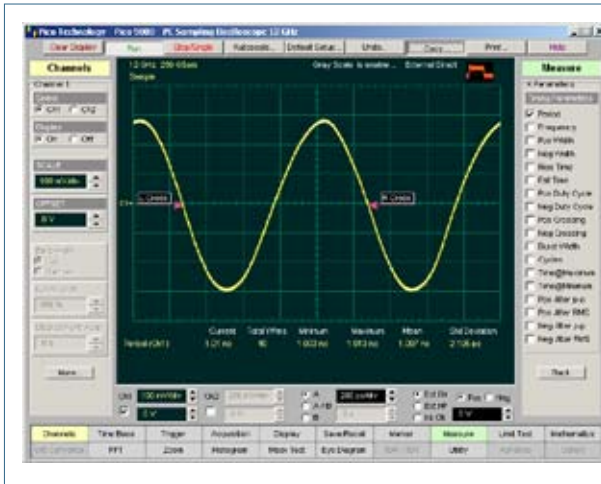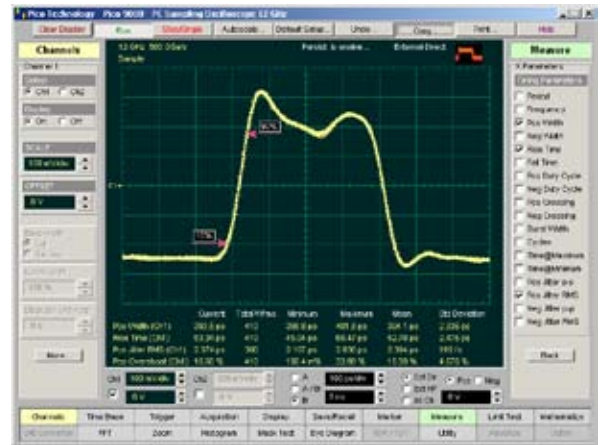

10 GHz prescaled trigger

The PicoScope 9000 Series has a built-in high-frequency trigger. The bandwidth of up to 10 GHz allows measurements of microwave components with extremely fast data rates.

1 GHz full-function direct trigger

The PicoScope 9000 Series is equipped with built-in direct trigger for signals up to 1 GHz repetition rate without using additional trigger units.

Built-in 2.7 Gb/s clock recovery

The PicoScope 9211 has built-in clock recovery for serial data up to 2.7 Gb/s.

Pulse parameter measurements

The PicoScope 9000 scopes quickly measure more than 40 pulse parameters. Up to ten simultaneous measurements or four statistics measurements are supported. No need to count graticules and estimate the waveform's position. The measurements conform to the IEEE standards.




Kit contents

- PicoScope 9201 or 9211 Sampling PC Oscilloscope
- PicoScope 9000 Series Software CD
- Installation guide
- Two SMA M-F adapters/connector savers
- USB cable
- LAN cable (9211 only)
- Power supply - UK, US, EU or AUS/NZ
- Carry case

Powerful mathematical analysis

The PicoScope 9000 Series supports up to four simultaneous mathematical combinations and functional transformation of acquired waveforms.


You can select any of the mathematical functions as a maths operator to act on the operand or operands. A waveform maths operator is a maths function that requires either one or two sources. The operators that involve two waveform sources are: Add, Subtract, Multiply, and Divide. The operators that involve one waveform source are: Invert, Absolute, Exponent, Logarithm, Differentiate, Integrate, Inverse, FFT, Interpolation, Smoothing.

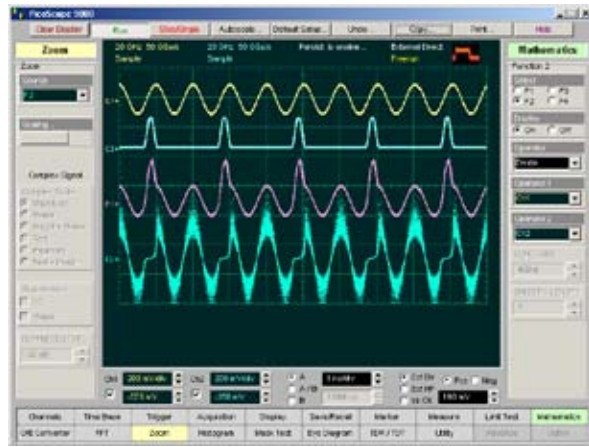

Histogram analysis

A histogram is a probability distribution that shows the distribution of acquired data from a source within a user-definable histogram window. The information gathered by the histogram is used to perform statistical analysis on the source.

Histograms can be constructed on waveforms on either the vertical or horizontal axes. The most common use for a vertical histogram is measuring and characterising noise on displayed waveforms, while the most common use for a horizontal histogram is measuring and characterising jitter on displayed waveforms.

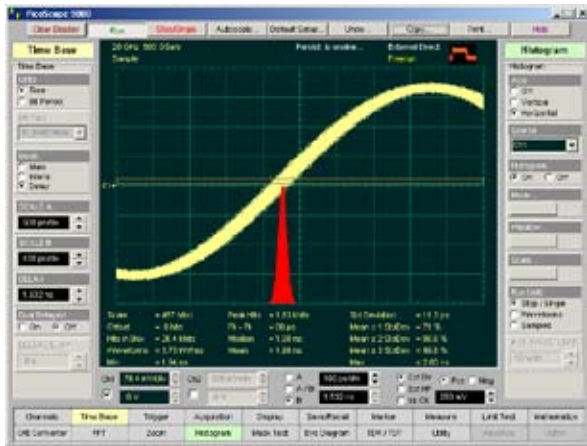


Eye-diagram analysis

The PicoScope 9000 Series quickly measures more than 30 fundamental parameters used to characterise non-return-to-zero (NRZ) signals and return-to-zero (RZ) signals. Up to four parameters can be measured simultaneously.


Mask testing

For eye-diagram masks, such as those specified by the SONET and SDH standards, the PicoScope 9000 Series supports on-board mask drawing for visual comparison. The display can be grey-scaled or colour-graded to aid in analysing noise and jitter in eye diagrams.

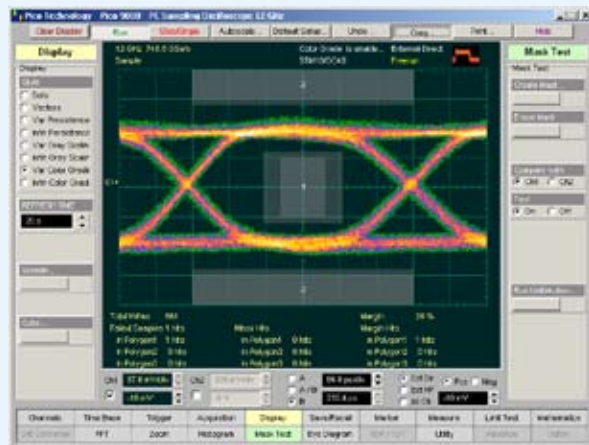

PicoScope 9000 Series front panel

Dual SMA inputs with
12 GHz bandwidth

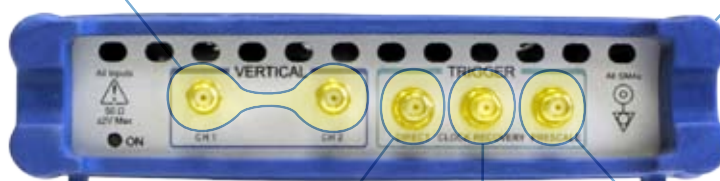

Tough aluminium
enclosure protected
by rubber bumpers

1 GHz full-function trigger

12.3 Mbps to 2.7 Gbps clock recovery input
(PicoScope 9211)

10 GHz prescaled trigger

Channels (vertical)		
Number of channels		2 (simultaneous acquisition)
Bandwidth		DC to 12 GHz
Pulse response rise time		29.2 ps
RMS noise, maximum		< 2.5 mV
Scale factors (sensitivity)		2 mV/div to 500 mV/div
Nominal input impedance		(50 ± 1) Ω
Input connectors		SMA (F)
Timebase (horizontal)		
Timebases		10 ps/div to 2 ms/div (main, intensified, two delayed, or dual delayed)
Delta time interval accuracy		±0.4% of of delta time interval ±15 ps ±100 ppm of delay setting
Time interval resolution		200 fs minimum
Trigger		
Trigger sources		External direct trigger, external prescaled trigger, internal clock trigger, clock recovery trigger (9211 only)
Direct trigger bandwidth and sensitivity		100 mV p-p DC to 100 MHz, increasing linearly from 100 mV p-p at 100 MHz to 400 mV p-p at 1 GHz
Prescaled trigger bandwidth and sensitivity		200 mV p-p to 2 V p-p from 1 GHz to 8 GHz, 300 mV p-p to 1 V p-p to 10 GHz
Trigger RMS jitter, maximum		3.5 ps + 20 ppm of delay setting
Acquisition		
ADC resolution		16 bits
Digitising rate		DC to 100 kHz maximum
Acquisition modes		Sample (normal), average, envelope
Data record length		32 to 4096 points maximum per channel in x2 sequence
Display		
Display resolution		Variable
Display style		Dots, vectors, variable persistence, infinite persistence, variable grey scaling, infinite grey scaling, variable colour grading, infinite colour grading
Measurements and analysis		
Marker		Vertical bars, horizontal bars (measure volts) or waveform markers (x and +)
Automatic measurements		Up to 40 automatic pulse measurements
Histogram		Vertical or horizontal
Mathematics		Up to four math waveforms can be defined and displayed
FFT		Up to two fast Fourier transforms can be run simultaneously with the built-in filters (Rectangular, Nicolson, Hanning, Flattop, Blackman-Harris and Kaiser-Bessel)
Eye diagram		Automatically characterises NRZ and RZ eye patterns. Measurements are based on statistical analysis of the waveform.
Mask test		Acquired signals are tested for fit outside areas defined by up to eight polygons. Standard or user-defined masks can be selected.
Clock recovery (CDR; PicoScope 9211 only)		
Sensitivity		50 mV p-p typ from 12.3 Mb/s to 2.7 Gb/s continuous rate
Recovered clock RMS trigger jitter, maximum		1.0% of unit interval
Maximum safe trigger input voltage		±2 V (DC + peak AC)
Trigger input connector		SMA (F)
General		
Operating temperature range		+5 °C to +40 °C
Power		+6 VDC ± 5%. 1.9 A max. (2.3 A for PicoScope 9211). Mains adaptor supplied for UK/US/EU/AUS/NZ.
PC connection		USB 2.0 (compatible with USB 1.1)
LAN connection		10/100 Mbit/s (PicoScope 9211 only)
PC requirements		Windows XP (SP2) or Vista, 32-bit versions
Dimensions		W 170 mm x D 255 mm x H 40 mm
Weight		1.0 kg

Ordering information	£	\$	€
PP463 PicoScope 9201 12 GHz PC Sampling Oscilloscope	5,995	10,795*	7 795*
PP473 PicoScope 9211 12 GHz PC Sampling Oscilloscope with CDR and LAN	6,995	12,595*	9 095*

* Dollar and euro prices are subject to exchange rate fluctuations. Please contact Pico Technology for the latest prices before ordering.
Errors & omissions excepted.

www.picotech.com

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[PICOSCOPE 9211](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant