

# Value for You Prijzlijst



Juni 2013

## FUJITSU DESKTOP PC




## FUJITSU NOTEBOOKS



## FUJITSU SERVERS



# LIFEBOOK Notebooks / STYLISTIC Tablets

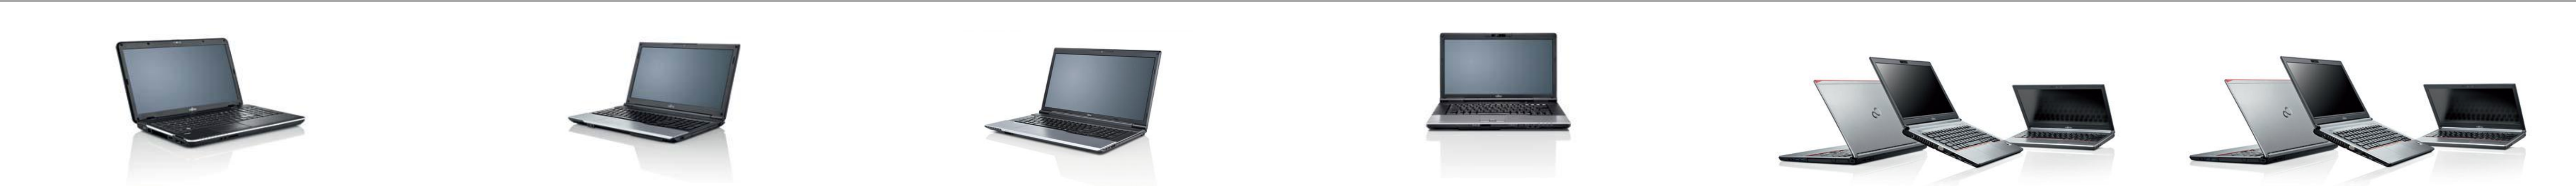

LIFEBOOK A512	LIFEBOOK A532	LIFEBOOK N532	LIFEBOOK E752	LIFEBOOK E753	LIFEBOOK E743
<p><b>Your Everyday Partner</b></p> <p><b>Processor, Chipset, Memory</b> Intel® Core™ i3-2348M processor (2.3 GHz), 3 MB, Intel® HM75 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM</p>	<p><b>Your Essential Partner</b></p> <p><b>Processor, Chipset, Memory</b> Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® HM76 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM</p>	<p><b>Boost uw multimedia prestaties</b></p> <p><b>Processor, Chipset, Memory</b> Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® HM77 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM</p>	<p><b>Your Professional Desktop Replacement</b></p> <p><b>Processor, Chipset, Memory</b> Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® HM76 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM</p>	<p><b>Elegant Design and Functionality without Compromises</b></p> <p><b>Processor, Chipset, Memory</b> Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® QM77 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM</p>	<p><b>Elegant Design and Functionality without Compromises</b></p> <p><b>Processor, Chipset, Memory</b> Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® QM77 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM</p>
<p><b>Drives</b> SATA, 5400 rpm, 320 GB, 2.5-inch, S.M.A.R.T. DVD Super Multi</p>	<p><b>Drives</b> SATA, 5400 rpm, 500 GB, 2.5-inch, S.M.A.R.T. DVD Super Multi</p>	<p><b>Drives</b> SATA, 5400 rpm, 500 GB, 2.5-inch, S.M.A.R.T. DVD Super Multi</p>	<p><b>Drives</b> SATA, 7200 rpm, 500 GB, 2.5-inch, S.M.A.R.T. DVD Super Multi</p>	<p><b>Drives</b> SSHD, 5400 rpm, 500 GB / 8 GB SSD Cache, 2.5-inch, S.M.A.R.T. DVD Super Multi</p>	<p><b>Drives</b> SSHD, 5400 rpm, 500 GB / 8 GB SSD Cache, 2.5-inch, S.M.A.R.T. DVD Super Multi</p>
<p><b>Communication, Network</b> Bluetooth: v4.0 + EDR LAN: 10/100/1000 MBit/s Realtek RTL 8111F</p>	<p><b>Communication, Network</b> Bluetooth: v4.0 + EDR LAN: 10/100/1000 MBit/s Realtek RTL 8111F</p>	<p><b>Communication, Network</b> WLAN: Intel® Centrino® Wireless-N2200 b/g/n Bluetooth: Integrated V4.0 + HS LAN: 10/100/1000 MBit/s</p>	<p><b>Communication, Network</b> WLAN: Intel® Centrino® Wireless-N2200 b/g/n Bluetooth: Bluetooth 4.0 LAN: Built-in 10/100/1000 MBit/s Intel® 82579 V</p>	<p><b>Communication, Network</b> WLAN: Intel® Centrino® Wireless-N2200 b/g/n UMTS Modul: Sierra Wireless Gobi 3000 LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM</p>	<p><b>Communication, Network</b> WLAN: Intel® Centrino® Wireless-N2200 b/g/n UMTS Modul: Sierra Wireless Gobi 3000 LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM</p>
<p><b>Display, Grafic</b> 39.6 cm (15.6-inch), TFT, (HD), LED backlight, anti-glare, 1366 x 768 pixel, 300:1 (min), 200 cd Intel® HD Graphics or HD Graphics 3000 (depending on CPU), up to 1695 MB</p>	<p><b>Display, Grafic</b> 39.6 cm (15.6-inch), TFT, (HD), LED backlight, anti-glare, 1366 x 768 pixel, 300:1 (min), 200 cd Intel® HD Graphics 3000 or 4000 (depending on CPU), up to 1695 MB</p>	<p><b>Display, Grafic</b> 43.9 cm (17.3-inch), LED backlight, (HD+), Anti-glare display, 1600 x 900 pixel, 300:1, 220 cd/m<sup>2</sup> NVIDIA® GeForce® GT 620M, 1 GB (DDR3 VRAM)</p>	<p><b>Display, Grafic</b> 39.6 cm (15.6-inch), LED backlight, (HD), Anti-glare display, compound, 1366 x 768 pixel, 300:1, 220 cd/m<sup>2</sup> Intel® HD Graphics 4000 with 3rd generation Core i processors</p>	<p><b>Display, Grafic</b> 39.6 cm (15.6-inch), LED backlight, (HD), Anti-glare display, magnesium, 1366 x 768 pixel, 300:1 (t.b.d.), 200 cd/m<sup>2</sup> Intel® HD Graphics 4000 with 3rd generation Core i processors</p>	<p><b>Display, Grafic</b> 35.6 cm (14-inch), LED backlight, (HD+), Anti-glare display, magnesium, 1600 x 900 pixel, 300:1 (t.b.d.), 250 cd/m<sup>2</sup> Intel® HD Graphics 4000 with 3rd generation Core i processors</p>
<p><b>Keyboard and pointing devices</b></p> <p>Touchpad, Status LED Keyboard, N/A</p>	<p><b>Keyboard and pointing devices</b></p> <p>Touchpad, Status LED Keyboard, N/A</p>	<p><b>Keyboard and pointing devices</b></p> <p>Touchpad, Status LED Keyboard, N/A</p>	<p><b>Keyboard and pointing devices</b></p> <p>Multi gesture touchpad with two mouse buttons, Optional: Fingerprint sensor, Optional: TouchStick, Application buttons Keyboard, N/A</p>	<p><b>Keyboard and pointing devices</b></p> <p>Multi gesture touchpad (105mmx66mm) with 2 integrated mouse buttons, Optional: Fingerprint sensor, Application buttons Keyboard, N/A</p>	<p><b>Keyboard and pointing devices</b></p> <p>Multi gesture touchpad (93mmx55mm) with 2 integrated mouse buttons, Optional: Fingerprint sensor, Application buttons Keyboard, N/A</p>
<p><b>Power supply</b></p> <p>Li-Ion battery 6-cell, 4400 mAh, 48 Wh Runtime 1st battery: up to 6 h</p>	<p><b>Power supply</b></p> <p>Li-Ion battery 6-cell, 4400 mAh, 48 Wh Runtime 1st battery: Up to 6:20 h (productivity mode)</p>	<p><b>Power supply</b></p> <p>Li-Ion battery 6-cell, 5200 mAh, 57 Wh Runtime 1st battery: up to 7 hours</p>	<p><b>Power supply</b></p> <p>Runtime 1st battery: up to 12 h</p>	<p><b>Power supply</b></p> <p>Runtime 1st battery: up to 13 h (tbd)</p>	<p><b>Power supply</b></p> <p>Runtime 1st battery: up to 13 h (tbd)</p>
<p><b>Dimensions / Weight / Environmental</b></p> <p>2.5 kg 378 x 252 x 36.5 mm Matt Matte black</p>	<p><b>Dimensions / Weight / Environmental</b></p> <p>2.4 kg 378 x 252 x 34.2 mm Matt Black/silver</p>	<p><b>Dimensions / Weight / Environmental</b></p> <p>Approx. 3.0 kg 410 x 270 x 20.4 (front) / 35 (back) mm Black/antracite</p>	<p><b>Dimensions / Weight / Environmental</b></p> <p>2.5 kg 372 x 245 x 35 mm</p>	<p><b>Dimensions / Weight / Environmental</b></p> <p>2.0 kg 374 x 250 x 20 (f) - 27 (r) mm</p>	<p><b>Dimensions / Weight / Environmental</b></p> <p>1.8 kg 338 x 231 x 20 (f) - 27 (r) mm</p>
<p><b>Operating system</b></p> <p>Windows 8 Pro</p>	<p><b>Operating system</b></p> <p>Windows 8 Pro</p>	<p><b>Operating system</b></p> <p>Windows 8 Pro</p>	<p><b>Operating system</b></p> <p>Windows 8 Pro</p>	<p><b>Operating system</b></p> <p>Windows 8 Pro</p>	<p><b>Operating system</b></p> <p>Windows 8 Pro</p>
<p><b>Interfaces</b></p> <p>1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 (34 mm and 54 mm supported) x ExpressCard slots, 1 x HDMI, N/A x , 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x SD-Card Reader (SD/SDHC) x Memory card slots, 3 (1 x Anytime USB Charge functionality) x USB 2.0 total, 1 x VGA, Intel® Centrino® Wireless N2230 (IEEE 802.11b/g/n) x Integrated WLAN</p>	<p><b>Interfaces</b></p> <p>1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 (34 mm) x ExpressCard slots, 1 x HDMI, N/A x , 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x 4in1 Card Reader (SD/SDHC/MS/MS Pro) x Memory card slots, 1 x USB 2.0 total, 3 (1 x Anytime USB Charge functionality) x USB 3.0 total, 1 x VGA, Intel® Centrino® Wireless N2230 (IEEE 802.11b/g/n) x Integrated WLAN</p>	<p><b>Interfaces</b></p> <p>1 x Audio: line-in / microphone, N/A x , 1 x DC-in, 1 (34 / 54 mm) x ExpressCard slots, 1 x HDMI, N/A x , 1 (digital) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x 4in1 Card Reader (SD/SDHC/MS/MS Pro) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS ), 1 (incl. 1x eSATA/USB combo) x USB 2.0 total, 3 (incl. 1x Anytime USB Charge functionality) x USB 3.0 total, 1 x VGA</p>	<p><b>Interfaces</b></p> <p>1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 (V1.1a) x DisplayPort, 1 x Docking connector for Port Replicator, 1 x eSATA &amp; USB combo, 1 (34 / 54 mm supported) x ExpressCard slots, N/A x , 2x digital (array) microphones as option x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB, MS Pro, MS Pro Duo) x Memory card slots, 1 (optional) x Modem (RJ-11), 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x SmartCard slot, 2 (1x with Anytime USB Charge functionality) x USB 2.0 total, 2 (1 thereof is the E-SATA &amp; USB combo) x USB 3.0 total, 1 x VGA</p>	<p><b>Interfaces</b></p> <p>1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x DisplayPort, 1 x Docking connector for Port Replicator, 1 x HDMI, N/A x , 2x digital microphones (array) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 (optional) x SmartCard slot, 1 x USB 2.0 total, 3 (1 with Anytime USB Charge functionality) x USB 3.0 total, 1 x VGA</p>	<p><b>Interfaces</b></p> <p>1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x DisplayPort, 1 x Docking connector for Port Replicator, N/A x , 2x digital microphones (array) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 (optional) x SmartCard slot, 1 x USB 2.0 total, 3 (1 with Anytime USB Charge functionality) x USB 3.0 total, 1 x VGA</p>
<p><b>Warranty</b></p> <p>1 year Bring-in Service</p>	<p><b>Warranty</b></p> <p>1 year Bring-in Service</p>	<p><b>Warranty</b></p> <p>1 year Bring-in Service</p>	<p><b>Warranty</b></p> <p>1 year Bring-in Service</p>	<p><b>Warranty</b></p> <p>2 year Bring-in Service</p>	<p><b>Warranty</b></p> <p>2 year Bring-in Service</p>
<p><b>€ 449</b> VFY:A5120M4311NL</p>	<p><b>€ 599</b> VFY:A5320M4501NL</p>	<p><b>€ 669</b> VFY:N5320M4501NL</p>	<p><b>€ 779</b> VFY:E7520M4501NL</p>	<p><b>€ 999</b> VFY:E7530MXE11NL</p>	<p><b>€ 999</b> VFY:E7430MXE11NL</p>

**LIFEBOOK E733**

**Elegant Design and Functionality without Compromises**
**Processor, Chipset, Memory**

Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® QM77  
4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**

SSHD, 5400 rpm, 500 GB / 8 GB SSD Cache, 2.5-inch, S.M.A.R.T.  
DVD Super Multi

**Communication, Network**

WLAN: Intel® Centrino® Wireless-N2230 b/g/n  
UMTS Modul: Sierra Wireless Gobi 3000  
LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

33.8 cm (13.3-inch), LED backlight, (HD), Anti-glare display, magnesium, 1366 x 768 pixel, 300:1 (t.b.d.), 200 cd/m<sup>2</sup>  
Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**

Multi gesture touchpad (93mmx55mm) with 2 integrated mouse buttons,  
Optional: Fingerprint sensor, Application buttons  
Keyboard, N/A

**Power supply**

Runtime 1st battery: up to 13 h (tbd)

**Dimensions / Weight / Environmental**

1.7 kg  
321 x 228 x 20 (f) - 27 (r) mm

**Operating system**

Windows 8 Pro

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x DisplayPort, 1 x Docking connector for Port Replicator, N/A x , 2x digital microphones (array) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 (optional) x SmartCard slot, x USB 2.0 total, 3 (1 with Anytime USB Charge functionality) x USB 3.0 total, 1 x VGA

**Warranty**

2 year Bring-in Service

€ 999

VFY:E7330MXE11NL

**LIFEBOOK E733**

**Elegant Design and Functionality without Compromises**
**Processor, Chipset, Memory**

Processor, Chipset, Memory  
Intel® Core™ i5-3230M processor (2.6 GHz), 3 MB, Intel® QM77  
4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**

SATA, 5400 rpm, 500 GB, 2.5-inch, S.M.A.R.T.  
DVD Super Multi

**Communication, Network**

WLAN: Intel® Centrino® Wireless-N2230 b/g/n  
LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

33.8 cm (13.3-inch), LED backlight, (HD), Anti-glare display, magnesium, 1366 x 768 pixel, 300:1 (t.b.d.), 200 cd/m<sup>2</sup>  
Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**

Multi gesture touchpad (93mmx55mm) with 2 integrated mouse buttons,  
Optional: Fingerprint sensor, Application buttons  
Keyboard, N/A

**Power supply**

Runtime 1st battery: up to 13 h (tbd)

**Dimensions / Weight / Environmental**

1.7 kg  
321 x 228 x 20 (f) - 27 (r) mm

**Operating system**

Windows 8 Pro

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x DisplayPort, 1 x Docking connector for Port Replicator, N/A x , 2x digital microphones (array) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 (optional) x SmartCard slot, x USB 2.0 total, 3 (1 with Anytime USB Charge functionality) x USB 3.0 total, 1 x VGA

**Warranty**

2 year Bring-in Service

€ 889

VFY:E7330M55A1NL

**LIFEBOOK U772 Ultrabook™**

**Business Elegance in Style**
**Processor, Chipset, Memory**

Intel® Core™ i5-3337U processor (1.8 GHz), 3 MB, Intel® QM77  
4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**

SSD SATA III, 128 GB, 2.5-inch

**Communication, Network**

WLAN: Intel® Centrino® 6205 802.11 a/b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: Sierra Wireless Gobi 3000  
LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

35.6 cm (14-inch), LED backlight, (HD), Anti-glare frameless display, magnesium, 1366 x 768 pixel, 200:1, 220 cd/m<sup>2</sup>  
Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**

Multi gesture touchpad with integrated mouse button functionality, Fingerprint sensor, EcoButton  
Keyboard, N/A

**Power supply**

Runtime 1st battery: Up to 10:00 h

**Dimensions / Weight / Environmental**

1.4 kg  
327 x 225 x 15.6 mm

**Operating system**

Windows 8 Pro

**Interfaces**

1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x Docking connector for Port Replicator, 1 x HDMI, N/A x , 2 (digital) x Internal microphones, 1 x Kensington Lock support, 1 (mini LAN connector, Adapter included) x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x USB 2.0 total, 2 (1 with Anytime USB Charge functionality) x USB 3.0 total

**Warranty**

2 year Bring-in Service

€ 1.149

VFY:U7720M4501NL

**LIFEBOOK U772 Ultrabook™**

**Business Elegance in Style**
**Processor, Chipset, Memory**

Intel® Core™ i7-3687U processor (2.1 GHz), 4 MB, Intel® QM77  
8 GB (1 module(s) 8 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**

SSD SATA III, 256 GB, 2.5-inch

**Communication, Network**

WLAN: Intel® Centrino® 6205 802.11 a/b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: LTE Sierra Wireless MC7710  
LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

35.6 cm (14-inch), LED backlight, (HD), Anti-glare frameless display, magnesium, 1366 x 768 pixel, 200:1, 220 cd/m<sup>2</sup>  
Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**

Multi gesture touchpad with integrated mouse button functionality, Fingerprint sensor, EcoButton  
Keyboard, N/A

**Power supply**

Runtime 1st battery: Up to 10:00 h

**Dimensions / Weight / Environmental**

1.4 kg  
327 x 225 x 15.6 mm

**Operating system**

Windows 8 Pro

**Interfaces**

1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x Docking connector for Port Replicator, 1 x HDMI, N/A x , 2 (digital) x Internal microphones, 1 x Kensington Lock support, 1 (mini LAN connector, Adapter included) x Ethernet (RJ-45), 1 (SD up to 2GB, SDHC up to 32GB, SDXC up to 64GB) x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x USB 2.0 total, 2 (1 with Anytime USB Charge functionality) x USB 3.0 total

**Warranty**

3 year Bring-in Service

€ 1.699

VFY:U7720MXP42NL

**STYLISTIC M532**

**Perfect Choice for Business and Private Use**
**Processor, Chipset, Memory**

NVIDIA® Tegra® 3  
NVIDIA® Tegra® 3 T30S, Quad-Core ARM Cortex A9, 1.4 GHz

**Drives**

32GB eMMC flash memory  
64GB eMMC flash memory

**Communication, Network**

AzureWave AW-AH663 802.11 a/b/g/n  
2x dual band WLAN, 1x UMTS, 1x GPS  
Bluetooth 3.0

**Display, Grafic**

25.7 cm (10.1-inch), TFT, (WXGA), 1280 x 800 pixel, 800:1, max. 550 cd/m<sup>2</sup>

**Keyboard and pointing devices**
**Power supply**

video playback 8.4 h

**Dimensions / Weight / Environmental**

560 g  
262.6 x 175.4 x 8.6 mm

**Operating system**

Android 4.0, upgrade to Android 4.1 available

**STYLISTIC M702**

**Designed for the toughest businesses**
**Processor, Chipset, Memory**

NVIDIA® Tegra® 3  
NVIDIA® Tegra® 3 AP37, Quad-Core ARM Cortex A9, 1 MB, 1.7 GHz

**Drives**

32GB eMMC 4.4.1 Flash Memory

**Communication, Network**

Texas Instruments WL1283

**Display, Grafic**

25.7 cm (10.1-inch), TFT, (WUXGA), 1920 x 1200 pixel, 500:1, max. 300 cd/m<sup>2</sup>

**Keyboard and pointing devices**
**Power supply**

video playback up to 15 h

**Dimensions / Weight / Environmental**

590 g  
259 x 169 x 9.9 mm

**Operating system**

Android 4.0 (Ice Cream Sandwich)

**Interfaces**

1 x Audio: line-in / line-out, N/A x , N/A x , 1 (digital) x Internal microphones, 1 x Memory card slots, 1 x Micro USB 2.0, 1 x SIM card slot ( Micro-SIM ), Texas Instruments WL1283 x Integrated WLAN

**Warranty**

1 year Collect Return Service

€ 899

VFY:M7020MPAD11N

€ 419

VFY:M53200MPAD11N

**STYLISTIC Q572**

**Your Professional BusinessPad**

**Processor, Chipset, Memory**  
AMD A68M FCH

**Drives**  
mSATA, 128 GB, FDE

**Communication, Network**  
UMTS Modul: Sierra Wireless Gobi 3000  
10/100 Mbit/s (via cradle only)

**Display, Grafic**

AMD Radeon™ HD 6250

**Keyboard and pointing devices**

**Dimensions / Weight / Environmental**  
0.732 kg  
273.5 x 176 x 13.9 mm

**Operating system**  
Windows 8 Pro

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, 1 x DC-in, 1 x Docking connector for Port Replicator, 1 x HDMI, 2 (digital) x Internal microphones, 1 x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x SmartCard slot, 2 x USB 2.0 total

**Warranty**  
2 year Bring-in Service

**€ 999**  
VFY:Q5720M3001NL

**STYLISTIC Q702**

**Attach or Touch - The Hybrid Business Talent**

**Processor, Chipset, Memory**  
Intel® Core™ i5-3437U processor (1.9 GHz), 3 MB, Intel® QM77

**Drives**  
SSD mSATA, 256 GB

**Communication, Network**  
WLAN: Intel® Centrino® 6205 802.11 a/b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: LTE Sierra Wireless MC7710  
Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**
**Power supply**

**Dimensions / Weight / Environmental**  
0.850 kg  
302 x 195 x 12.7 mm

**Operating system**  
Windows 8 Pro

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x Docking connector for Port Replicator, 1 x HDMI, N/A x , 2 (digital) x Internal microphones, 1 x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x USB 2.0 total, 1 x USB 3.0 total

**Warranty**  
2 year Bring-in Service

**€ 1.699**  
VFY:Q7020MXP41NL

**STYLISTIC T902**

**Your Excellent Flexible Companion**

**Processor, Chipset, Memory**  
Intel® Core™ i5-3340M processor (2.7 GHz), 3 MB, ( ), 512 KB, Intel® QM77  
4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**  
SATA, 7200 rpm, 500 GB, 2.5-inch, S.M.A.R.T.  
DVD Super Multi

**Communication, Network**  
WLAN: Intel® Centrino® Wireless-N2200 b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: Sierra Wireless Gobi 3000  
LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

33.8 cm (13.3-inch), TFT, (HD+), Anti-glare touchscreen, 1600 x 900 pixel, 500:1, 300 cd/m<sup>2</sup>  
Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**  
Fingerprint sensor, Launch keys, Application buttons, Tablet Pen, Touchscreen, Multi gesture touchpad with two mouse buttons  
Keyboard, N/A

**Power supply**

Li-Ion battery 6-cell, 72 Wh (6.700mAh battery) mAh  
Runtime 1st battery: up to 7h 40m

**Dimensions / Weight / Environmental**  
1.89 kg  
326 x 244 x 27.1 mm front / 31 mm back (without foot) mm

**Operating system**  
Windows 8 Pro

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x Docking connector for Port Replicator, 1 x HDMI, N/A x , 2 (digital) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x SmartCard slot, 2 (1 left side with Anytime USB Charge functionality) x USB 2.0 total, 2 x USB 3.0 total, 1 x VGA

**Warranty**  
2 year Bring-in Service

**€ 1.444**  
VFY:T9020MXE11NL

**STYLISTIC T902**

**Your Excellent Flexible Companion**

**Processor, Chipset, Memory**  
Intel® Core™ i7-3540M processor (3.0 GHz), 4 MB, ( ), 512 KB, Intel® QM77  
2 x 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**  
SSD SATA III, 256 GB, 2.5-inch  
DVD Super Multi

**Communication, Network**  
WLAN: Intel® Centrino® Wireless-N2200 b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: Sierra Wireless Gobi 3000  
LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

33.8 cm (13.3-inch), TFT, (HD+), Anti-glare touchscreen, 1600 x 900 pixel, 500:1, 300 cd/m<sup>2</sup>  
Intel® HD Graphics 4000 with 3rd generation Core i processors

**Keyboard and pointing devices**  
Fingerprint sensor, Launch keys, Application buttons, Tablet Pen, Touchscreen, Multi gesture touchpad with two mouse buttons  
Keyboard, N/A

**Power supply**

Li-Ion battery 6-cell, 72 Wh (6.700mAh battery) mAh  
Runtime 1st battery: up to 7h 40m

**Dimensions / Weight / Environmental**  
1.89 kg  
326 x 244 x 27.1 mm front / 31 mm back (without foot) mm

**Operating system**  
Windows 8 Pro

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, N/A x , 1 x DC-in, 1 x Docking connector for Port Replicator, 1 x HDMI, N/A x , 2 (digital) x Internal microphones, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x Memory card slots, 1 x SIM card slot ( usable only with 3G/UMTS, 4G/LTE ), 1 x SmartCard slot, 2 (1 left side with Anytime USB Charge functionality) x USB 2.0 total, 2 x USB 3.0 total, 1 x VGA

**Warranty**  
2 year Bring-in Service

**€ 1.749**  
VFY:T9020MXP41NL

# ESPRIMO Desktops

ESPRIMO E400	ESPRIMO E400 E85+	ESPRIMO P400	ESPRIMO P400	ESPRIMO E510
--------------	-------------------	--------------	--------------	--------------



### Your Flexible Economy PC

#### Processor, Chipset, Memory

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, Intel® H61  
2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1333 MHz, PC3-10600, DIMM

#### Drives

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

#### Communication, Network

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

#### Display, Grafic

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

#### Dimensions / Weight / Environmental

10 kg  
330 x 405 x 104 mm

#### Operating system

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8/

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DVI, 1 x Front audio: headphone, 1 x Front audio: microphone, 2 x USB front, 1 x Ethernet (RJ-45), 2 x Mouse / Keyboard (PS/2), 8 x USB 2.0 total, 4 x USB rear, optional USB 3.0 total, 2 x USB internal, 1 x VGA

#### Slots, Bays

1 x PCI-Express 2.0 x16, 2 x PCI-Express x1, 1 x 3.5-inch external bays, 1 x 3.5-inch internal bays, 1 x 5.25-inch external bays

#### Warranty

1 year Bring-in Service

€ 449

VFY:E0400P4311NL



### Your Immediately Available Office PC

#### Processor, Chipset, Memory

Intel® Pentium® processor G2020 (2.90 GHz), 3 MB, Intel® H61  
2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1333 MHz, PC3-10600, DIMM

#### Drives

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

#### Communication, Network

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

#### Display, Grafic

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

#### Dimensions / Weight / Environmental

9 kg  
175 x 425 x 353 mm

#### Operating system

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 (DVI-D) x DVI, 1 x Front audio: headphone, 1 x Front audio: microphone, 2 x USB front, 1 x Ethernet (RJ-45), 2 x Mouse / Keyboard (PS/2), 8 x USB 2.0 total, 4 x USB rear, optional USB 3.0 total, 2 x USB internal, 1 x VGA

#### Slots, Bays

1 x PCI-Express 2.0 x16, 2 x PCI-Express x1, 1 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

#### Warranty

1 year Bring-in Service

€ 389

VFY:P0400P4231NL



### Your Immediately Available Office PC

#### Processor, Chipset, Memory

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, apr-13  
2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1333 MHz, PC3-10600, DIMM

#### Drives

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

#### Communication, Network

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

#### Display, Grafic

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

#### Dimensions / Weight / Environmental

9 kg  
175 x 425 x 353 mm

#### Operating system

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 (DVI-D) x DVI, 1 x Front audio: headphone, 1 x Front audio: microphone, 2 x USB front, 1 x Ethernet (RJ-45), 2 x Mouse / Keyboard (PS/2), 8 x USB 2.0 total, 4 x USB rear, optional USB 3.0 total, 2 x USB internal, 1 x VGA

#### Slots, Bays

1 x PCI-Express 2.0 x16, 2 x PCI-Express x1, 1 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

#### Warranty

1 year Bring-in Service

€ 449

VFY:P0400P4301NL



### Your Immediately Available Office PC

#### Processor, Chipset, Memory

Intel® Core™ i5-3330 processor (3.00 GHz), 6 MB, Intel® H61  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1333 MHz, PC3-10600, DIMM

#### Drives

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
DVD Super Multi

#### Communication, Network

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

#### Display, Grafic

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

#### Dimensions / Weight / Environmental

9 kg  
175 x 425 x 353 mm

#### Operating system

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 (DVI-D) x DVI, 1 x Front audio: headphone, 1 x Front audio: microphone, 2 x USB front, 1 x Ethernet (RJ-45), 2 x Mouse / Keyboard (PS/2), 8 x USB 2.0 total, 4 x USB rear, optional USB 3.0 total, 2 x USB internal, 1 x VGA

#### Slots, Bays

1 x PCI-Express 2.0 x16, 2 x PCI-Express x1, 1 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

#### Warranty

1 year Bring-in Service

€ 549

VFY:P0400P4521NL



### Your Flexible Economy PC

#### Processor, Chipset, Memory

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, Intel® B75  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

#### Drives

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

#### Communication, Network

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

#### Display, Grafic

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

#### Dimensions / Weight / Environmental

10 kg  
340 x 382 x 98 mm

#### Operating system

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8/

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 (DVI-D) x DVI, 1 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 2x 2.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 8 x USB 2.0 total, 4x 2.0/ 2x 3.0 x USB rear, 4 x USB 3.0 total, 2x 2.0/ 2x 3.0 x USB internal, 1 x VGA

#### Slots, Bays

2 x PCI-Express x1, 1 x PCI slots, 1 x 3.5-inch external bays, 1 x 3.5-inch internal bays, 1 x 5.25-inch external bays

#### Warranty

1 year Bring-in Service

€ 499

VFY:E0510P4311NL

**ESPRIMO P510**

**Your Flexible and Economic PC**
**Processor, Chipset, Memory**

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, Intel® B75  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

10 kg  
175 x 425 x 353 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 (DVI-D) x DVI, 1 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 2x 2.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 8 x USB 2.0 total, 4x 2.0/ 2x 3.0 x USB rear, 4 x USB 3.0 total, 2x 2.0/ 2x 3.0 x USB internal, 1 x VGA

**Slots, Bays**

2 x PCI-Express x1, 1 x PCI slots, 1 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 499

VFY:P0510P4311NL

**ESPRIMO P510 E85+**

**Your Flexible and Economic PC**
**Processor, Chipset, Memory**

Intel® Core™ i5-3470 processor (3.20 GHz), 6 MB, Intel® B75  
2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
MultiCard Reader 24in1 USB 2.0 3.5"  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Realtek RTL 8111E

**Display, Grafic**

NVIDIA® GeForce® GT630 DisplayPort 2GB FH, 2 GB  
Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

10 kg  
175 x 425 x 353 mm

**Operating system**

WIN8 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 (DVI-D) x DVI, 1 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 2x 2.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 8 x USB 2.0 total, 4x 2.0/ 2x 3.0 x USB rear, 4 x USB 3.0 total, 2x 2.0/ 2x 3.0 x USB internal, 1 x VGA

**Slots, Bays**

2 x PCI-Express x1, 1 x PCI slots, 1 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 599

VFY:P0510PR562NL

**ESPRIMO Q510**

**The Mini with More PC per cm**
**Processor, Chipset, Memory**

Intel® Core™ i3-3220T processor (2.80 GHz), 3 MB, Intel® H61  
4 GB (1 module(s) 4 GB) DDR3, non-ECC, 1600 MHz, PC3-12800, SO DIMM

**Drives**

HDD SATA II, 5400 rpm, 500 GB, 2.5-inch  
DVD Super Multi Slot-in slim

**Communication, Network**

Bluetooth: 1 (optional)  
LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500 (depending on processor), up to 1759 MB

**Dimensions / Weight / Environmental**

1.6 kg  
185 x 188 x 54 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8/

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, 1 (DVI-I) x DVI, 2x 2.0 x USB front, 1 x HDMI, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x Multicardreader, 6 x USB 2.0 total, 4x 2.0 x USB rear, 1 (via DVI to VGA adapter, part of shipment) x VGA, 1 (optional) x Integrated WLAN

**Slots, Bays**

1 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 549

VFY:Q0510P4311NL

**ESPRIMO C710**

**Your Ultra Small Form Factor PC**
**Processor, Chipset, Memory**

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, Intel® Q75  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD SuperMulti SATA slim

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 V

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

9 kg  
265 x 315 x 88 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 1 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 2 x Serial (RS-232) (powered, 9pin, 16 byte FIFO, 16550 compatible), 8 x USB 2.0 total, 4x 2.0/ 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x 3.5-inch internal bays, 1 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 549

VFY:C0710P4361NL

**ESPRIMO E710**

**Your Desktop PC Without Any Compromises**
**Processor, Chipset, Memory**

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, Intel® Q75  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 V

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

10 kg  
340 x 382 x 98 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8/

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 1 x 3.5-inch external bays, 1 x 3.5-inch internal bays, 1 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 549

VFY:E0710P4371NL

**ESPRIMO P710**

**Excellent Performance, Expandability And Energy Efficiency**
**Processor, Chipset, Memory**

Intel® Core™ i3-3220 processor (3.30 GHz), 3 MB, Intel® Q75  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 V

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

11 kg  
175 x 419 x 395 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8/

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 549

VFY:P0710P4371NL

**ESPRIMO P710**

**Excellent Performance, Expandability And Energy Efficiency**
**Processor, Chipset, Memory**

Intel® Core™ i5-3570 processor (3.40 GHz), 6 MB, Intel® Q75  
2 x 2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
MultiCard Reader 24in1 USB 2.0 3.5"  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 V

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

11 kg  
175 x 419 x 395 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

1 year Bring-in Service

€ 779

VFY:P0710PXP61NL

**ESPRIMO E910**

**The Innovative 0-Watt PC**
**Processor, Chipset, Memory**

Intel® Core™ i5-3470 processor (3.20 GHz), 6 MB, Intel® Q77  
2 x 2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

10 kg  
340 x 382 x 98 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 1 x 3.5-inch external bays, 1 x 3.5-inch internal bays, 1 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 719

VFY:E0910PXG61NL

**ESPRIMO P910**

**The Expandable Business Workhorse**
**Processor, Chipset, Memory**

Intel® Core™ i5-3470 processor (3.20 GHz), 6 MB, Intel® Q77  
2 x 2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 500 GB, 3.5-inch  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

11 kg  
175 x 419 x 395 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 719

VFY:P0910PXG61NL

**ESPRIMO P910**

**The Expandable Business Workhorse**
**Processor, Chipset, Memory**

Intel® Core™ i5-3570 processor (3.40 GHz), 6 MB, Intel® Q77  
2 x 2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
MultiCard Reader 24in1 USB 2.0 3.5"  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

NVIDIA® GeForce® GT630 DisplayPort 2GB FH 0-Watt, 2 GB Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

11 kg  
175 x 419 x 395 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 899

VFY:P0910PXP61NL

**ESPRIMO P910**

**The Expandable Business Workhorse**
**Processor, Chipset, Memory**

Intel® Core™ i7-3770 processor (3.40 GHz), 8 MB, Intel® Q77  
2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM

**Drives**

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
SSD SATA III, 64 GB, 2.5-inch

MultiCard Reader 24in1 USB 2.0 3.5"  
DVD Super Multi

**Communication, Network**

LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

NVIDIA® GeForce® GT630 DisplayPort 2GB FH 0-Watt, 2 GB  
Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB

**Dimensions / Weight / Environmental**

11 kg  
175 x 419 x 395 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: line-out, 1 x DisplayPort, 1 (DVI-I) x DVI, 2 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 4x 2.0 or 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 1.099

VFY:P0910XP71NL

**ESPRIMO Q910**

**The Mini with More PC per cm**
**Processor, Chipset, Memory**

Intel® Core™ i5-3470T processor (2.90 GHz), 3 MB, Intel® Q77  
4 GB (1 module(s) 4 GB) DDR3, non-ECC, 1600 MHz, PC3-12800, SO DIMM

**Drives**

HDD SATA II, 5400 rpm, 500 GB, 2.5-inch  
DVD Super Multi Slot-in slim

**Communication, Network**

Bluetooth: 1 (optional)  
LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500 (depending on processor), up to 1759 MB

**Dimensions / Weight / Environmental**

1.6 kg  
185 x 188 x 54 mm

**Operating system**

WIN7 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO/DU DVD WIN7+8

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, 1 x DisplayPort, 1 (DVI-I) x DVI, 2x 3.0 x USB front, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 1 x Multicardreader, 2 x USB 2.0 total, 2x 2.0 and 2x 3.0 x USB rear, 4 x USB 3.0 total, 1 (via DVI to VGA adapter, part of shipment) x VGA, 1 (optional) x Integrated WLAN

**Slots, Bays**

1 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 829

VFY:Q0910XP61NL

**ESPRIMO X913 Touch**

**Evolutionary PC for the Modern Office**
**Processor, Chipset, Memory**

Intel® Core™ i5-3470T processor (2.90 GHz), 3 MB, Intel® Q77  
4 GB (1 module(s) 4 GB) DDR3, non-ECC, 1600 MHz, PC3-12800, SO DIMM

**Drives**

HDD SATA II, 5400 rpm, 500 GB, 2.5-inch

**Communication, Network**

Bluetooth: 1 (optional with WLAN module)  
LAN: 10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

Intel® HD Graphics#Intel® HD Graphics 2000#Intel® HD Graphics 2500, up to 1759 MB

**Dimensions / Weight / Environmental**

8.62 kg  
554 x 225 x 433 mm

**Operating system**

WIN8 PRO64 MAIN/LIC WIN8 PRO/RDVD W7+8PRO

**Interfaces**

1 x Audio: line-in / microphone, 1 x Audio: line-out / headphone, 1 x DVI, optional with camera module x Internal microphones, 2 x Kensington Lock support, 1 x Ethernet (RJ-45), 2 x USB 2.0 total, 2x2.0 2x3.0 x USB rear, 4 x USB 3.0 total, 1 (via DVI to VGA adapter, part of shipment) x VGA, 1 (optional) x Integrated WLAN

**Slots, Bays**

0 x 2.5-inch bays

**Warranty**

3 year Bring-in Service

€ 1.149

VFY:X913TP3511NL



# FUTRO Thin Clients



## FUTRO S700

## FUTRO S700



### De betaalbare Thin Client

### De betaalbare Thin Client

#### Processor, Chipset, Memory

AMD A55E Controller Hub

2 GB (1 module(s) 2 GB) DDR3, 1066 MHz, PC3-8500, SO DIMM

#### Processor, Chipset, Memory

AMD A55E Controller Hub

2 GB (1 module(s) 2 GB) DDR3, 1066 MHz, PC3-8500, SO DIMM

#### Drives

mSATA, 2 GB, Flash drive

#### Drives

mSATA, 4 GB, Flash drive

#### Communication, Network

LAN: Built-in 10/100/1000 MBit/s

#### Communication, Network

LAN: Built-in 10/100/1000 MBit/s

#### Display, Graphics

ATI Radeon™ HD 6250 , up to 256 MB

#### Display, Graphics

ATI Radeon™ HD 6250 , up to 256 MB

#### Dimensions / Weight / Environmental

1,2 kg

97 x 191 x 266 mm

#### Dimensions / Weight / Environmental

1,2 kg

97 x 191 x 266 mm

#### Operating system

eLux® RL - Embedded Linux

#### Operating system

Windows® Embedded Standard 7

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-out, 1 x DC-in, 1 DP x DisplayPort, 1 DVI-I (integrated VGA can be used with DVI-VGA adapter) x DVI, 1 x Front audio: headphone, 1 x Front audio: line-in / microphone, 2 x USB front, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 2 x Mouse / Keyboard (PS/2), 8 x USB 2.0 total, 4 x USB rear, 2 x USB internal

#### Interfaces

1 x Audio: line-in, 1 x Audio: line-out, 1 x DC-in, 1 DP x DisplayPort, 1 DVI-I (integrated VGA can be used with DVI-VGA adapter) x DVI, 1 x Front audio: headphone, 1 x Front audio: line-in / microphone, 2 x USB front, 1 x Kensington Lock support, 1 x Ethernet (RJ-45), 2 x Mouse / Keyboard (PS/2), 8 x USB 2.0 total, 4 x USB rear, 2 x USB internal

#### Warranty

2 year Bring-in Service

#### Warranty

2 year Bring-in Service

€ 299

VFY:S0700PF045NL

€ 349

VFY:S0700PX011NL

PRIMERGY TX100 S3p



Enter the world of PRIMERGY TX servers

The PRIMERGY TX100 S3p is ideal for SMEs, looking for a first server with Intel® Xeon® support. It also offers high availability (dual onboard gigabit LAN), a choice of two highly energy efficient power supply units and high data safety (optional RAID 5/6 with battery backup).

**Processor, Chipset, Memory**

Intel® Xeon® processor E3-1220v2# (4C/4T, 3.10 GHz, TLC: 8 MB, Turbo: Yes, 1600 MHz, 69 W)  
Intel® C202  
2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

D 3009

**Drives, Controller**

2 x HDD SATA, 7200 rpm, 500 GB, 3.5-inch, economic  
DVD Super Multi, half height, SATA I

**Slots, Bays**

1 x PCI Exp 2.0 x1 mech x4  
4x 3.5" easy change SATA

**Dimensions / Weight / Environmental**

175 x 419 x 395 mm  
up to 14 kg

**Software**

Enterprise Linux 5, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 11, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows Server® 2008 R2 Foundation, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Small Business Server Essentials 2011, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Windows Server® 2012 Essentials, Windows Server® 2012 Foundation, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

2 x Gbit/s Ethernet, 9 (2x front, 6x rear, 1x internal for backup device), 1 x RS232, 1 x VGA (ATI ES1000 (64MB) on board)

**Warranty**

1 year  
On-site Service

€ 549

VFY:T1003SC070IN

PRIMERGY TX100 S3p



Enter the world of PRIMERGY TX servers

The PRIMERGY TX100 S3p is ideal for SMEs, looking for a first server with Intel® Xeon® support. It also offers high availability (dual onboard gigabit LAN), a choice of two highly energy efficient power supply units and high data safety (optional RAID 5/6 with battery backup).

**Processor, Chipset, Memory**

Intel® Xeon® processor E3-1230v2# (4C/8T, 3.30 GHz, TLC: 8 MB, Turbo: Yes, 1600 MHz, 69 W)  
Intel® C202  
2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

D 3009

**Drives, Controller**

2 x HDD SATA, 7200 rpm, 1 TB, 3.5-inch, business critical  
DVD Super Multi, half height, SATA I

**Slots, Bays**

1 x PCI Exp 2.0 x1 mech x4  
4x 3.5" easy change SATA

**Dimensions / Weight / Environmental**

175 x 419 x 395 mm  
up to 14 kg

**Software**

Enterprise Linux 5, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 11, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows Server® 2008 R2 Foundation, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Small Business Server Essentials 2011, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Windows Server® 2012 Essentials, Windows Server® 2012 Foundation, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

2 x Gbit/s Ethernet, 9 (2x front, 6x rear, 1x internal for backup device), 1 x RS232, 1 x VGA (ATI ES1000 (64MB) on board)

**Warranty**

1 year  
On-site Service

€ 849

VFY:T1003SC090IN

PRIMERGY TX120 S3p



For small environments with high demands

PRIMERGY TX120 S3p: For small environments with high demands. It is the perfect server for environments where space, high server functionality and low TCO are crucial. The unique combination of ultra-compact form factor, Intel® Xeon® processor performance, low TCO and high TX120 S3p ideal for demanding environments where space is scarce. availability features, make the PRIMERGY

**apr-13**

Intel® Xeon® processor E3-1265Lv2# (4C/8T, 2.50 GHz, TLC: 8 MB, Turbo: Yes, 1600 MHz, 45 W)  
Intel® C202  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

D3049

**Drives, Controller**

DVD Super Multi, slimline, SATA I

**Slots, Bays**

1 x PCI Exp 2.0 x1 mech x4  
1 x PCI-Express 2.0 x4 (mech. x8)  
4 x 2.5-inch hot-plug SAS/SATA or 2x 3.5-inch non hot-plug SATA.  
Not upgradeable in the field.  
None  
1 x 3.5/1.6-inch for backup devices#1 x 5.25/0.5-inch for CD-RW/DVD

**Dimensions / Weight / Environmental**

98 x 399 x 340 mm  
up to 10 kg - Actual weight may vary depending on configuration

**Software**

Enterprise Linux 5, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 11, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows Server® 2008 R2 Foundation, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Datacenter, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Web Server 2008, Windows® Small Business Server Essentials 2011, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Windows Server® 2012 Essentials, Windows Server® 2012 Foundation, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

10 x USB 2.0 (2x front, 6x rear, 2x internal; the 2 internal ports cannot be used in parallel), 1 x RS-232-C, 1 x VGA, 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Optional front service LAN port (10/100 Mbit/s)

**Warranty**

1 year  
On-site Service

€ 669

VFY:T1203SXG10IN

PRIMERGY TX140 S1p



Expandable SME all-round server

PRIMERGY TX140 S1p: the expandable SME all-rounder. It is ideal for SME or branch customers looking for a classic file, print, mail, or database server, with high scalability, Intel® Xeon® E3 series-based performance, and optional redundant power supplies. Storing up to 12 TB, and offering an optional rack conversion kit, the TX140 S1p is an attractive long-term investment.

**Processor, Chipset, Memory**

Intel® Xeon® processor E3-1265Lv2# (4C/8T, 2.50 GHz, TLC: 8 MB, Turbo: Yes, 1600 MHz, 45 W)  
Intel® C202  
4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

D3049

**Drives, Controller**

DVD Super Multi, half height, SATA I

**Slots, Bays**

1 x PCI Exp 2.0 x1 mech x4  
1 x PCI-Express 2.0 x4 (mech. x8)  
3.5-inch or 2.5-inch hot-plug SAS/SATA

**Dimensions / Weight / Environmental**

482 x 570 x 220 mm  
205 x 584 x 444 mm  
21-28 kg - Actual weight may vary depending on configuration

**Software**

Enterprise Linux 5, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 11, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows Server® 2008 R2 Foundation, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Datacenter, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Web Server 2008, Windows® Small Business Server Essentials 2011, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Windows Server® 2012 Essentials, Windows Server® 2012 Foundation, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

10 x USB 2.0 (2x front, 6x rear, 2x internal; the 2 internal ports cannot be used in parallel), 1 x serial RS-232-C, usable for iRMC or system or shared, 1 x VGA, 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port

**Warranty**

1 year  
On-site Service

€ 749

VFY:T1401SXG10IN

PRIMERGY TX150 S8



The one-processor tower server - maximized!

The PRIMERGY TX150 S8: the right system for SMEs, branch offices or virtualized environments where the main focus is on expandability and availability. With processors of the Intel® Xeon® E5-1400 and E5-2400 family, the TX150 S8 delivers excellent energy-efficient performance. PRIMERGY TX150 S8: the one processor tower server – maximized!

**Processor, Chipset, Memory**

Intel® Xeon® processor E5-2420# (6C/12T, 1.90 GHz, TLC: 15 MB, Turbo: Yes, 7.2 GT/s, Mem bus: 1333 MHz, 95 W)  
Intel® C602  
8 GB (1 module(s) 8 GB) DDR3 LV, registered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

D 3079

**Drives, Controller**

DVD Super Multi, half height, SATA I

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x8)  
3.5-inch or 2.5-inch hot-plug SAS/SATA

**Dimensions / Weight / Environmental**

483 x 611 x 177 mm  
177 x 651 x 456 mm  
16 - 29 kg - Actual weight may vary depending on configuration

**Software**

XenServer®, Enterprise Linux 5, Enterprise Linux 5 with XEN, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 11 with XEN, SUSE Linux Enterprise Server 10 with XEN, SUSE Linux Enterprise Server 11, vSphere™ 4.1, vSphere™ 4.1 Embedded, vSphere™ 4.1 Installable, vSphere™ 5.0 Embedded, vSphere™ 5.0, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Datacenter, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Web Server 2008, Windows® Small Business Server Essentials 2011, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Small Business Server Essentials 2011, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Windows Server® 2012 Essentials, Windows Server® 2012 Foundation, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

2 x Gbit/s Ethernet, 9 x USB 2.0 (2x front, 4x rear, 3x internal for backup, UFM and internal USB), 1 x serial RS-232-C, usable for iRMC or system or shared, 1 x VGA, 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port

**Warranty**

1 year  
On-site Service

€ 1,099

VFY:T1508SC040IN

**PRIMERGY TX200 S7**

**Well-balanced price- performance**

*The PRIMERGY TX200 S7 is a perfect server for SMEs, branch offices or virtualized infrastructures. The tower server offers dual processor performance combined with expandability and energy efficiency. Its feature set makes the TX200 S7 a great virtualization, database or communication server. The PRIMERGY TX200 S7 strikes the right balance between price and performance.*

**Processor, Chipset, Memory**

..Intel® Xeon® processor E5-2420# (6C/12T, 1.90 GHz, TLC: 15 MB, Turbo: Yes, 7.2 GT/s , Mem bus: 1333 MHz, 95 W)

..Intel® C602

..8 GB (1 module(s) 8 GB) DDR3 LV, registered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

..D 3099

**Drives, Controller**

..DVD Super Multi, half height, SATA I  
..RAID 5/6 Ctrl., SAS/SATA 6 Gbit/s, Fujitsu RAID Ctrl SAS 6G 5/6 512MB (D2616), 8 ports int.#RAID level: 0, 1, 10, 5, 50, 6, 60, 512 MB Cache, Optional BBU (based on LSI SAS2108)

**Slots, Bays**

..1 x PCI-Express 2.0 x4 (mech. x8)  
..3.5-inch or 2.5-inch hot-plug SAS/SATA

**Dimensions / Weight / Environmental**

..483 x 611 x 177 mm  
..177 x 651 x 456 mm  
..16 kg - 29 kg - Actual weight may vary depending on configuration

**Software**

..XenServer®, Enterprise Linux 5, Enterprise Linux 5 with XEN, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 10 with XEN, SUSE Linux Enterprise Server 11, vSphere™ 4.1, vSphere™ 4.1 Embedded, vSphere™ 4.1 Installable, vSphere™ 5.0 Embedded, vSphere™ 5.0, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Datacenter, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

..2 x Gbit/s Ethernet (Intel Hartwell), 9 x USB 2.0 (2 x front USB, 4 x rear USB 3 x internal for backup, UFM and internal USB), 1 x serial RS-232-C (9 pin), usable for iRMC S3 or system or common use, 1 x VGA, 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port

**Warranty**

.. 3 years  
.. On-site Service

€ 1.449

VFY:T2007SC040IN

**PRIMERGY TX300 S7**

**No compromise tower server**

*PRIMERGY TX300 S7: a no compromise tower server offering maximum performance, expandability and availability. It combines the latest Intel® Xeon® processors E5 family, with up to two 6 GB GPGPUs and up to 2x 10 Gb LAN cards. Its 10 slots guarantee excellent expandability. Up to 4 hot-plug power supplies assure business continuity. It is ideal for database, virtualization or HPC scenarios.*

**Processor, Chipset, Memory**

Intel® Xeon® processor E5-2630# (6C/12T, 2.30 GHz, TLC: 15 MB, Turbo: Yes, 7.2 GT/s , Mem bus: 1333 MHz, 95 W)

Intel® C600 (Intel® Patsburg A)

8 GB (1 module(s) 8 GB) DDR3 LV, registered, ECC, 1333 MHz, PC3-10600, DIMM

**Mainboard type**

D2949

**Drives, Controller**

DVD Super Multi, half height, SATA I  
RAID 5/6 Ctrl., SAS/SATA 6 Gbit/s, Fujitsu RAID Ctrl SAS 6G 5/6 512MB (D2616), 8 ports int.#RAID level: 0, 1, 10, 5, 50, 6, 60, 512 MB Cache, Optional BBU (based on LSI SAS2108)

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x8)  
3.5-inch or 2.5-inch hot-plug SAS/SATA

**Dimensions / Weight / Environmental**

177 x 777 x 456 mm  
up to 35 kg - Actual weight may vary depending on configuration

**Software**

XenServer®, Enterprise Linux 5, Enterprise Linux 5 with XEN, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 10 with XEN, SUSE Linux Enterprise Server 11, vSphere™ 4.1, vSphere™ 4.1 Embedded, vSphere™ 4.1 Installable, vSphere™ 5.0 Embedded, vSphere™ 5.0, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows HPC Server® 2008 R2 Suite, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

x Gbit/s Ethernet, 10 x USB 2.0 (2x front, 4x rear, 2x internal for backup devices, 1x USB stick, 1x SSD), 1 x serial RS-232-C, usable for iRMC S3 or system or shared, 2 x VGA (thereof 1x front optional), 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port or optional Modular LAN 2x10Gbit controller, Front management LAN port as option

**Warranty**

3 years  
On-site Service

€ 1.999

VFY:T3007SC020IN

**PRIMERGY RX100 S7p proGREEN selection**

**Small in size and low in cost – rich in optional features**

*The Fujitsu PRIMERGY RX100 S7 is an entry mono socket rack server designed to meet small budgets by delivering highest energy efficiency of its class and a rich set of optional expansions to meet individual demands. Optimized for infrastructure and communication applications, this 1U server delivers up to 32GB RAM, up to 3 PCIe slots and up to 4 hard disk drives.*

**Processor, Chipset, Memory**

Intel® Xeon® processor E3-1265Lv2# (4C/8T, 2.50 GHz, TLC: 8 MB, Turbo: Yes, 1600 MHz, 95 W)

Intel® C202

4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM

**Mainboard type**

D 3034

**Drives, Controller**

DVD Super Multi, slimline, SATA I

**Slots, Bays**

1 x PCI Exp 2.0 x1 mech x4  
1 x PCI-Express 2.0 x4 (mech. x8)  
4x 2.5-inch hot-plug SAS/SATA  
PRIMERGY RX100 S7p proGREEN selection:  
4 x 2.5-inch drive bays pre-configured  
1 x 5.25/0.5-inch for CD-RW/DVD#1 x  
3.5/0.5-inch for ServerView Local Service Panel or front VGA + front Service LAN

**Dimensions / Weight / Environmental**

482.6 mm (Bezel) / 431mm (Body) x 572 x 42.5 mm  
up to 14 kg - Actual weight may vary depending on configuration

**Software**

Enterprise Linux 5, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 11, vSphere™ 4.0 Embedded, vSphere™ 4.0 Installable, vSphere™ 4.1, vSphere™ 4.1 Embedded, vSphere™ 5.0 Embedded, vSphere™ 5.0, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows Server® 2008 R2 Foundation, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Datacenter, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Web Server 2008, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011

**Interfaces**

2 x Gbit/s Ethernet, 7 x (2x front, 4x back, 1x internal for UFM), 1 x serial RS-232-C, usable for iRMC or system or shared, 1 x VGA (15-pin), 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port

**Warranty**

1 year  
On-site Service

€ 849

VFY:R1007SXG10IN

**PRIMERGY RX200 S7**

**Maximum productivity in a 1U housing**

*The Fujitsu PRIMERGY RX200 S7 is a rack server that provides high performance of the new Intel® Xeon® E5 product family, expandability up to 768GB of memory and up to 94% energy efficiency - all in 1U space saving housing. Thus, the PRIMERGY RX200 S7 is ideal for virtualization and cloud, small databases as well as for high performance computing.*

**Processor, Chipset, Memory**

Intel® Xeon® processor E5-2620# (6C/12T, 2.00 GHz, TLC: 15 MB, Turbo: Yes, 7.2 GT/s , Mem bus: 1333 MHz, 95 W)

Intel® C600 (Intel® Patsburg A)

8 GB (1 module(s) 8 GB) DDR3 LV, registered, ECC, 1333 MHz, PC3-10600, DIMM

**Mainboard type**

D3032

**Drives, Controller**

DVD Super Multi, slimline, SATA I

**Slots, Bays**

4 x 2.5-inch base unit or 8 x 2.5-inch base unit  
1 x 5.25/0.5-inch for DVD-RW/Blu-ray (only for base unit 4x 2.5-inch HDD)

**Dimensions / Weight / Environmental**

482 mm (Bezel) / 431mm (Body) x 762 mm x 43 mm  
up to 18 kg - Actual weight may vary depending on configuration

**Software**

XenServer®, Enterprise Linux 5, Enterprise Linux 5 with XEN, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 10 with XEN, SUSE Linux Enterprise Server 11, vSphere™ 4.1, vSphere™ 4.1 Embedded, vSphere™ 4.1 Installable, vSphere™ 5.0 Embedded, vSphere™ 5.0, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows HPC Server® 2008 R2 Suite, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Web Server 2008, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard, ,

**Interfaces**

6 x USB 2.0 (2x front, 3x rear, 1x uSSD), 2 x VGA (thereof 1x front optional), 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port or optional Modular LAN 2x10Gbit controller, Front management LAN port as option

**Warranty**

3 years  
On-site Service

€ 1.449

VFY:R2007SC010IN

**PRIMERGY RX300 S7**

**The versatile 2U powerhouse**

*The Fujitsu PRIMERGY RX300 S7 is a 2U dual socket rack server, optimized for all types of business applications by focusing on versatility and scalability that supports up to 16 harddisk drives, up to 7 PCIe Gen 3 cards and up to 768GB RAM. Thanks to top performance of the new Intel® Xeon® E5 product family and the available upgrade kits, the RX300 will also ensure the demands of tomorrow are met.*

**Processor, Chipset, Memory**

Intel® Xeon® processor E5-2630# (6C/12T, 2.30 GHz, TLC: 15 MB, Turbo: Yes, 7.2 GT/s , Mem bus: 1333 MHz, 95 W)

Intel® C600 (Intel® Patsburg A)

8 GB (1 module(s) 8 GB) DDR3 LV, registered, ECC, 1333 MHz, PC3-10600, DIMM

**Mainboard type**

D2939

**Drives, Controller**

DVD Super Multi, slimline, SATA I

**Slots, Bays**

2.5-inch base unit (max. 16 x 2.5) or 3.5-inch base unit (max. 6 x 3.5)  
1 x 5.25/0.5-inch for ODD#1 x 5.25/1.6-inch for ODD or backup devices #1 x 5.25/0.5-inch for Local Service Display

**Dimensions / Weight / Environmental**

482.6 mm (Bezel) / 445mm (Body) x 770 x 86.9 mm  
up to 25 kg - Actual weight may vary depending on configuration

**Software**

XenServer®, Enterprise Linux 5, Enterprise Linux 5 with XEN, Enterprise Linux 6, SUSE Linux Enterprise Server 10, SUSE Linux Enterprise Server 10 with XEN, SUSE Linux Enterprise Server 11, vSphere™ 4.1, vSphere™ 4.1 Embedded, vSphere™ 4.1 Installable, vSphere™ 5.0 Embedded, vSphere™ 5.0, Windows Server® 2008 R2 Datacenter, Windows Server® 2008 R2 Enterprise, Windows HPC Server® 2008 R2 Suite, Hyper-V™ Server 2008 R2, Windows Server® 2008 R2 Standard, Windows® Web Server 2008 R2, Windows® Server 2008 Enterprise, Windows® Server 2008 Standard, Windows® Web Server 2008, Windows® Small Business Server 2011 Premium Add-On, Windows® Small Business Server Standard 2011, Windows Server® 2012 Datacenter, Hyper-V Server 2012, Windows Server® 2012 Standard, Windows Storage Server 2012 Standard

**Interfaces**

10 x USB 2.0 (2x front, 4x rear, 2x internal for backup devices, 1x USB stick, 1x uSSD), 1 x serial RS-232-C, usable for iRMC or system or shared, 2 x VGA (thereof 1x front optional), 1 x dedicated management LAN port for iRMC S3 (10/100/1000 Mbit/s), Service LAN traffic can be switched to shared onboard Gbit LAN port or optional Modular LAN 2x10Gbit controller, Front management LAN port as option

**Warranty**

3 years  
On-site Service

€ 1.699

VFY:R3007SC020IN

**PRIMERGY RX350 S7**



**Maximum expandability in a 2 way server**

*PRIMERGY RX350 S7: a 4U dual socket rack server offering maximum performance, expandability and availability. It combines the latest Intel® Xeon® processors E5 family, with up to two 6GB GPGPUs, up to 24 hard drives and up to 768GB RAM. Its 10 PCI slots guarantee excellent expandability. Up to 4 hot-plug power supplies assure business continuity. It is ideal for database, virtualization or HPC scenarios.*

**Processor, Chipset, Memory**

Intel® Xeon® processor E5-2630# (6C/12T,  
2.30 GHz, TLC: 15 MB, Turbo: Yes, 7.2 GT/s ,  
Mem bus: 1333 MHz, 95 W)  
Intel® C600 (Intel® Patsburg A)  
8 GB (1 module(s) 8 GB) DDR3 LV,  
registered, ECC, 1333 MHz, PC3-10600,  
DIMM

**Mainboard type**

D2949

**Drives, Controller**

DVD Super Multi, half height, SATA I  
RAID 5/6 Ctrl., SAS/SATA 6 Gbit/s, Fujitsu  
RAID Ctrl SAS 6G 5/6 512MB (D2616), 8  
ports int.#RAID level: 0, 1, 10, 5, 50, 6, 60,  
512 MB Cache, Optional BBU (based on LSI  
SAS2108)

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x8)  
2.5-inch or 3.5-inch hot-plug SAS/SATA  
1 x 5.25/0.5-inch for ODD#1 x 5.25/1.6-  
inch for ODD or backup devices #1 x  
5.25/0.5-inch for Local Service Display

**Dimensions / Weight / Environmental**

482.6 mm (Bezel) / 448 mm (Body) x 736  
x 177 mm  
up to 35 kg - Actual weight may vary  
depending on configuration

**Interfaces**

10 x USB 2.0 (2x front, 4x rear, 2x internal for backup devices, 1x USB  
stick, 1x USSD), 1 x serial RS-232-C, usable for iRMC S3 or system or  
shared, 2 x VGA (thereof 1x front optional), 1 x dedicated management  
LAN port for iRMC S3 (10/100/1000 Mbit/s). Service LAN traffic can be  
switched to shared onboard Gbit LAN port  
or optional Modular LAN 2x10Gbit controller, Front management LAN  
port as option

**Warranty**

3 years  
On-site Service

**€ 2.149**

VFY:R3507SC020IN

CELSIUS W420	CELSIUS W420	CELSIUS W520	CELSIUS W520	CELSIUS M720
<b>The Gateway to Workstation Performance</b>	<b>Performance That Boosts Your Productivity</b>	<b>The Gateway to Workstation Performance</b>	<b>Performance That Boosts Your Productivity</b>	<b>Your "Thoroughbred" Workstation</b>
<p><b>Processor, Chipset, Memory</b> Intel® Core™ i7-3770 processor (3.40 GHz), 8 MB, Intel® Q77 2 x 2 GB (1 module(s) 2 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM</p>	<p><b>Processor, Chipset, Memory</b> Intel® Core™ i7-3770 processor (3.40 GHz), 8 MB, Intel® Q77 2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, non-ECC, 1600 MHz, PC3-12800, DIMM</p>	<p><b>Processor, Chipset, Memory</b> Intel® Xeon® processor E3-1240v2 Intel® C216 2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM</p>	<p><b>Processor, Chipset, Memory</b> Intel® Xeon® processor E3-1270v2 (3.50 GHz), 8 MB, Intel® C216 2 x 4 GB (1 module(s) 4 GB) DDR3, unbuffered, ECC, 1600 MHz, PC3-12800, DIMM</p>	<p><b>Processor, Chipset, Memory</b> Intel® Xeon® processor E5-1620 (3.60 GHz), 10 MB, Intel® C602 4 x 2 GB (1 module(s) 2 GB) DDR3, ECC, 1600 MHz, PC3-12800</p>
<p><b>Drives</b> HDD SATA III, 7200 rpm, 500 GB, 3.5-inch MultiCard Reader 24in1 USB 2.0 3.5" DVD Super Multi</p>	<p><b>Drives</b> HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch MultiCard Reader 24in1 USB 2.0 3.5" DVD Super Multi</p>	<p><b>Drives</b> HDD SATA III, 7200 rpm, 500 GB, 3.5-inch MultiCard Reader 24in1 USB 2.0 3.5" DVD Super Multi</p>	<p><b>Drives</b> HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch MultiCard Reader 24in1 USB 2.0 3.5" DVD Super Multi</p>	<p><b>Drives</b> HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch MultiCard Reader 24in1 USB 2.0 3.5" DVD Super Multi</p>
<p><b>Communication, Network</b> LAN: 10/100/1000 MBit/s Intel® 82579 LM</p>	<p><b>Communication, Network</b> LAN: 10/100/1000 MBit/s Intel® 82579 LM</p>	<p><b>Communication, Network</b> LAN: 10/100/1000 MBit/s Intel® 82579 LM</p>	<p><b>Communication, Network</b> LAN: 10/100/1000 MBit/s Intel® 82579 LM</p>	<p><b>Communication, Network</b> LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM</p>
<p><b>Display, Grafic</b> AMD FirePro™ V3900, 1 GB Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB</p>	<p><b>Display, Grafic</b> NVIDIA® Quadro® 600, 1 GB Intel® HD Graphics, HD Graphics 2000, HD Graphics 2500, HD Graphics 4000 (depending on CPU), up to 1759 MB</p>	<p><b>Display, Grafic</b> AMD FirePro™ V4900, 1 GB up to 1759 MB</p>	<p><b>Display, Grafic</b> DP to DVI-D (single link) Adapter Cable NVIDIA® Quadro® 2000, 1 GB up to 1759 MB</p>	<p><b>Display, Graphics</b> AMD FirePro™ V4900, 1 GB</p>
<p><b>Dimensions / Weight / Environmental</b> approx. 11 kg 175 x 419 x 395 mm</p>	<p><b>Dimensions / Weight / Environmental</b> approx. 11 kg 175 x 419 x 395 mm</p>	<p><b>Dimensions / Weight / Environmental</b> approx. 16 kg 186 x 481 x 430 mm</p>	<p><b>Dimensions / Weight / Environmental</b> approx. 16 kg 186 x 481 x 430 mm</p>	<p><b>Dimensions / Weight / Environmental</b> 18 kg 186 x 481 x 430 mm</p>
<p><b>Operating system</b> Pre-installed: Windows 8 Pro</p>	<p><b>Operating system</b> Pre-installed: Windows 8 Pro</p>	<p><b>Operating system</b> Pre-installed: Windows 8 Pro</p>	<p><b>Operating system</b> Pre-installed: Windows 8 Pro</p>	<p><b>Operating system</b> Pre-installed: Windows® 7 Professional 64-bit Rec-DVD: Windows® 7 Professional 64-bit Rec-DVD: Windows® 7</p>
<p><b>Interfaces</b> 1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: lineout, 1 x DisplayPort, 1 x DVI, 1 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA</p>	<p><b>Interfaces</b> 1 x Audio: line-in, 1 x Audio: line-in / microphone, 1 x Audio: lineout, 1 x DisplayPort, 1 x DVI, 1 (optional) x eSATA, 1 x Front audio: headphone, 1 x Front audio: microphone, 2x 2.0/ 2x 3.0 x USB front, 1 x Ethernet (RJ-45), 1 (optional) x Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 4 x USB 3.0 total, 2 x USB internal, 1 (via DVI to VGA adapter, part of shipment) x VGA</p>	<p><b>Interfaces</b> 2 x Audio: in (rear), 1 x Audio: out (rear), 1 x DisplayPort, 1 (depends on processor) x DVI, 1 (optional) x eSATA, 1 x Audio: in, 1 x Audio: out, 2x 2.0/ 2x 3.0 x USB front, 1 x Internal speakers, 1 x Ethernet (RJ-45), 1, optional Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 1 + 1 x USB internal, 1 (depends on processor, via DVI to VGA adapter) x VGA</p>	<p><b>Interfaces</b> 2 x Audio: in (rear), 1 x Audio: out (rear), 1 x DisplayPort, 1 (depends on processor) x DVI, 1 (optional) x eSATA, 1 x Audio: in, 1 x Audio: out, 2x 2.0/ 2x 3.0 x USB front, 1 x Internal speakers, 1 x Ethernet (RJ-45), 1, optional Parallel (25pin with EPP and ECP), 2 x Mouse / Keyboard (PS/2), 1 x Serial (RS-232) (9pin, 16 byte FIFO, 16550 compatible), 10 x USB 2.0 total, 6x 2.0 / 2x 3.0 x USB rear, 1 + 1 x USB internal, 1 (depends on processor, via DVI to VGA adapter) x VGA</p>	<p><b>Interfaces</b> 1 x Audio: in (rear), 1 x Audio: out (rear), 1 x Audio: in, 1 x Audio: out, 4 (2x USB 3.0) x USB front, 1 x Internal speakers, 1 x Ethernet (RJ-45), 1 / 1 x Mouse / Keyboard (PS/2), 11 x USB 2.0 total, 6 x USB rear, 2 x USB 3.0 total, 3, thereof 1 type A x USB internal</p>
<p><b>Slots, Bays</b> 1 x PCI-Express 2.0 x16, 1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays</p>	<p><b>Slots, Bays</b> 1 x PCI-Express 2.0 x16, 1 x PCI-Express 2.0 x4 (mech. x16), 1 x PCI-Express x1, 1 x PCI slots, 2 x 3.5-inch external bays, 2 x 3.5-inch internal bays, 2 x 5.25-inch external bays</p>	<p><b>Slots, Bays</b> 1 x PCI-Express 2.0 x16, 1 x PCI-Express 2.0 x4 (mech. x16), 3 x PCI-Express x1, 2 x PCI slots, 2 x 3.5-inch external bays, 4 x 3.5-inch internal bays, 2 x 5.25-inch external bays</p>	<p><b>Slots, Bays</b> 1 x PCI-Express 2.0 x16, 1 x PCI-Express 2.0 x4 (mech. x16), 3 x PCI-Express x1, 2 x PCI slots, 2 x 3.5-inch external bays, 4 x 3.5-inch internal bays, 2 x 5.25-inch external bays</p>	<p><b>Slots, Bays</b> 1 x PCI-Express 2.0 x4 (mech. x16), 2 x PCI slots, 8 x 2.5-inch bays, 2 x 3.5-inch external bays, 4 x 3.5-inch internal bays, 2 x 5.25-inch external bays</p>
<p><b>Warranty</b> 3 year Bring-in Service</p>	<p><b>Warranty</b> 3 year Bring-in Service</p>	<p><b>Warranty</b> 3 year Bring-in Service</p>	<p><b>Warranty</b> 3 year Bring-in Service</p>	<p><b>Warranty</b> 3 year Bring-in Service</p>
<p><b>€ 849</b> VFY:W4200WVG31NL</p>	<p><b>€ 1.199</b> VFY:W4200WXP31NL</p>	<p><b>€ 1.099</b> VFY:W5200WVG31NL</p>	<p><b>€ 1.499</b> VFY:W5200WXP31NL</p>	<p><b>€ 1.249</b> VFY:M7200WVG11NL</p>

**CELSIUS M720**

**Your "Thoroughbred" Workstation**
**Processor, Chipset, Memory**

Intel® Xeon® processor E5-1620 (3.60 GHz), 10 MB, Intel® C602  
4 x 4 GB (1 module(s) 4 GB) DDR3, ECC, 1600 MHz, PC3-12800

**Drives**

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
SSD SATA III, 128 GB, 2.5-inch  
MultiCard Reader 24in1 USB 2.0 3.5"  
DVD Super Multi

**Communication, Network**

LAN: Built-in 10/100/1000 MBit/s Intel® 82579 LM

**Display, Graphics**

DP to DVI-D (single link) Adapter Cable  
NVIDIA® Quadro® K2000, 2 GB

**Dimensions / Weight / Environmental**

18 kg  
186 x 481 x 430 mm

**Operating system**

Pre-installed: Windows® 7 Professional 64-bit  
Rec-DVD: Windows® 7 Professional 64-bit  
Rec-DVD: Windows® 7

**Interfaces**

1 x Audio: in (rear), 1 x Audio: out (rear), 1 x Audio: in, 1 x Audio: out, 4 (2x USB 3.0) x USB front, 1 x Internal speakers, 1 x Ethernet (RJ-45), 1 / 1 x Mouse / Keyboard (PS/2), 11 x USB 2.0 total, 6 x USB rear, 2 x USB 3.0 total, 3, thereof 1 type A x USB internal

**Slots, Bays**

1 x PCI-Express 2.0 x4 (mech. x16), 2 x PCI slots, 8 x 2.5-inch bays, 2 x 3.5-inch external bays, 4 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 1.799  
VFY:M7200WXP21NL

**CELSIUS R920**

**Uncompromising Workstation Performance for Extreme Requirements**
**Processor, Chipset, Memory**

Intel® Xeon® processor E5-2640 (2.50 GHz), 15 MB, 7.2 GT/s Intel® C602  
4 x 4 GB (1 module(s) 4 GB) DDR3, ECC, 1600 MHz, PC3-12800

**Drives**

HDD SATA III, 7200 rpm, 1000 GB, 3.5-inch  
SSD SATA III, 256 GB, 2.5-inch  
MultiCard Reader 24in1 USB 2.0 3.5"  
DVD Super Multi

**Communication, Network**

LAN: 2x Built-in 10/100/1000 MBit/s Intel® 82579 LM and Intel®

**Display, Graphics**

No graphics in system

**Dimensions / Weight / Environmental**

20 kg  
186 x 618 x 430 mm

**Operating system**

Pre-installed: Windows® 7 Professional 64-bit  
Rec-DVD: Windows® 7 Professional 64-bit  
Rec-DVD: Windows® 7

**Interfaces**

1 x Audio: in (rear), 1 x Audio: out (rear), 1 x eSATA, 1 x Audio: in, 1 x Audio: out, 4 (2x USB 3.0) x USB front, 1 x Internal speakers, 2 x Ethernet (RJ-45), 1 / 1 x Mouse / Keyboard (PS/2), 11 x USB 2.0 total, 6 x USB rear, 2 x USB 3.0 total, 3, thereof 1 type A x USB internal

**Slots, Bays**

1 x PCI slots, 8 x 2.5-inch bays, 2 x 3.5-inch external bays, 4 x 3.5-inch internal bays, 2 x 5.25-inch external bays

**Warranty**

3 year Bring-in Service

€ 2.999  
VFY:R9200WXP41NL

**CELSIUS H720**

**Workstation Power on-the-Go**
**Processor, Chipset, Memory**

Intel® Core™ i7-3740QM processor (2.7 GHz), 6 MB, Intel® QM77  
2 x 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**

SSD SATA III, 256 GB, 2.5-inch  
DVD-RW Dual Double Layer Super Multi

**Communication, Network**

WLAN: Intel® Centrino® Advanced-N 6205 802.11 a/b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: Sierra Wireless Gobi 3000 module  
10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

39.6 cm (15.6-inch), LED backlight, (Full HD), Anti-glare display, magnesium, 1920 x 1080 pixel, 300:1, 220 cd/m  
NVIDIA® Quadro® K1000M#NVIDIA® Quadro® K2000M, 2 GB (GDDR3 VRAM)

**Dimensions / Weight / Environmental**

2.8 kg  
379.8 x 257.0 x 35.5 mm

**Operating system**

Win8P lic./ Win7P load / RDVD TWIN-Pack

**Interfaces**

1 x DC-in, 1 x DisplayPort, 1 x eSATA, 1 (34 mm) x ExpressCard slots, 1 x Audio: in, 1 x Audio: out, 2 digital array microphones x Internal microphones, 1 x Ethernet (RJ-45), 1 (SD up to 2 GB, SDHC up to 32 GB, SDXC up to 64 GB) x Multicardreader, 1 x SIM card slot ( ), 1 x SmartCard slot, 1 x USB 2.0 total, 3 x USB 3.0 total, 1 x VGA

**Warranty**

3 year Bring-in Service

€ 1.999  
VFY:H7200WXP41NL

**CELSIUS H920**

**High-End Workstation Power on-the-Go**
**Processor, Chipset, Memory**

Intel® Core™ i7-3740QM processor (2.7 GHz), 6 MB, Intel® QM77  
4 x 4 GB (1 module(s) 4 GB) DDR3, 1600 MHz, PC3-12800, SO DIMM

**Drives**

SSD SATA III, 128 GB, 2.5-inch  
DVD-RW Dual Double Layer Super Multi

**Communication, Network**

WLAN: Intel® Centrino® Advanced-N 6205 802.11 a/b/g/n  
Bluetooth: Bluetooth 4.0  
UMTS Modul: Sierra Wireless Gobi 3000 module  
10/100/1000 MBit/s Intel® 82579 LM

**Display, Grafic**

43.9 cm (17.3-inch), LED backlight, (Full HD), Anti-glare display, 1920 x 1080 pixel  
NVIDIA® Quadro® K3000M, 2 GB (GDDR5 VRAM)  
NVIDIA® Quadro® K3000M#NVIDIA® Quadro® K4000M, 2 / 4 GB (GDDR5 VRAM)

**Dimensions / Weight / Environmental**

4.25 kg  
417 x 287 x 33/44 mm

**Operating system**

Win8P lic./ Win7P load / RDVD TWIN-Pack

**Interfaces**

1 x DC-in, 1 x DisplayPort, 1 x eSATA, 1 (34/54 mm) x ExpressCard slots, 1 x Audio: out, 1 digital array microphone x Internal microphones, 1 x Ethernet (RJ-45), 1 (SD up to 2 GB, SDHC up to 32 GB, SDXC up to 64 GB) x Multicardreader, 1 x SIM card slot ( ), 1 x SmartCard slot, 3 x USB 2.0 total, 1 x USB 3.0 total, 1 x VGA

**Warranty**

3 year Bring-in Service

€ 2.499  
VFY:H9200WXP41NL