

**HIKVISION®**



BETTER VISION  
FOR BETTER SECURITY  
**HIKVISION MONITORS**



Hikvision's incredibly durable Monitors are specially designed for security and control center environments. Featuring industry-grade panels, professional displays, and sharp, brilliant image clarity, these are ideal monitors for every critical monitoring need – 24 hours a day, 7 days a week.

# FEATURES

## 4K Ultra HD display

The high-definition monitors present clearer images with more details, and lifelike viewing experience for the users. When combined with 4K cameras, the 4K monitors can greatly enhance the performance of the entire surveillance system.



## Longer Life Span for Critical Performance and Minimum TCO




Panel life of Hikvision monitors  
 50,000 – 60,000 Hours



Panel life of normal monitors  
 20,000 – 25,000 Hours


## Perfect Integration and Compatibility with DVRs & NVRs

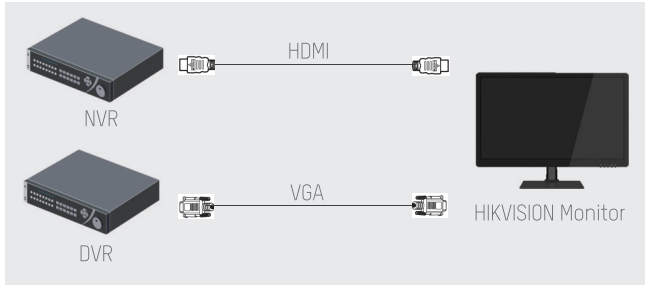

## On Duty 24/7 for Mission Critical Applications



Original Modular Panel



Professional Display Board



Professional Power Board




## Wide Viewing Angle for Flexible Monitor Positioning

### Viewing Angles

- Multiple monitoring angles



Flexible Monitoring Angles

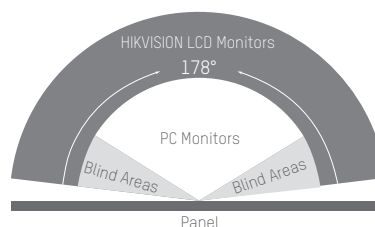

Viewing Angle Comparison

## Various Interfaces making it more convenient and powerful

### Multiple Interfaces

Supports HDMI, DVI, VGA, BNC, USB, and Audio input

### USB Media Play

Supports playing videos through USB drive

### Built in Speaker

Supports audio playing

### RS232 Control

Supports turning the monitor on/off through RS232



## Professional, User-Friendly Design



Metal Casing



Standard VESA compliance




Plastic Casing







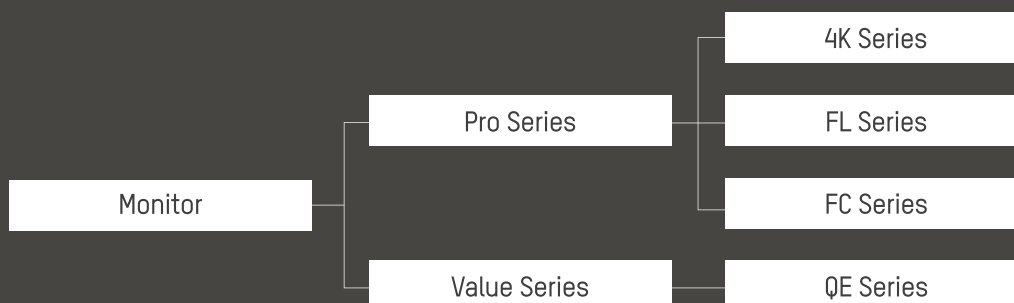

Base with -5 to +10-degree angle adjustment for flexible monitoring

## HIKVISION MONITOR FAMILY











## Pro Series: 4K Series

Models	DS-D5028UC	DS-D5043UC	DS-D5050UC	DS-D5055UL-B	DS-D5055UC	DS-D5065UC
	<b>HOT</b>	<b>HOT</b>	<b>COMING SOON</b>		<b>COMING SOON</b>	<b>COMING SOON</b>
Image						
Bezel Material	Plastic	Plastic	Plastic	Metal	Plastic	Plastic
<b>Display</b>						
Max Resolution	3840x2160	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160
Backlight	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	28"	43"	55"	55"	55"	65"
Brightness	300 cd/m <sup>2</sup>	350 cd/m <sup>2</sup> (typ)	300 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>	350 cd/m <sup>2</sup> (typ)	450 cd/m <sup>2</sup> (typ)
Contrast Ratio	1000: 1	1200: 1	4000: 1	1400:1	1200: 1	1200: 1
Response Time	5.5 ms	8 ms	8 ms	8 ms	8 ms	8 ms
Viewing Angle	Horizontal 170°, vertical 160°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°
<b>Interface</b>						
HDMI Input	1	2	1	1	2	2
VGA Input	1	1	1	1	1	1
DP Input	1	-	-	-	-	-
DVI Input	-	-	-	1	-	-
USB	-	USB2.0*1, USB3.0*1	2	1	USB2.0*1, USB3.0*1	USB2.0*1, USB3.0*1
Audio	Support	Audio In *1 Audio Out *1 Internal Speaker 8W*2	Support	Support	Audio In *1 Audio Out *1 Internal Speaker 8W*2	Audio In *1 Audio Out *1 Internal Speaker 8W*2
RS232	-	1(RJ45 interface)	-	-	1(RJ45 interface)	1(RJ45 interface)
<b>Genera</b>						
VESA Mounting	100 × 100 mm	400mm*400mm	400 × 200 mm	400mm x 400mm	200mm*400mm 400mm*400mm	400mm*400mm



## Pro Series: FL Series

Models	DS-D5032FL	DS-D5032FL-B	DS-D5032FL-C	DS-D5043FL	DS-D5049FL	DS-D5055FL
Image						
Bezel Material	Metal	Metal	Metal	Metal	Metal	Metal
<b>Display</b>						
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Backlight	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	32"	32"	31.5"	42"	49"	55"
Brightness	400 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	450 cd/m <sup>2</sup>	380 cd/m <sup>2</sup>
Contrast Ratio	4000:1	3000:1	3000:1	1200:1	1100:1	1200:1
Response Time	6.5 ms	6.5 ms	6.5 ms	8 ms	12 ms	8 ms
Viewing Angle	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°
<b>Interface</b>						
HDMI Input	1	1	1	1	1	1
VGA Input	1	1	1	1	1	1
DVI Input	1	-	-	1	1	1
BNC Input	1	1	-	1	1	1
USB	1	1	1	1	1	1
BNC Output	-	1	-	-	-	-
Audio	Support	Support	Support	Support	Support	Support
<b>Genera</b>						
VESA Mounting	200mm×200mm	200mm × 200mm	200mm × 200mm	Not comply VESA 394mm x 307mm	300mm x 200mm	400mm x 300mm

## Pro Series: FC Series

Models	DS-D5022FC	DS-D5024FC	DS-D5032FC-A	DS-D5040FC	DS-D5043FC
Image	 <b>HOT</b>	 <b>HOT</b>		 <b>HOT</b>	
Bezel Material	Plastic	Plastic	Plastic	Plastic	Plastic
Display					
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Backlight	LED-Backlit TFT LCD	LED-Backlit	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	21.5"	23.6"	31.5"	39.5"	42.5"
Brightness	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	360 cd/m <sup>2</sup>	260 cd/m <sup>2</sup>
Contrast Ratio	1000:1	1000:1	1000:1	3000:1	1200:1
Response Time	5 ms	5 ms	8 ms	9.5 ms	8 ms
Viewing Angle	Horizontal 170°, Vertical 160°	Horizontal 170°, Vertical 160°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°
Interface					
HDMI Input	1	1	1	1	1
VGA Input	1	1	1	1	1
DVI Input	-	-	1	1	1
BNC Input	1	1	1	1	1
USB	1	-	-	1	-
BNC Output	1	1	1	1	-
Audio	Support	Support	Support	Support	Support
Genera					
VESA Mounting	100mm × 100mm	100mm × 100mm	100 mm × 100 mm	100 mm × 100 mm	300mm x 200mm

## Value Series: QE Series

Models	DS-D5019QE	DS-D5019QE-B	DS-D5022QE-B	DS-D5022QE-E	DS-D5024QE	DS-D5027QE	DS-D5032QE	DS-D5032QE-B	DS-D5043QE
Image		 <b>HOT</b>	 <b>HOT</b>	 <b>NEW</b>	 <b>NEW</b>	 <b>NEW</b>	 <b>COMING SOON</b>	 <b>COMING SOON</b>	 <b>COMING SOON</b>
Bezel Material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Matal/Plastic	Plastic
Display									
Max Resolution	1366×768	1366×768	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080	1920*1080	1920*1080
Backlight	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	18.5"	18.5"	21.5"	21.5"	23.8"	27"	32"	31.5"	42.51"
Brightness	200 cd/m <sup>2</sup>	200 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	200 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	300cd/m <sup>2</sup> (typ)	350 cd/m <sup>2</sup> (typ)	260 cd/m <sup>2</sup> (typ)
Contrast Ratio	600:1	600:1	1000:1	600:1	1000:1	1000:1	1200: 1	1400: 1	1200: 1
Response Time	5 ms	5 ms	5 ms	5 ms	14 ms	14 ms	8 ms	6ms	9ms
Viewing Angle	Horizontal 90°, Vertical 65°	Horizontal 90°, Vertical 65°	Horizontal 170°, Vertical 160°	Horizontal 90°, Vertical 65°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°
Interface									
HDMI Input	-	1	1	1	1	1	1	1	3
VGA Input	1	1	1	1	1	1	1	1	1
DP Input	-	-	-	-	-	-	-	-	-
DVI Input	-	-	-	-	-	-	-	1	-
BNC Input	-	-	-	-	-	-	-	-	1
USB	-	-	-	-	-	-	-	-	2
BNC Output	-	-	-	-	-	-	-	-	-
RS232	-	-	-	-	-	-	1[RJ45 interface]	-	-
Audio	-	-	-	-	-	-	Internal Speaker 5W*2 VGA Audio in*1	PC Audio*1	in*1, out*1
Genera									
Speakers	75mm x 75mm	75mm x 75mm	100mm × 100mm	100mm × 100mm	100mm x 100mm	100mm x 100mm	100mm ×100 mm	-	400mm ×200 mm



BETTER VISION  
FOR BETTER SECURITY  
**HIKVISION MONITORS**

Distributed by



**HIKVISION®**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Germany**  
T +49-69-401507290  
sales.adch@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +6-032-7224000  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-1031-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com

www.hikvision.com

Follow us on social media to get the latest product and solution information:



Hikvision  
Corporate Channel