



Overview

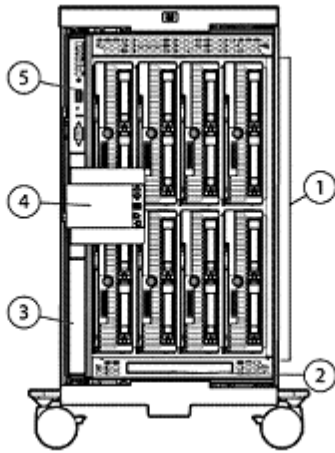


HP BladeSystem c3000 Enclosure – Tower – Front View

1. Device Bays 1 thru 8
2. Enclosure DVD Drive
3. Standby Onboard Administrator (reserved for Future)
4. Insight Display
5. Active Onboard Administrator

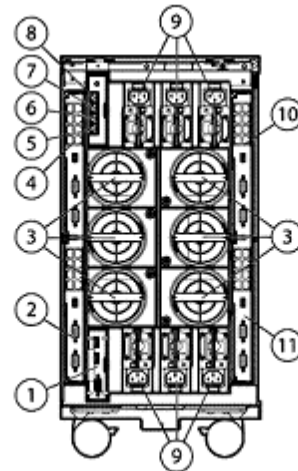


HP BladeSystem c3000 Enclosure – Tower – Rear View

1. Local KVM interface
2. Interconnect Bay 1
3. Active Cool Fans
4. Interconnect Bay 2
5. Enclosure Up-link and Service Port
6. Enclosure Down-link
7. iLO/Onboard Administrator Port
8. iLO/Onboard Administrator Port 2 (reserved for future)
9. Power Supplies
10. Interconnect Bay 4
11. Interconnect Bay 3

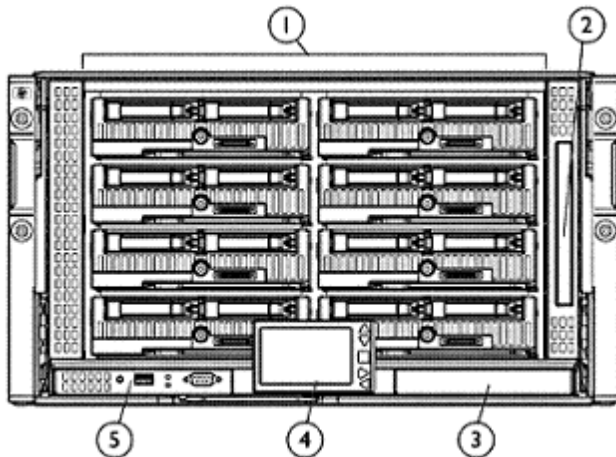

HP BladeSystem c3000 Enclosure – Rack – Front View

1. Device Bays 1 thru 8
2. Enclosure DVD Drive
3. Standby Onboard Administrator (reserved for Future)
4. Insight Display
5. Active Onboard Administrator

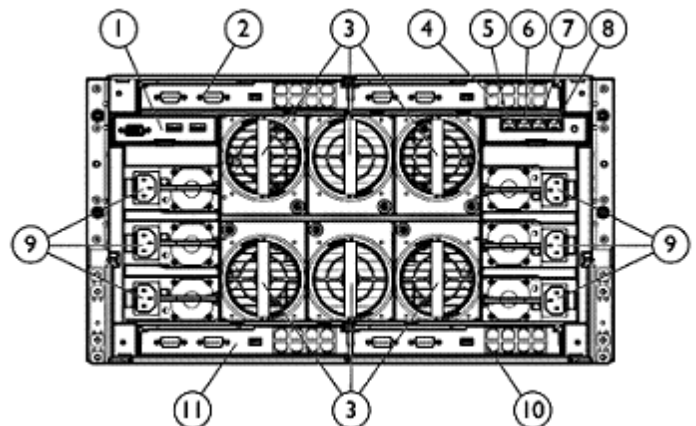

HP BladeSystem c3000 Enclosure – Rack – Rear View

1. Local KVM interface
2. Interconnect Bay 1
3. Active Cool Fans
4. Interconnect Bay 2
5. Enclosure Up-link and Service Port
6. Enclosure Down-link

Overview

7. iLO/Onboard Administrator Port
8. iLO/Onboard Administrator Port 2 (reserved for future)
9. Power Supplies
10. Interconnect Bay 4
11. Interconnect Bay 3

What's New

- HP BladeSystem c3000 Enclosure – Tower Model

At A Glance

This document covers the HP BladeSystem c3000 enclosure only. For more information on the HP c7000 enclosure, the HP ProLiant Server Blades, and HP BladeSystem c-Class Interconnect Components please see the following QuickSpecs:

HP c7000 Enclosure: HP ProLiant Server Blades:

http://h18000.www1.hp.com/products/quickspecs/north_america/12534.html

HP BladeSystem c-Class Interconnect QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12524_na/12524_na.html

HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517_na/12517_na.html

HP BladeSystem c7000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12810_na/12810_na.html

HP BladeSystem solutions start with either a c7000 or c3000 Enclosure. For the c3000 Enclosure, customers can add c3000 power supplies, Active Cool Fans, a c3000 DVD drive, and if needed, an optional local KVM module. Once the enclosure has been selected, the following components can be added: networking interconnect modules, HP ProLiant and Integrity Server Blades, and optional Insight Control Environment for BladeSystem management software. Please reference the QuickSpecs listed above.

- HP BladeSystem c3000 Enclosures:
- Offered in two different models: the c3000 Enclosure for racking in standard 19 inch racks, or the c3000 Tower Enclosure on casters for sites without racks.
- Server blades, storage blades, interconnect modules, power supplies, fans, and Onboard Administrator modules are designed to fit into the c3000 enclosure.
- The HP BladeSystem c3000 enclosure is:
 - A single-phase enclosure available for use with in-rack PDUs & UPSs which accept C13/C14 power cords; or
 - Alternatively, with low-line (100VAC to 110VAC) power outlets, the enclosure's power supplies can be connected directly to low-line wall outlets.
 - **NOTE:** Caution: when connecting directly to wall outlets, customers should determine the maximum amperage of the wall outlet circuit to prevent power overload. See Technical specification section in this document for the individual power supply amperage.
- HP BladeSystem c3000 enclosure options:
 - Optional c3000 AC power supplies (up to 6 total)
 - Optional c-Class Active Cool fans (between 4 and 6 total)
 - Optional KVM module
 - Optional DVD drive (if not part of an enclosure bundled part number)
 - Optional Rack rails (if not part of an enclosure bundled part number)
- The c3000 enclosure is 6U and holds up to 8 HP c-Class server blades:
 - Up to 8 half-height server blades (examples: HP ProLiant BL460c, BL465c Server Blade)
 - Up to 4 full-height server blades (Examples: HP ProLiant BL480c, BL 680c G5, BL685c Server Blades)
 - Up to 4 HP SB40c Storage blades attached to half-height server blades
 - Up to 4 PCI Expansion blades attached to half-height server blades
 - Or combinations of the above.
 - For additional server & storage blade information, please visit:

Overview

http://h18000.www1.hp.com/products/quickspecs/north_america/12534.html

- Types of interconnect modules available: (up to 4 per enclosure)
 - Ethernet Interconnect Switches from Cisco & Blade Network Technologies (BNT)
 - Ethernet Pass-Thru modules
 - Virtual Connect Ethernet modules (requires VC Management firmware v1.20 or greater)
 - Fibre Channel Interconnect Switches from Brocade & Cisco
 - Virtual Connect Fibre Channel modules
 - Fibre Channel Pass-Thru module.
 - InfiniBand Switch modules
 - For additional HP BladeSystem c-Class Interconnect Component information, please visit:
http://h18000.www1.hp.com/products/quickspecs/12524_na/12524_na.html
- HP Insight Control Environment for BladeSystem management software: (Choice of either a trial use DVD, or an 8 blade fully licensed DVD)
 - A fully licensed DVD covers all 8 blades in the HP BladeSystem Enclosure with no need to buy separate management and/or provisioning tools
- Insight Control Environment for HP BladeSystem contains the following components:
 - HP Systems Insight Manager (HP SIM) with the HP BladeSystem Integrated Manager (BSIM).
 - HP iLO 2 Select Pack licenses
 - HP ProLiant Essentials Rapid Deployment Pack (RDP)
 - HP ProLiant Essentials Insight Power Management Pack (IPM)
 - HP ProLiant Essentials Virtual Machine Management Pack (VMM)
 - HP ProLiant Essentials Performance Management Pack (PMP)
 - HP ProLiant Essentials Vulnerability and Patch Management Pack (VPM)
- Warranty:
 - Protected by HP Services and a worldwide network of HP Authorized Channel Partners. Three-year, on-site limited global warranty. Certain restrictions and exclusions apply. SATA hard drives have a one year warranty

For additional information please visit:

<http://h18004.www1.hp.com/products/blades/components/components.html>

Models

HP BladeSystem c-Class Server Blade Enclosures

Rack Models - Supports a full enclosure of 8 blades	
HP BladeSystem c3000 Single-Phase Enclosure	437504-B22
NOTE: Includes 4 Power Supplies, 6 Fans, an Onboard Administrator module, a DVD drive, rail kit, and 8 Insight Control Environment Licenses	
HP BladeSystem Single-Phase c3000 Enclosure	437502-B22
NOTE: Includes 4 Power Supplies, 6 Fans, an Onboard Administrator module, a DVD drive, rail kit, and 8 Insight Control Environment Trial Licenses.	
Rack Models - A "starter" enclosure that supports up to 4 blades	
HP BladeSystem c3000 Single-Phase Enclosure	437504-B21
NOTE: Includes 2 Power Supplies, 4 Fans, an Onboard Administrator module, a DVD drive, rail kit, and 8 Insight Control Environment Licenses; additional power supplies and fans can subsequently be added to support more than 4 blades.	
HP BladeSystem Single-Phase c3000 Enclosure	437502-B21
NOTE: Includes 2 Power Supplies, 4 Fans, an Onboard Administrator module, a DVD drive, rail kit, and 8 Insight Control Environment Trial Licenses; additional power supplies and fans can subsequently be added to support more than 4 blades.	
Tower Models - Supports a full enclosure of 8 blades	
HP BladeSystem c3000 Tower Enclosure with 8 Insight Control Environment for BladeSystem Licenses	458033-B21
NOTE: Includes 4 Power Supplies, 6 Fans, an Onboard Administrator module, a DVD drive and 8 Insight Control Environment Licenses.	
HP BladeSystem c3000 Tower Enclosure with 8 Insight Control Environment Trial Licenses.	458032-B21
NOTE: Includes 4 Power Supplies, 6 Fans, an Onboard Administrator module, a DVD drive and 8 Insight Control Environment Trial Licenses.	
Tower Models - A "starter" enclosure that supports up to 4 blades	
HP BladeSystem c3000 Tower Enclosure	469499-B21
NOTE: Includes 2 Power Supplies, 4 Fans, an Onboard Administrator module, a DVD drive and Trial Licenses; additional power supplies and fans can subsequently be added to support more than 4 blades	
HP BladeSystem c3000 Tower Enclosure	469500-B21
NOTE: Includes 2 Power Supplies, 4 Fans, an Onboard Administrator module, a DVD drive and Insight Control Environment for BladeSystem Licenses; additional power supplies and fans can subsequently be added to support more than 4 blades.	

Models

Smart Buys

The ProLiant Smart Buy program offers a collection of promotional server and option products that are configured with SMB in mind, offered at discounted prices, and positioned for quick delivery. Smart Buy server offers are available for a limited time only.

For a full listing of ProLiant Smart Buys available for all server families, visit

<http://www.hp.com/go/smartbuy/server/specs>

NOTE: The Starter and Enclosure Smart Buys below include (2) C13 to C14 PDU and (2) Nema 5-15P to IEC320-C13 power cords

HP BladeSystem c3000 Enclosure Smart Buy with Cisco Switch 461270-001

NOTE: Includes 2 Power Supplies, 4 Fans, an Onboard Administrator module, a DVD drive, rail kit, (1) Cisco Catalyst Blade Switch 3020, and 8 Insight Control Environment 30 Day Trial Licenses

HP BladeSystem c3000 Enclosure Smart Buy with Virtual Connect 461272-001

NOTE: Includes 2 Power Supplies, 4 Fans, an Onboard Administrator module, a DVD drive, rail kit, 1Gb Virtual Connect Ethernet Module, and 8 Insight Control Environment 30 Day Trial Licenses

HP ProLiant BL460c Smart Buy Server Blade 461273-001

NOTE: Includes (1) Quad Core Intel Xeon Processor E5345, 4 GB (2 x 2 GB) PC2-5300 FBD, Smart Array E200i Controller with 64MB cache, (2) Integrated Gigabit Ethernet NIC ports plus (1) additional 10/100 NIC dedicated to iLO 2 Management, and Integrated Lights-Out 2 (iLO 2) Standard Blade Edition

HP BladeSystem c-Class Overview

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/erc/downloads/4aa0-5978enw.pdf>

HP BladeSystem Overview As server, storage and network technologies have changed; traditional rack-mounted infrastructure solutions have generated increased complexity of both infrastructure management and physical datacenter deployment.

HP BladeSystem is the evolution of rack-mounted and pedestal infrastructure. A BladeSystem reduces costs and simplifies the management, building, and maintenance of the infrastructure behind your multi-server environment. It consolidates and repackages all the supporting infrastructure elements—compute, storage, network, and power into a single platform that can accelerate the integration and optimization of your data center.

The HP BladeSystem c3000 enclosure has the flexibility to scale from a single enclosure holding up to 8 blades, to a rack containing 7 enclosures holding up to 56 blades, the c-Class infrastructure is designed to meet the needs of today's businesses. The c3000 enclosure is designed for several markets:

- Remote sites or branch offices holding between 3 and 8 servers, and in deployment sites such as retail stores, branch offices, manufacturing sites, and wiring closets. This enclosure is also designed for harsh environments not found in modern datacenters (high ambient temperatures, dusty environments, and in ships, airplanes, platforms, and vehicles).
- Small and medium businesses, who own between 3 and 100 servers. The enclosure is designed for use with management devices such as local KVM switches for local administration.
- Datacenters with special power and cooling constraints, such as datacenters needing DC powered racks, and/or datacenters with low power & cooling capacities (under 3000 watts per rack).
- HPC clusters with InfiniBand interconnection, where the applications need a 1 to 1 IB network subscription ratio between physical nodes in the compute cluster.

HP BladeSystem c-Class infrastructure is made up of several components:

- HP ProLiant and/or HP Integrity Server blades for HP-UX, Windows, Linux, and HP Open VMS.
- Choice of Intel® or AMD processors, including the latest dual-core & quad-core processors for 32-bit and 64-bit applications.
- HP BladeSystem c-Class enclosure (either a c7000 or c3000) that provides connectivity, power, and cooling options. The c-Class enclosure is designed for full redundancy and high availability. A configurable choice of either redundant or non-redundant power, cooling, enclosure management, and interconnect modules are part of the standard enclosure design.
- Onboard Administrator module which provides a single point of control for intelligent management of the entire enclosure.
- Insight Display powered by the Onboard Administrator provides local management through an LCD display conveniently sited on the front of the system.
- Virtual Connect, Ethernet, Fibre Channel, InfiniBand, iSCSI, and other interconnect choices
- A power subsystem that provides either redundant or non-redundant power modes and Dynamic Power Saving mode, which uses up to 30% less power than traditional rack-mounted and tower servers.
- PARSEC (Parallel, Redundant, Scaleable, Enclosure Cooling) architecture: for maximum cooling that consumes less power and reduces datacenter noise.
- Direct-attach storage blades, and shared storage blades, which will provide file-based or block-based shared storage capacity for the servers within the enclosure.

HP BladeSystem c-Class Overview

HP ProLiant & Integrity Server Blades

Delivering best-in-class performance, choice and reliability with AMD Opteron™, Intel® Xeon™, and Intel® Itanium 2™ processors for Windows, Linux, or HP-UX based servers, the HP portfolio of server blades supports a variety of application requirements for scale-out architectures. HP offers one-, two-, and four-processor (dual-core & quad-core) server blades, including the widest range of performance, and form factors, and the most processing density and performance of any other portfolio. This portfolio of servers is designed for 32-bit and 64-bit applications.

For more information please see:

http://h18000.www1.hp.com/products/quickspecs/north_america/12534.html

HP SB40c Storage Blade

The StorageWorks SB40c is a half-height c-Class storage blade featuring support for up to six hot-plug Small Form Factor (SFF) Serial Attached SCSI (SAS) or Serial ATA (SATA) hard disk drives. The SB40c connects directly to the adjacent server blade to provide up to 876GB additional storage capacity to that blade. For maximum fault tolerance the SB40c uses supports hardware RAID 0, 1, 1+0, 5, and 6 (ADG), using the onboard Smart Array P400 with up to 256MB of battery-backed write cache.

For more information please see:

http://h18000.www1.hp.com/products/quickspecs/12587_na/12587_na.html

HP StorageWorks Tape Blades

The HP StorageWorks SB920c Tape Blade is an LTO-3 Ultrium tape blade that provides up to 800GB of capacity on a single data cartridge (2:1 compression) and performance up to 432GB/hr (2:1 compression).

The Ultrium 448c Tape Blade is an LTO-2 Ultrium tape blade the provides up to 400GB of capacity on a single data cartridge (2:1 compression) and performance up to 173GB/hr (2:1 compression). Both tape blades are ideal for HP BladeSystem c-Class customers who need a data protection solution but are not connected into a Storage Area Network (SAN). They provide direct attach data protection for the adjacent server and network backup protection for all other data within the enclosure. The HP StorageWorks tape blades are the industry's first bladed tape drives and are developed exclusively for the BladeSystem c-Class enclosures.

For more information, please visit:

http://h18000.www1.hp.com/products/quickspecs/12729_na/12729_na.html

HP StorageWorks AiO SB600c Storage Blade

The HP AiO SB600c Storage Blade Solution helps customers create HP c-Class BladeSystem business solutions by consolidating file serving (NAS), shared application storage (iSCSI SAN), and data protection under a unified management umbrella to deliver outstanding value and utility. The AIO SB600c Storage Blade Solution consists of the following components; a half-height c-Class server blade, a storage blade with 1.16 TB of raw storage capacity, and HP Management software.

For more information, please visit:

<http://www.hp.com/go/aiostorage>

HP BladeSystem c-Class Overview

HP BladeSystem c-Class c3000 Enclosure

A BladeSystem c3000 enclosure holds up to 8 server and/or storage blades plus redundant or non-redundant network and storage switches. It includes a shared, multi-terabit high-speed mid-plane for wire-once connectivity of server blades to network and shared storage. Power is delivered through a pooled power backplane that ensures the full capacity of the power supplies is available to all blades.

Each c3000 enclosure is built with the following functions:

- Up to 8 half-height and/or up to 4 full-height server blades and/or storage blades per enclosure.
- Up to 3 different interconnect fabrics (Ethernet, FC, IB, iSCSI, SAS, etc.) supported simultaneously within the enclosure.
- A single-phase power subsystem - for flexibility in connecting to datacenter power, or to UPS's or to low-line wall outlets.
- PARSEC enclosure design - Parallel, redundant and scalable cooling and airflow design
- Four (4) to Six (6) Active Cool fans
- Fully redundant design - no single point of failure; redundant interconnections between servers and interconnect modules; a mid-plane with no active components; redundant cooling using Active Cool fans; all devices are hot-pluggable and customer replaceable.
- Best performance per watt - lower wattage per server blade, in comparison to rack-mounted servers
- Full AC redundancy - with no power zones.
- Single or redundant Onboard Administrator management modules (optional active-standby design)

An Onboard Administrator management module is built in to the enclosure with the following functions:

- Robust, multiple enclosure setup and control.
- Reports asset and inventory information for the devices in the enclosure.
- Reports thermal and power information, including real-time actual power usage per server and per enclosure.
- Front-mounted Insight Display for easy management at the deployment site.
- Integrated access to all server blade iLOs from a single cable.
- Provides integrated access to interconnect bay device management ports from the single Onboard Administrator cable.
- Single sign-on capability for all devices in the enclosure
- Role-based security locally and/or with LDAP directory services.
- Provides a wizard-based initial setup process for easy configuration.
- An optional DVD drive for local software deployment, and HP SmartStart deployment
- An optional local KVM interface for connection to KVM switches.

A BladeSystem c3000 enclosure provides the following benefits:

- With local and remote hardware management integrated across the solution, one full enclosure can be managed as easily as one server.
- Scalable: Management and network interconnects extend scalability beyond a single enclosure, allowing resources to be pooled and shared across multiple enclosures.
- Investment protection: Accommodates multiple server and network designs in one enclosure.
- Lower costs per server, in comparison to rack-mounted servers
- Lower power consumption, in comparison to rack-mounted servers.
- Service and management: Allows multiple administrators to remotely access and maintain multiple servers & interconnect devices simultaneously.

HP BladeSystem c-Class Overview

HP BladeSystem c-Class Interconnect Options

HP also offers one of the broadest selections of interconnect fabric options in the industry to provide network, SAN/network attached storage (NAS), and cluster connectivity. HP BladeSystem interconnects provide:

- New HP Virtual Connect devices, designed to reduce networking costs and simplify network configuration and provisioning.
- Seamless integration of Ethernet, FC, InfiniBand, iSCSI, and SAS fabrics: Standard-based switch options include Cisco, Brocade, and HP (BNT) products that integrate within your existing standards.
- Built-in redundancy: Rear-mounting interconnect modules designed for redundant interconnections between server blades and switches.
- Cable reduction: Interconnect switches provide up to 32-to-1 network cable reductions per server blade enclosure

For more information HP BladeSystem c-Class Interconnect Components, please visit:

http://h18000.www1.hp.com/products/quickspecs/12524_na/12524_na.html

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging. HP products supported through Factory Express include: a wide array of servers and storage: HP Integrity, HP ProLiant & HP ProLiant & Integrity Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>

HP Insight Control Management Suites

Insight Control Environment for BladeSystem delivers foundation management for HP BladeSystem lifecycles, including remote monitoring, hardware resource deployment, health monitoring, software version control, performance monitoring, vulnerability scanning and patch management and power management.

Insight Control Environment for BladeSystem installs and licenses the following components by default using a wizard-based integrated installer:

- HP Systems Insight Manager(SIM)
- HP iLO Select Pack
- HP ProLiant Essentials Rapid Deployment Pack(RDP)
- HP Insight Power Manager(IPM)
- HP ProLiant Essentials Virtual Machine Manager (VMM)
- HP ProLiant Essentials Performance Management Pack (PMP)
- HP ProLiant Essentials Vulnerability and Patch Management Pack

Additional ProLiant Essentials software and management tools included in the Insight Control Management media kit can be installed manually.

- HP Server Migration Pack – Universal Edition
- HP Open Service Event Manager
- HP Instant Support Enterprise Edition

HP BladeSystem c-Class Overview

NOTE: HP Server Migration Pack – Universal Edition can be installed from the SMP-P2P CD included in the Insight Control Management media kit.

NOTE: HP Insight Control Environment for BladeSystem can be installed from the Insight Control Management DVD, which can be delivered with HP BladeSystem c-Class enclosures with a choice of licensing options. Licensing options include a free 30 day evaluation license for 8 servers (default option for every enclosure order), a full purchased license for 8 blade servers or a full purchased license for 16 blade servers). For additional information on HP c-Class Infrastructure please visit: HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517_na/12517_na.html

NOTE: For additional product and licensing information about HP Insight Control Environment for BladeSystem, HP Systems Insight Manager and Essentials software refer to:

<http://www.hp.com/go/insightcontrol>

HP Insight Control management suites and select HP ProLiant Essentials include one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit:

<http://www.hp.com/services/insight>

Server Management Stand Alone Software Product - ProLiant Essentials	HP Systems Insight Manager	HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms.
	ProLiant Essentials Rapid Deployment Pack	Rapid Deployment Pack (RDP) extends HP Systems Insight Manager with a complete deployment solution for HP ProLiant blade servers. RDP provides a central location to configure server hardware, deploy Windows, Linux and VMware ESX operating environments and install HP ProLiant Support Pack drivers using images and scripted profiles.
	ProLiant Essentials Server Migration Pack – Universal Edition	Upgrading, replacing, or virtualizing your existing server? Effortlessly transition to new virtual or physical HP ProLiant servers or BladeSystem with automated, accurate and affordable migration of OS, application and data. SMP Universal automates the manual processes required for migrating servers between physical or virtual platforms, whether migrating to VMware or Microsoft virtual machines. SMP Universal allows all of the following migrations:
		<ul style="list-style-type: none">• physical to ProLiant• physical to virtual• virtual to virtual• virtual to ProLiant
	ProLiant Essentials Performance Management Pack	NOTE: For more information, visit: http://www.hp.com/go/migrate . Performance Management Pack (offered exclusively through the Insight Control suites) – a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.
	Integrated Lights-Out Select Pack	Upgrades the iLO 2 processor with enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication) for servers managed using remote consoles available in iLO 2 Standard and iLO 2 Standard Blade Edition.

HP BladeSystem c-Class Overview

iLO Power Management Pack for BladeSystem	Is energy-efficient management software that delivers centralized control, reliable security, and energy savings for your BladeSystem infrastructure. iPMP combines the total control of iLO 2 Advanced in the area of remote management with the energy monitoring and control of the Insight Power Manager to deliver a robust solution capable of full remote control and power management of ProLiant servers through a unified interface within HP Systems Insight Manager.
HP Insight Power Manager (IPM)	Upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager. IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.
Virtual Connect Enterprise Manage	Simplifies the management of BladeSystem environments that use Virtual Connect to control LAN and SAN connectivity, helping organizations increase productivity, respond more quickly to business demands, and significantly reduce operating costs.
ProLiant Essentials Virtual Machine Management Pack	Virtual Machine Management Pack – provides central management and control of virtual machines from Microsoft and VMware. Integrated approach provides the ability to manage both physical and virtual resources from a single management console.
ProLiant Essentials Vulnerability and Patch Management Pack	Vulnerability and Patch Management Pack (offered exclusively through the Insight Control suites) – identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats.

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to: <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

Core Infrastructure Management

SmartStart	SmartStart is a tool that simplifies server setup, providing a rapid way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at: http://www.hp.com/servers/smartstart .
Insight Management Agents	The Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers. Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at: http://www.hp.com/servers/manage .
Subscriber's Choice	Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change notifications for ProLiant products. Sign up at: http://www.hp.com/go/subscriberschoice and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.

HP BladeSystem c-Class Overview

ProLiant Support Packs and ROMPaq, software

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options, available through ProLiant Support Packs the ProLiant Essentials Rapid Deployment Pack, SmartStart or downloaded from Software and Drivers download pages website at:
<http://www.hp.com/go/support>.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

HP BladeSystem Power Sizer

The HP BladeSystem Power Sizer helps in sizing the power infrastructure needed for a HP BladeSystem solution. This sizer enables effective planning for the power consumption and heat load of the BladeSystem at its site.

The sizer enables you to:

- Select the type and number of components within each Blade Server and Blade Enclosure.
- View the effect of component changes on the power consumption and heat loading.
- Review server loading and determine power supply and power subsystem requirements.
- Approximate electrical and heat load for facilities planning purposes.

The sizing estimate is based on component level power measurements for a system stressed to maximum capability.

Values obtained from the BladeSystem Sizer tool are measured with all components stressed to 100% load and are intended for facilities planning purposes only. Actual power consumption varies with application type, application utilization, and ambient temperature.

The p-class BladeSystem and the c-Class BladeSystem solutions are supported in the BladeSystem Power Sizer.

Available at: <http://www.hp.com/go/bladeSystem/powercalculator>

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Blade Enclosure Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support.

HP Care Pack services provide total care and support expertise with committed response designed to meet your IT and business needs.

The HP Care Pack service for HP ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

HP Care Pack services for the c7000 and c3000 enclosures cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP

HP BladeSystem c-Class Overview

supported c-Class enclosure devices including pass thru, Ethernet interconnect and virtual connect modules are also covered by the c7000 and c3000 enclosure Care Pack services.

NOTE: SAN/Fabric switches for the HP c-Class BladeSystem are not covered under the c7000 and c3000 enclosure Care Packs, SAN/Fabric switches carry separate Care Packs. SAN/Fabric Switch Care Pack service level support should always be uplifted to match existing storage or server service level.

To fully capitalize on your HP BladeSystem servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a HP BladeSystem server support offer to help you speedily deploy and maximize system uptime.

Recommended Service – Simplify ProLiant solution implementation, maintenance and management.

- **Support Service** – 4-Hour Response Coverage, 3-Year, 24 x 7, Same Business Day
- **Deployment Service** – Installation and Start Up for HP BladeSystem Infrastructure

Enhanced Service – Optimize service level to increase IT performance and availability

- **Support Service** – HP Proactive BladeSystem Service, 1-Year
- **Deployment Service** – Enhanced Network Installation and Start-up for HP BladeSystem Switches

Installation & Start-Up service for HP BladeSystem Infrastructure plus HP BladeSystem Enhanced Network Installation and Start-UP as per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

For a complete listing of service offerings and information visit:

<http://www.hp.com/services/bladessystemservices>

<http://www.hp.com/go/proliant/carepack>

Configuration Information Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order server blades must start with a CTO Blade.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option is a Factory Installable Option.

For a complete configuration of the HP BladeSystem, please do the following:

Step 1: Select desired model, configuration and quantity of HP ProLiant server and Storage blades

NOTE: For server blade information, please visit:

http://h18000.www1.hp.com/products/quickspecs/north_america/12534.html

NOTE: For Storage Blade information, please visit:

http://h18000.www1.hp.com/products/quickspecs/12587_na/12587_na.html

Step 2: Determine quantity of HP BladeSystem c-3000 Enclosures to purchase and choose Required Options

(One of the following from each list unless otherwise noted):

NOTE: Each HP BladeSystem c3000 Server Blade Enclosure holds up to 8 half-height blades, or up to 4 full-height server blades. Server blanks will be shipped in all empty bays.

Select Base Server Blade Enclosure Configuration

HP BladeSystem BLc3000 c-Class Server Blade Enclosures Choose one of the following CTO enclosures

HP BLc3000 CTO Enclosure	437507-B21
NOTE: CTO model includes 4 Active Cool Fans	
HP BLc3000 CTO Enclosure – Tower	458034-B21
NOTE: CTO model includes 4 Active Cool Fans	

Select Required Options (Choose one of the following from each category unless otherwise noted)

Onboard Administrator	HP BLc3000 Onboard Administrator, FIO	448589-B21
	NOTE: Supports CTO Enclosure – Rack (p/n 437507-B21) only.	
Power Supplies	HP BL3000 Tower Onboard Administrator, FIO	461514-B21
	NOTE: Supports CTO Enclosure – Tower (p/n 458034-B21) only.	
	1200W High Efficiency AC Power Supply, CSCI 2007/8	437572-B21
	NOTE: Climate Savers Computing Initiative, 2007-2008 Compliant	
	NOTE: Minimum 1 Power Supply required. For additional Power Supplies, please see step 2A of this QuickSpecs.	
	NOTE: Includes a C13 to C14 PDU power cord.	
	NOTE: Order additional power supplies, as determined by the use of the HP BladeSystem Power Calculator.	
	NOTE: For a full enclosure, order 4 power supplies in a Power Supply Redundant (N+1) configuration; order 6 power supplies in an AC Redundant (N+N) configuration.	

Configuration Information Factory Integrated Models

Step 2A: Select additional optional enclosure options:

Additional C3000 Power Supplies	1200W High Efficiency AC Power Supply, CSCI 2007/8 NOTE: Climate Savers Computing Initiative, 2007-2008 Compliant NOTE: Includes a C13 to C14 PDU power cord. NOTE: Order additional power supplies, as determined by the use of the HP BladeSystem Power Calculator. NOTE: For a full enclosure, order 4 power supplies in a Power Supply Redundant (N+1) configuration; order 6 power supplies in an AC Redundant (N+N) configuration	437572-B21
c-Class Active Cool Fan	HP BL c-Class Active Cool Fan NOTE: For a full enclosure, order 2 additional (6 total) Active Cool Fans.	412140-B21
HP c3000 Enclosure DVD Drive	HP c3000 Enclosure DVD Drive	437577-B21
HP c3000 KVM Modules and Adapters	HP c3000 KVM module NOTE: For use with in-rack KVM switches. KVM Adapter for KVM switches with internal media drives NOTE: Order one KVM Adapter per c3000 enclosure, to support KVM switches accepting RJ45 cables (P/N's AF600A, AF601A, or AF602A). Please see Options section of this QuickSpecs for additional product information. KVM Adapter for KVM switches without media drives NOTE: Order one KVM Adapter per c3000 KVM enclosure, to support KVM switches accepting RJ45 cables (P/N's 336044-B21 or 336045-B21). Please see Options section of this QuickSpecs for additional product information.	437575-B21 AF603A 336047-B21
Other Enclosure Options	HP BLc3000 Rack Rails NOTE: For use with the c3000 rack-able (437507-B21) model.	437576-B21
HP Insight Control for BladeSystem Licenses	HP c-Class Insight Control Environment for BladeSystem, 8 server blade licenses including 1 year of 24x7 Technical Support and Updates	439034-B23

Step 3: Select additional (one to four) interconnects.

NOTE: Interconnect Bay 1 must contain one of the "Ethernet" interconnect modules For additional information on Interconnect Options, please visit:

HP BladeSystem c-Class Interconnect QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12524_na/12524_na.html

HP BladeSystem c-Class Ethernet Interconnects	HP 1/10Gb-F Virtual Connect Ethernet Module for c-Class BladeSystem HP BladeSystem c-Class Virtual Connect 1Gb SX SFP HP BladeSystem c-Class Virtual Connect 1Gb RJ-45 SFP Opt Kit HP 1Gb Virtual Connect Ethernet Module for c-Class BladeSystem NOTE: This module must be upgraded to VC Management firmware v1.20 or greater. Ethernet Pass-Through Module for HP BladeSystem Cisco Catalyst Blade Switch 3020 for HP c-Class BladeSystem GbE2c Ethernet Blade Switch for HP c-Class BladeSystem GbE2c Layer 2/3 Ethernet Blade Switch for HP c-Class BladeSystem HP 1:10 Gb Ethernet BL-c Switch HP 10Gb Ethernet BL-c Switch NOTE: The purchase the HP 10Gb Ethernet BL-c Switch, also requires the purchase of one (1) HP NC512m Dual Port 10GbE Multifunction BL-c Adapter (P/N 440910-B21) per server blade that requires 10Gbit support. NOTE: The HP BladeSystem c-Class Network Interconnects ship as single units. The above interconnects must be ordered in quantities of two for redundant configurations.	447047-B21 453151-B21 453154-B21 399593-B22 406740-B21 410916-B21 410917-B21 438030-B21 438031-B21 445860-B21
---	--	--

Configuration Information Factory Integrated Models

	HP NC512m Dual Port 10GbE Multifunction BL-c Adapter	440910-B21
	NOTE: An NC512m network adapter card is required for each server blade connecting to the HP 10Gb Ethernet BL-c Switch	
	NOTE: A maximum of one NC512m is supported per server in a type II mezzanine slot.	
	NOTE: The NC512m requires a minimum of 4 GB of server memory and supports a maximum of 32 GB. Therefore, when an NC512m is installed in a blade server, the server is limited to a maximum of 32 GB of memory.	
HP BladeSystem c-Class FC SAN Interconnects	HP 4Gb Virtual Connect Fibre Channel Module for c-Class BladeSystem	409513-B21
	16 port FC Pass-thru Module for c-Class BladeSystem	403626-B21
	HP Brocade 4/12 SAN Switch	AE370A
	HP Brocade 4/24 SAN Switch Power Pack	AE371A
	HP Brocade 4/24 SAN Switch	AE372A
	HP Brocade 4/12 SAN Switch Upgrade LTU	AE373A
	Cisco MDS 9124e 12 port Fabric Switch	AG641A
HP BladeSystem InfiniBand Interconnects	HP 4X DDR IB Switch Module for HP c-Class BladeSystem	410398-B21

Step 4: Select rack power distribution for installing the enclosure into a rack.

NOTE: For use with the c3000 rack-able model only.

NOTE: A pair of PDUs must be ordered for AC Feed redundancy. If AC redundancy is not required, a single PDU or UPS may be acceptable.

HP Monitored Power Distribution Unit	HP 8.6 kVA Monitored PDU, 30A	AF504A
HP Modular PDU	HP 8.3kVA Modular Distribution Unit 40 Amp	252663-D73
	HP 4.9kVA Modular Distribution Unit 24 Amp	252663-D72
	HP Two C-13 PDU Extension Bars	AF500A
HP UPS	HP rack-mountable R5500 UPS (5000VA / 4500 watts)	AF426A
	NOTE: The R5500 includes four c-13 PDU Extension bars.	
	NOTE: The R5500 supports 4 power supplies in the Power Supply Redundant (N+1) power mode.	

Step 5: Select Wall Outlet Power Cords (For connection to standard wall outlets)

NOTE: Select one wall outlet power cord for each power supply when plugging the power supplies into a wall outlet.

NOTE: Wall Outlet power cords should only be used with low-line (100v to 110V) power sources. If high-line power outlets are required, safety regulations require the use of a PDU or a UPS between the c3000 enclosures power supplies and wall outlets.

NOTE: A standard PDU power cord(c13 to C14) is included with each AC power supply, so these wall outlet power cords are not required if you plan to plug the power supplies into a PDU or UPS.

Wall Outlet Power Cords	Nema 5-15P to IEC320-C13, low voltage (6 ft/2 m)	AF556A
	NOTE: HP Power cord (6 ft) 1.83 meter 10A C-13-UL domestic power cord, for grounded USA 110V wall outlets.	

Related Options

c3000 Enclosure Options	HP c-Class Replacement Enclosure Miscellaneous Blanks kit	412148-B21
	<p>NOTE: Contains 1 each of Power Supply Blank, Interconnect Module Blank, Local KVM option blank, DVD Blank, Active Cool Fan Blank, and c3000 minidivider</p> <p>NOTE: This kit should only be ordered to replace lost or damaged blanks.</p>	
	HP c-Class Replacement Server Blank and Coupler Option Kit (contains 1 x half-height server blank with coupler)	412150-B21
	<p>NOTE: The coupler allows half-height server blanks to be coupled together to create a full-height server blank.</p> <p>NOTE: This kit should only be ordered to replace lost or damaged blanks.</p>	
<hr/>		
c3000 Rack Brackets	HP c3000 Rack Shipping Bracket Kit	461384-B21
	<p>NOTE: Required when shipping a c3000 enclosure in a HP 10000 series rack. Please order 1 kit per enclosure.</p>	
<hr/>		
c-Class Power Supply	1200W High Efficiency AC Power Supply, CSCI 2007/8	437572-B21
	<p>NOTE: Climate Savers Computing Initiative, 2007-2008 Compliant</p> <p>NOTE: Includes a C13 to C14 PDU power cord.</p> <p>NOTE: For a full enclosure, order 2 additional power supplies (4 total) in a Power Supply Redundant (N+1) configuration; order 4 additional power supplies (6 total) in an AC Redundant (N+N) configuration.</p> <p>NOTE: For c-3000 Low-line Power Cords. Please see Step 5 above for power cord part numbers.</p>	
	<hr/>	
	<hr/>	
c-Class Active Cool Fans	HP c-Class Active Cool Fan	412140-B21
	<p>NOTE: For a full enclosure, order 2 additional (6 total) Active Cool Fans.</p> <p>NOTE: Supports the c7000 and c3000 enclosures.</p>	
<hr/>		
HP BLc3000 Enclosure DVD Drive	HP c3000 Enclosure DVD Drive	437577-B21
<hr/>		
HP c3000 KVM Module and Adapters	HP c3000 KVM Module	437575-B21
	<p>NOTE: For use with in-rack KVM switches</p> <p>KVM Adapter for KVM switches with internal media drives</p>	AF603A
	<p>NOTE: Order one KVM Adapter per c3000 enclosure, to support KVM switches accepting RJ45 cables (P/N's AF600A, AF601A, or AF602A). Please see Options section of this QuickSpecs for additional product information.</p> <p>KVM Adapter for KVM switches without media drives</p>	336047-B21
	<p>NOTE: Order one KVM Adapter per c3000 KVM enclosure, to support KVM switches accepting RJ45 cables (P/N's 336044-B21 or 336045-B21). Please see Options section of this QuickSpecs for additional product information.</p>	
<hr/>		
Other c3000 enclosure options	HP BLc3000 Rack Rails	437576-B21
	<p>NOTE: For use with the c3000 rack models.</p>	

Related Options

HP BladeSystem c-Class Ethernet Interconnects	HP 1/10Gb-F Virtual Connect Ethernet Module for c-Class BladeSystem	447047-B21
	HP BladeSystem c-Class Virtual Connect 1Gb SX SFP	453151-B21
	HP BladeSystem c-Class Virtual Connect 1Gb RJ-45 SFP Option Kit	453154-B21
	HP 1Gb Virtual Connect Ethernet Module for c-Class BladeSystem	399593-B22
	NOTE: This module must be upgraded to VC Management firmware v1.20 or greater.	
	Ethernet Pass-Through Module for HP BladeSystem	406740-B21
	NOTE: The Ethernet Pass-Thru Module is shipped as a single unit and should be ordered in quantities of two.	
	Cisco Catalyst Blade Switch 3020 for HP c-Class BladeSystem	410916-B21
	GbE2c Ethernet Blade Switch for HP c-Class BladeSystem	410917-B21
HP GbE2c Layer 2/3 Ethernet Blade Switch	438030-B21	
HP 1:10Gb Ethernet BL-c switch	438031-B21	
HP BladeSystem c-Class FC SAN Interconnects	HP 4Gb Virtual Connect Fibre Channel Module for c-Class BladeSystem	409513-B21
	16 port FC Pass-through Module for c-Class BladeSystem	403626-B21
	HP Brocade 4/12 SAN Switch	AE370A
	HP Brocade 4/24 SAN Switch Power Pack	AE371A
	HP Brocade 4/24 SAN Switch	AE372A
HP Brocade 4/12 SAN Switch Upgrade LTU	AE373A	
Cisco MDS 9124e Fabric Switch for HP c-Class BladeSystem	Cisco MDS 9124e 12-port Fabric Switch	AG641A
	Cisco MDS 9124e 24-port Fabric Switch	AG642A
	Cisco MDS 9124e 12-port Upgrade LTU	T5169A
HP BladeSystem InfiniBand Interconnects	HP 4X DDR IB Switch Module for HP c-Class BladeSystem	410398-B21
HP Insight Control Management Suites	NOTE: Electronic licensing options are available for Insight Control suites software products. Please see the appropriate Insight Control QuickSpecs for additional information.	
	HP Insight Control Environment for BladeSystem	
	HP Insight Control Environment for BladeSystem, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates	453484-B21
	NOTE: Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.	
	HP Insight Control Management Software Media Kit	436222-B21
NOTE: Insight Control Management DVD media without licenses. Contains Insight Manager and Essentials software products and components licensed by Insight Control Management suites. Uses an integrated installer to perform quick and accurate software installation and updates.		
NOTE: Contains 1 license for each of RDP, PMP, VPM, IPM and iLO Select. Includes one year of 24 x 7 HP Software Technical Support and Update Service.		
NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html		
iLO Power Management Pack for BladeSystem		

Related Options

HP iLO Power Management Pack for BladeSystem, No Media, 1-Server License including 1 year of 24x7 Technical Support and Updates 442937-B21

NOTE: This option kit includes 1 license for iLO Select and Insight Power Manager. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional -HP Insight Power Manager Packs please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12632_na/12632_na.html

Server Management Stand Alone Software Product – ProLiant Essentials **NOTE:** Electronic licensing options are available for select ProLiant Essentials software products. Please see the appropriate ProLiant Essentials QuickSpecs for additional information.

Deploy

ProLiant Essentials Rapid Deployment Pack

ProLiant Essentials Rapid Deployment Pack No Media 1-Server License including 1 year of 24x7 Technical Support and Updates 452151-B21

NOTE: This license allows 1 server to be deployed and managed via RDP. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional ProLiant Essentials Rapid Deployment Pack License Kits- please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11053_na/11053_na.html

HP Server Migration Pack – Universal Edition

HP Server Migration Pack – Universal Edition, No Media, Physical / Virtual to ProLiant Single Migration License, including 1 year of 24x7 Technical Support 460750-B21

NOTE: This license allows 1 physical to ProLiant or virtual to ProLiant migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

HP Server Migration Pack – Universal Edition, No Media, Physical / Virtual to Virtual Single Migration License, including 1 year of 24x7 Technical Support 460753-B21

NOTE: This license allows 1 physical to virtual or virtual to virtual migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support.

HP Server Migration Pack – Universal Edition, No Media, 1-Year Unlimited Migration License, including 1 year of 24x7 Technical Support 460756-B21

NOTE: This license allows unlimited migrations (physical to ProLiant, physical to virtual, virtual to virtual, and virtual to ProLiant) for one year. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12855_na/12855_na.html

Control

Integrated Lights-Out Select Pack

Related Options

ProLiant Essentials Integrated Lights-Out Select Pack, No Media, 1-Server License 452158-B21

NOTE: For additional License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362_na/12362_na.html

Featuring: Sophisticated remote control and security features for HP BladeSystem servers and ProLiant ML/DL servers.

NOTE: For additional ProLiant Essentials Integrated Lights-Out Value Packs please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362_na/12362_na.html

Optimize

HP Insight Power Manager (IPM)

HP Insight Power Manager, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates 452677-B21

NOTE: Customers purchasing this upgrade must already have an iLO Advanced or Select license on each managed server. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional -HP Insight Power Manager Packs please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12623_na/12623_na.html

ProLiant Essentials Virtual Machine Management Pack

ProLiant Essentials Virtual Machine Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates 452153-B21

NOTE: Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional ProLiant Virtual Machine Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12328_na/12328_na.html

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to: <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

HP Virtual Connect Enterprise Manager

HP Virtual Connect Enterprise Manager for BL-c3000, No Media, 1-Enclosure License including 1 year of 24x7 Technical Support and Updates. 459867-B21

NOTE: This license allows 1 BL-c3000 enclosure to be managed with VCEM.

Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional information regarding the HP Virtual Connect Enterprise Manager License kits, please visit:

http://h18000.www1.hp.com/products/quickspecs/12860_na/12860_na.html

Related Options

HP c-Class Storage Blades	HP StorageWorks SB40c storage blade	411243-B21
	<p>NOTE: For additional information regarding the HP StorageWorks SB40c storage blade, please visit: http://h18000.www1.hp.com/products/quickspecs/12587_na/12587_na.html</p>	
	HP PCI Express Mezzanine pass-thru card for HP BladeSystem	431643-B21
	<p>NOTE: The mezzanine card is needed to support the SB40c storage blade (P/N 411243-B21) with HP c-Class BladeSystem full-height server blades.</p>	
HP c-Class Tape Blades	HP StorageWorks Ultrium 448c Tape Blade	440947-B21
	HP StorageWorks SB920c Tape Blade	AJ401A
	HP PCI Express Mezzanine pass-thru card for HP BladeSystem	431643-B21
	<p>NOTE: The HP PCI Express Mezzanine Pass-Thru Card for HP BladeSystem (431643-B21) is required when installing a tape blade adjacent to a full-height server blade</p> <p>NOTE: Please see the HP Tape Blades QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12729_div/12729_div.html</p>	
HP PCI Expansion Blade	PCI Expansion Blade	448018-B21
	<p>NOTE: For additional information regarding the HP PCI Expansion Blade, please visit: http://h18000.www1.hp.com/products/quickspecs/12753_div/12753_div.html</p>	
HP StorageWorks AiO SB600c shared storage blade	HP StorageWorks AiO SB600c Storage Blade – 1.16TB	AG780A
	<p>NOTE: Shared storage blade for server blades within the enclosure. The SB600c can be either NAS (file-based shared storage or iSCSI Shared Storage connected to server blades within the enclosure using an Ethernet switch in the enclosures interconnect bays.</p> <p>NOTE: For additional information regarding the HP StorageWorks AiO SB600c Storage Blade, please visit: http://h18000.www1.hp.com/products/quickspecs/12786_div/12786_div.html</p>	
	HP StorageWorks Storage Mirroring for AiO Edition Software	T5321A
	<p>NOTE: This optional software is for mirroring data between AiO Storage blades in different locations. This is host-based data replication software for disaster recovery and data protection.</p> <p>NOTE: Order 1 unit for each AiO SB600c Storage Blade.</p>	
HP Monitored Power Distribution Unit	HP 8.6 kVA Monitored PDU, 30A	AF504A
HP Modular PDU	HP 8.3kVA Modular Distribution Unit 40 Amp	252663-D73
	HP 4.9kVA Modular Distribution Unit 24 Amp	252663-D72
	HP Two C-13 PDU Extension Bars	AF500A
HP UPS	HP rack-mountable R5500 UPS (5000VA / 4500 watts)	AF426A
	<p>NOTE: The R5500 includes four c-13 PDU Extension bars.</p> <p>NOTE: The R5500 supports 4 power supplies in the Power Supply Redundant (N+1) power mode.</p>	

Related Options

HP Rack 10000 Series (Graphite Metallic)	HP S10614 (14U) Rack Cabinet – Shock Pallet	292302-B22
--	---	------------

HP Rack 10000 G2 Series (Graphite Metallic)	10622 G2 (22U) Rack Cabinet Shock	AF022A
	10622 G2 (22U) Rack Cabinet Pallet	AF021A
	10642 G2 (42U) Rack Cabinet – Pallet	AF001A
	10642 G2 (42U) Rack Cabinet – Shock Pallet	AF002A
	10642 G2 (42U) Rack Cabinet – Crated	AF003A
	10642 G2 (42U) Rack Cabinet, with Extension – Shock Pallet	AF004A
	10642 G2 (42U) Rack Shock Pallet – for field racking	AF007A
	10636 G2 (36U) Rack Cabinet – Shock Pallet	AF011A
	10636 G2 (36U) Rack Cabinet – Crated	AF012A
	10636 G2 (36U) Rack Cabinet, with Extension – Shock Pallet	AF013A
	10636 G2 (36U) Rack Cabinet, without door – Shock Pallet	AF014A
	10647 G2 (47U) Rack Cabinet – Pallet	AF031A
	10842 G2 (42U) Rack Cabinet Shock	AF042A
	10842 G2 (42U) Rack Cabinet Pallet	AF041A

NOTE: Please see the Rack 10000 G2 QuickSpecs for additional part numbers and Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/12402_na/12402_na.html

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

Rack Options for Rack 10000 G2 Series	HP 10642 G2 Front Door ALL	AF009A
	HP 10636 G2 Front Door ALL	AF019A
	10642 G2 (42U) Side Panels (set of two) (Graphite Metallic)	AF054A
	10636 G2 (36U) Side Panels (set of two) (Graphite Metallic)	AF056A
	10642 Rear Extension Kit	AF058A
	10636 G2 Rear Extension Kit	AF060A
	600mm G2 Stabilizer Option Kit (Graphite)	AF062A
	800mm G2, Heavy Duty Stabilizer Option Kit (Graphite)	AF068A
	NOTE: Supports 10000 G2 Series only.	
	HP 10000 G2 Rack Grounding Kit	AF074A
	600W 10K G2 Rack Tie Down	AF076A

NOTE: For additional information regarding Rack Options, please see the following URL: <http://www.hp.com/go/rackandpower>.

HP Modular Cooling System	HP Modular Cooling System	AF098A
----------------------------------	---------------------------	--------

Tape Libraries

The following options are supported in an Enterprise Backup Solution (EBS) environment with the HP BladeSystem c-Class enclosure. Please visit:

<http://www.hp.com/go/ebs> for complete compatibility details.

HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ033A
HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 4GB FC Library	AJ034A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 SCSI Drive Library	AG115A

Related Options

HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 4GB FC Library	AG326B
HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SCSI Drive Library	AH169A
HP StorageWorks MSL2024 2 LTO-3 Ultrium 920 SCSI Drive Library	AH170A
HP StorageWorks MSL2024 1 LTO-2 Ultrium 448 SCSI Drive Library	AG116A
HP StorageWorks MSL2024 2 LTO-2 Ultrium 448 SCSI Drive Library	AG117A
HP StorageWorks MSL4048 Tape Library	
HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ035A
HP StorageWorks MSL4048 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ037A
HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 4GB FC Library	AJ036A
HP StorageWorks MSL4048 2 LTO-4 Ultrium 1840 4GB FC Library	AJ038A
HP StorageWorks MSL4048 1 LTO-2 Ultrium 448 SCSI Drive Library	AG320A
HP StorageWorks MSL4048 2 LTO-2 Ultrium 448 SCSI Drive Library	AG321A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SCSI Tape Library	AH171A
HP StorageWorks MSL4048 2 LTO-3 Ultrium 920 SCSI Tape Library	AH172A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 SCSI Drive Library	AG322A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 4GB FC Library	AG324B
HP StorageWorks MSL4048 2 LTO-3 Ultrium 960 SCSI Drive Library	AG323A
HP StorageWorks MSL4048 2 LTO-3 Ultrium 960 4GB FC Library	AG325B
HP StorageWorks MSL8096 Tape Library	
HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ039A
HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 4GB FC Library	AJ040A
HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 4GB FC Library	AH218A
HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 SCSI Library	AH219A
HP StorageWorks MSL6000 Tape Library	
Ultrium 960 technology	
HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ029A
HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 4GB FC Library	AJ030A
HP StorageWorks MSL6030 1 LTO-3 Ultrium 960 SCSI Drive Library	AD606B
HP StorageWorks MSL6030 1 LTO-3 Ultrium 960 4GB FC Library	AD608B
HP StorageWorks MSL6030 2 LTO-3 Ultrium 960 SCSI Drive Library	AD607B
HP StorageWorks MSL6030 2 LTO-3 Ultrium 960 4GB FC Library	AD609B
HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ031A
HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 4GB FC Library	AJ032A
HP StorageWorks MSL6060 2 LTO-3 Ultrium 960 SCSI Drive Library	AD610B
HP StorageWorks MSL6060 2 LTO-3 Ultrium 960 4GB FC Library	AD611B
NOTE: Please reference the MSL2024, MSL4048, MSL8096 and MSL6000 Tape Library QuickSpecs at: http://www.hp.com/go/automation for additional information needed to create a complete solution; reference current compatibility information at: http://www.hp.com/go/ebs	
HP StorageWorks Virtual Library Systems	
HP StorageWorks 12000 Virtual Library System Gateway Base Library	AH814A
HP StorageWorks 9030 Virtual Library System	AG306A
HP StorageWorks 6218 Virtual Library System	AH809A
HP StorageWorks 6227 Virtual Library System	AH810A
HP StorageWorks 6636 Virtual Library System	AH811A
HP StorageWorks 6653 Virtual Library System	AH812A

Related Options

NOTE: Please reference the Virtual Library Systems QuickSpecs at: <http://www.hp.com/go/automation> for additional information needed to create a complete solution. Reference current compatibility information at: <http://www.hp.com/go/ebs>

Monitors and Keyboards	TFT7210R Rack Mounted 17" Monitor	348373-B21
	TFT7600 Rackmount Keyboard Monitor	AG052A
	1U Rackmount Keyboard with USB	AG072A

NOTE: For additional information regarding Rack Options, please see the following URL: <http://www.hp.com/go/rackandpower>

HP KVM Switch Options	2x1x16 IP Console Switch with Virtual Media	AF601A
	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	BladeSystem c-Class KVM Interface Adapter - 1 pack	AF605A
	HP 1x8 Server Console Switch	336044-B21
	HP 2x16 Server Console Switch	336045-B21
	USB Interface Adapter, 1-pack	336047-B21
	Serial Interface Adapter, 1-pack with power supply	373045-B21
	NOTE: Cat5e cables are required to connect Interface Adapters to Consoles Switches. Cat52 cables can be found at the following URL: http://www.hp.com/go/kvm	
	HP 1x4 Console Switch	AF611A
	HP USB Server Console Cable, 6 foot, 2-Pack	AF613A

NOTE: required for supporting USB peripherals.

HP USB KVM Cable with audio, 6'-2-pack	371729-B21
--	------------

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>

HP Serial Console Server Options	HP 16 Port Serial Console Server	AF101A
	HP 48 Port Serial Console Server	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
	NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm .	

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

Service and Support Offerings
(HP Care Pack Services)

NOTE: HP Care Pack services for the c3000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP supported c-Class enclosure devices including pass thru, Ethernet interconnect and virtual connect modules are also covered by the c3000 enclosure Care Pack services.

NOTE: SAN/Fabric switches for the HP c-Class BladeSystem are not covered under the c3000 enclosure Care Packs, SAN/Fabric switches carry separate Care Packs. SAN/Fabric Switch Care Pack service level support should always be uplifted to match existing storage or server service level.

Related Options

Hardware Services On-site Service

Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic UH309E

NOTE: Uplifts the Ethernet devices to the same level of warranty as the c-class enclosure.

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic UH310E

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic UH311E

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic UH312E

Support Plus 24

Onsite HW support 24x7, 4-Hour response and Insight Control Environment for BladeSystem Software Updates and Software Technical support offsite, onsite at HP's discretion, 24x7 2-Hour response time including. HP holidays, Electronic UF540E

Installation & Start-up Services

HP BladeSystem c3000 + ICE + OS Installation and Startup Service for Blade Hardware and Insight Control Software, Electronic UF817E

HP BladeSystem c3000 Installation & Startup for Blade Hardware and Operating System UF818E

HP BladeSystem c3000 Enhanced Network Installation and Startup Service, Electronic UF814E

ProLiant BL c-Class Enclosure and Blade Hardware Installation, Electronic UE494E

ProLiant BL c-Class Blade Server Hardware Installation, Electronic UE493E

NOTE: For more information, customer/resellers can contact:

<http://www.hp.com/services/bladessystemservices>

NOTE: The HP Care Pack service part numbers below covers the HP Brocade 4Gb, 12 Port SAN Switch and Brocade 4/24 SAN Switch.

Hardware Services On-site Service

Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic UE436E

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic UE437E

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, (24 port) Electronic UE438E

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic UE439E

Hardware Installation, Electronic U5988E

NOTE: The HP Care Pack service part numbers below covers the Brocade 4/24 SAN Switch Power Pack.

Hardware Services On-site Service

Support Plus

Onsite Hardware support, 8am-9pm, M-F, 4-hour response and Software Technical support offsite, onsite at HP's discretion, 8am-9pm, M-F 2-hour response time excluding HP holidays, Electronic UE728E

Support Plus 24

Onsite Hardware support, 8am-9pm, M-F, 4-Hour response and Software Technical support offsite, onsite at HP's discretion, 8am-9pm, M-F 2-Hour response time excluding. HP holidays, Electronic UE729E

NOTE: The HP Care Pack service part numbers below covers the HP Cisco MDS 9124e 12 port and 24 port Fabric Switch.

Hardware Services On-site Service

Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic UF313E

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic UF972E

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic UF973E

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic UF974E

Related Options

Hardware Installation, Electronic	U5988E
Software Installation and StartUp Services	
Provides for the Installation and Start-up of ProLiant Essentials Rapid Deployment Pack, Electronic	U5683E
NOTE: Provides installation on a Customer supplied server designated as a Deployment Server. Includes the deployment of a single server. This new server will be deployed using either one of the pre-configured scripts or an image. In addition, the service will provide for the capture and storage of the configuration of the newly deployed server and orientation on product usage. To be delivered during standard office hours, standard office days.	
Provides for the Installation and Start-up of Rapid Deployment Pack Implementation of Rapid Deployment Pack (Basic), Electronic	UA042E
NOTE: Service coverage: onsite installation of the Vulnerability and Patch Management (VPM) software on a customer designated server, configuration of the VPM software to acquire security patches, enabling the VPM software to scan up to five (5) systems, applying the security patches to the designated servers, generating a report from VPM that shows the vulnerability assessment results, and providing customer with an orientation to the software.	
Provides for the Installation and Start-up of System Insight Manager (Electronic)	UA041E
Provides for the Installation and Start-up of System Insight Manager Agents (Electronic)	UA040E
Provides for the Installation and Startup of Insight Control – Linux Edition	UF369E
Provides for the Installation and Startup of Virtual Machine Management & Server Migration Pack	UD546E
Software Operating Environment Care Packs	
1 Year Microsoft operating environment software support 24x7 – 10 incidents	U9269E
1 Year Red Hat operating System software support 24x7 – 10 incidents	U3408E
1 Year SuSE operating System software support 24x7 – 10 incidents	U9936E
1 Year 9x5 ProLiant Essentials Software Support	UF512E
1 Year 24x7 ProLiant Essentials Software Support	UF513E
3 Year 9x5 ProLiant Essentials Software Support	UF514E
HP 3 Year 24x7 ProLiant Essentials Software Support	UF515E
NOTE: For more information, customer/resellers can contact: http://www.hp.com/hps/carepack/services/	
NOTE: HP Care Pack services for the c3000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP supported c-Class enclosure devices including pass thru, Ethernet interconnect and virtual connect modules are also covered by the c7000 enclosure Care Pack services.	
NOTE: SAN/Fabric switches for the HP c-Class BladeSystem are not covered under the c7000 enclosure Care Packs, SAN/Fabric switches carry separate Care Packs. SAN/Fabric Switch Care Pack service level support should always be uplifted to match existing storage or server service level.	
Hardware Services On-site Service	
Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic	HA101A3#6X4
NOTE: Uplifts the Ethernet devices to the same level of service as the c-class enclosure	
4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	HA103A3#6X4
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	HA104A3#6X4
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	HA105A3#6X4
Support Plus	

Related Options

Onsite HW support, 8am-9pm, M-F, 4hr response and SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, 3 Years	HA109A3#6X4
Support Plus 24 - Onsite HW support 24x7, 4hr response and SW support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, 3 Year	HA110A3#6X4
Proactive 24 Service - Mission Critical proactive environment 24x7 4hr onsite HW support, 3 Years	HA111A3#6X4
Critical Service - Mission Critical proactive environment 6-Hour Call-to-Repair onsite HW support, 3 Years	HA112A3#6X4

Installation & Start-up Services

HP BladeSystem c3000 Hard Ware Installation	HA113A1#57A
HP BladeSystem c3000 Infrastructure Installation and Startup Service for Blade Hardware and Insight Control Software	HA114A1#57A

NOTE: For more information, customer/resellers can contact:

<http://www.hp.com/services/bladessystemservices>

NOTE: The HP Care Pack service part numbers below covers the HP Brocade 4Gb, 12 Port SAN Switch and Brocade 4/24 SAN Switch.

Hardware Services On-site Service

Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years	HA101A3#85J
4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years	HA103A3#85J
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years	HA104A3#85J
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	HA105A3#85J
Hardware Installation, Electronic	HA113A1#5D2

NOTE: The HP Care Pack service part numbers below covers the Brocade 4/24 SAN Switch Power Pack.

Hardware Services On-site Service

Support Plus

Onsite HW support, 8am-9pm, M-F, 4hr response and SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excluding HP holidays, Electronic	HA109A3#85K
--	-------------

Support Plus 24

Onsite HW support 24x7, 4hr response and SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time including HP holidays, Electronic	HA110A3#85K
---	-------------

NOTE: The HP Care Pack service part numbers below covers the HP Cisco MDS 9124e 12 port and 24 port Fabric Switch.

Hardware Services On-site Service

Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years	HA101A3#87L
4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years	HA103A3#87L
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years	HA104A3#87L
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	HA105A3#87L
Hardware Installation, Electronic	HA113A1#5D2


NOTE: For more information, customer/resellers can contact:

<http://www.hp.com/hps/carepack/services/>


Technical Specifications

Server Blade, Power Supply and Fan Population Guidelines


Fan & power supply bay numbering

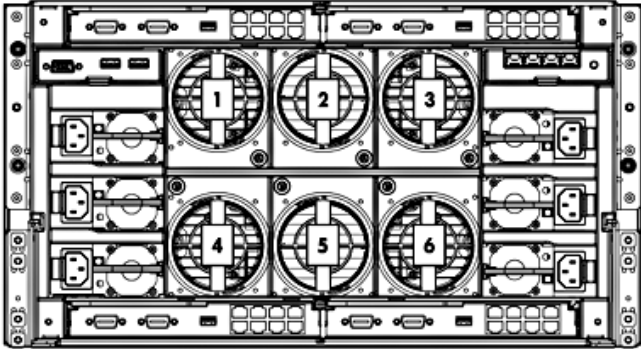


HP BladeSystem c3000 Enclosure – Rack
Fan bay numbering

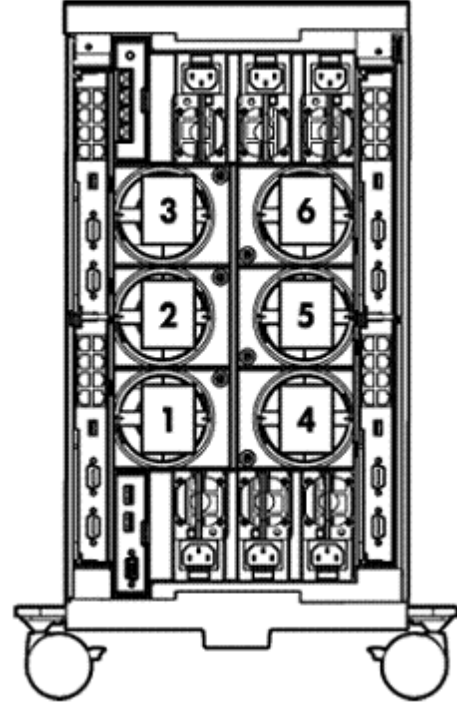

HP BladeSystem c3000 Enclosure – Tower

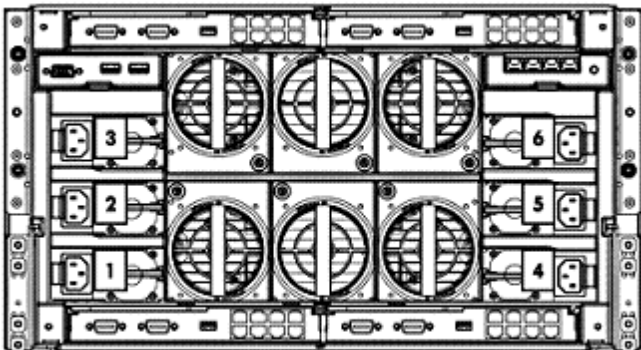

HP BladeSystem c3000 Enclosure – Rack

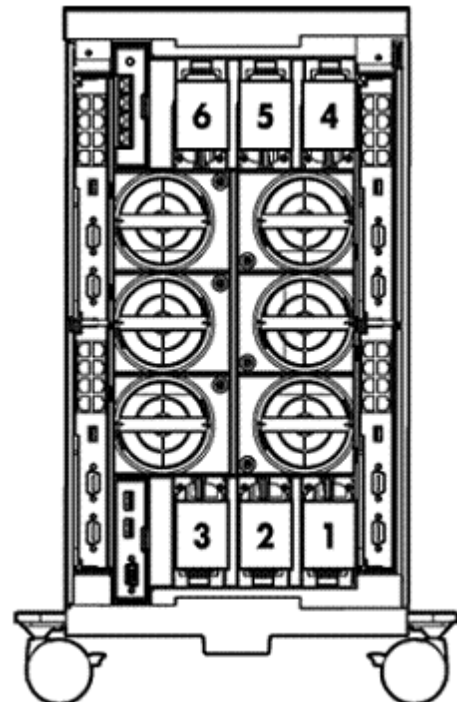

HP BladeSystem c3000 Enclosure – Tower

Technical Specifications

Power supply bay numbering

Power Supplies & Fans must be placed in the following bays

Number of Fans

4

6

Number of Power Supplies (for PS Redundant or non-redundant mode)

2

3

4

5

6

Number of Power Supplies (For AC Redundant mode)

2

4

6

Fan Bays Used

2,4,5, 6

all bays filled

Power Supply Bays Used

1 & 2

1, 2, & 3

1, 2, 3, 4

1 through 5

All bays

Place Power Supplies in bays:

1 & 4


1, 2, 4, & 5

all bays filled

NOTE: With four fans, the enclosure will support only 4 half-Height Server blades in the bottom half of the enclosure device bays. With six fans, all 8 server bays may be filled.


NOTE: For correct operation, fans and server blades must be installed in the correct bays. The Onboard Administrator will ensure that fans and blades are correctly placed before allowing systems to power on.

Half-height server blade bay numbering

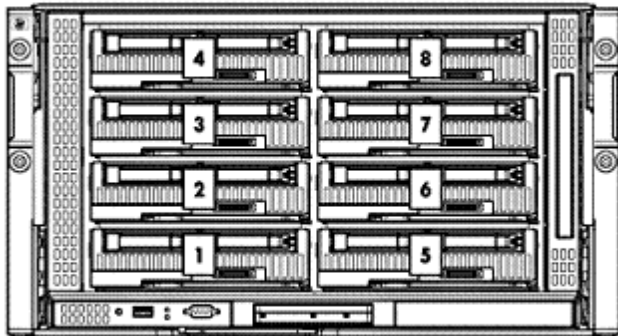

HP BladeSystem c3000 Enclosure – Racks

1. Device Bay 1
2. Device Bay 2
3. Device Bay 3
4. Device Bay 4
5. Device Bay 5

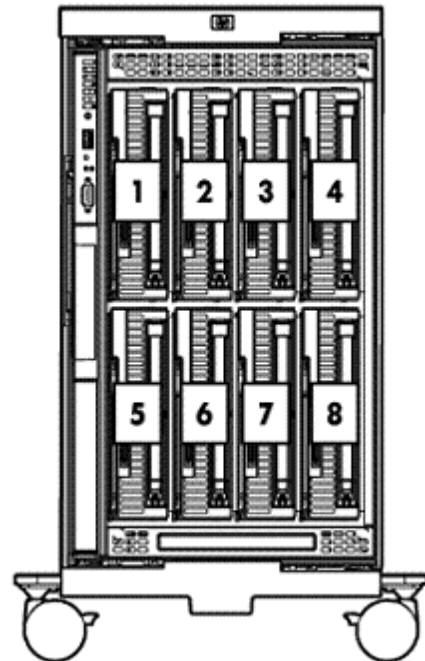

HP BladeSystem c3000 Enclosure – Tower


1. Device Bay 1
2. Device Bay 2
3. Device Bay 3
4. Device Bay 4
5. Device Bay 5

Technical Specifications

- | | |
|-----------------|-----------------|
| 6. Device Bay 6 | 6. Device Bay 6 |
| 7. Device Bay 7 | 7. Device Bay 7 |
| 8. Device Bay 8 | 8. Device Bay 8 |

NOTE: Half-height server blades should be populated from the bottom half of the enclosure, in the following order (bays 1, 5, 2, 6, 3, 7, 4, & 8)


Full-height server blade bay numbering

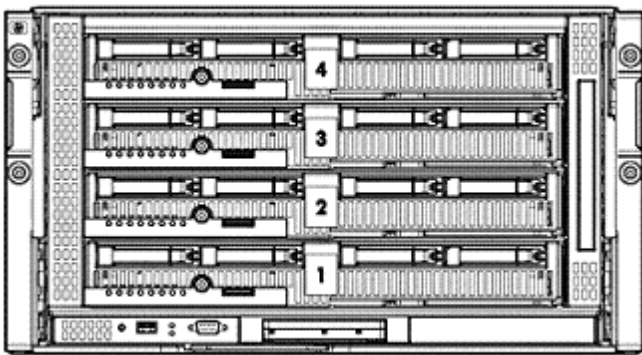

HP BladeSystem c3000 Enclosure – Racks

1. Device Bay 1
2. Device Bay 2
3. Device Bay 3
4. Device Bay 4

NOTE: Full-height servers should be populated from the bottom to the top (bays 1 thru 4). With four fans, only the bottom 2 bays can be used; with six fans, all bays can be used.

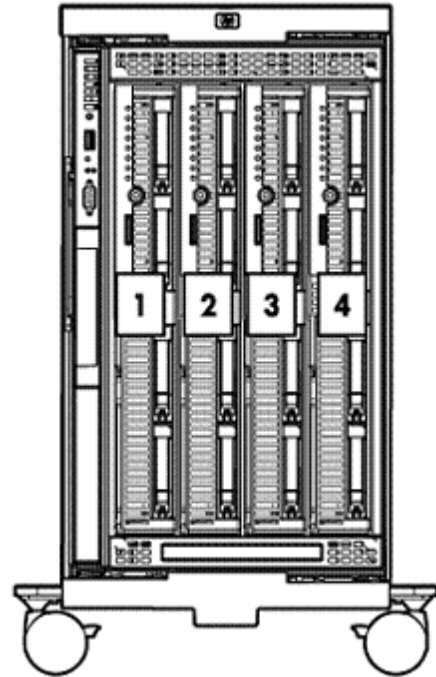

HP BladeSystem c3000 Enclosure – Tower

1. Device Bay 1
2. Device Bay 2
3. Device Bay 3
4. Device Bay 4

Technical Specifications

Mixed Configuration – Full Height and Half Height Population

The c3000 enclosure is divided into 2 zones or quadrants by the horizontal (vertical on Tower model) support metalwork. Zone 1 includes bays 1, 2, 4, & 5; and Zone 2 contains bays 3, 4, 7, & 8. Within each zone a removable divider is used to support half height devices. To install a full-height blade in any zone this divider must be removed. An optional mini-divider support bracket is included with every c3000 enclosure. As a consequence of using the mini-divider in the Zone 2, this zone can only contain one full height blade and 2 half-height blades. Zone 1 can contain either 4 half-height blades, or by removing the divider, it can contain 2 full-height blades.

NOTE: Please read the RTF card (included with each c3000 enclosure) and the "HP BladeSystem c3000 Setup and Installation Guide" for more information on using bay dividers and the mini-divider for mixed configurations.

NOTE: Storage or tape blades can be installed in the same zone as both full-height and half-height blades, a bracket ships with each SB40c that allows a half-height blade to be mounted to the left side of a storage or tape blade.

NOTE: In this case, the SB40c or tape blade cannot be removed without first removing the half height blade and mounting bracket.

NOTE: For Mixed configurations of full height and half height population rules; please see the c3000 Enclosure installation and users guide at: <http://h71028.www7.hp.com/enterprise/cache/316682-0-0-0-121.html>

Enclosure Unit – Rack Model	Dimensions (H x W x D) (with bezel)	10.4 x 19.1 x 32.977 in (265 x 485 x 835 mm)		
	Weight (approximate)	Maximum	300 lb (136 kg)	
		(one enclosure with 8 blades and 4 interconnects installed)		
	Input Requirements (per AC power supply)	Minimum	130 lb (59 kg)	
		(one enclosure without blades and interconnects)		
	BTU Rating	Rated Line Voltage	90 – 132 VAC 180 – 264 VAC	
		Rated Input Current	9.3 A (at 100 VAC)	
			9.7 A (at 120VAC)	
			7.8 A (at 200 VAC)	
			7.2 A (at 208 VAC)	
6.8 A (at 220 VAC) 6.2 A (at 240 VAC)				
Power Specifications	Rated Input Frequency	47 to 63 Hz		
	Maximum per power supply	2728 BTU/hr (at 100 VAC)		
		3069 BTU/hr (at 120VAC)		
4092 BTU/hr (at 200 to 240 VAC)				
Power Supply Output (per power supply)	To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: www.hp.com/go/bladeSystem/powercalculator			
	Rated Steady-State Power	800 W (at 100 VAC) 900 W (at 120 VAC) 1200 W (at 200 to 240 VAC)		
	Maximum Peak Power	880 W (at 100 VAC) 990 W (at 120 VAC) 1350 W (at 200 to 240 VAC)		

Technical Specifications

System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise		Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
	Idle	depends on server configuration & mix of server blades
	Operating	varies by CPU utilization, server configuration, and mix of server blades

Enclosure Unit – Tower Model	Dimensions (H x W x D) (with bezel)	21.29 x 13.48 x 34.43 in (54.08 x 34.24 x 87.45 cm)	
	Weight (approximate)	Maximum	342 lb (155 kg)
Minimum (2 power supplies & 4 fans, no server blades nor interconnects installed)		192 lb (87.09 kg)	

Technical Specifications

Input Requirements (per AC power supply)	Rated Line Voltage	90 – 132 VAC 180 - 264 VAC
	Rated Input Current	9.3 A (at 100 VAC) 9.7 A (at 110 VAC) 7.8 A (at 200 VAC) 7.2 A (at 208 VAC) 6.8 A (at 220 VAC) 6.2 A (at 240 VAC)
BTU Rating	Rated Input Frequency	47 to 63 Hz
	Maximum per power supply	2728 BTU/hr (at 100 VAC) 3069 BTU/hr (at 120VAC) 4092 BTU/hr (at 200 to 240 VAC)
Power Specifications	To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: : www.hp.com/go/bladeSystem/powercalculator	
Power Supply Output (per power supply)	Rated Steady-State Power	800 W (at 100 VAC), 900 W (at 120 VAC) 1200 W (at 200 to 240 VAC)
	Maximum Peak Power	880 W (at 100 VAC), 990 W (at 120 VAC) 1350 W (at 200 to 240 VAC)
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Technical Specifications

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

Idle depends on server configuration & mix of server blades

Operating varies by CPU utilization, server configuration, and mix of server blades

Option Kits

Power Supply Dimensions

Size
Height: 1.515 in (38.48 mm)
Width: 3.4 in (86.36 mm)
Depth: 7.5 in (190.5 mm)

Weight
2.5 lbs (1.13 kg)

Fan Option Shipping Dimensions

Size
Height: 8.75 in (223 mm)
Width: 9.75 in (248 mm)
Depth: 15.88 in (403 mm)

Weight
4.0 lbs (1.8 Kg)

Environment-friendly Products and Approach

NOTE: To review maximum system power ratings for facilities planning purposes use the Active Answers Power Calculator which is available via the online tool located at URL: <http://www.hp.com/go/bladesystem/powercalculator>

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries. AMD is a US registered trademark of AMD Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.