

Increase business opportunities with a printer that delivers unrivaled versatility for outdoor and indoor applications. Experience the ease of reliable HP Designjet printing. Attract the attention of environmentally conscious customers.



## UNRIVALED VERSATILITY FROM ONE PRINTING SYSTEM(1

- Produce outdoor signage with durability comparable to ecosolvent inks.<sup>(2)</sup>
- Achieve high-quality results—that meet clients' branding requirements—for all your indoor signage applications, from exhibition graphics to interior decorations.
- Print on a wide range of media, including coated media or polyester fabric<sup>(3)</sup> and low-cost papers without treatments.
- Produce vehicle wraps with HP Latex Inks that outperform eco-solvent inks. HP is the only company that offers and warrants the entire printing system for vehicle wraps<sup>(4)</sup> with the HP Performance Warranty for HP Air Release Adhesive Gloss Cast Vinyl and HP Clear Gloss Cast Overlaminate.<sup>(5)</sup>
- Expect the most out of each application when you use the broad portfolio of Original HP printing materials.

## EASY, AUTOMATIC, LOW MAINTENANCE PRINTING

- Experience easy, unattended printing with HP Thermal Inkjet printheads and automatic maintenance.
- Experience greater uptime—with user-replaceable printheads you can avoid the delay and expense of a service call.
- Automatically achieve high image quality and consistency with the HP Optical Media Advance Sensor (OMAS) and embedded spectrophotometer.
- Post-print production is easy with prints that come off the printer dry and ready—for lamination, packaging, shipping, and display.
- Minimize interruptions with pro-active alerts and the embedded Web server, which is accessible through your preferred RIP.

## GO GREEN, IMPROVE YOUR OPERATOR'S WORK ENVIRONMENT

- Provide your print operators with an improved working environment—without the health and safety considerations of printshops that use eco-solvent-based printers.
- Build a competitive edge with odorless prints<sup>6</sup> ideal for sensitive indoor areas. HP Latex Ink prints on HP PVC-free Wall Paper meet the GREENGUARD Children & Schools standard for low emitting products<sup>7</sup> and AgBB criteria for health-related evaluation of VOC emissions of indoor building products.<sup>8</sup>
- No special ventilation equipment<sup>(9)</sup> or external dryer requirement helps keep energy costs down.
- Distinguish your business and attract new environmentally focused customers by offering a complete solution—including water-based HP Latex Inks and HP recyclable media.<sup>(10)</sup>
- Take advantage of free, convenient HP programs for recycling Original HP 789 Ink Cartridges, Printheads, and cleaning supplies<sup>(1)</sup>, as well as prints produced on HP recyclable media.<sup>(10)</sup>

### **ecohighlights**

HP DESIGNJET L25500 PRINTER SERIES

- Water-based HP Latex Inks—no hazard warning labels, no HAPs<sup>(1)</sup>
- No special ventilation required<sup>(2)</sup>
- Odorless prints;<sup>3</sup> printed HP wall paper meets GREENGUARD and AgBB criteria<sup>(4)</sup>
- Range of recyclable HP media available, with take-back program<sup>(5)</sup>
- ENERGY STAR® qualified product
- Special ventilation is not required to meet US OSHA requirements on occupational exposure to VOCs from HP Latex Inks. Special ventilation equipment installating the the discretion of the customer—no specific HP recommendation is intended. Customers should consult state and local requirements and regulations.
- Some substrates may have an inherent odor.
  HP PVC-free Wall Paper printed using HP Latex Inks meets GREENGUARD Children & Schools criteria for low emitting pro
  - vailability varies. Please check www.hp.com/recycle for details.







### SAVE TIME AND EXPENSE WITH USER-REPLACEABLE PRINTHEADS

The HP Designjet L25500 Printer series is designed to save you time and money. Printheads you can replace yourself eliminate the down-time and expense of a service call. And fully-automatic printhead testing and maintenance systems eliminate time-consuming daily manual maintenance.



### GET HIGH PERFORMANCE

WITH HP DOUBLE SWATH TECHNOLOGY

The HP Designjet L25500 uses pairs of staggered printheads in HP Double Swath Technology for a wide (1.7 inch/43.2 mm) print swath and higher throughput. To eliminate swath-to-swath banding, the print swaths overlap each other and nozzles printing in the same scan line (top and bottom printheads) are used together.



## ELIMINATE WAITING TIME WITH PRINTS THAT ARE COMPLETELY DRY RIGHT OFF THE PRINTER


Win business with faster turnaround times. Prints come out of the printer completely dry, so there's no waiting before you move on to lamination, finishing, or packing for shipment.




# REVOLUTIONARY HP LATEX INK TECHNOLOGIES

HAVE THE POWER TO CHANGE YOUR FUTURE.

Innovative HP Latex Inks produce prints with the quality and durability of eco-solvent and low-solvent ink technologies<sup>(2)</sup> but they're water-based inks. So you get the application versatility, without the hassle associated with the environmental, health, and safety considerations of solvent-based inks.

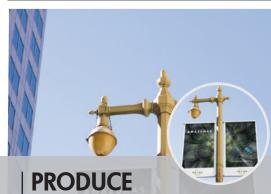

A REMARKABLY BROAD RANGE OF OUTDOOR AND INDOOR APPLICATIONS From rugged, eye-catching vehicle wraps that get ad campaigns moving to odorless<sup>(6)</sup> indoor displays perfectly suited for sensitive hospital or restaurant environments, HP Latex Ink Technologies provide you with the opportunity to print on a wide range of solvent-compatible media including most low-cost uncoated media. Expand your offering and watch your print volumes grow.





## ACHIEVE QUALITY AND CONSISTENCY WITH THE OPTICAL MEDIA ADVANCE SENSOR AND OPTICAL DROP DETECTOR

Featuring sophisticated media advance controls and automatic nozzle testing, this printer is designed to produce defect-free prints that help you avoid ink and media waste. The HP Optical Media Advance Sensor (OMAS) controls the media as it advances through the printer to minimize banding at high speeds. The Optical Drop Detector (ODD) automatically tests the drop ejection performance of every printhead nozzle to produce prints free of defects.




## PROACTIVELY MANAGE YOUR PRINT JOBS WITH THE EMBEDDED WEB SERVER

Accessible using your preferred web browser, the embedded Web server allows you to control print settings and monitor your printer's use of ink and media. Gain tighter control over your print jobs and prevent unnecessary ink and media waste.



## PRINT CONTINUOUS, UNATTENDED RUNS WITH THE TAKE-UP REEL, INCLUDED STANDARD

Improve productivity by printing continuous, unattended runs—even overnight—and on long media rolls with the media take-up reel that comes standard on both 42-inch and 60-inch models of this printer.

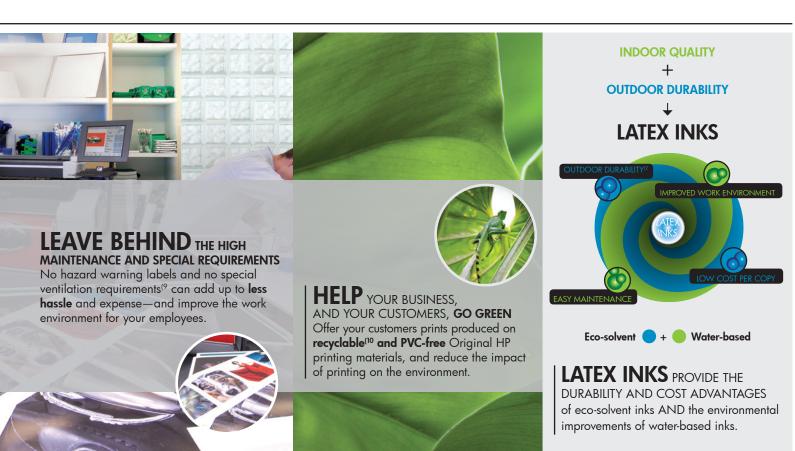

### TECHNICAL SPECIFICATIONS

Print speed <sup>(12</sup>	H- 1- 22 02/L- (244 ft2/L-)
Media	Up to 22.8 m²/hr (246 ft²/hr)
Media Handling	Roll feed, take-up reel, automatic cutter for vinyl, paper-based media, backlit
nanaling	polyester film, and thin banners
Types	Banners, vinyls, films, fabrics, papers, mesh with liner
Size	<b>42-in models:</b> 58 to 106.7-cm (23 to 42-in) rolls, up to 28 kg (61.7 lb)
	<b>60-in models:</b> 58 to 152.4-cm (23 to 60-in) rolls, up to 40 kg (88 lb)
Loading	Rolls up to 18 cm (7.1 in) outside diameter
Thickness	Up to 0.5 mm (19.7 mil)
Printing modes <sup>(12</sup>	
4-pass bidirectional	22.8 m <sup>2</sup> /h (246 ft <sup>2</sup> /hr)
6-pass bidirectional	16.5 m <sup>2</sup> /h (178 ft <sup>2</sup> /hr)
8-pass bidirectional	10.6 m <sup>2</sup> /h (114 ft <sup>2</sup> /hr)
10-pass bidirectional	9.0 m²/h (97 ft²/hr)
12-pass bidirectional	7.6 m²/h (81 ft²/hr)
16-pass bidirectional	6.3 m <sup>2</sup> /h (68 ft <sup>2</sup> /hr)
Printing	e.e / (ee /)
Print resolution	1200 x 1200 dpi
Margins (top x bottom x left	5 x 5 x 5 x 5 mm (0.2 x 0.2 x 0.2 x 0.2 in)
x right)	3 x 3 x 3 x 3 min (0.2 x 0.2 x 0.2 x 0.2 in)
Technology	HP Thermal Inkjet
Ink types	HP Latex Inks
Ink colors	Cyan, magenta, yellow, black, light cyan, light magenta
Ink drop	12 pl
Ink cartridge size	775 ml
Printheads	6 (2 x yellow/black, 2 x cyan/light cyan, 2 x light magenta/magenta)
	2112 per printhead (2 colors per printhead, 1056 nozzles per color)
Nozzles	
Maximum print length	No physical limit (determined by RIP software or media roll length) <sup>[13]</sup>
Connectivity	C:
Interfaces (standard)	Gigabit Ethernet (1000Base-T)
Dimensions (w x d x h)	
Printer	<b>42-in models:</b> 1985 x 690 x 1370 mm (78 x 27.5 x 54 in)
	<b>60-in models:</b> 2465 x 690 x 1370 mm (97 x 27.5 x 54 in)
Shipping	<b>42-in models:</b> 2230 x 810 x 1184 mm (87.8 x 31.9 x 46.6 in)
	<b>60-in models:</b> 2690 x 810 x 1184 mm (105.9 x 31.9 x 46.6 in)
Weight	
Printer	<b>42-in models:</b> 161 kg (355 lb)
	<b>60-in models:</b> 181 kg (399 lb)
Shipping	<b>42-in models:</b> 250 kg (550 lb)
	<b>60-in models:</b> 310 kg (682 lb)
What's in the box	
What's in the box	Printer, printheads, cleaning kit, cleaning container, ink funnel, lubrication kit
What's in the box	Original HP sample media, printer stand, take-up reel, user maintenance kit,
What's in the box	maintenance & troubleshooting guide, setup poster, site guide, documentatio
	Original HP sample media, printer stand, take-up reel, user maintenance kit,
Environmental ranges	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords
Environmental ranges Operating temperature	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)
Environmental ranges Operating temperature Recommended operating	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords
Environmental ranges Operating temperature Recommended operating temperature	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound power, active Sound power, standby Sound power, standby Power consumption Maximum	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  42-in models: 1.8 kW moximum (only when warming up)  42-in models: 1.8 kW moximum (only when warming up)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 1.8 kW  60-in models: 2.6 kW  42-in models: 12.3 kBtu/hr
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW  42-in models: 1.8 kW  42-in models: 1.2 x Bbu/hr  60-in models: 1.2 x Bbu/hr
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW moximum (only when warming up)  42-in models: 1.8 kW  60-in models: 1.2 kBtu/hr  60-in models: 16.4 kBtu/hr  60-in models: 16.4 kBtu/hr
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  40-in models: 1.8 kW maximum (only when warming up)  42-in models: 1.2 kBu/hr  60-in models: 1.2 kBu/hr  60-in models: 16.4 kBu/hr  7 29 watts  0.4 watts
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up) 60-in models: 4.8 kW maximum (only when warming up) 42-in models: 1.8 kW 60-in models: 12.3 kBtu/hr 60-in models: 12.4 kBtu/hr 60-in models: 16.4 kBtu/hr < 72 watts 0.4 watts 42-in models: lnput voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW moximum (only when warming up)  42-in models: 1.8 kW  60-in models: 12.3 kBtu/hr  60-in models: 12.3 kBtu/hr  60-in models: 16.4 kBtu/hr  472 watts  0.4 watts  44-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (-4/-3 Hz), 13 A max per power cord
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 12.8 kW  60-in models: 12.3 kBtu/hr 60-in models: 12.4 kBtu/hr  5.1 a condensity  42-in models: 12.3 kBtu/hr 60-in models: 13.4 kBtu/hr 60-in models: 13.4 kBtu/hr 60-in models: 13.4 kBtu/hr 60-in models: 13.5 kW maximum (200 to 240 VAC (10% +6%), 50/60 kBtu/hr  14.1 in models: 13.3 A max per power cord bright models: lnput voltage (auto ranging) 200 to 240 VAC (10% +6%), 50/60 kBtu/hr  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  19 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr  10 to 20 to 20 to 240 VAC (10% +6%), 50/60 kBtu/hr
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Accustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW moximum (only when warming up)  42-in models: 1.8 kW  60-in models: 12.3 kBtu/hr  60-in models: 12.3 kBtu/hr  60-in models: 16.4 kBtu/hr  472 watts  0.4 watts  44-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (-4/-3 Hz), 13 A max per power cord
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW  60-in models: 12.3 kBu/hr 60-in models: 12.3 kBu/hr 60-in models: 12.3 kBu/hr 42-in models: 1.3 kBu/hr 60-in models: 1.3 kBu/hr
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatic software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW moximum (only when warming up)  42-in models: 1.8 kW  60-in models: 1.2 kBtu/hr  60-in models: 12.4 kBtu/hr  <72 watts  0.4 watts  42-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 13 A max per power cord  60-in models: Input voltage (auto ranging) 220 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 15 A max per power cord  USA and Canada (CSA certified), EU (IVD and EN 60950-1 compliant),
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements  Certification Safety	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatic software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  40-in models: 12.8 kW  40-in models: 12.3 kBtu/hr  60-in models: 12.4 kBtu/hr  47 watts  42-in models: 10.4 kBtu/hr  47 watts  42-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 13 A max per power cord  40-in models: Input voltage (auto ranging) 220 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 15 A max per power cord
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements  Certification Safety	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up) 60-in models: 4.8 kW maximum (only when warming up) 42-in models: 1.8 kW 60-in models: 1.2 3 kBu/hr 60-in models: 12.3 kBu/hr 60-in models: 12.3 kBu/hr 42-in models: 12.3 kBu/hr 60-in models: 1.3 kBu/hr
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 12.8 kW  60-in models: 12.3 kBtu/hr  60-in models: 12.3
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements  Certification Safety Electromagnetic	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW  60-in models: 12.3 kBtu/hr  60-in models: 12.3 kBtu/hr  60-in models: 16.4 kBtu/hr  < 72 watts  42-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 13 A max per power cord  60-in models: Input voltage (auto ranging) 220 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 15 A max per power cord  USA and Canada (CSA certified), EU (IVD and EN 60950-1 compliant), Russia (GOST), China (CCC)  Compliant with Class A requirements, including: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), China (CCC), Japan (VCCI), Korea (KCC)
Environmental ranges Operating temperature Recommended operating temperature Storage temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, active Sound power, standby Power consumption Maximum  Active Heat dissipation Powersave Off Power requirements  Certification Safety  Electromagnetic	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW  42-in models: 12.3 kBu/hr  60-in models: 12.3 kBu/hr  60-in models: 12.3 kBu/hr  42-in models: 13.4 kBu/hr  47 watts  42-in models: 1,1 a kBu/hr  42-in models: 1,1 a kBu/hr  57 watts  0.4 watts  42-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 13 A max per power cord  60-in models: Input voltage (auto ranging) 220 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 15 A max per power cord  60-in models: (GOST), China (CCC)  USA and Canada (CSA certified), EU (IVD and EN 60950-1 compliant), Russia (GOST), China (CCC)  Compliant with Class A requirements, including: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), China (CCC)  WEEE, EU ROHS, China ROHS, REACH, EuP, FEMP
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements  Certification Safety Electromagnetic Environmental ENERGY STAR® qualified	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW  60-in models: 12.3 kBtu/hr  60-in models: 12.3 kBtu/hr  60-in models: 16.4 kBtu/hr  < 72 watts  42-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 13 A max per power cord  60-in models: Input voltage (auto ranging) 220 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 15 A max per power cord  USA and Canada (CSA certified), EU (IVD and EN 60950-1 compliant), Russia (GOST), China (CCC)  Compliant with Class A requirements, including: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), China (CCC), Japan (VCCI), Korea (KCC)
Environmental ranges Operating temperature Recommended operating temperature Recommended operating temperature Recommended operating humidity Acoustic Sound pressure, active Sound pressure, standby Sound power, active Sound power, standby Power consumption Maximum Active Heat dissipation Powersave Off Power requirements  Certification Safety	Original HP sample media, printer stand, take-up reel, user maintenance kit, maintenance & troubleshooting guide, setup poster, site guide, documentatio software, power cords  15 to 30° C (59 to 86° F)  18 to 25° C (64 to 77° F)  -25 to 55° C (-13 to 131° F)  20 to 80% RH (non-condensing)  56 dB(A)  39 dB(A)  7.5 B(A)  5.1 B(A)  42-in models: 3.5 kW maximum (only when warming up)  60-in models: 4.8 kW maximum (only when warming up)  42-in models: 1.8 kW  42-in models: 12.3 kBu/hr  60-in models: 12.3 kBu/hr  60-in models: 12.3 kBu/hr  42-in models: 13.4 kBu/hr  47 watts  42-in models: 1,1 a kBu/hr  42-in models: 1,1 a kBu/hr  57 watts  0.4 watts  42-in models: Input voltage (auto ranging) 200 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 13 A max per power cord  60-in models: Input voltage (auto ranging) 220 to 240 VAC (-10% +6%), 50/60 Hz (+/-3 Hz), 15 A max per power cord  60-in models: (GOST), China (CCC)  USA and Canada (CSA certified), EU (IVD and EN 60950-1 compliant), Russia (GOST), China (CCC)  Compliant with Class A requirements, including: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), China (CCC)  WEEE, EU ROHS, China ROHS, REACH, EuP, FEMP

### FOR MORE INFORMATION, VISIT OUR WEBSITE AT WWW.HP.COM/GO/DESIGNJETL25500

© Copyright 2010 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without octopyright 2014 retwelled action development company, c.r. in a monitoried the only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. 4AA2-7663ENUC, June 2010

ORDERIN	G INFORMATION
Product	
CH955A	HP Designjet L25500 42-in Printer
CH956A	HP Designjet L25500 60-in Printer
Accessories	
CQ692A	HP Designjet L25500 42-in Printer 2-in Spindle
CQ154A	HP Designjet L25500 42-in Printer 3-in Spindle
CQ693A	HP Designjet L25500 60-in Printer 2-in Spindle
CQ155A	HP Designjet L25500 60-in Printer 3-in Spindle
Original HP	printheads
CH612A	HP 789 Yellow/Black Designjet Printhead
CH613A	HP 789 Cyan/Light Cyan Designjet Printhead
CH614A	HP 789 Light Magenta/Magenta Designjet Printhead
Original HP i	ink cartridges
CH615A	HP 789 775-ml Black Latex Designjet Ink Cartridge
CH616A	HP 789 775-ml Cyan Latex Designjet Ink Cartridge
CH617A	HP 789 775-ml Magenta Latex Designjet Ink Cartridge
CH618A	HP 789 775·ml Yellow Latex Designjet Ink Cartridge
CH619A	HP 789 775-ml Light Cyan Latex Designjet Ink Cartridge
CH620A	HP 789 775-ml Light Magenta Latex Designjet Ink Cartridge
	maintenance supplies
CH621A	HP 789 Designjet Printhead Cleaning Kit
CH622A	HP 789 Designjet Printhead Cleaning Container
	printing materials
Banners	
	HP HDPE Reinforced Banner—recyclable <sup>(10)</sup>
	HP Durable Frontlit Scrim Banner
	HP Outdoor Frontlit Scrim Banner
Self-adhesive	e materials
	HP Air Release Adhesive Gloss Cast Vinyl
	HP One-view Perforated Adhesive Window Vinyl
	HP Permanent Gloss Adhesive Vinyl
	HP Permanent Matte Adhesive Vinyl
Polyester fab	·
,	HP Heavy Textile Banner—recyclable(10
	HP Light Textile Display Banner—new, recyclable(10
	HP Wrinkle-free Flag with Liner—recyclable(10
Papers/photo	ographic papers
	HP PVC-free Wall Paper
	HP White Satin Poster Paper—recyclable(10
	HP Photo-realistic Poster Paper—recyclable(10
	HP Blue Back Billboard Paper
Specialty ma	· ·
	HP DuPont™ Tyvek® Banner—recyclable <sup>(10</sup>
	HP Satin Canvas
Service and	
US218E	3 year, Next business day, Onsite, Designjet L25500 60-inch Support
US211E	3 year, 4 hour response 13 by 5 Onsite, Designjet L25500 60-inch Support
US212PE	1 year, Post Warranty, Next business day, Onsite, Designjet L25500 60-inch Support
US206PE	1 year, Post Warranty, 4 hour response 13 by 5 Onsite, Designjet L25500 60-inch Support
	, , , , , , , , , , , , , , , , , , ,

For more HP large-format printing materials and sizes please visit us online at: www.hp.com/go/lfprinting/materials-supplies

**Software:** For HP Certified third-party RIP solutions, please visit us online at: www.hp.com/go/L25500/solutions

See Site Preparation Guide requirements to ensure complete compliance with all installation and operation requirements, safety procedures, warnings, cautions, and local regulations. Download this and other manuals from: www.hp.com/go/L25500/manuals

1 year, Post Warranty, Next business day, Onsite, Designjet L25500 42-inch Support

1 year, Post Warranty, 4 hour response 13 by 5 Onsite, Designjet L25500 42-inch Support

3 year, Next business day, Onsite, Designjet L25500 42-inch Support 3 year, 4 hour response 13 by 5 Onsite, Designjet L25500 42-inch Support

- 1) The HP Designjet L25500 Printer produces an extremely broad range of both outdoor and indoor applications from a single device, which surpasses the number of different applications that traditional ecosolvent printers or water-based printers can produce.

  2) HP image permanence and scratch, smudge, and water resistance estimates by HP lange Permanence Lab. Outdoor display permanence tested according to SAE 12527 using HP Latex, low-solvent, and ecosolvent inks on a range of media, including HP media; in a vertical display orientation in simulated nominal outdoor display conditions for select high and low-climates, including exposure to direct sunlight and water; performance may vary as environmental conditions change. Scratch, smudge, and water resistance tested using HP Latex, low-solvent, and ecosolvent inks on a wide range of media, including HP media; water resistance is composite when printed on water-resistant substrates. Laminated display permanence for Latex/low-solvent comparison using Neschen Solvoprint Performance Clear 80 laminate, for Latex/cosolvent emparison using SNeschen Solvoprint Performance Rol laminate, for Latex/low-solvent comparison using Neschen Solvoprint Performance Rol laminate, for Latex/socsolvent comparison using SNeschen Solvoprint Performance Clear performance and scratch testing methodology. For more information, see www.hp.com/go/supplies/printpermanence.

  3) For best results, print on polyester fabric that does not stretch. Performance may vary depending on media. Please consult your media supplier for compatibility details.

  4) The HP printer is subject to the HP hardware warranty.

  5) Some warranty limitations apply, see the HP Performance Warranty for HP Air Release Adhesive Gloss Cast Vinyl at www.hp.com/go/

US206PF US203E

US196F

US197PE US191PF

- 49 The Finding is adjusted to the Fin Indiaware wardings.

  5) Some warranty limitations apply, see the HP Performance Warranty for HP Air Release Adhesive Gloss Cast Vinyl at www.hp.com/go/HPMediaWarranties.

  6) Printers using HP Latex Inks use internal heaters to dry and cure the latex polymer film. Some substrates may have inherent odor.
- 6) Printers using HP Latex Inks use internal headers to dry and cure the latex polymer film. Some substrates may have inherent odor.
  7) HP PVC-free Wall Paper printed using HP latex Inks is listed in the GREEN/QUARD product listing for low emitting products and is tested to the GREEN/QUARD Children & Schools standard. The print is neither GREEN/QUARD nor GREEN/QUARD Children & Schools Certified. The GREEN/QUARD Environmental Institute is an American National Standards Institute (ANSI) authorized standards developer that establishes acceptable indoor air standards for indoor products, environments, and buildings. See www.greenguard.org.
  8) The Committee for Health-related Evaluation of Building Products, AgBB, establishes the fundamentals for a uniform and reproducible health-related evaluation for building products in Germany, including criteria for testing and an evaluation scheme for health-related evaluation of VOC emissions from building products used for application indoors.

- evaluation of VCL emissions from building products used for application indoors.

  9) Special ventilation is not required to meet US OSHA requirements on accurage to volcs from HP Latex Inks. Special ventilation equipment installation is at the discretion of the customer—no specific HP recommendation is intended. Customers should consult state and local requirements and regulations.

  10) HP offers the HP Large-format Media take-back program in the U.S., Europe, and Canada (as of June 1, 2010), through which most HP recyclable signage media can be returned, availability varies. Some recyclable papers can be recycled through commonly available recycling programs. For details visit www.hp.com/recycle. Aside from this program, recycling apportunities for these products are currently only available in limited areas. Customers should consult local recycling resources for recycling these products.
- 11) In the circa 50 countries and territories in which the HP Planet Partners program operates. Program features and availability varies.

  Where this program is not available, and for other consumables not included in the program, consult the Material Safety Data Sheet
  (MSDS) available at www.hp.com/go/ecodata to determine appropriate disposal.

  12) Speed based on printing using full width (152.4 cm/60 in). Measured on an HP Designjet L25500 60-in Printer.

  13) Recommended up to 30 m (100 ft).

