

HP Designjet 4520 Printer series



Ideal for color production and unattended printing

Unattended color production at low cost

- Take advantage of unattended color printing with two long media rolls up to 175 meters (575 ft) and reliable 775-ml black, 400-ml color Original HP ink cartridges.
- Double your print capacity and truly maximize productivity with HP Double Swath technology and 160 GB hard disk.
- Experience greater cost efficiency with free HP support, HP supplies that deliver a better value, and finishing options that save time and money.

Provides great possibilities to grow your business

- Experience more possibilities to increase your personal productivity with the HP Instant Printing Utility 2.0, HP Embedded Web Server, and the optional Serif PosterDesigner Pro for HP⁽¹⁾.
- Turn your HP Designjet into a print workflow management system with optional stacker and SCP reprocontrol for HP⁽².
- Produce excellent lines and images with patented HP inks, printheads enabling 0.1% line accuracy⁽³⁾, and HP Professional Color technologies.
- Expand your business with high performance copy and scan capabilities⁴.
- Choose from a broad portfolio of over 35 Original HP media for high-quality results from CAD drawings and renders to presentations and posters.

Trusted integration in your IT environment

- Trusted connectivity and security-with built-in Gigabit Ethernet networking, advanced access control, and optional HP Jetdirect support for secure IPsec and IPv6⁽⁵. A Linux PS driver offers additional support for Linux users⁽⁶.
- Manage your HP Designjet, fleet of devices, and your costs with HP Web Jetadmin and the embedded Web server.
- Experience true peace of mind with a printer and printing supplies you know you can trust—from a company with years of experience and expertise.





- Serif PosterDesigner Pro for HP is an optional feature. Not included, sold separately.
- (2 SCP reprocontrol for HP is an optional feature. Not included, sold separately.
- (3 +/-0.1% of the specified vector length or +/-0.1 mm (whichever greater) at 23° C (73° F), 50-60% relative humidity, on E/A0 printing material in Best or Normal mode with HP Matte Film.
- (4 The HP Designjet 4520 Scanner comes standard on the HP Designjet 4520 HD-MFP. It is an optional (not included, sold separately) accessory on the HP Designjet 4520 and 4520ps printers.
- (5 IPsec and IPv6 support requires the purchase of the HP Jetdirect 630n or HP Jetdirect 635n.
- (6 Available on the HP Designjet 4520ps Printer and HP Designjet 4520 HD-MFP only. Support in English only.




HP Designjet 4520 Printer series

- 1. Ink cartridge of 225 and 400-ml for CMY, and 400 and 775-ml for K.
- 2. Accommodates 2 media rolls with long roll support up to 175 m (575 ft)
- 3. Front panel with user-friendly animations.
- 4. Color consistency and screen-to-print matching with HP Professional Color technologies.
- 5. Pairs of staggered printheads in the carriage mean the HP Designjet 4520 Printer series has double the print capacity of earlier models⁷⁷.
- 6. HP Embedded Web Server for driverless file submission, queue management, preview, supplies and printer status, and error notification.
- 7. HP Embedded Jetdirect Gigabit Ethernet print server (1000Base-T) + FireWire (IEEE-1394a compliant) ports.
- 8. EIO port for optional Jetdirect cards.
- 9. Embedded processor for simultaneous printing and processing. 160 GB hard disk and 608 MB standard memory-upgradeable to 1120 MB.
- 10. Equipped with a standard bin that holds 25 A1 (D) prints. An optional stacker is capable of flattening and stacking up to 200 plots.
- (7 Compared to any HP Designjet 600/700/800/1000 Printer

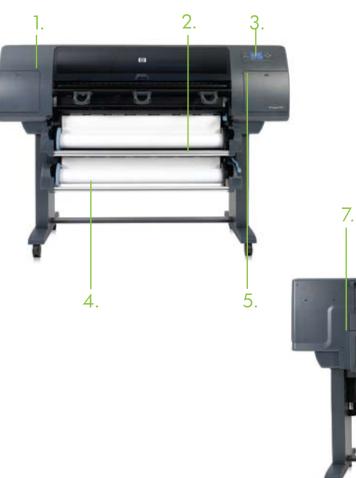

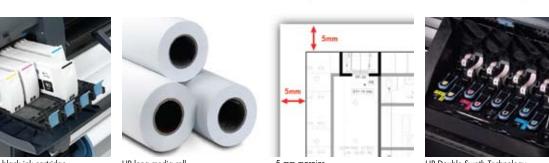



HP long media roll

- 5 mm margins
- HP Double Swath Technology

10.

HP Designjet 4520 Printer series at a glance

HP Designjet 4520 Printer

- Embedded processor and 608 MB memory upgradeable up to 1120 MB. 160 GB hard disk

HP Designjet 4520ps Printer

HP Designjet 4520 HD-MFP

- All the features of the 4520 model, plus: Embedded RIP for Adobe PostScript 3, Adobe PDF 1.5 HP Designjet 4520 Scanner

Optional accessories

6.

DATE

8. 9

- HP Designiet 512 MB Memory Upgrade
 HP Designiet High Speed USB 2.0 Card
 HP Jetdirect 630n IPv6 Gigabit Print Server
 HP Jetdirect 635n IPv6/IPsec Print Server
- Serif PosterDesigner Pro for HP
 SCP reprocontrol for HP

- Optional service and support
 HP Installation Service (1 unit)
 HP Network Installation Service (1 unit)

- HP 4 hour response 13x5 Onsite Hardware Support onsite in 4 hours, 3 years
 HP Next Business Day Onsite Hardware Support, 1 year post
- HP 4 hour response 9x5 Same-Day Onsite Hardware Support, 1 year post warranty
 HP 4 hour response 13x5

Ideal for unattended printing of high-quality large-format drawings, graphics, maps, presentations, renders, and posters¹.

Full flexibility from the HP Designjet 4520 Printer series









More functionality with the HP Designjet 4520 HD-MFP

With scan speeds of 3 inches per second color and 10 inches per second black-and-white, 2 A1 (D)-size prints in less than 1 minute¹⁸, and excellent image quality (508 dpi optical resolution and up to 9600 dpi enhanced resolution), the HP Designjet 4520 HD-MFP delivers outstanding copy and scan performance.

The integrated copy system of this Designjet features real-time printer, media, and queue info in the scanner user interface, copy accounting in the printer, and copy job priority capability.

Integration with the printer enables excellent copy quality and performance.

An easy-to-use touchscreen, easy color calibration, and easy print settings for printing sets make scanning and copying exceptionally user-friendly.

It is easy to integrate with a wide variety of industry-leading third-party applications such as scan, raster-to-vector conversion, or document management. This MFP is fully compatible. Easily print scanned documents directly to almost any HP Designjet printer[®]. Built-in scan-to-network capabilities foster productivity with fewer steps. Easily save scanned files in PDF, TIFF, JPEG2000, and DWF file formats

HP Designjet 4500 Stacker (optional)

The HP Designjet 4500 Stacker collects up to 200 A1 (D) or A0 (E) size plots and automatically flattens them, keeping them organized until you can gather them. Print unattended runs during business hours—and get more done—or overnight. Free up production staff to work on multiple projects at once. The HP Designjet 4500 Stacker handles large black-and-white or color jobs without intervention. Unattended printing allows users to get more done.

users to get more done. Save time and collect your valuable, high-impact output as it prints with the HP Designjet 4500 Stacker. When you're ready to gather your output, it will be organized and waiting for you. Neatly and cleanly collects all sizes and weights of printable media supported by the HP Designjet 4520 Printer series¹⁰, including over 35 Original HP printing materials from new HP Cockle-free Coated Paper available in 100 g/m² and 170 g/m², to new chlorine-free HP Recycled Bond Paper made of 100% recycled base paper, to versatile HP Everyday Adhesive Matte Polypropylene and HP Durable Banner with DuPont[™] Tyvek[®].

HP Designjet 4520 Printer series

nt speed	25 sec/page on A1/D ^o , 93 m ² /hr (1000 tt ² /hr) ^w . 100 A1/D prints per hour ^w
nt	25 sec/page on A1/D®, 93 m²/hr (1000 ft²/hr)™, 100 A1/D prints per hour™
Print resolution	Up to 2400 x 1200 optimized dpi
Margins (top x bottom x left x right)	5 x 5 x 5 x 5 mm (0.2 x 0.2 x 0.2 x 0.2 in)
Technology	HP Thermal Inkjet
Ink cartridge colors	Black, cyan, magenta, yellow
Ink types	Dye-based (cyan, magenta, yellow), pigment-based (black)
Ink drop	5 pl (cyan, magenta, yellow), 15 pl (black)
Line accuracy	+/- 0.1%/3
Line width	Minimum line width (HP-GL/2 addressable): 0.02 mm (0.0007 in)
	Guaranteed minimum line thickness (ISO/IEC 13660:2001(E))*: 0.07 mm (0.0027 in)
nter media	
Thickness	Up to 0.4 mm (15.7 mil)
Weight	50 to 328 g/m² (0.11 to 0.72 lb)
Size	Rolls up to 1067 mm (42 in) wide
	Kolis up to 1007 mini (42 m) wide
in ⁽⁴	
Scan speed	Color (200 dpi/400 dpi Turbo): 76 mm/sec (3 in/sec)
	Black-and-white (200 dpi/400 dpi Turbo): 254 mm/sec (10 in/sec)
Scan/copy resolution	Enhanced mode: 9600 x 9600 dpi, with variable resolution settings from
	50 dpi in increments of 1 dpi
	Best mode: 300 x 300 dpi
	Normal mode: 200 x 200 dpi
Adaption of the	Draft mode: 150 x 150 dpi
Maximum scan width	1067 mm (42 in)
Maximum scan thickness	15 mm (0.6 in)
mory	
Printer	608 MB memory (upgradeable to 1120 MB), 160 GB hard disk
Scanner ⁴	1 GB memory, 40 GB hard disk
dia Handling	
Printers	Two automatic rolls, automatic roll-switching, automatic cutter
Scanner ⁴	
	Straight-through scan paper path for sheet and cardboard originals
dia Types	
Printers	Bond and coated paper, technical paper, film, photographic paper, proofing paper, self-adhesive, banner and
	sign material
Scanner ⁴	Non-abrasive paper, vellum, Mylar, sepia, blueprints, plastic, film, plastic laminate, foam board, cardboard.
	(No plywood, stone plates, metal plates or abrasive, dirty, rough, sharp edged, metal clamped, or burned surfaces or transparencies)
Stacker	Paper (plain, inkjet, coated, heavyweight coated, super heavyweight coated, semi-gloss, translucent bond,
and the first second	natural tracing, photo, vellum) ¹³
nectivity	
Interfaces (standard): Printers	1 Gigabit Ethernet (1000Base-T) port, 2 FireWire (IEEE-1394a compliant) ports, 1 EIO Jetdirect accessory slot
Interfaces (standard): Scanner ⁴	1 Gigabit Ethernet (1000Base-T) port, 1 FireWire (IEEE-1394a compliant) port
Drivers (included)	HP-GL/2, HP-RTL, PostScript ⁶ drivers for Windows; HP PCL 3 GUI, PostScript ⁶ drivers for Mac OS X; support for
	Citrix XenApp and Citrix XenServer environments
nt languages (standard)	
4520	HPGL/2, HPRTL, TIFF, JPEG, CALS G4
4520ps & 4520 HD-MFP	Adobe PostScript 3, Adobe PDF 1.5, HP-GL/2, HP-RTL,TIFF, JPEG, CALS G4
nensions (h x d x w)	
Printer	1930 x 800 x 1350 mm (76 x 31.5 x 53.2 in)
Scanner ¹⁴	1800 x 1020 x 1380 mm (70.8 x 40.2 x 54.3 in)
Stacker	1286 x 1569 x 1135 mm (50.63 x 61.77 x 44.69 in)
Shipping Printer	2130 x 775 x 1890 mm (83.9 x 30.5 x 74.4 in)(NA, LAR, APJ)
11 5	2130 x 775 x 1320 mm (83.9 x 30.5 x 52 in)(EMEA)
Shipping Scanner ⁴⁴	
Shipping Scanner	1910 x 680 x 615 mm (75.2 x 26.8 x 24.2 in)
	1400 x 810 x 23.6 mm (55.1 x 31.9 x 23.6 in)
Shipping Stacker	
Shipping Stacker	185 kg (408 lb)
Shipping Stacker ight	185 kg (408 lb) 92.5 kg (204 lb)
Shipping Stacker ight Printer Scanner ⁴	
Shipping Stacker ight Printer Scanner ⁴ Stacker	92.5 kg (204 lb) 53 kg (116 lb)
Shipping Stacker ight Printer Scanner ⁴ Stacker Shipping Printer	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA)
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner"	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb)
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA)
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker at's in the box	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb)
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker at's in the box	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) (43.3 lb) Printer, 42-in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module,
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker at's in the box	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb)
Shipping Stacker ight Printer	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) (43.3 lb) Printer, 42-in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module,
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker at's in the box	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD,
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker at's in the box HP Designjet 4520/4520ps	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC),
Shipping Stacker ight Printer Scanner ⁴ Stacker Shipping Printer Shipping Scanner ⁴ Shipping Stacker at's in the box HP Designjet 4520/4520ps	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide,
Shipping Stacker ight Printer Scanner" Stacker Shipping Printer Shipping Scanner" Shipping Stacker at's in the box HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP olar image (100% color coverage) printed in Fi	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVVire cobles (x2), Ethernet coble, power cord at mode on HP Right When liket Poster Rode). Spend modered a maximum printer spend.
Shipping Stacker ight Printer Scanner ⁴⁴ Stacker Shipping Printer Shipping Stacker arts in the box HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP alor image (100% color coverage) printed in F	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVire colbels (x2), Ethernet colbe, power cord at mode on HP Bright When kley Paper (Bord), Speed indicated a maximum printer speed. imp printen fir at mode on HP Bright When kley Paper (Bord). Speed indicated a maximum printer speed.
Shipping Stacker ight Printer Scanner ⁴⁴ Stacker Shipping Printer Shipping Stacker arts in the box HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP alor image (100% color coverage) printed in F	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVVire cobles (x2), Ethernet cable, power cord at mode on HP Griff Whe hield Feed Road-Speed Intervented to maximum printer speed.
Shipping Stacker ight Printer Scanner* Stacker Shipping Printer Shipping Scanner* Shipping Stacker des in the box HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP olor inage (100% solar soverage) printed in fi Milicarpy printing inst. Lire draw like HP Designjet 4500 Stacker does not support	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVire colbels (x2). Ethernet colbe, power cord at mode on HP Bright When kley Pope (Bord). Speed indicaded a maximum printer speed. imported in Tarmode on HP Bright When kley Pope (Bord). Speed indicaded a maximum printer speed.
Shipping Stacker Shipping Stacker Printer Scanner* Stacker Shipping Printer Shipping Scanner* Shipping Stacker d's in the box HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP oble image (100% color coverage) printed in F ublicopy printing, tool printing time. Lire draw to HP Designjet 4520 Stacker does not support wironmental ranges Operating temperature	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42-in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cobles (x2), Ethernet coble, power cord at mode on HP Bright White high Paper (Bond). Speed indicated is maximum printer speed. Them, including HP Clear File and HP Mate Film or other media with long drying times. 5 to 40° C (41 to 104° F)
Shipping Stacker ight Printer Scanner ⁴¹ Stacker Stacker Shipping Printer Shipping Scanner ⁴¹ Shipping Scacker at's in the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP olor image (100% color coverage) printed in F tuthcopy printing, total printing time. Line draw the PD Design of the Operating time printing.	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif Poster/Designer Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cobles (x2), Ethernet coble, power cord at mode on HP Bright White high Pape (Bond). Speed indicated is maximum printer speed. Time, individing HP Care Film and HP Mate Film or other media with long drying time. 5 to 40° C (41 to 104° F) 15 to 40° C (41 to 104° F)
Shipping Stacker ight Printer Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Stacker dris in the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP oter image (100% color coverage) printed in Fi Will-copy printing, total printing lime. Live draw to HP Designjet 4500 Stacker does not uppor vironmental ranges Operating temperature Storage temperature Storage temperature Storage temperature Storage temperature Storage temperature Storage temperature	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cobles (x2), Ethernet coble, power cord at mode on HP Bright White likel Page (Bond). Speel indicated is maximum printer speed. time, induding HP Clear Film and HP Mate Film or other media with long drying times. 5 to 40° C (41 to 104* f) 15 to 30° C (50° b 80* f) 20 to 55° C (4 to 101* f) 20 to 55° E (4 to 101* f) 20 to 55° E (4 to 101* f)
Shipping Stacker ight Printer Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Scaner* Proprinter Shipping Stacker Proprinter Stacker Proprinter Stacker Proprinter Stacker S	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (1591 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVire colbels (x2), Ethernet colbe, power cord at mode on HP Bright When kleft Poper (Bord). Speed indicated a maximum printer speed. ingo printen fir and one of HP Bright When kleft Poper (Bord). Speed indicated a maximum printer speed. It lime, including HP Clear Film and HP Matte Film or other media with long drying times. Ste 40° C (41 to 104* F) 15 to 30° C (59° B 86* f) -20 to 55° C 4 to 11* f)
Shipping Stacker ight Frinter Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Scaner* HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP dolr image (100% color coverage) printe in F tuthcopy printing, total printing time. Line draw the HP Designjet 4520 Stacker does not support Nonental canges Poperating temperature Accommended operating temperature Storage temperature Coparating humpiday Recommended humidity coustic Sound pressure, active	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif Poster/Designer Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colbes (x2), Ethernet colbe, power cord at mode on HP Bright Wite high Poper (Bord). Spend indicated is maximum printer speed. time, induding HP Clear Film and HP. Mate Film or other media with long drying times. \$ te 40° C (41 to 104° F) 20 to 50% RH 53 dB(A)
Shipping Stacker ight Printer Scanner ⁴¹ Stacker Stacker Shipping Printer Shipping Scanner ⁴¹ Shipping Scacker at's in the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP olar image (100% color coverage) printed in F Unitcorp printing, toda printing time. Lire devi te HP Design 50 Stacker des ant support Vironmental ranges Operating temperature Strange te	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead deaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colles (x2), Ethernet colle, power cord at mode on HP Bright White high Power (Bond). Speed indicated is maximum printer speed. Them, induding HP Borgh Tonde Finer other media with long drying time. 5 to 40° C (41 to 104° F) 15 to 30° C (41 to 104° F) 15 to 30° C (41 to 104° F) 25 to 75% EH 5 st 40° C (41 to 104° F) 15 to 30° C
Shipping Stacker ight Printer Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Stacker at sin the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP oter image (100% color coverage) printed in Fi Utilicopy printing, total printing lime. Live dava te HP Designjet 4520 Stacker does not uppor vironmental ranges Operating lemperature Storage lemperat	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVire coldes (x2), Ethernet colde, power cord at mode on HP grinty White high Poper (Bond). Speed indicated a maximum printer speed. FireVire Colles (x2), Ethernet colle, power cord standes on HP grinty White high Poper (Bond). Speed indicated a maximum printer speed. 1 lifem, induding HP Clear Film or other media with long drying times. 5 te 40° C (41 te 104° F) 1 ts a3°C (29% Ba° F) 20 te 50° C (41 te 101° F) 20 te 50° C H te 101° F) 20 te 50° KH 25 te 75% BH
Shipping Stacker ight Printer Scanner ⁴¹ Stacker Stacker Shipping Printer Shipping Scanner ⁴¹ Shipping Scacker at's in the box HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP olor image (100% color coverage) printed in F Unitcorp printing, toda printing time. Lire devi te HP Design 50 Socker des on two printing temperature Coperating temperature Strange temperatur	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colles (x2), Ethernet coble, power cord ast index in HP Bright White high Poper (Bond). Speed indicated a maximum printer speed. Them, indeding HP Bright White high Poper (Bond). Speed indicated a maximum printer speed. S to 40° C (41 to 104° F) 15 to 30° C (29 to 86° F) -20 to 55° C (41 to 104° F) 15 to 30° C (29 to 86° F) -20 to 55° C (41 to 104° F) 5 to 40° C (41 to
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cables (x2), Ethernet cable, power cord at and and HP Mate Hape (Bond). Speel indicated is maximum printer speed. tilem, inciding IP Bright While Inket Paper (Bond). Speel indicated is maximum printer speed. tilem, inciding IP Bright While Inket Paper (Bond). Speel indicated is maximum printer speed. tilem, inciding IP Sci Vishe Inket Paper (Bond). Speel indicated is maximum printer speed. tilem, inciding IP Sci Vishe Inket Paper (Bond). Speel indicated is maximum printer speed. Ste 40° C (41 to 104° F) Ste 40° C
Shipping Stacker ight Printer Scanner* Stacker Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Stacker d's in the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520 HD-MFP ole image (100% color coverage) printed in f tulk-corp printing, total printing time. Lire draw the HP Designjet 4500 Stocker does not support wironmental Images Operating temperature Recommended humidity Count pressure, active Sound pressure, andby Sound power, active Sound pressure, andby Sound power, active Sound power, active Sound power, andby	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (1591 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireVire colbes (x2), Ethernet colbe, power cord at mode on HP Bright What high tope (Bord). Speed indicated a maximum printer speed. its printed in transmode on HP Bright Whe high tope (Bord). Speed indicated a maximum printer speed. 15 to 30° (159 k B6° F) 20 to 50° (24 to 104° F) 15 to 30° (157 k B1° F) 20 to 50° kB1 53 dB(A) 38 dB(A) 38 dB(A) 38 dB(A) 37 dB(A) 50 watts, 800 watts' Itopet veltage (tato ranging): 100 to 127 VAC (r/- 10%), 6 A, 220 to 240 VAC (r/- 10%), 3 A, 50/60 Hz (r/- 3 Hz);
Shipping Stacker ight Printer Scanner* Stacker Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Scanner* HP Designjet 4520 HD-MFP dolar ingbe (100% color coverage) printel in F HP Designjet 4520 HD-MFP dolar ingge (100% color coverage) printel in F HP Designjet 4520 HD-MFP dolar ingge (100% color coverage) printel in F HP Designjet 4520 HD-MFP dolar ingge (100% color coverage) printel in F HP Designjet 4520 HD-MFP dolar ingge (100% color coverage) printel in F HP Designjet 4520 Stacker does not support http://www.methal.cov/stacker Sound pressure, active Sound pre	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colbes (x2), Ethernet colbe, power cord at mode on HP Bright Wite high Poper (Bord), Spent informed in maximum printer speed. If Bright Wite Black Poper (Bord), Spent information in maximum printer speed. If Bright Wite Black Poper Bord in Cord in moximum printer speed. If Bright Wite Black Poper Bord in Statistical in anximum printer speed. If Bright Wite Black Poper Bord in Cord in the Bright Poper Bord in Brack Poper Bord in Brack Poper Statistical in anximum printer speed. If Bright Wite Black Poper Bord in Statistical in anximum printer speed. If Bright Wite Black Poper Bin and HP Matte Film or other media with long drying times. 5 In 40°C (41 to 104°F) 20 to 50% RH 35 Bright Statistical Statistical Statistical in anximum printer speed. 5 Statistical Stat
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colles (x2), Ethernet colle, power cord at mode on HP Bright White hilps Paper (Bond). Speed indicated is maximum printer speed. Them, including HP Clear Film and PA Mate Film or other media with long dying time. 5 to 40° C (41 to 104° F) 15 to 30° C (59 to 86° F) 35 840) 5 st 40° C (41 to 104° F) 15 to 30° C (59 to 86° F) 35 840) 5 st 40° C (41 to 104° F) 15 to 30° C (59 to 86° F) 35 840) 5 st 40° C (41 to 104° F) 15 to 30° C (59 to 86° F) 35 840) 50 woth, 800 woth* Inter stand and the standard and the film or other media with long dying time.
Shipping Stacker ight Printer Scanner* Stacker Shipping Printer Stacker Shipping Scanner* Shipping Scanner* Shipping Stacker at sin the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520/4520ps were conversely printing that printing time. Live draw ter HP Designjet 4500 blacker does not uppor withcomp state of operating temperature Storage t	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire coldes (x2), Ethernet colde, power cord at mode on HP Bright White likel Pose (Bond). Speed indicated is maximum printer speed. Time, including HP Clear Film and HP Matte Film or other media with long drying times. 5 to 40° C (41 to 104* f) 15 to 30° C (29% BeY f) 20 to 55° C (4+ to 101* f) 20 to 55° C (4+ to 101* f) 20 to 55° H 4 25 to 75% RH 53 dB(A) 38 dB(A) 39 dB(A) 39 dB(A) 30 data (200 weith*) 10 to 200 weith* 10 pot voltage (cuto ranging): 100 to 127 VAC (r/- 10%), 6 A; 220 to 240 VAC (r/- 10%), 3 A; 50/40 Hz (r/- 3 Hz); 10 to 240 VAC (-1+ 10%), 50/40 Hz, 5 A maximum USA and Canade (CSA), Weite, KEACH, Euro
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cables (x2), Ethermet cable, power cord at mode on HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, indeding HP Bright White hiller Paper (Bond). Speed indicated in maximum printer speed. Item, index (C) (C) be 86 F 1 -20 to 55° (C) to 86 F 1 -20 to 55° (C) to 80 F 1 -20 to 55° (C) to 80 F 1 -20 to 55° (C) to 80 F 1 -20 to 55° (C) be 80 F 1 -20 to
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire coldes (x2), Ethernet colde, power cord at mode on HP Bright White likel Pose (Bond). Speed indicated is maximum printer speed. Time, including HP Clear Film and HP Matte Film or other media with long drying times. 5 to 40° C (41 to 104* f) 15 to 30° C (29% BeY f) 20 to 55° C (4+ to 101* f) 20 to 55° C (4+ to 101* f) 20 to 55° H 4 25 to 75% RH 53 dB(A) 38 dB(A) 39 dB(A) 39 dB(A) 30 data (200 weith*) 10 to 200 weith* 10 pot voltage (cuto ranging): 100 to 127 VAC (r/- 10%), 6 A; 220 to 240 VAC (r/- 10%), 3 A; 50/40 Hz (r/- 3 Hz); 10 to 240 VAC (-1+ 10%), 50/40 Hz, 5 A maximum USA and Canade (CSA), Weite, KEACH, Euro
Shipping Stacker	92.5 kg (204 lb) 53 kg (116 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designijet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire coldes (x2), Ethermet colle, power cord at mode on HP Bright What high Poper (Bond). Speed indicated in maximum printer speed. ingo printer in trave and on + IP Bright What high Poper (Bond). Speed indicated in maximum printer speed. 15 ts 30° (C) Poper Bord 1 20 to 50° KB + 20 to 50° KB + 51 sd 30° (C) (4 to 104° F) 20 to 50° KB + 51 sd 30° (C) (4 to 104° F) 20 to 50° KB + 53 dB(A) 38 dB(A) 38 dB(A) 39 dB(A) 30 worth; 800 worth* Impair valuege toter ranging): 100 to 127 VAC (r/- 103), 6 A, 220 to 240 VAC (r/- 103), 3 A; 50/40 Hz (r/- 3 Hz); 100 to 240 VAC (+/- 103), 50/60 Hz, 5 A maximum. USA and Chean Bddy, CSA emittinged, UPOT and ENMOV90-1 compliant), Russia (GOST), Singapore (PSB), China (CCC), Argentina (IRAM), Mexico (NYCE) ELB & Chean Bddy, CSA emittinged, UPOT and ENMOV90-1 compliant), Russia (GOST), Singapore (PSB), China (CCC), Argentina (IRAM), Mexico (NYCE); ELB & Chean Bddy, CSA emittinged, ELW Complicated, ICSA, Australia (ACA), New Zealand (MaC), China (CCC), Japon (VCC); Complicate for Casa A ITE products EL (LPC). Deschol, USA FCC Rele), Canada (ICES), Australia (ACA), New Zealand (MaC), China (CCC), Japon (VCC); constituents and casa A File products. REI (HCC). Deschol, USA FCC Rele), Canada (ICES), Australia (ACA), New Zealand (MaC), China (CCC), Japon (VCC); constituents and Casa A File products. REI (HCC) Deschol, USA FCC Rele), Canada (ICES), Australia (ACA), New
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colbes (x2), Ethernet colbe, power cord at mode on HP Bright Wite high Pope (Bord), Speel indicated in maximum printer speed. tign printer in trade on HP Bright Mite high Pope (Bord), Speel indicated in anotimum printer speed. time, including HP Clear Film and HP Mate Film or other media with long drying time. 5 ste 40° C (41 to 104 ° f) 20 to 80% RH 25 to 75% RH 5 ste 30° C (24 to 101 ° f) 20 to 80% RH 5 ste 40° C (41 to 104 ° f)
Shipping Stacker igh Printer Scanner* Stacker Shipping Printer Stacker Shipping Scaner* Shipping Scaner* Shipping Scaker at in the box HP Designjet 4520/4520ps HP Designjet 4520/4520ps HP Designjet 4520/4520ps Protecting Imperdure And the Programmer and the protection of the protectio	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 272.3 kg (599.1 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cobles (x2), Ethernet coble, power cord at andor on HP digit White high Pape (Bond). Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clend). Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clend). Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clend). Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clend). Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clend). Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clear Strip Speel indicated is maximum printer speed. tilms, individing HP Clear Film and HP Matte Flave Clear Strip Speel Matter Strip Speel Strip Speel Matter Speel Speel Matter Speel Matter Speel Speel Matter Speel Matter Speel Matter Speel Speel Speel Matter Speel Speel Speel Matter Speel Speel Matter Speel Speel Matter Speel Speel Speel Matter Speel Speel Speel Speel Matter Speel
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colbes (x2), Ethernet colbe, power cord at mode on HP Bright Wite high Pope (Bord), Speel indicated in maximum printer speed. tign printer in trade on HP Bright Mite high Pope (Bord), Speel indicated in anotimum printer speed. time, including HP Clear Film and HP Mate Film or other media with long drying time. 5 ste 40° C (41 to 104 ° f) 20 to 80% RH 25 to 75% RH 5 ste 30° C (24 to 101 ° f) 20 to 80% RH 5 ste 40° C (41 to 104 ° f)
Shipping Stacker Shipping Stacker Printer Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Stacker The Design et 4520/4520ps HP Design et 4520/4520ps Kernended coverage) printe lin F Line dav te th Design et 4520 Nocker des not support to parating temperature Scanner et al. Sound pressure, standby Sound pressure, stand	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colbes (x2), Enternet colbe, power cord at mode on HP Bright Wite high Rpc (Bord), Sped indicade in namium printer speed. time, including HP Clear Film and HP Mate Film or other media with long drying times. \$ 54 40° C (41 to 104* f) 11 sub 0° C (27 to 80 81 f) 20 to 80% RH 3 84(A) 3 84(A) 3 84(A) 3 84(A) 3 84(A) 5 10 40° C (24 to 104); 500 1577 VAC (x² - 10%), 6 A, 220 to 240 VAC (x² - 10%), 3 A; 50/60 Hz (x² - 3 Hz); 5 00 woths, 800 woths* 10 words, 800 woths* 11 sub 0° C (26 to 80 F) 12 sub 0° C (24 to 104; 5 A maximum 12 sub 0° C (24 to 104; 5 A maximum 13 sub 0° C (26 to 105; 577 VAC (x² - 10%), 6 A, 220 to 240 VAC (x
Shipping Stacker Shipping Stacker Printer Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Stacker The Design et 4520/4520ps HP Design et 4520/4520ps Kernended coverage) printe lin F Line dav te th Design et 4520 Nocker des not support to parating temperature Scanner et al. Sound pressure, standby Sound pressure, stand	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cobles (x2), Ethernet coble, power cord at andor on HP digit White high Pow (Bond). Speel indicated is maximum printer speed. tilms, induding HP Clear Film and HP Meter Film or other media with long drying time. 5 to 40° C (41 to 104° F) 15 ks 30° C (59 ks 86° F) 20 to 55° C (4 to 131° F) 20 to 55° C (4 to 151° F)
Shipping Stacker Shipping Stacker Printer Scanner* Stacker Shipping Printer Shipping Printer Shipping Scanner* Shipping Stacker The Design et 4520/4520ps HP Design et 4520/4520ps Kernended coverage) printe lin F Line dav te th Design et 4520 Nocker des not support to parating temperature Scanner et al. Sound pressure, standby Sound pressure, stand	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, integrating britter with long broker (body), printer speed. Terdevine cables (x2), Ethernet cable, power cord are not PR gright White likel Power (Bond). Speed indicated is maximum printer speed. Terdevine cables (x2), Ethernet cable, power cord stands on PR gright White likel Power (Bond). Speed indicated is maximum printer speed. Terdevine cables (x2), Ethernet cable, power cord stands on PR gright White likel Power (Bond). Speed indicated is maximum printer speed. Terdevine cables file and HP Mate Film or other media with long drying time. 5 to 40° C (41 to 104° P) 15 to 30° (510 % Bd r) 25 to 30° (
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (14.3.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire colbes (x2), Ethremet coble, power cord at mode on HP Bright What high Rpse (Bond). Speed indicated is maximum printer speed. Item, induding HP Clear Film and P Mate Him or other media with long dying time. ************************************
Shipping Stacker	92.5 kg (204 lb) 53 kg (16 lb) 272.3 kg (5991 lb)(NA, LAR, APJ); 227.3 kg (500.1 lb)(EMEA) 122 kg (269 lb) 65 kg (143.3 lb) Printer, 42:in printer stand and bin, printheads (x8), printhead cleaners (x8), introductory ink cartridges, roll module, user maintenance kit, quick reference guide, setup poster, Serif PosterDesigner Pro poster, documentation and drivers CD, power cord All the features mentioned above, plus HP Designjet 4520 Scanner, scanner stand, touchscreen (panel PC), keyboard, quick reference guide, setup poster, documentation CD, system recovery DVD, customer service guide, FireWire cobles (x2), Ethernet coble, power cord are not PR gright White likel Post (Bond). Speel indicated is maximum printer speed. It may, induding HP Clear Film and HP Mete Film or other media with long drying times. 5 to 40° C (41 to 104° F) 15 to 30° C (41 to 104° F) 15 to 30° C (41 to 104° F) 25 to 40° C (41 to 104° F) 25 to 40° C (41 to 104° F) 25 to 40° C (41 to 104° F) 25 to 50° KH 25 to 75° KH 53 dB(A) 38 dB(A) 38 dB(A) 39 dB(A) 20 to 55° C (4 to 101° F) 20 to 55° C (4 to 101° F) 20 to 56° KH 25 to 75° KH 53 dB(A) 38 dB(A) 38 dB(A) 39 dB(A) 30 dB(A) 30 dB(A) 30 dB(A) 31 dB(A) 31 dB(A) 32 dB(A) 32 dB(A) 32 dB(A) 33 dB(A) 33 dB(A) 34 dB(A) 35 dB(A) 35 dB(A) 35 dB(A) 35 dB(A) 36 dB(A) 37 DB(A) 50 oveth; 800 weth* Input whenge factor ranging): 100 to 127 VAC (r/-103), 6 A; 220 to 240 VAC (r/-103), 3 A; 50/60 Hz (-1 3 Hz); 100 to 240 VAC (-1 103), 50/60 Hz, 5 A maximum USA and Canada (CSA certified), EU (VD and EN407501 complicent), Rusia (GOST), Singapore (PSB), China (CCC), Agentina ((RAM), Mexico (NTCE)) EU A China RoSS, WEEE, REACH, EU Compliance Or Cana J HE Potext: BU (RCD Delethe), USA FCC Relei, Canada (ICS), Australia (ACA), New Zeidend (McC), China (CCC), Japon (YCC)); Certified a Class A product. Rece (RCC), Tawan (RSM) set: www.hub.com/goc/mexicus/line UN397E HF B, YNet Bainess Doy Oralie UN397E HF B, YNet Bainess Doy Oralie UN397E HF B, YNet Bainess D

SCP reprocented for HP (1 printer) SCP reprocentred for HP (2 printers) HP Designjet 4520 Scenner (comes as standard with HP Designjet 4520 HD-MFP) Pink cartridges HP 90 Black Printhead and Cleaner HP 90 Magente Printhead and Cleaner HP 90 V25-ml Koartridge HP 90 225-ml Kogento Richard Cleaner HP 90 225-ml Kogento Richard Cleaner HP 90 225-ml Kogento Ink Cartridge HP 90 400-ml Koartridge HP 90 400-ml Koartridge Kortridge HP 90 400-ml Kogento Ink Cartridge HP 90 Kogento Ink Cartridge, 400-ml, Value Pack HP 90 Kogento Ink Cartridge, 400-ml, Value Pack HP 90 Kogento Ink Cartridge, 400-ml, 3-ink Multipack HP 90 Kogento Ink Cartridge, 400-ml, 3-ink Multipack HP 90 Kogento Ink Cartridge, 400-ml, 3-ink Multipack HP 90 Black Koc Tritdge, 775-ml, 3-ink Multipack HP 90 Black Koc Tritdge, 775-ml, 3-ink Multipack HP 90 Black Printhead Cleaner Plage-format printing materials HP Universal Bond Paper 80 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 25,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 25,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 25,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m², 36 in. x 150 ft/914 mm x 45,7 m HP Caeted Paper 90 g/m²

Aore HP large-format printing material sizes and weights available at vww.hp.com/go/designjet/supplies

HP DESIGNJET 4520 PRINTER

- Save paper and avoid printing mistakes with HP Instant Printing Utility 2.0
- Less ink wasted thanks to efficient installation and maintenance
- Free, convenient cartridge recycling¹
 Supports 100% recycled media

• ENERGY STAR® Qualified Product²

1. In countries where the HP's Planet Partner Program operates 2. Not applicable to HP Designjet 4520 HD-MFP

www.hp.com/ecosolutions

Please recycle your printing hardware and supplies. Find out how at our website.

2004, 2009 HewletPackard Development Company, LP. The information contained herein is subject to change viltout notice. The only warranties for HP products and services are set forth in the express warranty statements ccompanying such products and services. Nothing herein should be construed as constituting an additional arranty. HP sholl not be liable for technical or editorial errors or omisions contained herein. PANTONE is the rapenty of Pantone, Inc. Adobe and PastScript 3 are trademarks of Adobe Systems Incorporated. FireWire is a ademark of Apple Computer, Inc., registered in the U.S. and other countries. ENERGY STAR and the ENERGY TAR mark are registered U.S. marks. Windows is a U.S. registered trademark of Microsoft Corporation.

(p)

www.hp.com/go/designjet4520



Mac Universit

FireWire

PANTONE

60

Adobe PostScript 3"