



Intel® Server Board S2600KP Product Family
Intel® Compute Module HNS2600KP Product Family
Intel® Server Chassis H2000G Product Family
Configuration Guide and Spares/Accessories List

Reference guide for ordering parts and accessories to configure an Intel® Server System based on the Intel® Server Board S2600KP Product Family.

Rev 2.30

October 2019

<Blank page>

Document Revision History

Date	Revision	Changes
November 2015	2.0	Second Production Candidate Release.
March 2016	2.20	Added RS25GB008, RS25SB008 and AHWKPTP12GBGBIT. Added support for Intel® Xeon® processor E5-2600 v4 product family. Added support for 2400 MT/s RDIMMs and LRDIMMs.
April 2016	2.21	Added PSU spare FXX2130PCRPS.
April 2016	2.22	Added 100HFA018LS and 100HFA016LS.
May 2016	2.23	Added form factor specification for AXXKPTPM2IOM. Corrected 100HFA016LS MM number. Re-added RS3GC008. Added RS25NB008 and AXRSBBU9. Added BBS2600KPTR.
June 2016	2.24	Added H2312XXLR2 and H2216XXLR2. Removed BXSTS200P. Corrected RKSATA4R5 description.
August 2016	2.25	Re-added AXX1P40FRTIOM and AXX2P40FRTIOM. Corrected BBS2600KPTR and BBS2600KPR's Intel® Ethernet Controller specification. Added low-profile PCIe* card form factor specification.
October 2016	2.26	Added AXXRMM4LITE2. Removed RS25GB008, RS25NB008, AXRPFKSSD2 and AXRSBBU9 accessories due to EOL – Not orderable. Standardized Revision History section.
January 2017	2.27	Corrected F1UL16RISER2 for FHW1U16RISER2. Enhanced AXXRMM4LITE2 description. Reformatted document.
September 2018	2.28	Intel® RAID Add-in Cards, Modules, and Accessories support links updated.
September 2019	2.29	Updating new MM# for Server Board BBS2600KPR and Server System HNS2600KPR. According to PCN 117129-01.
October 2019	2.30	Corrected RS25SB008 MM#

Disclaimers

Intel technologies' features and benefits depend on system configuration and may require enabled hardware, software, or service activation. Learn more at Intel.com, or from the OEM or retailer.

You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein. You agree to grant Intel a non-exclusive, royalty-free license to any patent claim thereafter drafted which includes subject matter disclosed herein.

No license (express or implied, by estoppel or otherwise) to any intellectual property rights is granted by this document.

The products described may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Intel disclaims all express and implied warranties, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement, as well as any warranty arising from course of performance, course of dealing, or usage in trade.

Copies of documents which have an order number and are referenced in this document may be obtained by calling 1-800-548-4725 or by visiting www.intel.com/design/literature.htm.

Intel, the Intel logo, and Xeon are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.

*Other names and brands may be claimed as the property of others.

Copyright © 2019 Intel Corporation. All rights reserved.

Table of Contents

- 1. Intel® Server S2600KP Family Overview 7**
 - 1.1 Product Family Summary 7
 - 1.1.1 Intel® Server Board S2600KP Product Family 7
 - 1.1.2 Intel® Compute Module HNS2600KP Product Family 8
 - 1.1.3 Intel® Server Chassis H2000G Product Family 9
 - 1.2 Additional Resources..... 10
- 2. Server Building Block Configurations..... 11**
 - 2.1 Intel® Server Board 2600KP Family..... 11
 - 2.2 Intel® Compute Module HNS2600KP Family..... 13
 - 2.3 Intel® Server Chassis H2000G Family..... 14
- 3. Server System Configuration Accessories and Upgrades 18**
 - 3.1 Locking Front Bezel Accessory Kit..... 18
 - 3.1.1 Front Bezel Installation Instructions 18
 - 3.2 Intel® I/O Expansion Modules 19
 - 3.2.1 Intel® I/O Expansion Modules Installation Instructions 21
 - 3.3 SAS Bridge Board Upgrade Kits 22
 - 3.4 Intel® RAID Add-in Cards, Modules, and Accessories 23
 - 3.5 Rack Mount Kits 25
 - 3.6 Miscellaneous Accessories..... 26
- 4. Spare and Replacement Parts 27**
- 5. Extended Warranties 30**
- Appendix A. Glossary 31**

List of Figures

Figure 1. Intel® Compute Module HNS2600KP Product Family feature set identification.....	8
Figure 2. Intel® Server Chassis H2000G Product Family feature set identification.....	9
Figure 3. Installing front bezel to chassis.....	18
Figure 4. Installing snap-in branding badges to front bezel.....	18
Figure 5. Intel® I/O Expansion Module installation	21

List of Tables

Table 1. Intel® Server Board S2600KP Product Family summary	7
Table 2. Intel® Compute Module HNS2600KP Product Family summary	8
Table 3. Intel® Server Chassis H2000G Product Family summary	9
Table 4. Intel® Server Board S2600KPR	11
Table 5. Intel® Server Board S2600KPFR.....	12
Table 6. Intel® Server Board S2600KPTR.....	12
Table 7. Intel® Compute Module HNS2600KPR.....	13
Table 8. Intel® Compute Module HNS2600KPFR	13
Table 9. Intel® Server Chassis H2312XXKR2	14
Table 10. Intel® Server Chassis H2216XXKR2	15
Table 11. Intel® Server Chassis H2312XXLR2.....	16
Table 12. Intel® Server Chassis H2216XXLR2.....	17
Table 13. Front bezel accessory kits.....	18
Table 14. Intel® I/O Expansion Modules.....	19
Table 15. SAS bridge board upgrade kits and spares	22
Table 16. Intel® RAID Controller add-in cards	23
Table 17. Intel® RAID accessories.....	24
Table 18. Rack mount kits	25
Table 19. Miscellaneous accessories.....	26
Table 20. Spare and field replacement units (FRUs).....	27
Table 19. Extended warranties.....	30

1. Intel® Server S2600KP Family Overview

This document is provided to assist you in identifying the right Intel® Server System components and available accessories to create a unique server platform that meets your unique server requirements.

The Intel® Server S2600KP Family is offered as a building block system. The server building blocks include:

- **Intel® Server Board S2600KP Product Family**– Server board only.
- **Intel® Compute Module HNS2600KP Product Family** – Compute module integrated with the Intel® Server Board S2600KP Product Family.
- **Intel® Server Chassis H2000G Product Family** – 2U rack mount server chassis.

The Intel® Server S2600KP Family supports the following processors and memory.

- Intel® Xeon® processor E5-2600 v4 product family
- Intel® Xeon® processor E5-2600 v3 product family

Note: Previous generations of Intel® Xeon® processors are not supported.

- DDR4 ECC RDIMM/LRDIMM 1600, 1866, 2133, 2400 MT/s

Note: 2400 MT/s is only supported on Intel® Xeon® processor E5-2600 v4 product family.

1.1 Product Family Summary

The following tables provide an overview of the available product codes for the building blocks within the Intel® Server S2600KP Family and their key features. For additional order code information and full product descriptions, refer to section 2.

1.1.1 Intel® Server Board S2600KP Product Family


The server boards in the Intel® Server Board S2600KP Product Family have identical feature sets except Intel® Server Board S2600KPFR offers integrated InfiniBand* technology and Intel® Server Board S2600KPTR is a Trusted Platform Module (TPM).

Table 1. Intel® Server Board S2600KP Product Family summary

Intel Product Code (iPC)	# of CPU sockets	# of DIMM slots	# of riser slots	# of RJ45 LAN ports (1 Gb)	# of SATA ports (6 Gb/s)	Integrated InfiniBand*	Intel® I/O Expansion Module support	Trusted Platform Module (TPM)
BBS2600KPR	2	8	3	2	4	No	Yes	No
BBS2600KPFR	2	8	3	2	4	Yes (FDR 56 Gb/s)	Yes	No
BBS2600KPTR	2	8	3	2	4	No	Yes	Yes

1.1.2 Intel® Compute Module HNS2600KP Product Family

To identify the feature set of the Intel® Compute Module HNS2600KP Product Family, refer to Figure 1.

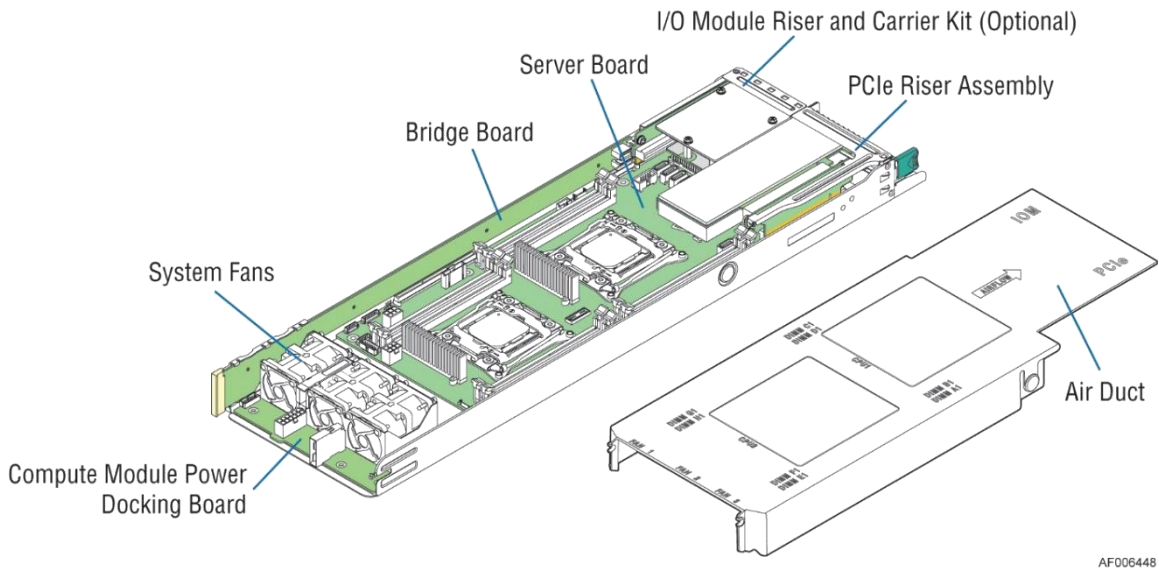

AF006448

Figure 1. Intel® Compute Module HNS2600KP Product Family feature set identification

Table 2. Intel® Compute Module HNS2600KP Product Family summary

Intel Product Code (iPC)	Server board	Form factor	# of heat sinks	# of fans	# of riser slots	Intel® I/O Expansion Module	Bridge board	Air duct
HNS2600KPR	BBS2600KPR	1U	2	3	2	Optional	6 G/s	Yes
HNS2600KPFR	BBS2600KPFR	1U	2	3	2	Optional	6 G/s	Yes

1.1.3 Intel® Server Chassis H2000G Product Family

To identify the feature set of the Intel® Server Chassis H2000G Product Family, refer to Figure 2.

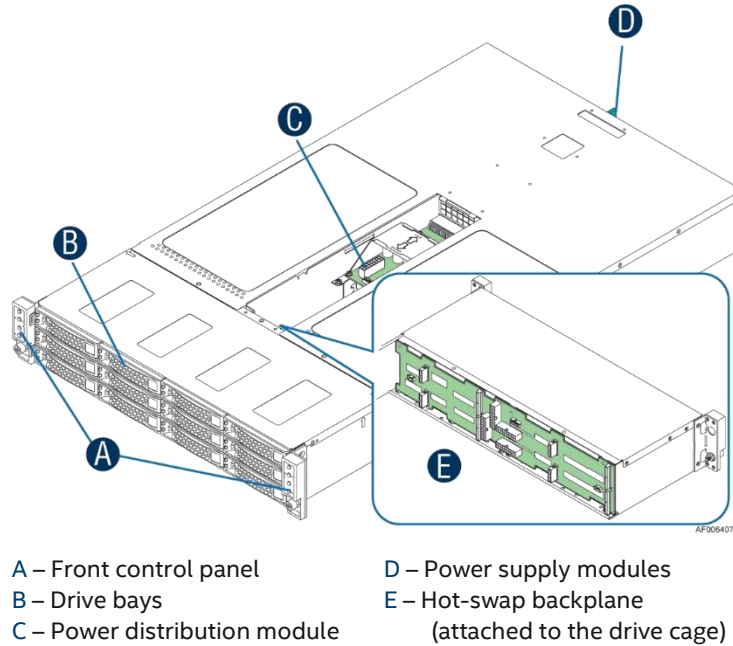


Figure 2. Intel® Server Chassis H2000G Product Family feature set identification

Table 3. Intel® Server Chassis H2000G Product Family summary

Intel Product Code (iPC)	Chassis form factor	Drive form factor	# of drives (front)	Power supply module	Rails
H2312XXKR2	2U	3.5"	12	2 x 1600 W AC	Optional
H2216XXKR2	2U	2.5"	16	2 x 1600 W AC	Optional
H2312XXLR2	2U	3.5"	12	2 x 2130 W AC	Optional
H2216XXLR2	2U	2.5"	16	2 x 2130 W AC	Optional

1.2 Additional Resources

For additional information about this family of products and its supported accessories, refer to the following resources also available through <http://www.intel.com/support>.

For in-depth technical information and a complete list of supported processors, memory, add-in cards, and peripherals, visit [Intel® Server Board S2600KP Family Support](#). Helpful documents accessible from the support site include:

- Intel® Server Board S2600KP Technical Product Specification
- Intel® Server System H2000G Product Family Technical Product Specification
- Intel® Remote Management Module 4 (Intel® RMM4) and Integrated BMC User Guide
- Intel® Remote Management Module 4 Technical Product Specification
- Intel® I/O Expansion Modules Hardware Specification
- Intel® Server System BIOS Setup Utility Guide
- Intel® Server Platform Firmware Specification Update
- Product Safety and Regulatory Compliance - Intel® Xeon® Processor E5-2600 v3/v4

For system firmware updates, onboard device drivers, and software to manage your Intel® Server System, visit [Intel® Server Board 2600KP Family Downloads](#).

Other useful resources include:

- [Intel® Server Board S2600KP Family System Integration and Service Guide](#)
- [Intel® Server Configurator Tool](#)
- [Intel® Server Board S2600KP Power Budget and Thermal Configuration Tool](#)

2. Server Building Block Configurations

The Intel® Server S2600KP Family is offered as a building block system. Server building blocks provide the option to configure and assemble a unique server system from the bare chassis up. Each building block component and optional accessory is purchased separately.

At a minimum, a functional server system requires:

- Chassis from the Intel® Server Chassis H2000G Product Family
- Compute module from the Intel® Compute Module HNS2600KP Product Family
- Power cord (Note that chassis shipped to the US and Canada contain North American power cords.)
- Processor
- Memory

In addition, many optional accessories and upgrades are available including riser card options, Intel® I/O Expansion Modules, Intel® Remote Management Modules, and SAS and SAS RAID support. For a full list of available accessories and upgrades, refer to section 3.

2.1 Intel® Server Board 2600KP Product Family

Table 4. Intel® Server Board S2600KPR


Intel® Server Board S2600KPR			
	<p>iPC BBS2600KPR MM# 999NV6 UPC 00735858308908 EAN 5032037081665 MOQ 10</p>	<p>Product type Server board only Building block/ spare FRU Packaged gross wt. 12.62 kg (27.82 lb) Un-packaged net wt. 0.9834 kg (2.16 lb) Dimensions 6.4" x 17.7"</p>	
<p>Description</p>	<ul style="list-style-type: none"> • Support for dual Intel® Xeon E5-2600 v3/v4 processor family • 8 DDR4 DIMM Slots • 4 x 6Gb/s SATA ports from secondary AHCI controller and 1 x SATA DOM port • 2 integrated 1Gb ports (Intel® Ethernet Controller I350) • 2 PCIe* 3.0 x24 capable slots and 1 PCIe* 3.0 x16 capable slot (not PCI-SIG* compatible) • Integrated baseboard management controller with IPMI 2.0 support • Optional advanced management features activated by Intel® Remote Management Module 4 Lite • Dedicated 1Gb management port onboard • Support for Intel® I/O Expansion Modules • Support for SAS modules <p>Box includes: (1) server board</p> <p>Note: All necessary mounting hardware, cabling, and shielding ship with the chassis and optional accessory kits.</p>		

Table 5. Intel® Server Board S2600KPFR



Intel® Server Board S2600KPFR			
	iPC MM# UPC EAN MOQ	BBS2600KPFR 999P1N 00735858308915 5032037081672 10	Product type Packaged gross wt. Un-packaged net wt. Dimensions
			Server board only Building block/ spare FRU 12.62 kg (27.82 lb) 0.9834 kg (2.16 lb) 6.4" x 17.7"
Description	<ul style="list-style-type: none"> • Support for dual Intel® Xeon® E5-2600 v3/v4 processor family • 8 DDR4 DIMM Slots • 4 x 6Gb/s SATA ports from secondary AHCI controller and 1 x SATA DOM port • 2 integrated 1Gb ports (Intel® Ethernet Controller I350) • 2 PCIe* 3.0 x24 capable slots and 1 PCIe* 3.0 x16 capable slot (not PCI-SIG* compatible) • Integrated baseboard management controller with IPMI 2.0 support • Optional advanced management features activated by Intel® Remote Management Module 4 Lite • Dedicated 1Gb management port onboard • Support for Intel® I/O Expansion Modules • Support for SAS modules • Single InfiniBand* FDR integrated port (Connect-IB* x8, QSFP+) <p>Box includes: (1) server board</p> <p>Note: All necessary mounting hardware, cabling, and shielding ship with the chassis and optional accessory kits.</p>		

Table 6. Intel® Server Board S2600KPTR

Intel® Server Board S2600KPTR			
	iPC MM# UPC EAN MOQ	BBS2600KPTR 999NV4 00735858311861 5032037084055 10	Product type Packaged gross wt. Un-packaged net wt. Dimensions
			Server board only Building block/ spare FRU 12.62 kg (27.82 lb) 0.9834 kg (2.16 lb) 6.4" x 17.7"
Description	<ul style="list-style-type: none"> • Support for dual Intel® Xeon® E5-2600 v3/v4 processor family • 8 DDR4 DIMM Slots • 4 x 6Gb/s SATA ports from secondary AHCI controller and 1 x SATA DOM port • 2 integrated 1Gb ports (Intel® Ethernet Controller I350) • 2 PCIe* 3.0 x24 capable slots and 1 PCIe* 3.0 x16 capable slot (not PCI-SIG* compatible) • Integrated baseboard management controller with IPMI 2.0 support • Optional advanced management features activated by Intel® Remote Management Module 4 Lite • Dedicated 1Gb management port onboard • Support for Intel® I/O Expansion Modules • Support for SAS modules • Trusted Platform Module (TPM) v1.2 <p>Box includes: (1) server board</p> <p>Note: All necessary mounting hardware, cabling, and shielding ship with the chassis and optional accessory kits.</p>		

2.2 Intel® Compute Module HNS2600KP Product Family

Table 7. Intel® Compute Module HNS2600KPR



Intel® Compute Module HNS2600KPR				
	iPC	HNS2600KPR	Product type	Building block/ spare FRU
	MM#	999NV3	Packaged gross wt.	4.76 kg (10.494 lb)
	UPC	00735858309271	Un-packaged net wt.	3.4 kg (7.49 lb)
	EAN	5032037081863	Dimensions	6.4" x 17.7"
	MOQ	1		
Included	(1) – Intel® Server Board S2600KPR (1) – Node power board – iPC FH2000NPB2 (1) – 6Gb/s bridge board – iPC FHWKPTPBGB (1) – Slot 1 PCIe* riser card – iPC FHW1U16RISER2 Note: Only low profile PCIe* cards can be installed on the slot 1 riser card. (3) – 40x56 mm dual rotor fan FXX4056DRFAN2 (1) – Front 1U passive heat sink - iPC FXXEA91X91HS2 (1) – Rear 1U passive heat sink - iPC FXXCA91X91HS (1) – Air duct (1) – 1U node tray			

Table 8. Intel® Compute Module HNS2600KPFR

Intel® Compute Module HNS2600KPFR				
	iPC	HNS2600KPFR	Product type	Building block/ spare FRU
	MM#	999P1P	Packaged gross wt.	4.76 kg (10.494 lb)
	UPC	00735858309288	Un-packaged net wt.	3.4 kg (7.49 lb)
	EAN	5032037081870	Dimensions	6.4" x 17.7"
	MOQ	1		
Included	(1) – Intel® Server Board S2600KPFR (with integrated InfiniBand* technology) (1) – Node power board – iPC FH2000NPB2 (1) – 6Gb/s bridge board – iPC FHWKPTPBGB (1) – Slot 1 PCIe* riser card – iPC FHW1U16RISER2 Note: Only low profile PCIe* cards can be installed on the slot 1 riser card. (3) – 40x56 mm dual rotor fan FXX4056DRFAN2 (1) – Front 1U passive heat sink - iPC FXXEA91X91HS2 (1) – Rear 1U passive heat sink - iPC FXXCA91X91HS (1) – Air duct (1) – 1U node tray			

2.3 Intel® Server Chassis H2000G Product Family

The product tables in this section provide order code information and detailed descriptions for each available Intel® Server Chassis building block option. The lower rows of the table identify:

- Included components shipped with the specified chassis.
- Required items which include hardware necessary to achieve basic functionality using the default system feature set.
- Optional accessories which include some of the accessories available to enhance the basic feature set of the server board or chassis. Find additional accessories in section 3.

In an effort to provide the complete product bill of materials, the lists of included components contain items identified by Intel Part Number (iPN). The iPN information is provided for reference only; these components are not orderable as spares or accessories. Items identified by Intel Product Code (iPC) are orderable building blocks, accessories, or spares.

Table 9. Intel® Server Chassis H2312XXKR2


Intel® Server Chassis H2312XXKR2																									
	<table border="0"> <tr> <td>iPC</td> <td>H2312XXKR2</td> <td>Product type</td> <td>Chassis only</td> </tr> <tr> <td>MM#</td> <td>933689</td> <td>Chassis form factor</td> <td>2U rack mount</td> </tr> <tr> <td>UPC</td> <td>00735858288347</td> <td>Packaged gross wt.</td> <td>28.32 kg (62.434 lb)</td> </tr> <tr> <td>EAN</td> <td>5032037067669</td> <td>Un-packaged net wt.</td> <td>19.97 kg (44.026 lb)</td> </tr> <tr> <td>MOQ</td> <td>1</td> <td>Chassis dimensions</td> <td>771 x 438 x 86.9 mm</td> </tr> <tr> <td></td> <td></td> <td>Package dimensions</td> <td>983 x 577 x 260 mm</td> </tr> </table>	iPC	H2312XXKR2	Product type	Chassis only	MM#	933689	Chassis form factor	2U rack mount	UPC	00735858288347	Packaged gross wt.	28.32 kg (62.434 lb)	EAN	5032037067669	Un-packaged net wt.	19.97 kg (44.026 lb)	MOQ	1	Chassis dimensions	771 x 438 x 86.9 mm			Package dimensions	983 x 577 x 260 mm
iPC	H2312XXKR2	Product type	Chassis only																						
MM#	933689	Chassis form factor	2U rack mount																						
UPC	00735858288347	Packaged gross wt.	28.32 kg (62.434 lb)																						
EAN	5032037067669	Un-packaged net wt.	19.97 kg (44.026 lb)																						
MOQ	1	Chassis dimensions	771 x 438 x 86.9 mm																						
		Package dimensions	983 x 577 x 260 mm																						
<p>Included</p>	<p>(1) – 2U chassis with quick reference label affixed to top cover (1) – Pre-installed standard control panel assembly (board only) – iPC FH2000FPANEL2 (1) – Power distribution board – iPC FXXCRPSPDB2 (2) – 1600 W 80 PLUS* Platinum power supply units – iPC FXX1600PCRPS (4) – 3.5" hot-swap drive bays with drive carriers and drive blanks, includes: (1) – 12 Gb SAS/SATA backplane – iPC FHW12X35HS12G (12) – 3.5" hot swap drive carriers – iPC FXX35HSCAR (4) – Blank node fillers (1) – Basic rack rail – iPC AXXELVRAIL Note: The rail kit only supports specific rack type with 3/8" square and 7.1 mm round holes. (1) – Power supply bay blank insert (8) – DIMM slot blanks – iPN H43597-00x (2) – Chassis handles (1 set) installed – iPN H19171-00x (2) – AC power cord retention strap assembly – iPN H23961-00x Server board and riser card mounting screws Spares for each screw type</p>																								
<p>Required items (sold separately)</p>	<ul style="list-style-type: none"> • Intel® Compute Module HNS2600KP (choose one) <ul style="list-style-type: none"> ◦ HNS2600KPR ◦ HNS2600KPFR – with integrated InfiniBand* technology • Power cord(s) – See section 4 <p>Note: Chassis shipped to the US and Canada contain North American power cords.</p> <ul style="list-style-type: none"> • (1) or (2) Intel® Xeon® Processor E5-2600 v4 product family • ECC DDR4 memory (RDIMM or LRDIMM) 																								
<p>Optional accessories (sold separately)</p>	<ul style="list-style-type: none"> • One x16 PCIe* 3.0 slot riser card (one for each riser slot) – iPC FHW1U16RISER2 • Intel® I/O Expansion Modules – See section 3.2 for options • Intel® RAID Modules – See section 3.4 for options • Lockable front system bezel – iPC A2UBEZEL • Intel® RMM4 Lite for advanced management features – iPC AXXRMM4LITE • Storage drives 																								

Table 10. Intel® Server Chassis H2216XXKR2


Intel® Server Chassis H2216XXKR2			
	<p>iPC H2216XXKR2 MM# 933688 UPC 00735858288354 EAN 5032037067676 MOQ 1</p>	<p>Product type Chassis only Chassis form factor 2U rack mount Packaged gross wt. 29.12 kg (64.198 lb) Un-packaged net wt. 19.54 kg (43.078 lb) Chassis dimensions 733 x 438 x 86.9 mm Package dimensions 984 x 578 x 266 mm</p>	
Included	<p>(1) – 2U chassis with quick reference label affixed to top cover (1) – Pre-installed standard control panel assembly (board only) – iPC FH2000FPANEL2 (1) – Power distribution board – iPC FXXCRRPSPDB2 (2) – 1600 W 80 PLUS* Platinum power supply units – iPC FXX1600PCRPS (4) – 2.5" hot-swap drive bays with drive carriers and drive blanks, includes: (1) – 12 Gb SAS/SATA backplane – iPC FHW16X25HS12G (16) – 2.5" hot swap drive carriers – iPC FXX25HSCAR2 (4) – Blank node fillers (1) – Basic rack rail – iPC AXCELVRAIL Note: The rail kit only supports specific rack type with 3/8" square and 7.1 mm round holes. (1) – Power supply bay blank insert (8) – DIMM slot blanks – iPN H43597-00x (2) – Chassis handles (1 set) installed – iPN H19171-00x (2) – AC power cord retention strap assembly – iPN H23961-00x Server board and riser card mounting screws Spares for each screw type</p>		
Required items (sold separately)	<ul style="list-style-type: none"> • Intel® Compute Module HNS2600KP (choose one) <ul style="list-style-type: none"> ○ HNS2600KPR ○ HNS2600KPFR – with integrated InfiniBand* technology • Power cord(s) – See section 4 <p>Note: Chassis shipped to the US and Canada contain North American power cords.</p> <ul style="list-style-type: none"> • (1) or (2) Intel® Xeon® Processor E5-2600 v4 product family • ECC DDR4 memory (RDIMM or LRDIMM) 		
Optional accessories (sold separately)	<ul style="list-style-type: none"> • One x16 PCIe* 3.0 slot riser card (one for each riser slot) – iPC FHW1U16RISER2 • Intel® I/O Expansion Modules – See section 3.2 for options • Intel® RAID Modules – See section 3.4 for options • Lockable front system bezel – iPC A2UBEZEL • Intel® RMM4 Lite for advanced management features – iPC AXXRMM4LITE • Storage drives 		

Table 11. Intel® Server Chassis H2312XXLR2



Intel® Server Chassis H2312XXLR2			
	iPC MM# UPC EAN MOQ	H2312XXLR2 942352 00735858316729 5032037086981 1	Product type Chassis form factor Packaged gross wt. Un-packaged net wt. Chassis dimensions Package dimensions
Included	(1) – 2U chassis with quick reference label affixed to top cover (1) – Pre-installed standard control panel assembly (board only) – iPC FH2000FPANEL2 (1) – Power distribution board – iPC FXXCRPSPDB2 (2) – 2130 W 80 PLUS* Platinum power supply units – iPC FXX2130PCRPS (4) – 3.5" hot-swap drive bays with drive carriers and drive blanks, includes: (1) – 12 Gb SAS/SATA backplane – iPC FHW12X35HS12G (12) – 3.5" hot swap drive carriers – iPC FXX35HSCAR (4) – Blank node fillers (1) – Basic rack rail – iPC AXXELVRAIL Note: The rail kit only supports specific rack type with 3/8" square and 7.1 mm round holes. (1) – Power supply bay blank insert (8) – DIMM slot blanks – iPN H43597-00x (2) – Chassis handles (1 set) installed – iPN H19171-00x (2) – AC power cord retention strap assembly – iPN H23961-00x Server board and riser card mounting screws Spares for each screw type		
Required items (sold separately)	<ul style="list-style-type: none"> • Intel® Compute Module HNS2600KP (choose one) <ul style="list-style-type: none"> ○ HNS2600KPR ○ HNS2600KPFR – with integrated InfiniBand* technology • Power cord(s) – See section 4 Note: Chassis shipped to the US and Canada contain North American power cords. <ul style="list-style-type: none"> • (1) or (2) Intel® Xeon® Processor E5-2600 v4 product family • ECC DDR4 memory (RDIMM or LRDIMM) 		
Optional accessories (sold separately)	<ul style="list-style-type: none"> • One x16 PCIe* 3.0 slot riser card (one for each riser slot) – iPC FHW1U16RISER2 • Intel® I/O Expansion Modules – See section 3.2 for options • Intel® RAID Modules – See section 3.4 for options • Lockable front system bezel – iPC A2UBEZEL • Intel® RMM4 Lite for advanced management features – iPC AXXRMM4LITE • Storage drives 		

Table 12. Intel® Server Chassis H2216XXLR2


Intel® Server Chassis H2216XXLR2			
	<p>iPC H2216XXLR2 MM# 942353 UPC 00735858316736 EAN 5032037086998 MOQ 1</p>	<p>Product type Chassis only Chassis form factor 2U rack mount Packaged gross wt. 28.4 kg (62.611 lb) Un-packaged net wt. 20.5 kg (45.194 lb) Chassis dimensions 733 x 438 x 86.9 mm Package dimensions 983 x 577 x 260 mm</p>	
Included	<p>(1) – 2U chassis with quick reference label affixed to top cover (1) – Pre-installed standard control panel assembly (board only) – iPC FH2000FPANEL2 (1) – Power distribution board – iPC FXXCRPSPDB2 (2) – 2130 W 80 PLUS* Platinum power supply units – iPC FXX2130PCRPS (4) – 2.5" hot-swap drive bays with drive carriers and drive blanks, includes: (1) – 12 Gb SAS/SATA backplane – iPC FHW16X25HS12G (16) – 2.5" hot swap drive carriers – iPC FXX25HSCAR2 (4) – Blank node fillers (1) – Basic rack rail – iPC AXXELVRAIL Note: The rail kit only supports specific rack type with 3/8" square and 7.1 mm round holes. (1) – Power supply bay blank insert (8) – DIMM slot blanks – iPN H43597-00x (2) – Chassis handles (1 set) installed – iPN H19171-00x (2) – AC power cord retention strap assembly – iPN H23961-00x Server board and riser card mounting screws Spares for each screw type</p>		
Required items (sold separately)	<ul style="list-style-type: none"> • Intel® Compute Module HNS2600KP (choose one) <ul style="list-style-type: none"> ○ HNS2600KPR ○ HNS2600KPFR – with integrated InfiniBand* technology • Power cord(s) – See section 4 <p>Note: Chassis shipped to the US and Canada contain North American power cords.</p> <ul style="list-style-type: none"> • (1) or (2) Intel® Xeon® Processor E5-2600 v4 product family • ECC DDR4 memory (RDIMM or LRDIMM) 		
Optional accessories (sold separately)	<ul style="list-style-type: none"> • One x16 PCIe* 3.0 slot riser card (one for each riser slot) – iPC FHW1U16RISER2 • Intel® I/O Expansion Modules – See section 3.2 for options • Intel® RAID Modules – See section 3.4 for options • Lockable front system bezel – iPC A2UBEZEL • Intel® RMM4 Lite for advanced management features – iPC AXXRMM4LITE • Storage drives 		

3. Server System Configuration Accessories and Upgrades

3.1 Locking Front Bezel Accessory Kit

The locking front bezel is designed for maximum airflow to maintain system cooling requirements. The bezel includes a keyed locking mechanism which can be used to prevent unauthorized access to installed storage devices and front I/O ports.

Table 13. Front bezel accessory kits

Product Image	Details	Description
	<p>2U Bezel A2UBEZEL</p> <p>iPC A2UBEZEL MM# 918086 UPC 735858241137 EAN 5032037035880 MOQ 1</p> <p>Product type Accessory kit</p>	Snap-on bezel made of black molded plastic for 2U rack chassis. Includes two snap-on badges and snap-on swoosh for branding.

3.1.1 Front Bezel Installation Instructions

To install the front bezel, lock the right side of the bezel to the rack handle (A) and press the left side of the bezel towards the chassis until it clicks into place (B) as pictured in Figure 3.

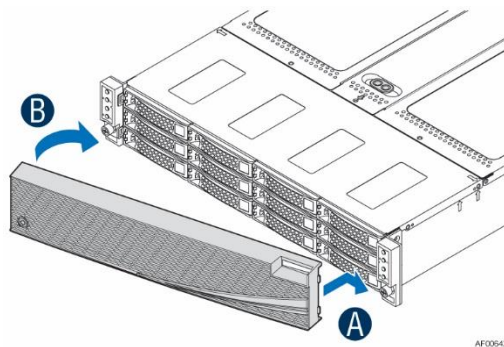


Figure 3. Installing front bezel to chassis

To mount the snap-on badge to the bezel, insert the badge hooks into the bezel and press to snap in place.








Figure 4. Installing snap-in branding badges to front bezel



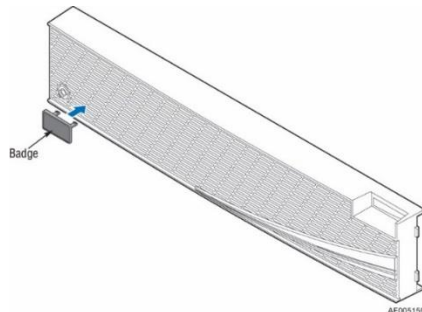


3.2 Intel® I/O Expansion Modules



The Intel® Server S2600KP Family supports a number of optional Intel® I/O Expansion Modules that install using proprietary connectors on the server board and leaving available PCIe* add-in card slots available for other add-in card options.

Note: Intel® I/O Expansion Modules require AXXKPTPIOM or AXXKPTPM2IOM carrier boards for installation. The production compute modules and chassis configurations do not include rIOM carrier boards.

Table 14. Intel® I/O Expansion Modules


Product Image	Details	Description
	<p>1U PCIe* rIOM Riser and rIOM Carrier Board Kit AXXKPTPIOM</p> <p>iPC AXXKPTPIOM MM# 935524 UPC 00735858288385 EAN 5032037067706 MOQ 1</p> <p>Product type Accessory kit</p>	<p>1x16 PCIe* (200 pin) rIOM riser and rIOM carrier board kit supporting an Intel® I/O Expansion Module on Slot 2 of the Intel® Compute Module HNS2600KP Product Family.</p> <p>Note: A rIOM carrier board is required for Intel® I/O Expansion Module installation.</p>
	<p>1U PCIe* rIOM Riser and rIOM Carrier Board with M.2 Support Kit AXXKPTPM2IOM</p> <p>iPC AXXKPTPM2IOM MM# 943483 UPC 73585830272015 EAN 5032037077491 MOQ 1</p> <p>Product type Accessory kit</p>	<p>1x16 PCIe* (200 pin) rIOM riser and rIOM carrier board kit supporting one SATA 80 mm M.2 device and one Intel® I/O Expansion Module on Slot 2 of the Intel® Compute Module HNS2600KPR. Includes one SATA cable.</p> <p>Note: M.2 device installation is supported on Intel® Compute Module HNS2600KPR only.</p> <p>Note: A rIOM carrier board is required for Intel® I/O Expansion Module installation.</p>
	<p>Dual Port Intel® 82599EB 10GbE I/O Module AXX10GBNIAIOM</p> <p>iPC AXX10GBNIAIOM MM# 917905 UPC 735858241090 EAN 5032037035842 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Dual SFP+ port 10GbE I/O module based on Intel® 82599 10 Gigabit Ethernet Controller.</p> <p>Supports direct connect or transceiver. Cables/transceivers not included.</p> <p>Includes three screws.</p>
	<p>Dual RJ45 port 10GBASE-T I/O Module AXX10GBTWLHW3</p> <p>iPC AXX10GBTWLHW3 MM# 941868 UPC 735858296649 EAN 5032037072465 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Dual RJ45 port 10GBASE-T I/O module, based on Intel® Ethernet Controller X540.</p>

Product Image	Details	Description
	<p>FDR InfiniBand* ConnectX-3* I/O Module AXX1FDRIBIOM</p> <p>iPC AXX1FDRIBIOM MM# 918607 UPC 735858241106 EAN 5032037035859 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Single port, FDR 56GT/S speed InfiniBand* Intel® I/O Expansion Module, with QSFP connector, based on Mellanox* CX3 MT27504A1-FCCR-FV chip.</p> <p>Includes three screws.</p>
 	<p>FDR InfiniBand* ConnectX-3* I/O Module AXX2FDRIBIOM</p> <p>iPC AXX2FDRIBIOM MM# 920627 UPC 735858245722 EAN 5032037040235 MOQ 1</p> <p>Product type Accessory kit</p> <p>Quad Port Intel® I350-AE4 GbE I/O Module AXX4P1GBPWL IOM</p> <p>iPC AXX4P1GBPWL IOM MM# 917911 UPC 735858241083 EAN 5032037035835 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Dual-port, FDR 56GT/S (per port capable) speed InfiniBand* module, with QSFP connector, based on Mellanox* CX3 MT27508A1-FCCR-FV chip.</p> <p>Includes three screws.</p> <p>Note: Due to PCIe* 3.0 x8 bandwidth limitation, both ports cannot simultaneously function at full speed.</p> <p>Quad-port 1GbE IO Module based on Intel® Ethernet Controller I350.</p> <p>Includes three screws.</p>
	<p>Ethernet I/O Module XL710-QDA1 AXX1P40FRTIOM</p> <p>iPC AXX1P40FRTIOM MM# 933742 UPC 735858282291 EAN 5032037063623 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Single-port 40 Gpbs QSFP+ Ethernet Intel® I/O Expansion Module based on 10 Gbps Intel® Ethernet Controller XL710-BM2.</p> <p>Includes EMI shield and three screws.</p> <p>For a list of compatible QSFP+ modules and cables, visit: http://www.intel.com/content/www/us/en/support/network-and-i-o/ethernet-products/000006051.html.</p>
	<p>Ethernet I/O Module XL710-QDA2 AXX2P40FRTIOM</p> <p>iPC AXX2P40FRTIOM MM# 933743 UPC 735858282314 EAN 5032037063647 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Dual-port 40 Gpbs QSFP+ Ethernet Intel® I/O Expansion Module based on 10 Gbps Intel® Ethernet Controller XL710-BM2.</p> <p>Includes EMI shield and three screws.</p> <p>For a list of compatible QSFP+ modules and cables, visit: http://www.intel.com/content/www/us/en/support/network-and-i-o/ethernet-products/000006051.html.</p> <p>Note: The 4x 10 GbE SFP+ breakout is supported by Port #0 only.</p>

Product Image	Details	Description
	<p>Intel® Omni-Path Host Fabric Interface Adapter 100 Series 1 Port Low Profile PCIe* x8</p> <p>iPC 100HFA018LS MM# 945670 UPC 735858313452 EAN 5032037084987 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Intel® Omni-Path Architecture (Intel® OPA) single-port PCIe* x8 adapter, low profile and standard height brackets, FDR 58 Gpbs.</p> <p>Supports QSFP28 passive copper only. Please refer to the Intel® Omni-Path cables matrix at http://www.intel.com/content/www/us/en/high-performance-computing-fabrics/omni-path-cables.html.</p> <p>Note: Supported in riser slot 1 only.</p> <p>Note: Multiple Intel® Omni-Path Host Fabric Interface adapters (100HFA018LS or 100HFA016LS) in one system is not supported.</p>
	<p>Intel® Omni-Path Host Fabric Interface Adapter 100 Series 1 Port Low Profile PCIe* x16</p> <p>iPC 100HFA016LS MM# 948159 UPC 735858313445 EAN 5032037084970 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Intel® Omni-Path Architecture (Intel® OPA) single-port PCIe* x16 adapter, low profile and standard height brackets, FDR 100 Gpbs.</p> <p>Supports QSFP28 passive copper only. Please refer to the Intel® Omni-Path cables matrix at http://www.intel.com/content/www/us/en/high-performance-computing-fabrics/omni-path-cables.html.</p> <p>Note: Supported in riser slot 1 only.</p> <p>Note: Multiple Intel® Omni-Path Host Fabric Interface adapters (100HFA018LS or 100HFA016LS) in one system is not supported.</p>

3.2.1 Intel® I/O Expansion Modules Installation Instructions

To install an Intel® I/O Expansion Module, insert the module (H) into the pre-installed AXXKPTPIOM or AXXKPTP2IOM carrier board. Then secure the module using the three mounting screws (I) as pictured in Figure 5.

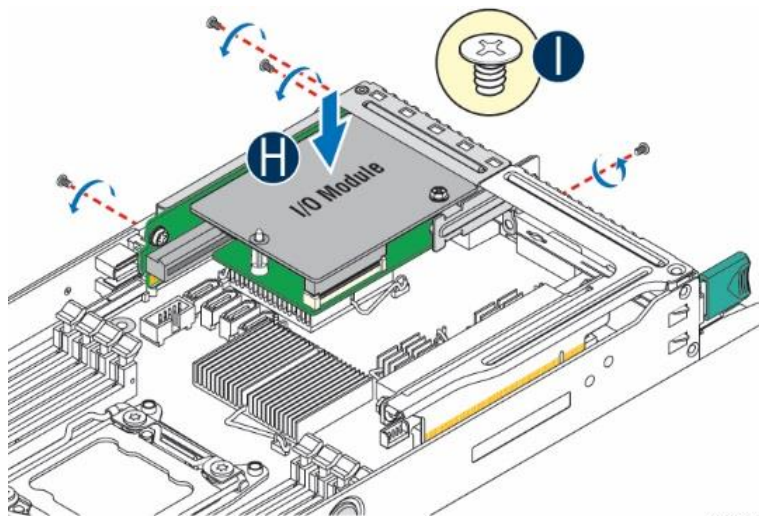





AF008712

Figure 5. Intel® I/O Expansion Module installation

3.3 SAS Bridge Board Upgrade Kits

The Intel® Compute Module HNS2600KP Family includes a 6 Gb/s bridge board. The following table lists the available upgrade and spare options.

Table 15. SAS bridge board upgrade kits and spares

Product Image	Details	Description
	<p>Spare 12Gb SAS Bridge Board AHWKPTP12GBGBIT (SAS without RAID)</p> <p>iPC AHWKPTP12GBGBIT MM# 949475 UPC 735858316248 EAN 5032037086851 MOQ 1</p> <p>Product type Upgrade kit</p>	<p>12Gb SAS bridge board (no RAID) for Intel® Compute Module HNS2600KP Product Family.</p> <p>Note: The AHWKPTP12GBGBIT is only supported in dual processor configurations.</p>
	<p>Spare 12Gb SAS Bridge Board AHWKPTP12GBGB</p> <p>iPC AHWKPTP12GBGB MM# 935580 UPC 735858288484 EAN 5032037067805 MOQ 1</p> <p>Product type Upgrade kit</p>	<p>12Gb SAS bridge board (RAID 0/1/10) for Intel® Compute Module HNS2600KP Product Family.</p> <p>Note: 12Gb/s LSI* SAS3008 is included on the bridge board, RAID firmware is based on MegaRAID*. The AHWKPTP12GBGB is only supported in dual processor configurations.</p>
	<p>Spare 12Gb SAS Bridge Board AHWKPTP12GBGBR5 (with RAID 5)</p> <p>iPC AHWKPTP12GBGBR5 MM# 937453 UPC 735858288903 EAN 5032037068185 MOQ 1</p> <p>Product type Upgrade kit</p>	<p>12Gb SAS bridge board (RAID 0/1/10/5) for Intel® Compute Module HNS2600KP Product Family.</p> <p>Note: 12Gb/s LSI* SAS3008 is included on the bridge board, RAID firmware is based on MegaRAID*. The AHWKPTP12GBGBR5 is only supported in dual processor configurations.</p>
	<p>Bridge Board Spare FHWKPTPBGB</p> <p>iPC FHWKPTPBGB MM# 935575 UPC 735858288422 EAN 5032037067744 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare 6Gb/s SATA bridge board for Intel® Compute Module HNS2600KP Product Family.</p>

3.4 Intel® RAID Add-in Cards, Modules, and Accessories

Intel® RAID offers a broad portfolio of RAID solutions designed to address the storage-related challenges of the modern day datacenter as well as the small business. The Intel® Server S2600KP Family includes support for the latest generation of 12Gb/s SAS Intel® RAID add-in cards, modules, expanders, and accessories. Previous 6 Gb/s Intel RAID cards are also supported. See the published tested hardware and OS list for a full list of validated Intel RAID cards.

For additional information on Intel RAID products, refer to [Intel® Integrated RAID Module RMS3 Product Family Product Brief](#) and [Intel® RAID Family Brochure](#).

Table 16. Intel® RAID Controller add-in cards







Product Image	Details	Description
	<p>Intel® RAID Controller RS3GC008</p> <p>iPC RS3GC008 MM# 928220 UPC 735858267175 EAN 5032037053839 MOQ 5</p> <p>Product type Accessory kit</p>	<p>Intel® RAID Controller RS3GC008 for Intel® Compute Module HNS2600KP Product Family.</p> <ul style="list-style-type: none"> • Low profile, half length, (MD2 compliant) PCIe* add-in card • Entry level SAS card • (8) external SAS / SATA ports (12Gb/s SAS, 6Gb/s SATA) • LSI* SAS3008 IOC • RAID levels – JBOD (SAS connectivity) <p>Note: SAS data cables are not included and must be purchased separately.</p>
	<p>Intel® RAID Controller RS3SC008</p> <p>iPC RS3SC008 MM# 928223 UPC 735858266956 EAN 5032037068567 MOQ 5</p> <p>Product type Accessory kit</p>	<p>Intel® RAID Controller RS3GC008 for Intel® Compute Module HNS2600KP Product Family.</p> <ul style="list-style-type: none"> • Low profile, half length, (MD2 compliant) PCIe* add-in card • (8) external SAS / SATA ports (12Gb/s SAS, 6Gb/s SATA) • LSI* SAS3108 ROC • RAID levels – 0, 1, 5, 6, 10, 50, and 60 • Embedded 1GB DDR3 cache memory • Supports Intel® RAID Maintenance Free Backup AXRMFBU4 <p>Note: SAS data cables are not included and must be purchased separately.</p>
	<p>Intel® RAID Controller RS25SB008</p> <p>iPC RS25SB008 MM# 934614 UPC 735858228633 EAN 5032037023443 MOQ 5</p> <p>Product type Accessory kit</p>	<p>Intel® RAID Controller RS25SB008 for Intel® Compute Module HNS2600KP Product Family.</p> <ul style="list-style-type: none"> • Low profile, half length, (MD2 compliant) PCIe* add-in card • (8) external SAS / SATA ports (6Gb/s) • LSI* SAS2208 I/O ROC • RAID levels – 0, 1, 5, 6, 10, 50, and 60 • Embedded 1GB DDR3 cache memory • Include Intel® RAID Maintenance Free Backup Unit (RMFBU) <p>Note: SAS data cables are not included and must be purchased separately.</p>

Table 17. Intel® RAID accessories



Product Image	Details	Description
 <p>The image shows the Intel RAID C600 Upgrade Key RKSATA4R5. It consists of a black plastic housing with a green printed circuit board (PCB) inside. The PCB has a SATA connector on one side and a small black component on the other. The key is shown from multiple angles: a top view, a side view, and a front view.</p>	<p>Intel® RAID C600 Upgrade Key RKSATA4R5</p> <p>iPC RKSATA4R5 MM# 916346 UPC 735858238861 EAN 5032037033640 MOQ 5</p> <p>Product type Accessory kit</p>	<p>RAID activation key for Intel® Compute Module HNS2600KP Product Family, black.</p> <p>Activates Intel® Rapid Storage Technology enterprise (Intel® RSTe) RAID 5 to the four internal SATA ports (board-only customers) and Intel® ESRT2 RAID 5.</p>
 <p>The image shows the Intel RAID Drive Encryption Management key. It is a green PCB with a black component and a small black component. The PCB has a SATA connector on one side and a small black component on the other. The key is shown from a top-down perspective.</p>	<p>Intel® RAID Drive Encryption Management</p> <p>iPC AXXPFKDE2 MM# 915317 UPC 73585822201474 EAN 5032037051705 MOQ 5</p> <p>Product type Accessory kit</p>	<p>Upgrade key to enable drive encryption management for Intel® RAID RS25 family of ROC products.</p>
 <p>The image shows the Intel RAID Rapid Recovery Snapshot key. It is a green PCB with a black component and a small black component. The PCB has a SATA connector on one side and a small black component on the other. The key is shown from a top-down perspective.</p>	<p>Intel® RAID Rapid Recovery Snapshot</p> <p>iPC AXXPFKSNH2 MM# 915318 UPC 73585822201481 EAN 5032037051712 MOQ 5</p> <p>Product type Accessory kit</p>	<p>Upgrade key to enable rapid recovery snapshot for Intel® RAID RS25 family of ROC products.</p>

3.5 Rack Mount Kits

The Intel® Server S2600KP Product Family provides upgrade options to the rack mounts.




CAUTION: Exceeding the rail kit's specified maximum weight limit or misalignment of the server in the rack may result in failure of the rack rails and damage to the systems or personal injury. Using two people or the use of a mechanical assist tool to install and align the server into the rack is highly recommended.

Table 18. Rack mount kits

Product Image	Details	Description
	<p>2/4U Premium Rail AXXFULLRAIL</p> <p>iPC AXXFULLRAIL MM# 939209 UPC 735858291989 EAN 5032037070546 MOQ 1</p> <p>Product type Upgrade kit</p>	<p>2U+ premium quality rails.</p> <ul style="list-style-type: none"> • Travel distance 780 mm • Full extension from rack • Kit includes rails, screws, installation manual <p>Note: Cable management arm is not supported by the Intel® Server Chassis H2000G Product Family.</p>
	<p>Enhanced Value Rail AXVELVRAIL</p> <p>iPC AXVELVRAIL MM# 920970 UPC 735858244367 EAN 5032037038980 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Enhanced value rail kit, half extension, extended inner slide member.</p>

3.6 Miscellaneous Accessories



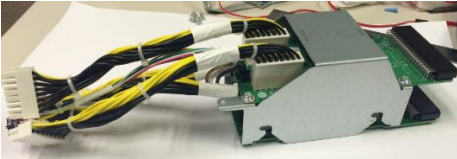


Table 19. Miscellaneous accessories

Product Image	Details	Description
	<p>Intel® Remote Management Module 4 Lite AXXRMM4LITE</p> <p>iPC AXXRMM4LITE MM# 911660 UPC 735858219297 EAN 503203702014946 MOQ 10</p> <p>Product type Accessory kit</p>	<p>Activation key for advanced management features. ROHS compliant.</p>
 	<p>Intel® Remote Management Module 4 Lite AXXRMM4LITE2</p> <p>iPC AXXRMM4LITE2 MM# 946514 UPC 735858307413 EAN 5032037080750 MOQ 10</p> <p>Product type Accessory kit</p> <p>Breakout Board AHWKPTPBOB</p> <p>iPC AHWKPTPBOB MM# 936274 UPC 735858288408 EAN 5032037067720 MOQ 1</p> <p>Product type Accessory kit</p>	<p>Activation key for advanced management features. ROHS free. Form, fit, and function is equivalent to AXXRMM4LITE.</p> <p>Breakout board accessory providing additional SATA ports for board only customers for Intel® Server Board S2600KP Family.</p>

4. Spare and Replacement Parts

Table 20. Spare and field replacement units (FRUs)




Product Image	Details	Description
	<p>1U PCIe* Riser FHW1U16RISER2 (Slot 1)</p> <p>iPC FHW1U16RISER2 MM# 935565 UPC 735858288392 EAN 5032037067713 MOQ 1</p> <p>Product type Spare FRU</p>	<p>1U PCIe* x16 riser card supporting in-board low-profile PCIe* add-in card (on slot 1).</p> <p>Compatible with Intel® Compute Module HNS2600KP Product Family.</p>
	<p>Spare 12Gb SAS/SATA 12 x 3.5" Backplane FHW12X35HS12G</p> <p>iPC FHW12X35HS12G MM# 935567 UPC 735858288446 EAN 5032037067768 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare 12 x 3.5" spare backplane.</p> <p>Compatible with Intel® Server Chassis H2312XXKR2 and H2312XXLR2.</p>
	<p>Spare 12Gb SAS/SATA 16 x 2.5" Backplane FHW16X25HS12G</p> <p>iPC FHW16X25HS12G MM# 935573 UPC 735858288453 EAN 5032037067775 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare 16 x 2.5" spare backplane.</p> <p>Compatible with Intel® Server Chassis H2216XXKR2 and H2216XXLR2.</p>
	<p>1600W Common Redundant Power Supply FXX1600PCRPS (Platinum-Efficiency)</p> <p>iPC FXX1600PCRPS MM# 915606 UPC 735858243650 EAN 5032037038294 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare 1600 W AC common redundant power supply 80 PLUS* Platinum.</p> <p>Compatible with Intel® Server Chassis H2312XXKR2 and H2216XXKR2.</p>

Product Image	Details	Description
	<p>2130W Common Redundant Power Supply FXX2130PCRPS (Platinum-Efficiency)</p> <p>iPC FXX2130PCRPS MM# 948196 UPC 735858311939 EAN 5032037084062 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare 2130 W AC common redundant power supply 80 PLUS* Platinum.</p> <p>Compatible with Intel® Server Chassis H2312XXLR2 and H2216XXLR2.</p>
	<p>Spare Node Power Board FH2000NPB2</p> <p>iPC FH2000NPB2 MM# 935574 UPC 735858288477 EAN 5032037067799 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare node power board (compute module power docking board).</p> <p>Compatible with Intel® Compute Module HNS2600KP Product Family.</p>
	<p>Power Distribution Board Spare FXXCRPSPDB2</p> <p>iPC FXXCRPSPDB2 MM# 935576 UPC 735858288460 EAN 5032037067782 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare power distribution board module including two boards, cables, a bus pair and supporting bracket, for common redundant power supplies.</p> <p>Compatible with Intel® Server Chassis H2000G Product Family.</p>
	<p>North America Power Cable FPWRCABLENA</p> <p>iPC FPWRCABLENA MM# 879287 UPC 735858181129 EAN 503203702015738 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare North American power cable.</p> <p>Compatible with Intel® Server Chassis H2000G Product Family.</p>
	<p>40x56mm Spare Dual Rotor Fan FXX4056DRFAN2</p> <p>iPC FXX4056DRFAN2 MM# 935566 UPC 735858288439 EAN 5032037067751 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare 40x56 mm dual rotor fan.</p> <p>Compatible with Intel® Compute Module HNS2600KP Product Family.</p>

Product Image	Details	Description
	<p>1U Heat Sink (Cu/Al) FXXCA91X91HS</p> <p>iPC FXXCA91X91HS MM# 918250 UPC 73585823662014 EAN 5032037031387 MOQ 2</p> <p>Product type Spare FRU</p>	<p>Spare 1U passive Cu/Al 91.5 x 91.5 mm heatsink (rear heat sink).</p> <p>Compatible with Intel® Compute Module HNS2600KP Product Family.</p>
	<p>1U Heat Sink (Ex-Al) FXXE91X91HS2</p> <p>iPC FXXE91X91HS2 MM# 937228 UPC 735858287982 EAN 5032037067539 MOQ 2</p> <p>Product type Spare FRU</p>	<p>Spare 1U standard Ex-Al 91.5 x 91.5 mm heatsink (front heat sink).</p> <p>Compatible with Intel® Compute Module HNS2600KP Product Family.</p>
	<p>2.5 inch Hot-swap Drive Carrier FXX25HSCAR2</p> <p>iPC FXX25HSCAR2 MM# 937542 UPC 735858289405 EAN 5032037068383 MOQ 8</p> <p>Product type Spare FRU</p>	<p>Spare 2.5" hot-swap drive carrier.</p> <p>Compatible with Intel® Server Chassis H2216XXKR2 and H2216XXLR2.</p>
	<p>3.5 inch Hot-swap Drive Carrier FXX35HSCAR</p> <p>iPC FXX35HSCAR MM# 936192 UPC 735858289412 EAN 5032037068390 MOQ 8</p> <p>Product type Spare FRU</p>	<p>Spare 3.5" hot-swap drive carrier.</p> <p>Compatible with Intel® Server Chassis H2312XXKR2 and H2312XXLR2.</p>
	<p>Spare Front Control Panel Kit FH2000FPANEL2</p> <p>iPC FH2000FPANEL2 MM# 935578 UPC 73585828842015 EAN 5032037067737 MOQ 1</p> <p>Product type Spare FRU</p>	<p>Spare front control panel kit including (2) mini front panel boards and rack handle for assembly.</p> <p>Compatible with Intel® Server Chassis H2000G Product Family.</p>

5. Extended Warranties

Table 21. Extended warranties

Product Image	Details	Description
 <p>Intel® Server System Component Extended Warranty Key SVCEWHWSY 923113 1 Expiration: 30 Days Instructions to enable Intel® Server Component Extended Warranty</p>	<p>Server System Extended Warranty</p> <p>iPC SVCEWHWSY MM# 923113 MOQ 1</p> <p>Product type Warranty</p>	<p>Extended warranty for complete server system:</p> <ul style="list-style-type: none"> (1) – Intel® Server Chassis H2000G (4) – Intel® Compute Module HNS2600KP
 <p>Intel® Server Node Component Extended Warranty Key SVCEWHWB 914905 1 Expiration: 30 Days Instructions to enable Intel® Server Component Extended Warranty</p>	<p>Single Node Extended Warranty</p> <p>iPC SVCEWHWB MM# 914905 MOQ 1</p> <p>Product type Warranty</p>	<p>Extended warranty for a single node:</p> <ul style="list-style-type: none"> (1) – Intel® Compute Module HNS2600KP
 <p>Intel® Server Board Component Extended Warranty Key SVCEWDPBD 911294 1 Expiration: 30 Days Instructions to enable Intel® Server Component Extended Warranty</p>	<p>Server Board Extended Warranty</p> <p>iPC SVCEWDPBD MM# 911294 MOQ 1</p> <p>Product type Warranty</p>	<p>Extended warranty for server board only:</p> <ul style="list-style-type: none"> (1) – Intel® Server Board H2600KP (for use with third party chassis)

Appendix A. Glossary

Term	Definition
AHCI	Advanced Host Controller Interface
CRPS	Common Redundant Power Supply
DOM	Disk on Module
EAN	International Article Number (barcode)
ESRT2	Intel® Embedded Server RAID Technology 2
FDR	Fourteen Data Rate
FRU	Field Replaceable Unit
IOC	I/O Controller
iPC	Intel Product Code
iPN	Intel Part Number
JBOD	Just a Bunch Of Drives
MM#	Master Material order number
MOQ	Minimum Order Quantity
NVMe*	NVM Express (Non-Volatile Memory Host Controller Interface Specification (NVMeHCI))
Intel® OPA	Intel® Omni-Path Architecture
PCI-SIG*	Peripheral Component Interconnect Special Interest Group
PCIe*	PCI Express*
QSFP	Quad Small Form factor Pluggable
RAID	Redundant Array of Independent Drives
rIOM	riser I/O Module
RMFBU	RAID Maintenance Free Backup Unit
Intel® RMM4 Lite	Intel® Remote Management Module 4 Lite
ROC	RAID on Chip
ROHS	Restriction of Hazardous Substance Directive
Intel® RSTe	Intel® Rapid Storage Technology enterprise
SAS	Serial Attached SCSI
SATA	Serial ATA
SFP	Small Form factor Pluggable
TPM	Trusted Platform Module
UPC	Universal Product Code (barcode)