


### Overview

**HP recommends  
Windows Vista® Business**

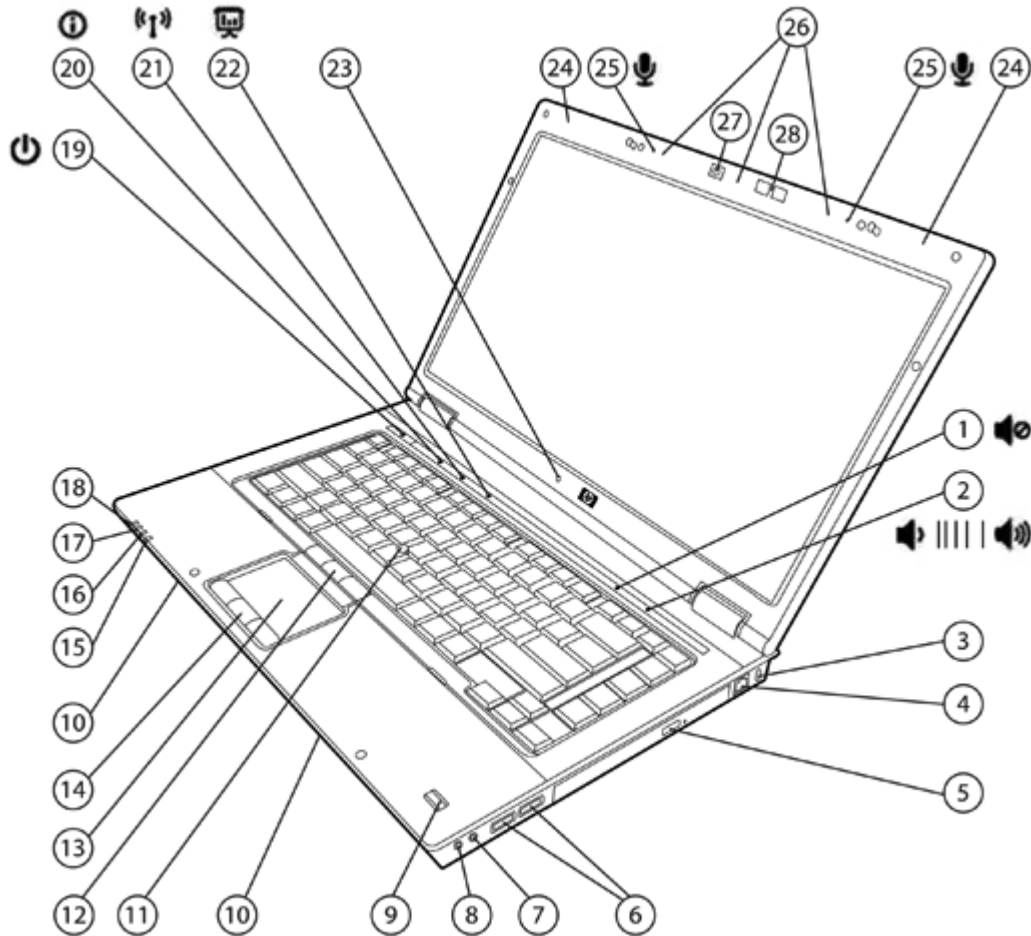


1. Volume mute button with LED indicator
2. Volume scroll zone with up/down LED indicators
3. Kensington Lock slot
4. RJ-11/modem port
5. Upgrade Bay (optical drive or second hard drive)
6. 2 USB 2.0 ports
7. Stereo microphone in
8. Stereo headphone/line out
9. HP Fingerprint Sensor
10. Integrated stereo speakers
11. Pointstick
12. Pointstick buttons, three
13. Touchpad with scroll zone
14. Wireless on/off LED
15. Hard drive / optical drive activity / HP 3D DriveGuard LED
16. Battery charging LED
17. Power/standby LED
18. Wireless on/off LED
19. Power button with LED
20. HP Info / HP QuickLook button with LED indicator
21. Wireless on/off button with LED indicator
22. HP Presentation button with LED indicator
23. Ambient Light Sensor
24. Two WWAN antennas (with WWAN option)
25. Dual-microphone array
26. Three WLAN antennas (with WLAN option)
27. Optional 2 MP Webcam with LED

### Overview

14. Touchpad buttons, three


28. HP NightLight and on/off button

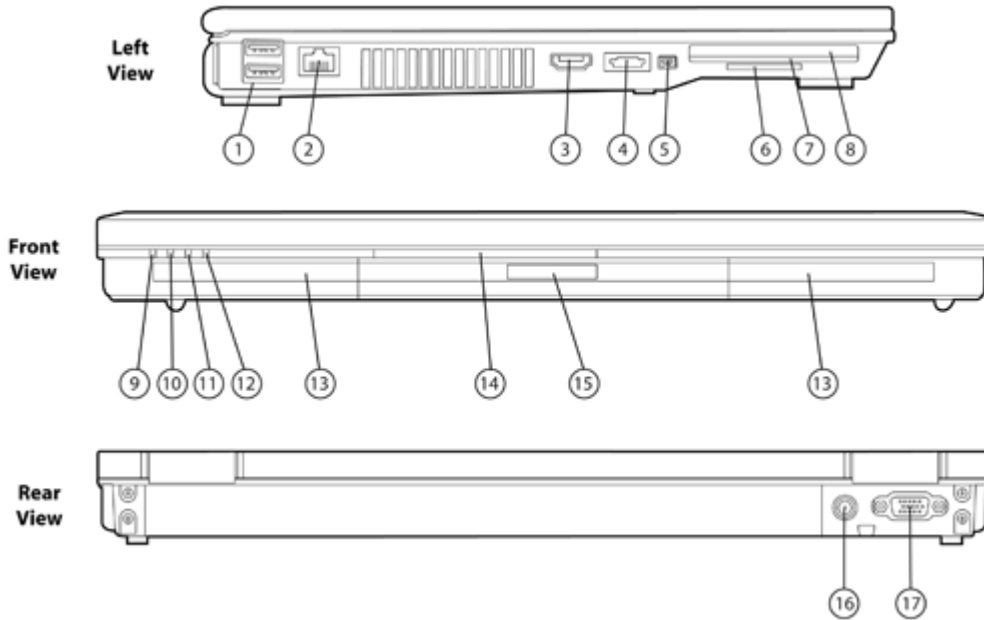

1. (2) USB 2.0 ports
2. RJ-45/Ethernet port
3. HDMI port
4. eSATA port
5. 1394a port
6. Media Card Reader
7. Integrated Smart Card Reader
8. ExpressCard/54 slot

9. Wireless on/off LED
10. Power/standby LED
11. Battery charging LED
12. Hard drive / optical drive activity / HP 3D DriveGuard LED
13. Integrated stereo speakers
14. Business Card slot
15. Display release latch
16. Power connector
17. VGA/external monitor connector

### Overview

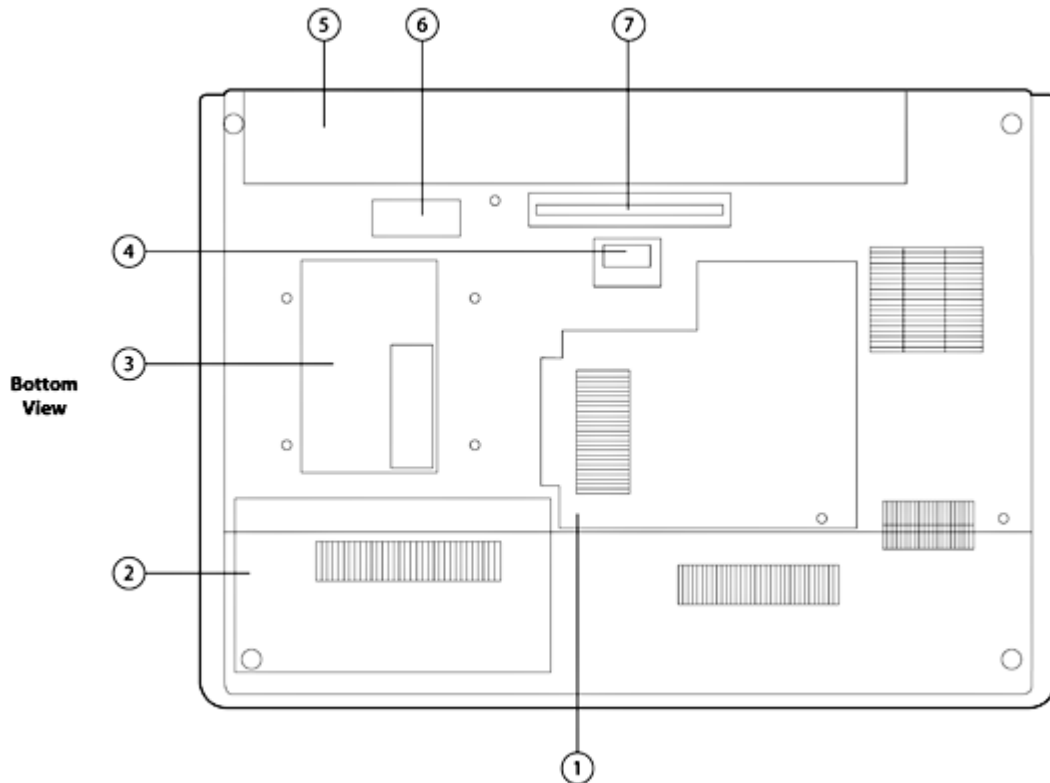

- |                                       |                          |
|---------------------------------------|--------------------------|
| 1. Memory module and WLAN compartment | 5. Battery bay           |
| 2. Hard drive bay                     | 6. Battery release latch |
| 3. Business card holder               | 7. Docking connector     |
| 4. Secondary battery connector        |                          |

**NOTE:** WWAN module compartment is accessible under the keyboard.

### At A Glance

- Genuine Windows Vista Business 64 (supported, not preinstalled), Genuine Windows Vista Business 32, Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed, or FreeDOS
- ATI Mobility Radeon HD 3650 graphics with up to 256 MB dedicated memory
- DirectX 10 support and Dual Link DVI (available through optional docking) provides faster rendering capabilities and support for ultra-high resolution monitors
- Intel® Centrino® 2 with vPro™ technology capable, with Intel Core™2 Duo processors
- Designed to travel, with weight starting at 6.3 lb/2.86 kg and 1.1-inch/28.2 mm thin at front
- Business Rugged - designed to meet the military standard Mil-Std-810F for shock, vibration, sand and dust, humidity, altitude, and high temperature operation\*
- Flexible wireless connectivity options:
  - Integrated HP un2400 EV-DO/HSDPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology
  - Integrated 802.11 a/b/g/draft-n wireless LAN module
  - Bluetooth®
- HDMI high definition video/audio port
- eSATA connector for external optical drive, hard drive, or RAID array
- Upgrade Bay for easy optical drive upgrade or optional second hard drive for RAID 1 Mirroring or RAID 0 Striping
- Optional Blu-Ray DVD+/-RW SuperMulti DL Drive

### Overview

- Widescreen 15.4-inch diagonal display with wide-viewing angle (select models), Ambient Light Sensor and HP Privacy Filter support
- Integrated Media Card Reader
- Enhanced security features including integrated Smart Card Reader, HP ProtectTools, HP SpareKey, HP Fingerprint Sensor, TPM 1.2 Embedded Security Chip\*\*
- Optional 2 MP Webcam with Business Card Reader Software
- HP QuickLook 2 for instant access to email, calendar, and contact information
- Enhanced reliability with HP DuraCase, HP DuraKeys and HP DuraFinish
- Up to 8 GB of 800 MHz DDR2 SDRAM supported, dual channel memory support
- Up to 320 GB 7200 rpm or 250 GB 5400 rpm SMART SATA II user-removable hard drive with HP 3D DriveGuard protection
- Integrated Intel Gigabit Network Connection (10/100/1000 NIC)
- Enhanced dual pointing devices (touchpad with scroll zone and pointstick)

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

\*\* TPM module disabled where not permitted by law (for example, Russia and China).

### Standard Features

#### Processors

Intel Core 2 Duo Processor T9800 (2.93 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor T9600 (2.80 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor T9550 (2.66 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor P8600 (2.40 GHz, 3 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor P8400 (2.26 GHz, 3 MB L2 cache, 1066 MHz FSB)\*

\* Intel's numbering is not a measurement of higher performance.

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

#### Operating System

##### Preinstalled

Genuine Windows Vista Business 32\*  
Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed\*†  
FreeDOS

##### Supported

Genuine Windows Vista Business 64\*  
Genuine Windows XP Professional 32

##### Certified

SuSE Linux Enterprise Desktop 10

\* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows Vista Business disk also included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.

#### Chipset

Mobile Intel PM45 Express Chipset ICH9M-Enhanced

#### Intel Centrino 2 with vPro technology capable

Intel Centrino 2 with vPro technology is a selectable feature that is available on units configured with an Intel WiFi Link 5300. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology (AMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach the operating system, isolate infected systems, and update PCs regardless of their power state.

\*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

**NOTE:** Some functionality of Intel Centrino 2 and vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Centrino 2 and vPro technology is dependant on 3rd party software providers. Compatibility with future "virtual appliances" and Microsoft Windows Vista operating system is yet to be determined.

### Standard Features

#### Business Rugged

Meets the military standard Mil-Std-810F\* for:

- Shock: Method 516.5 Proc. I
- Vibration: Method 514.5, Proc I
- High Temperature: Method 501.4, Proc I & II (140°F/60°C operational)
- Sand and Dust: Method 510.4, Proc. I (Blowing Dust)
- Humidity: Method 507.4 (95% relative humidity)
- Altitude: Method 500.4 Low Pressure, Proc. I & II (15,000 feet operational)

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

#### Graphics

ATI Mobility Radeon HD 3650 with 256 MB of dedicated video memory

Microsoft DirectX 10.1 (Shader 4.1) and OpenGL 2.1 capable

#### Display

##### Internal

15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)  
15.4-inch diagonal WSXGA+ anti-glare (1680 x 1050 resolution)

Ambient light sensor

Integrated lid switch

HP Privacy Filter support

##### External

Up to 32-bit per pixel color depth

**VGA** port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz

**HDMI** 1.3 port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).

**DVI** port in optional HP Docking Station (sold separately)

supports resolutions up to 1920 x 1200 for single-link DVI monitors and up to 2560 x 1600 for dual-link DVI monitors.

**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

#### Memory

##### Standard

800 MHz DDR2 SDRAM; two slots supporting dual channel memory  
1024 MB, 2048 MB, 4096 MB, or 8192 MB

##### Maximum

Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2

##### Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

### Standard Features

#### Communications

Integrated Intel Gigabit Network Connection (10/100/1000 NIC)\*  
56K V.92 modem\*\*

\* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

\*\* Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

#### Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Wireless LAN is factory configurable or available as an option to be added later. Broadband Wireless (WWAN) requires Windows Vista Business or Windows XP Professional and is available in select countries as a standard, factory configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

#### HP un2400 EV-DO/HSPA Mobile Broadband Module

Integrated WWAN module with Gobi global mobile Internet technology that provides worldwide connection to both CDMA (EVDO) and UMTS (HSPA) wireless networks.

**NOTE:** Separately purchased mobile network operator service is required.

Two 850/900/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

#### All 802.11 integrated wireless LAN options

Wi-Fi CERTIFIED\*

Cisco Compatible Extensions support

Wired Equivalent Privacy (WEP) support up to 128-bit keys

Wi-Fi Protected Access (WPA) and WPA2 support

802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP

Advanced Encryption Standard (AES) support

Three antennas integrated in the display enclosure

#### Intel WiFi Link 5300

Integrated support for 802.11a, b, g, and n draft 2.0\*

Up to 450 mbps data rate

#### HP Integrated Module with Bluetooth Wireless Technology

Bluetooth Specification v2.0 compliant

Works with a wide range of Bluetooth devices

\* The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled (Intel 802.11a/b/g only).

### Standard Features

#### Keyboard

The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (center-to-center spacing), 2.5-mm stroke, and comfort-dished keycaps.

HP DuraKeys is a clear coating applied over the notebook keyboard that helps protect the finish and the printed characters on the keys. HP DuraFinish helps protect the finish on the keyboard deck, graphics, and icons from normal wear and tear.

#### Touch-sensitive controls

Touch-sensitive controls provide easy access to the following features: HP Info Center, HP QuickLook, wireless on/off, HP Presentation button, external volume up, volume down, and mute

#### Pointing device

Enhanced dual pointing devices:  
Touchpad with scroll zone, three pick buttons  
and  
Pointstick, three pick buttons

#### Expansion card slots

##### ExpressCard/54 slot

Supports ExpressCard/54 and ExpressCard/34

##### Integrated Smart Card Reader

Compatible with ISO 7816 compliant Smart Cards  
PC/SC interface support

##### Media Card Reader

Supports SD (Secure Digital), MultiMedia Card, Memory Stick, Memory Stick Pro, Memory Stick Duo\*, Picture card

#### Storage

##### Internal Storage Device

120/160/250 GB 5400 rpm SMART SATA II Hard Drive  
160/250/320 GB 7200 rpm SMART SATA II Hard Drive

**NOTE:** Hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.

##### HP 3D DriveGuard

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock away from the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

##### Upgrade Bay

Fixed 12.7 mm SATA  
optical drive

Blu-ray R/RE DVD+/-RW SuperMulti DL Drive  
DVD+/-RW SuperMulti DL LightScribe Drive  
DVD-ROM Drive

or

Second hard drive\*

250 GB 5400 rpm SMART SATA II Hard Drive  
250/320 GB 7200 rpm SMART SATA II Hard Drive

\* For RAID configurations, both hard drive capacities must be equal.



### Standard Features

<b>Interfaces</b>	<b>ExpressCard/54 slot</b>	One
	<b>Smart Card Reader</b>	One
	<b>Media Card Reader</b>	One
	<b>External Monitor</b>	One – VGA
	<b>1394a</b>	One – 4-pin connector
	<b>Stereo microphone in</b>	One
	<b>Stereo headphone/line out</b>	One
	<b>Power connector</b>	One
	<b>RJ-11/modem</b>	One
	<b>RJ-45/Ethernet</b>	One
	<b>HDMI</b>	One – 1.3 compatible
	<b>eSATA</b>	One
	<b>USB 2.0</b>	Four
	<b>Docking connector</b>	One
	<b>Secondary battery connector</b>	One
<b>LED status indicators</b>	Fifteen	

---

### Audio/Visual

High Definition Audio support w/24-bit DAC  
Integrated stereo speakers  
Integrated dual-microphone array  
Touch-sensitive controls for volume up, volume down, and mute  
Stereo headphone/line out  
Stereo microphone in

Optional 2 MP Webcam with Business Card Reader Software

- Supports videoconferencing and still image capture
  - Large image sensor for excellent color matching and good low light sensitivity
  - Up to 30 frames/sec
  - AutoMacro focus lens
  - Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
  - 16-bit true color (camera sensors output YCrCb format among others)
-

### Standard Features

#### Software

#### Preinstalled software with Windows Vista or Windows XP

HP Recovery Manager (Vista only)  
HP Help and Support Center  
HP QuickLook 2  
HP Universal Print Driver  
HP ProtectTools Security Manager:  
    BIOS Configuration for HP ProtectTools  
    Credential Manager for HP ProtectTools  
    Device Access Manager for HP ProtectTools  
    Drive Encryption for HP ProtectTools  
    Embedded Security for HP ProtectTools  
    File Sanitizer for HP ProtectTools  
    Privacy Manager for HP ProtectTools  
HP Quick Launch Buttons  
HP Wireless Assistant  
Microsoft Office Ready with 60-day Office Professional 2007 Trial Edition (select models)  
PDF Complete Special Edition  
Intervideo WinDVD – DVD Player  
Roxio Creator Business (for optional DVD+/-RW and DVD/CD-RW drives)  
McAfee Total Protection\*  
Synaptics Touchpad Driver  
Microsoft Windows Live Messenger (select models)  
HP Webcam Software (select models)

**Additional software available from the web**

HP SoftPaq Download Manager  
HP Client Manager Software  
HP Client Management Solutions  
Java Card Security for HP ProtectTools

\* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

---

#### HP Recovery Manager

Each unit is shipped with HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 10 GB of the hard drive is reserved for the system recovery software.

---

#### SMBIOS Version 2.4

System Management BIOS, previously known as DMI BIOS, is used to store system management information.

---

### Standard Features

**HP ProtectTools Security Manager** HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are:

- BIOS Configuration for HP ProtectTools
- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Set-up Wizard for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Java Card Security for HP ProtectTools

### Security

#### Standard Features

HP ProtectTools Security Manager  
 Enhanced Pre-Boot Security  
 HP SpareKey  
 One-Step Logon  
 HP Fingerprint Sensor  
 Integrated Smart Card Reader  
 Configuration Control Hardware  
 Memory Change Alert  
 Ownership Tag  
 Setup Password  
 Power-On Password  
 TPM 1.2 Embedded Security Chip\*  
 TPM Enhanced DriveLock\*  
 HP Disk Sanitizer  
 HP 3D DriveGuard  
 Kensington Lock Slot  
 Support for Computrace / LoJack for Laptops (must be purchased separately)

#### Optional Features

#### HP Privacy Filter

Narrows viewing area so that screen data is visible only to persons directly in front of the monitor

\* TPM module disabled where use is restricted by law; for example, Russia and China.  
 For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

### Power Supply

External 120 watt\* Smart AC adapter, 6-foot (1.8-meter) power cord included.  
 Total length including external AC adapter is 12 feet (3.66 meter).  
 HP Fast Charge\*

\*HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to 12-cell Ultra-Capacity batteries.

### Standard Features

<b>Battery</b>	<b>Primary battery</b>	8-cell (73 WHr) Lithium-Ion battery
	<b>Optional HP Extended Life Battery</b>	8-cell (52 WHr) high capacity Lithium-Ion battery
	<b>Optional HP Ultra-Capacity Battery</b>	12-cell (95 WHr) high capacity Lithium-Ion battery

---

<b>Battery Life</b>	<b>Primary battery</b>	Up to 4 hours and 45 minutes
	<b>Primary battery and optional HP Extended Life Battery</b>	Up to 8 hours and 30 minutes
	<b>Primary battery and optional HP Ultra-Capacity Battery</b>	Up to 10 hours and 45 minutes

**NOTE:** The listed battery life measurements were taken on models running Microsoft Windows XP Professional. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

<b>System Standby Time</b>	Up to 2 weeks
----------------------------	---------------

---

<b>Power Conservation</b>	ATI PowerPlay technology Hibernation Standby ACPI compliance
---------------------------	---

---

<b>Docking and Stands</b>	HP Advanced Docking Station HP Docking Station HP Standard Monitor Stand HP Adjustable Notebook Stand HP External MultiBay II
---------------------------	---

HP's shared docking solutions provide simple and convenient port replication and cable management. Features include Gigabit NIC pass through, modem pass through, legacy parallel and serial ports, Dual Link DVI-D, USB 2.0 ports, integrated security mechanism\*, integrated MultiBay II and ExpressCard\*\* slots. These docking solutions are compatible across multiple Business Notebook platforms enabling a lower total cost of ownership.

\* HP/Kensington Cable Lock required (purchased separately)

\*\* HP Advanced Docking Station only

### Standard Features

#### Service and Support

HP Services offers limited 3-year warranty; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

#### Select Model(s)

HP's Global Product Offer includes Global Series Preconfigured (GS-P) and Configurable (GS-C) products. GPO delivers globally consistent products, services, and solutions with End-of-Life (EOL) transition management. These products reduce IT complexity, lower management costs, increase productivity, and simplify product transitions.

<b>8530p</b> FU616AW#ABA Global SKU	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Intel Centrino 2 with vPro technology</b>	Enabled
	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	250 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	15.4-inch diagonal WSXGA+ anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3650 with 256 MB
	<b>Webcam</b>	No
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0) HP Integrated Module with Bluetooth Wireless Technology
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
	<b>Battery</b>	8-cell (73 WHr) Li-Ion
	<b>Power</b>	External 120W adapter
	<b>Warranty</b>	3/3/0

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Standard Features

<b>8530p</b> FU617AW#ABA Global SKU	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Intel Centrino 2 with vPro technology</b>	Enabled
	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	250 GB 7200 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	15.4-inch diagonal WSXGA+ anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3650 with 256 MB
	<b>Webcam</b>	2 MP Webcam
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0) HP Integrated Module with Bluetooth Wireless Technology
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Standard Features

<b>8530p</b> KS045UT#ABA Smart Buy	<b>Processor</b>	Intel Core 2 Duo Processor P8600 (2.40 GHz, 3 MB L2 cache, 1066 MHz FSB)
	<b>Operating System</b>	Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	250 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	15.4-inch diagonal WSXGA+ anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3650 with 256 MB
	<b>Webcam</b>	None
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0) HP Integrated Module with Bluetooth Wireless Technology
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
	<b>Battery</b>	8-cell (73 WHr) Li-Ion
	<b>Power</b>	External 120W adapter
	<b>Warranty</b>	3/3/0

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Standard Features

<b>8530p</b> KS046UA#ABA Regional	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Operating System</b>	Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	160 GB 7200 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	15.4-inch diagonal WSXGA+ anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3650 with 256 MB
	<b>Webcam</b>	None
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0) HP Integrated Module with Bluetooth Wireless Technology
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
	<b>Battery</b>	8-cell (73 WHr) Li-Ion
	<b>Power</b>	External 120W adapter
	<b>Warranty</b>	3/3/0

\* TPM module disabled where use is restricted by law; for example, Russia and China.



### Standard Features

<b>8530p</b> KS047UT#ABA Smart Buy	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Operating System</b>	Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	250 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	15.4-inch diagonal WSXGA+ anti-glare
	<b>Graphics</b>	ATI Mobiltity Radeon HD 3650 with 256 MB
	<b>Webcam</b>	2 MP Webcam
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0) HP Integrated Module with Bluetooth Wireless Technology
	<b>Broadband Wireless</b>	HP un2400 EV-DO/HSPA Mobile Broadband Module
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
	<b>Battery</b>	8-cell (73 WHr) Li-Ion
	<b>Power</b>	External 120W adapter
	<b>Warranty</b>	3/3/0

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Standard Features

<b>8530p</b> KS048UA#ABA Regional	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Operating System</b>	Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	160 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	15.4-inch diagonal WSXGA+ anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3650 with 256 MB
	<b>Webcam</b>	2 MP Webcam
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0) HP Integrated Module with Bluetooth Wireless Technology
	<b>Broadband Wireless</b>	HP un2400 EV-DO/HSPA Mobile Broadband Module
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
	<b>Battery</b>	8-cell (73 WHr) Li-Ion
	<b>Power</b>	External 120W adapter
	<b>Warranty</b>	3/3/0

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Options

<b>Memory</b>	HP 1 GB (DDR2 800 MHz) SODIMM	KT292AA
	HP 2 GB (DDR2 800 MHz) SODIMM	KT293AA
	HP 4 GB (DDR2 800 MHz) SODIMM	KT294AA

---

<b>Storage</b>	HP Notebooks USB Diskette Drive	DC361B
	HP 250GB Pocket Media Drive	FE477AA
	HP Primary SATA 120 GB 7200 rpm Hard Drive	AH920AA
	HP Primary SATA 250 GB 5400 rpm Hard Drive	AK072AA
	HP Upgrade Bay SATA 250 GB 5400 rpm Hard Drive	AK868AA
	HP Upgrade Bay SATA DVD+/-RW SuperMulti DL LightScribe Drive	AK869AA

---

<b>MultiBay II Storage</b> (9.5-mm)	HP MultiBay II DVD-ROM Drive	PA849A
	HP MultiBay II DVD+/-RW SuperMulti DL Drive	PA851A

**NOTE:** Requires HP Advanced Docking Station or HP External MultiBay II

---

<b>Expansion Solutions</b>	HP Docking Station	EN488AA#ABA
	HP Advanced Docking Station	EN489AA#ABA
	HP 2008 150W Docking Station	KQ751AA#ABA
	HP 2008 180W Advanced Docking Station	KQ752AA#ABA
	HP External MultiBay II	PA509A#ABA
	HP Dual-Monitor Stand	AK084AA
	HP Standard Monitor Stand	PA507A
	HP Adjustable Notebook Stand	PA508A
HP Mobile Port Replicator	AK155AA	

---

<b>Communications</b>	Intel WiFi Link 5300	KM591AA#ABA
	HP un2400 EVDO/HSUPA Mobile Broadband Module	FN556AA

---

### Options

<b>Power</b>	HP 1-Bay Battery Charging Station	RW635AA#ABA
	HP 5-Bay Battery Charging Station	RW636AA#ABA
	HP Battery Adapter Kit	KV830AA
	HP 150W Smart AC Adapter	AL192AA#ABA
	HP 180W Smart AC Adapter	AK875AA#ABA
	HP 90W Smart Auto Adapter	ED493AA
	HP 90W Smart Combo Adapter	AJ652AA#ABA
	HP Primary 8-cell Battery pack	KU533AA
	HP Extended Life Battery	AJ359AA
HP 12-cell Ultra-Capacity Battery	EJ092AA	

---

<b>Carrying Cases</b>	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA

---

<b>Security</b>	HP ExpressCard Smart Card Reader with Java Card	AJ451AA
	HP ProtectTools Java Card – 10 units	EL348AA
	HP/Kensington MicroSaver Security Lock	PC766A
	HP Privacy Filter	AJ358AA

---

<b>Input/Output Devices</b>	HP PS/2 Keyboard & Mouse Bundle*	RC464AA#ABA
	HP USB Keyboard & Mouse Bundle	RC465AA#ABA
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA

\* Requires HP Docking Station, HP Advanced Docking Station, HP 2008 Docking Station or HP 2008 Advanced Docking Station. Availability may vary by region.

### Memory

800-MHz DDR2 SDRAM  
Two DIMM slots supporting dual channel memory  
DIMM sizes supported: 1024 MB, 2048 MB, and 4096 MB

- Standard Memory**
- 1024 MB (1024 MB x 1)
  - 2048 MB (2048 MB x 1 or 1024 MB x 2)
  - 4096 MB (4096 MB x 1 or 2048 MB x 2)
  - 8192 MB (4096 MB x 2)

**Optional Memory Upgrades** Support for up to 8192 MB of memory with the installation of optional DDR2 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
2048 MB	1024 MB	1024 MB
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
8192 MB	4096 MB	4096 MB

**NOTE:** This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

<b>Memory Upgrades</b>	HP 1 GB (DDR2 800 MHz) SODIMM	KT292AA
	HP 2 GB (DDR2 800 MHz) SODIMM	KT293AA
	HP 4 GB (DDR2 800 MHz) SODIMM	KT294AA

### Storage

#### Upgrade Bay Drive Support

	Quantity Supported	Drive Bay
Blu-ray R/RE DVD+/-RW SuperMulti DL Drive	One	Upgrade Bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Upgrade Bay
DVD-ROM Drive	One	Upgrade Bay
250 GB 5400 rpm SMART SATA II Hard Drive	One	Upgrade Bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Upgrade Bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Upgrade Bay

#### Internal Storage Device

	Quantity Supported	Drive Bay
<b>Hard Drives</b>		
250 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
120 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
<b>Solid State Drive</b>		
80 GB Solid State Drive	One	Dedicated hard drive bay

### Technical Specifications

<b>System Unit</b>	<b>Dimensions (HxWxD)</b>	1.1 in (at front) x 14.0 in x 10.4 in 28.2 mm (at front) x 355 mm x 263.5 mm
	<b>Weight</b>	Starting from 6.3 lb (2.86 kg)
	<b>NOTE:</b> Height varies depending upon where on the notebook the measurement is made. Starting weight includes 8-cell battery, hard drive, 1 GB memory, 802.11 wireless communications module, Bluetooth, and optical drive. Weight varies by configuration and components.	
<b>Stand-Alone Power Requirements</b>	Normal Operating Voltage	18.5 V
	Average Operating Power	26.0 W
	Max Operating Power	< 120 W
<b>Temperature</b>	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
<b>Relative Humidity</b>	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
<b>Shock</b>	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
<b>Random Vibration</b>	Operating	0.75 grms
	Non-operating	1.50 grms
<b>Altitude</b> (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
<b>Industry Standard Certifications</b>	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Yes*
	EPEAT	Gold**
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes	

### Technical Specifications

UKRSERTCOMPUTER Yes

\* Configurations of the HP EliteBook 8530p that are ENERGY STAR qualified are identified as HP EliteBook 8530p ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country. EPEAT status listed above applies to U.S.

**NOTE:** For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

#### HP 120W Smart AC Adapter

<b>Weight</b>	1.52 lb (0.69 kg) (adapter) 0.29 lb (0.13 kg) (power cord)
<b>Dimensions</b>	6.65 x 2.56 x 1.50 in (16.9 x 6.5 x 3.8 cm)
<b>Input</b>	Operating Input Voltage 100 to 240 VAC Operating Input Current PFC Version: 2.20 A at 90 VAC 1.10 A at 180 VAC Non-PFC Version: 2.5 A at 110 VAC 1.25 A at 180 VAC Operating Frequency Range 47 to 63 Hz AC
<b>Output</b>	Efficiency 83% minimum at 115 VAC Output power 120 W DC Output Voltage 18.5 V
<b>Environmental Design</b>	Operating Temperature 32° to 104° F (0° to 35° C) Non-operating (storage) Temperature -4° to 149° F (-20° to 65° C) Altitude 0 to 10,000 ft (0 to 3,048 m) Humidity 20% to 80% Storage Humidity 10% to 90%
<b>EMI and Safety Certifications</b>	CE Mark: full compliance with LVD and EMC directives Worldwide safety standards: IEC60950, EN60950, UL60950, Class2, SELV Agency approvals: C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE, S-Mark, Australian Electric Permit, PSB, eK, BSMI, BNCI, KONCAR, GS, GOST, SASO, SABS, UKRSERTCOMPUTER; MTBF-over 200,000 hours at 25°C ambient condition.



### Technical Specifications

<b>Optional HP Ultra-Capacity Battery</b>	<b>Dimensions (H x W x L)</b>	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	<b>Weight</b>	1.77 lb (0.803 kg)	
	<b>Cells/Type</b>	12-cell Lithium-Ion	
	<b>Energy</b>	Watt-hour Capacity	95 WHr
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
<b>Battery Re-Charge Time</b>	Smart Adapter	3 to 4 hours	
	System ON	4 to 5 hours (depending on system power consumption)	
<b>Fuel Gauge</b>	When pressed, LEDs light indicating level of charge remaining on battery		
<hr/>			
<b>Optional HP Extended Life Battery</b>	<b>Dimensions (H x W x L)</b>	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)	
	<b>Weight</b>	1.00 lb (0.455 kg)	
	<b>Cells/Type</b>	8-cell Lithium-Ion	
	<b>Energy</b>	Watt-hour Capacity	52 WHr
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	3 hours	
	System ON	3 to 5 hours (depending on system power consumption)	
	HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF	
<b>Fuel Gauge</b>	When pressed, LEDs light indicating level of charge remaining on battery		
<hr/>			
<b>8-Cell (73 WHr) Lithium-Ion battery</b>	<b>Dimensions (H x W x L)</b>	0.8 x 1.9 x 10.6 in (2.0 x 4.8 x 27.0 cm)	
	<b>Weight</b>	0.980 lb (0.445 kg)	
	<b>Cells/Type</b>	8-cell Lithium-Ion	
	<b>Energy</b>	Watt-hour Capacity	73 WHr
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	2.5 hours	
	System ON	3 to 5 hours (depending on system power consumption)	
	HP Fast Charge Technology	Charges the battery up to 90% within 1.5 hours when system is OFF	

### Technical Specifications

---

#### Displays

---

<b>15.4-inch WSXGA+ anti-glare</b>	<b>Dimensions (W x H)</b>	13.0 x 8.1 in (33.1 x 20.7 cm)	
	<b>Diagonal Size</b>	15.4 in (39.1 cm)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	300:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	200 nit (typical)	
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.197 mm
		<b>Format</b>	1680 x 1050
		<b>Configuration</b>	RGB stripe
		<b>Backlight</b>	CCFL
	<b>PPI</b>	129	
	<b>Viewing Angle</b>	±60° Horizontal, ± 50° Vertical (minimum) or ±70° Horizontal, ±60° Vertical (typical)	

---

<b>15.4-inch WXGA anti-glare</b>	<b>Active Area (W x H)</b>	13.0 x 8.1 in (33.1 x 20.7 cm)	
	<b>Diagonal Size</b>	15.4 in (39.1 cm)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	300:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	200 nit (typical)	
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.259 mm
		<b>Format</b>	1280 x 800
		<b>Configuration</b>	RGB stripe
		<b>Backlight</b>	CCFL
	<b>PPI</b>	98	
	<b>Viewing Angle</b>	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

---

#### Internal Storage

---

### Technical Specifications

<b>320 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lbs (115 g)	
	<b>Capacity</b>	320 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	625,142,448	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

<b>250 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lbs (115 g)	
	<b>Capacity</b>	250 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	488397168	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

### Technical Specifications

<b>160 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lb (115 g)	
	<b>Capacity</b>	160 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

<b>250 GB 5400 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.22 lb (101 g)	
	<b>Capacity</b>	250 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	3 ms
		<b>Average</b>	13 ms
		<b>Maximum</b>	24 ms
	<b>Rotational Speed</b>	5400 rpm	
	<b>Logical Blocks</b>	488,397,168	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

### Technical Specifications

<b>160 GB 5400 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.22 lb (101 g)	
	<b>Capacity</b>	160 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	3 ms
		<b>Average</b>	13 ms
		<b>Maximum</b>	24 ms
	<b>Rotational Speed</b>	5400 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

<b>120 GB 5400 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.22 lb (101 g)	
	<b>Capacity</b>	120 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	3 ms
		<b>Average</b>	13 ms
		<b>Maximum</b>	24 ms
	<b>Rotational Speed</b>	5400 rpm	
	<b>Logical Blocks</b>	234,441,648	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

### Optical Drives

---

### Technical Specifications

<b>DVD-ROM Drive</b>	<b>Access Times</b>	Random	<116 ms CD (typical) <125 ms DVD (typical)
	<b>Max Data Transfer Rate</b>	24X CD-ROM	Up to 3,600 KB/s
		8X-DVD	Up to 10,800 KB/s
	<b>Transfer Mode</b>	UDMA Mode 5	
	<b>Interface</b>	Gen 1 SATA	
	<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	<b>Supported Media (write)</b>	None	
	<b>Max Media Capacity (read)</b>	4.7 GB	
	<b>Transport</b>	Tray Loading	

<b>DVD+/-RW SuperMulti DL LightScribe Drive</b>	<b>Access Times</b>	Random	<175 ms CD (typical) <230 ms DVD (typical)
		<b>Max Data Transfer Rate</b>	24X CD-ROM 8X DVD 24X CD-R 16X CD-RW 8X DVD+R 4X DVD+RW 8X DVD-R 4X DVD-RW 2.4X DVD+R(9) 5X DVD-RAM
	<b>Transfer Mode</b>	UDMA Mode 5	
	<b>Interface</b>	Gen 1 SATA	
	<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	<b>Max Media Capacity (read)</b>	8.5 GB	
	<b>Max Media Capacity (write)</b>	8.5 GB	
	<b>Transport</b>	Tray Loading	

### Technical Specifications

<b>Blu-ray R/RE DVD+/-RW SuperMulti DL Drive</b>	<b>Access Times</b>	Random	<140 ms CD-ROM (typical) <160 ms DVD-ROM (typical) <300 ms BD-ROM (typical)
	<b>Max Data Transfer Rate</b>	24X CD-ROM	Up to 3,600 KB/s
		8X DVD-ROM	Up to 10,800 KB/s
		8X CD-R	Up to 1,200 KB/s
		8X CD-RW	Up to 1,200 KB/s
		8X DVD+R	Up to 10,800 KB/s
		4X DVD+RW	Up to 5,400 KB/s
		8X DVD-R	Up to 10,800 KB/s
		4X DVD-RW	Up to 5,400 KB/s
		2.4X DVD+R(9)	Up to 2,700 KB/s
		5X DVD-RAM	Up to 6,750 KB/s
		1X BD-ROM	Up to 4,500 KB/s
		1X BD-R	Up to 4,500 KB/s
1X BD-RE	Up to 4,500 KB/s		
<b>Transfer Mode</b>	UDMA Mode 5		
<b>Interface</b>	Gen 1 SATA		
<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE		
<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, BD-R, BD-RE		
<b>Max Media Capacity (read)</b>	50.0 GB		
<b>Max Media Capacity (write)</b>	50.0 GB		
<b>Transport</b>	Tray Loading		

### Security

### Technical Specifications

<b>HP Fingerprint Sensor</b>	<b>Mobile Voltage Operation</b>	3.0V–3.6V Single Supply
	<b>Operating Temperature</b>	32° – 158°F (0° – 70°C)
	<b>Current Consumption @ 3.3V</b>	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	<b>High-Rate Image Capture</b>	Up to 240 image frames /sec
	<b>ESD Resistance</b>	IEC 61000-4-2 Level 4 (±15KV)
	<b>Detection Matrix</b>	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

### Audio

<b>Hardware</b>	<b>Implementation</b>	ADI1984A High Definition CODEC
	<b>Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes
	<b>Sound Blaster Pro compatible</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes

<b>Audio Output Quality</b>	<b>Frequency Response</b>	20 Hz – 20 kHz
	<b>Signal to Noise Ratio</b>	>85 dB
	<b>Total Harmonic Distortion</b>	0.01%
	<b>Noise Floor</b>	–110 dB
	<b>Play/Record Sampling Rate(s)</b>	8 kHz – 48kHz
	<b>DAC</b>	16, 20 or 24-bit
	<b>ADC</b>	16, 20 or 24-bit

<b>Integrated Stereo Speakers</b>	<b>Power Rating</b>	2 Watts
	<b>Impedance</b>	4 Ohms

### Communications



### Technical Specifications

<p><b>Integrated Intel Gigabit Network Connection</b> (10/100/1000 NIC)</p> <p>82567LM</p>	<p><b>Ethernet Features</b></p> <p>10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p> <p><b>Power Management</b></p> <p>ACPI compliant -- multiple power modes Situation-sensitive features reduce power consumption</p> <p><b>Performance Features</b></p> <p>TCP/IP/UDP Checksum Offload (configurable)</p> <p><b>Manageability</b></p> <p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Intel Advanced Management Technology (iAMT)</p> <p><b>Interface</b></p> <p>PCI Express x1</p> <p><b>NIC Device Driver Name</b></p> <p>Intel 82567 Gigabit Network Connection</p>
--	---

<p><b>V.92 56K Data/Fax Modem Form Factor</b></p> <p><b>Power Management Support</b></p> <p><b>Approvals/Certifications</b></p> <p><b>Data Mode Capabilities</b></p>	<p>MDC 1.5 Daughtercard</p> <p>APM Revision 1.2, ACPI</p> <p>UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries</p> <p>V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction)</p> <p><b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates</p> <p><b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21</p>
--	--

### Technical Specifications

	Bell 212A Bell 103J
<b>Fax Mode Capabilities</b>	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
<b>Command Set</b>	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

#### HP un2400 EV-DO/HSPA Mobile Broadband Module

<b>Technology/Operating Bands</b>	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
<b>Wireless Protocol Standards</b>	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 5 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
<b>Wireless Parametric Standards</b>	Meets or exceeds TIA/EIA IS-98-D
<b>Maximum Data Rates</b>	UMTS (HSPA) – 7.2 Mbps (Download), 2.0Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8Mbps (Upload)
<b>Maximum Output Power</b>	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
<b>Maximum Power Consumption</b>	2500mA (peak); 1000mA (average)
<b>Power Consumption, Sleep Mode</b>	5 mA
<b>Power Management</b>	USB selective suspend Integrated notebook wireless button
<b>Antenna Type</b>	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express MiniCard
<b>Weight</b>	11.5 g
<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 4.5 mm)

### Technical Specifications

<b>Voltage, Operating</b>	3.3v +/- 10%
<b>Temperature, Operating</b> (from TIA/EIA/IS-98-D)	-22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
<b>Temperature, Non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
<b>Humidity, Non-operating</b>	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
<b>Configuration Utilities</b>	HP Connection Manager
<b>LED Activity</b>	LED Off – Radio Off; Solid LED On – Radio On

<b>Intel WiFi Link 5300</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n (draft 2.0)*  * The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled.
	<b>Interoperability</b>	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> ) Tested with wireless access points from several major manufacturers (details at: <a href="http://www.hp.com/go/notebooks/WLAN/draft-n">http://www.hp.com/go/notebooks/WLAN/draft-n</a> )
	<b>Frequency Band</b>	2.4 GHz and 5 GHz
	<b>Antenna Structure</b>	3 transmit; 3 receive (3x3)
	<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (draft): 66 possible data rates, ranging from 6 Mbps to 450 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification
	<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
	<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK



### Technical Specifications

- Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
- WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

---

<b>HP Integrated Module with Bluetooth Wireless Technology</b>	<b>Bluetooth Specification</b>	2.0 Compliant
	<b>Dimensions</b>	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
	<b>Frequency Band</b>	2402 to 2480 MHz
	<b>Number of Available Channels</b>	79 (1 MHz) available channels
	<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	<b>Transmit Power</b>	-6 dBm to 4 dBm (Bluetooth Class II)
	<b>Receiver Sensitivity</b>	Better than -80 dBm at 0.1 % raw bit error rate
	<b>Power Consumption</b>	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
	<b>Antenna</b>	Internally integrated within module
	<b>Range</b>	Up 33 ft (10 m)
	<b>Electrical Interface</b>	USB 2.0 compliant Microsoft Windows Plug and Play compliant
	<b>OS Support</b>	Microsoft Windows XP Professional and Home Microsoft Windows 2000
	<b>Bluetooth Software Supported</b>	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software
	<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves
	<b>Security</b>	Full support of Bluetooth Security Provisions
	<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
	<b>Temperature</b>	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)

### Technical Specifications

<b>Humidity</b>	Operating	10% to 90%
	Non-operating	5% to 95%
<b>Altitude</b>	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
<b>Bluetooth Profiles Supported</b>	(with Bluetooth for Windows 4.0 software)	
	Serial Port Profile (SPP)*	
	Dial-Up Networking (DUN)*	
	Generic Object Exchange Profile (GOEP)	
	Object Push Profile (OPP)*	
	File Transfer Profile (FTP)	
	Synchronization Profile (SYNC)	
	Hard Copy Cable Replacement (HCRP)*	
	Personal Area Networking Profile (PAN)*	
	Human Interface Device Profile (HID)*	
	FAX Profile (FAX)	
	Basic Imaging Profile (BIP)	
Headset Profile (HSP)		
Hands Free Profile (HFP)		
Advanced Audio Distribution Profile (A2DP)		

\* indicates the profile is also supported by Microsoft Windows XP SP2

### Eco Data

#### Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- Taiwan Green Mark
- China Energy Conservation Program
- IT ECO declaration
- EPEAT – Silver
- Korea ECO label

#### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

<b>Energy Consumption</b>	115 VAC	230 VAC	100 VAC
Normal Operation	15.22 W	17.02 W	15.12 W
Sleep (Energy Star low power mode)	1.278 W	1.335 W	1.271 W
Off	0.647 W	0.636 W	0.724 W
<b>Heat Dissipation*</b>	115 VAC	230 VAC	100 VAC
Normal Operation	52 BTU/hr	58 BTU/hr	52 BTU/hr
Sleep	4 BTU/hr	5 BTU/hr	4 BTU/hr
Off	2 BTU/hr	2 BTU/hr	3 BTU/hr

### Technical Specifications

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.4	26
Operation	3.4	26

#### Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000 ppm by weight.

The battery type and chemistry used in the product is:  
CR2032 (coin cell), Lithium

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

#### Additional information:

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level, see: [www.epeat.net](http://www.epeat.net)

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 95.0% recycle-able when properly disposed of at end of life.

### Technical Specifications

#### Packaging Materials

- External:
  - Polyethylene low density 13 g
  - Corrugated carton 236 g
- Internal:
  - Corrugated 280 g
- The EPE foam packaging material is made from 100% recycled content.
- The corrugated paper packaging materials contains at least 80% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment ([http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBEBs)
- Polybrominated Biphenyl Oxides (PBBOs)



### Technical Specifications

- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### **End-of-life Management and Recycling**

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### **Hewlett-Packard Corporate Environmental Information**

For more information about HP's commitment to the environment: Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>  
Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

---

Copyright © 2009 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core 2 Duo, Core 2 Extreme, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.