



KVM-8901US Version: 1

## 19" Widescreen LCD KVM Rack Console

The LevelOne KVM-8901 is a compact and modular KVM console drawer designed to be used in a standard 19-inch server rack. It offers connectivity to 8 or 16 computers by depending on the LevelOne KVM module that is installed (KCM-0832 or 1632). It features a 19-inch retractable LCD(19:10) high video quality up to 1440 x 900 monitor and keyboard with built-in touchpad. Users can daisy chain up to eight units of KCM-0832/1632 together, providing control of up to 128 computers in total, support Auto Scan Mode for monitoring PCs and flexible and easy PC selection via KVM-OSD manual or hot Keys.



1. KCM Moudule Connector

### Key Features

- Modulares Design für optionale KVM-Switches, ermöglicht Verwaltung von bis zu 128 Computern
- Unterstützt Videoauflösung von 1440 x 900
- Duale Schnittstelle für PS/2- und USB-Tastatur/Maus
- Einfaches Umschalten zwischen Rechnern über Funktionstasten/Bildschirmmenüs (OSD)
- Auto-Scan-Modus zur ununterbrochenen Überwachung eines ausgewählten Rechners
- Kennwortschutz unterbinden nicht autorisierten Zugriff
- Unterstützung verschiedener Plattformen: Windows, MacOS X, Sun, Linux

### Specifications

#### System Specifications

Connectors and Cabling:  
 DC Jack  
 HDB15 Female (Combo)

**Button:**

Auto, Memu, Down, up, Power On/Off

**Indicator:**

Power

**Resolution:**

Display Size:19 inch Wide Screen

Panel Type:TFT

Resolution:1440 x 900 / 1366x 768 (16:10 / 16:9)

View Angle:H 85 / 85,V 85 / 85

Contrast:500

Brightness:250cd/m2

Back light:lifetime: 50,000 hrs

Support Colors:16.7M

**Power:**

Power Consumption: 19.2W

Power Input: 100-240V AC, 50-60 Hz, 12V DC External Power Supply

**Standards & Protocols:**

Keyboard Modules

\*105 key Keyboard, compatible to IBM PC/AT, PS/2 keyboard, supports Windows function keys (Germany, English, French, Italian, Spanish, Japanese, Chinese, UK....optional)

\*PS/2 Touchpad (Microsoft mouse compatible with PS/2 mouse interface)

Full Wheel Mouse emulation.Left, middle and right button emulation.

TFT LCD Modules

\*19" Widescreen TFT LCD Panel Module

-Panel Resolution 1440 x 900

-Built-in 8 languages OSD controls

-Backlight lifetime: 50,000 hrs.

-Sun Micro System Multi-Sync Supported.

-Sun Micro System 1152x900 Resolution Supported.

-Automatic flat panel shut-off when monitor is in the closed position, or no signal input.

## Features

**General:**

Keyboard: 105 key ps/2usb keyboard with touch pad

**Management:**

Panel Control and OSD Function

## Environment

**Temperature (°C):**

Operating: 0°C ~ 50°C

Storage: - 20°C ~ 60°C

**Humidity (Non-condensing):**

Storage: 10% ~ 90%

Operating: 10% ~ 90%

## Physical Specifications

**Dimensions (W x D x H mm):**

482 x 610 x 44 mm


**Weight (g):**

24000 g

## Others

Approval and Compliance:  
CE, FCC, Rohs, REACH

## Diagramm

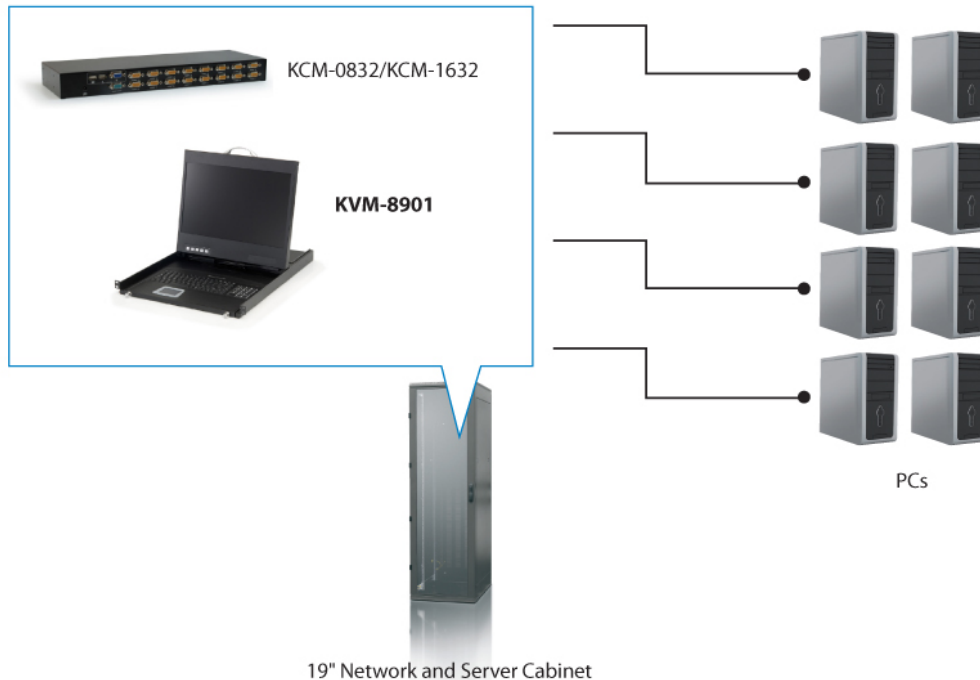

## Order Information

KVM-8901US: US Keyboard  
KVM-8901DE: DE Keyboard  
KVM-8901FR: FR Keyboard

## Package Contents

Netzadapter  
Stromkabel  
USB-Kabel  
Quick Installation Guide  
Ressource CD (Bedienungsanleitung, QIG)  
KVM-Kabel  
Schraubenset  
19" Einbaurahmen

## Zubehör



**KCM-1632**  
16-Port KVM Switch Module



**KCM-0832**  
8-Port KVM Switch Module



**ACC-2101**  
1.8m PS/2 und USB KVM Kabel



**ACC-2102**  
3m PS/2 und USB KVM Kabel



**ACC-2103**  
5m PS/2 und USB KVM Kabel

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.

All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.