



Lux-May

IP65 WATERPROOF FITTINGS • LED

PRISMATIC DIFFUSER

EFFICIENCY AT THE BEST PRICE




NO CLIPS DIFFUSER

VERY REDUCED HEIGHT

HIGH EFFICIENCY,
LOW CONSUMPTION

QUICK CONNECTION

WATERPROOF FITTINGS LED
EST/PRISMAPC/SLC
EST/PRISMAPC/SLE



UNTIL
165 lm/W



EST/PRISMAPC/SLC
EST/PRISMAPC/SLE

Mounting	Surface.	
Light source	LED linear modules SMD	
Optica system	Diffuser resistant to UVA rays (no clips system), reflector. Colour temperature 4000K or 6000K.	
Light distribution	Direct.	
Wiring	Electronic control gear (EEI=A+) PF>0,95. Possibility of incorporating dimmable electronic control gear (1 or 3 hours), presence detector.	
Material	Body: Polycarbonate. Reflector: White Lacquered steel. Diffuser: Unbreakable longitudinal prismatic polycarbonate. Ceiling fixing: Stainless steel clamp	
Surface finish	Body: Grey color with efficient gasket wich is injected into the body.	
Accessories	Suspension set 2 units. IP-68 fast connector (not included).	
Benefits	Ultra compact waterproof fitting. LED luminaire with integrated electronic control gear. Optimal lighting curve, homogeneous lighting in all area of projection. Low power consumption and high efficiency. Maintenance-optimised design. Average service life until 50.000 hours. Careful with the environment, it does not contain mercury. Fast electrical connection without opening the luminaire.	




NO CLIPS DIFFUSER



LED MODULES



ALLOWS TO ALING THE LUMINAIRES ONCE INSTALLED

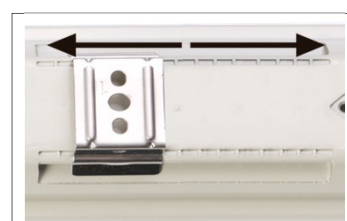



IP65 WATERPROOF FITTINGS • LED



PRISMATIC DIFFUSER

EFFICIENCY AT THE BEST PRICE

WATERPROOF FITTING LED
EST/PRISMAPC/SLC
EST/PRISMAPC/SLE

IP-68 FAST CONNECTOR | UNDER REQUEST

IP-68 FAST CONNECTOR
04010201 FAST CONNECTOR EST/ONIX




FAST ELECTRICAL CONNECTION





Fast electrical connection without opening the luminaire.

CONNECTION OF FEW LUMINAIRES BETWEEN EACH OTHER
1563610L002 INC.ELEC LC EST/ONIX

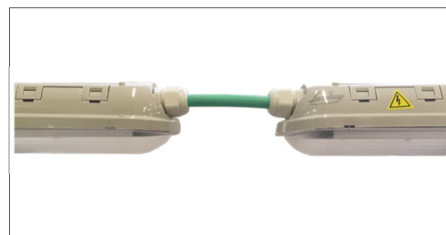

Easy connection of few luminaires between each other.



	X	Y	L	S
EST/PRISMAPC 590 SLC SLE	72	61	590	250-280
EST/PRISMAPC 1180 SLC SLE	72	61	1180	570-670
EST/PRISMAPC 1480 SLC SLE	72	61	1480	850-950



CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED + Driver lm/W	Colour temperature and rendering index		Emergency		Replace to lamp
						CCT (K)	CRI (Ra)	MC-1	MC-3	

- HIGH EFFICIENCY - 117-119 lm/W - Average service life until 30.000 h

EPL211K4G	EST/PRISMAPC/SLC-590-12W 1400lm/840	(0,8)	1400	12	117	4000	>80	-	-	1x18W.
EPL211K4GV	EST/PRISMAPC/SLC-590-12W-1400lm/860	(0,8)	1400	12	117	6000	>80	-	-	1x18W.
EPL212K1G	EST/PRISMAPC/SLC-590-18W 2100lm/840	(0,8)	2100	18	117	4000	>80	-	-	2x18W.
EPL212K1GV	EST/PRISMAPC/SLC-590-18W 2100lm/860	(0,8)	2100	18	117	6000	>80	-	-	2x18W.
EPL312K7G	EST/PRISMAPC/SLC-1180-23W 2700lm/840	(1,4)	2700	23	117	4000	>80	✓	✓	1x36W.
EPL312K7GV	EST/PRISMAPC/SLC-1180-23W 2700lm/860	(1,4)	2700	23	117	6000	>80	✓	✓	1x36W.
EPL314K2G	EST/PRISMAPC/SLC-1180-36W 4200lm/840	(1,4)	4200	36	117	4000	>80	✓	✓	2x36W.
EPL314K2GV	EST/PRISMAPC/SLC-1180-36W 4200lm/860	(1,4)	4200	36	117	6000	>80	✓	✓	2x36W.
EPL413K5G	EST/PRISMAPC/SLC-1480-30W 3500lm/840	(1,8)	3500	30	117	4000	>80	✓	✓	1x58W.
EPL413K5GV	EST/PRISMAPC/SLC-1480-30W 3500lm/860	(1,8)	3500	30	117	6000	>80	✓	✓	1x58W.
EPL415K7G	EST/PRISMAPC/SLC-1480-48W 5700lm/840	(1,8)	5700	48	119	4000	>80	✓	✓	2x58W.
EPL415K7GV	EST/PRISMAPC/SLC-1480-48W 5700lm/860	(1,8)	5700	48	119	6000	>80	✓	✓	2x58W.

- VERY HIGH EFFICIENCY - 164-165 lm/W - Average service life until 50.000 h

EPL316K6G	EST/PRISMAPC/SLC-1180-40W 6600lm/840	(1,4)	6600	40	165	4000	>80	✓	✓	2x58W.
EPL419K0G	EST/PRISMAPC/SLC-1480-55W 9000lm/840	(1,8)	9000	55	164	4000	>80	✓	✓	>2x58W.
1563610L001	INC.ELEC LC EST/ONIX SLC/HF									
04010202	FAST CONNECTOR EST/ONIX SLC/HF									