

# 21


## Industrial & Floodlights

Pages 577-610

T8 | Rx7s | COB LED | SMD LED | LED

Die cast | Aluminium | Metal



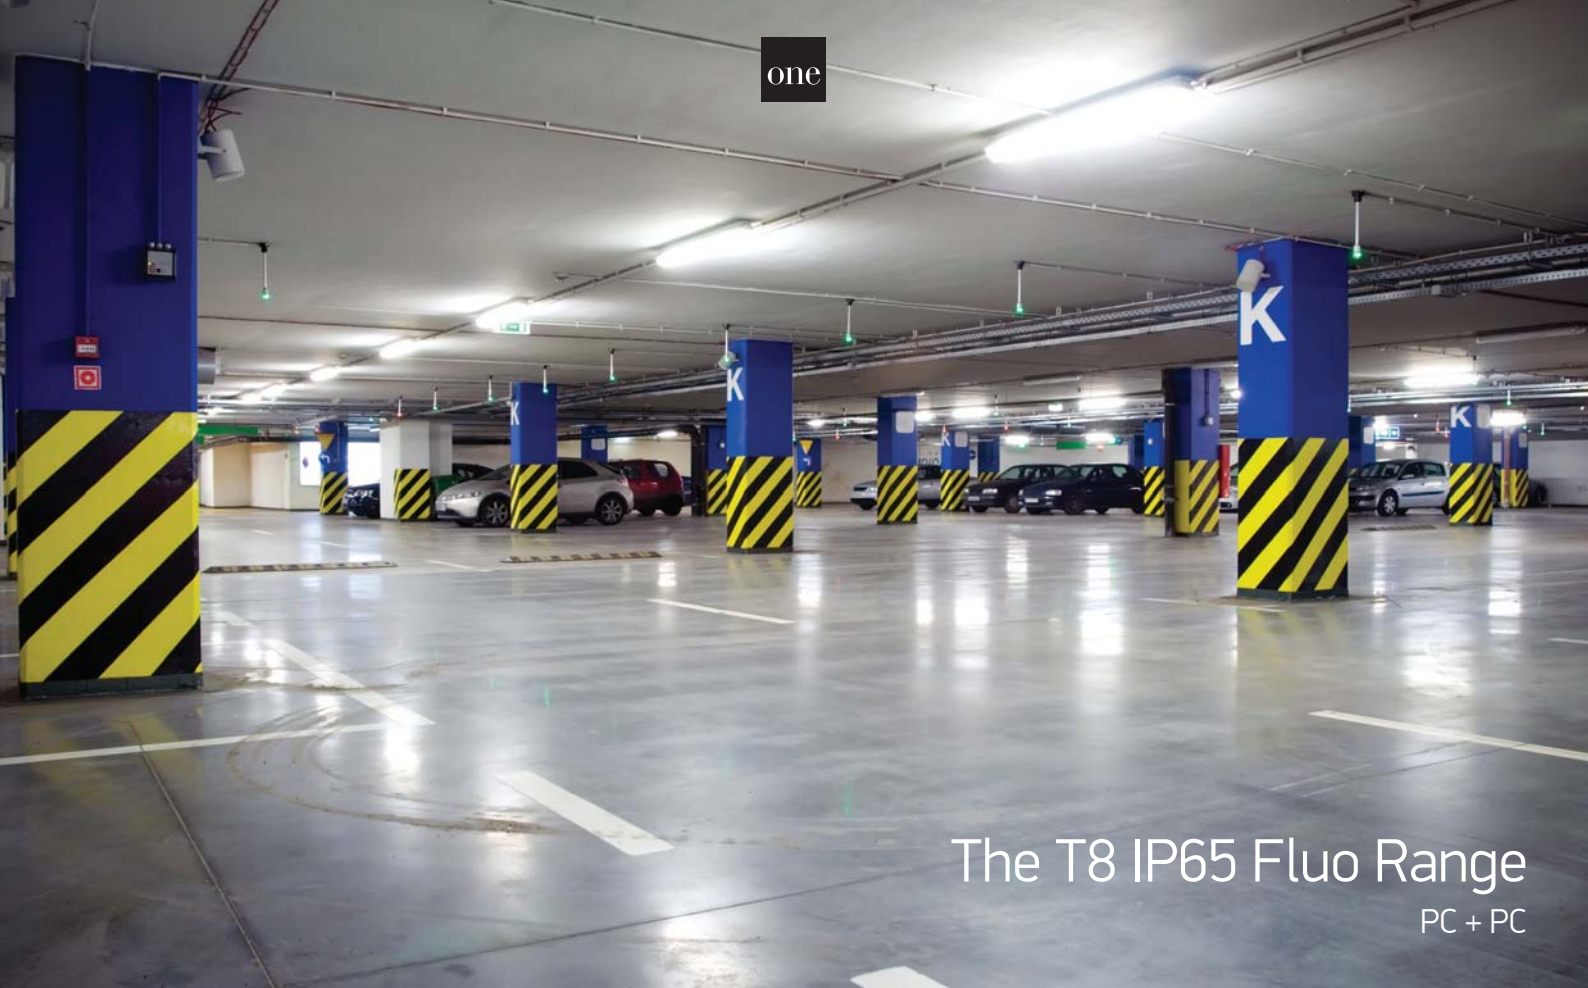

# The T8 IP65 Fluo Range

PC + PC




B-A<sup>+</sup>

**38136P** | 36W | T8 | PC + PC



IP65



B-A<sup>+</sup>

**38218P** | 2x18W | T8 | PC + PC



IP65



B-A<sup>+</sup>

**38236P** | 2x36W | T8 | PC + PC



IP65



Order Code	Colour	Watts	Input	Class		Notes
38136P	Grey	36W	230V		9	Complete with electronic ballast
38218P	Grey	2x18W	230V		9	Complete with electronic ballast
38236P	Grey	2x36W	230V		8	Complete with electronic ballast



# The IP65 Range For T8 LED Tubes

PC + PC



B-A<sup>++</sup>

<b>38118E</b>   T8 LED 60cm   PC + PC	<b>38136E</b>   T8 LED 120cm   PC + PC	<b>38158E</b>   T8 LED 150cm   PC + PC



B-A<sup>++</sup>

<b>38218E</b>   2xT8 LED 60cm   PC + PC	<b>38236E</b>   2xT8 LED 120cm   PC + PC	<b>38258E</b>   2xT8 LED 150cm   PC + PC

Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V		15	Only suitable for T8 LED tubes
38136E	Grey	100-240V		9	Only suitable for T8 LED tubes
38158E	Grey	100-240V		9	Only suitable for T8 LED tubes
38218E	Grey	100-240V		9	Only suitable for T8 LED tubes
38236E	Grey	100-240V		9	Only suitable for T8 LED tubes
38258E	Grey	100-240V		9	Only suitable for T8 LED tubes

# The High Power IP65 LED Range

Single




38118M/C



A-A

**38118L** | 11,5W | SMD LED | PC + opal PC diffuser




IP65




A-A

**38118M** | 15W | SMD 2835 | PC + opal PC diffuser




IP65

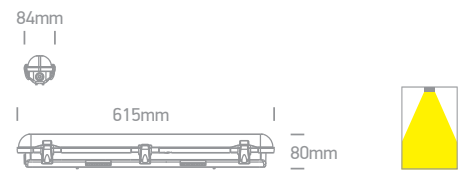

A-A

**38136M** | 30W | SMD 2835 | PC + opal PC diffuser




IP65




A-A

**38158M** | 40W | SMD 2835 | PC + opal PC diffuser



IP65

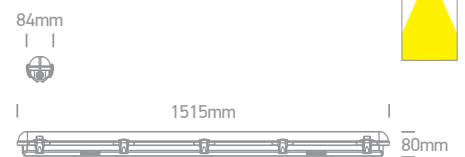

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38118L/C	Grey	Cool white	4000K	11,5W	950lm	230V	⊕	12	Complete with 450mA driver / Stainless steel clips
38118M/C	Grey	Cool white	4000K	15W	1200lm	230V	⊕	12	Complete with 400mA driver / Stainless steel clips
38136M/C	Grey	Cool white	4000K	30W	2400lm	230V	⊕	9	Complete with 500mA driver / Stainless steel clips
38158M/C	Grey	Cool white	4000K	40W	3200lm	230V	⊕	9	Complete with 700mA driver / Stainless steel clips

one




## The High Power IP65 LED Range

Double



**38236M** | 60W | SMD 2835 | PC + opal PC diffuser



IP65



113mm




1215mm



80mm



**38258M** | 70W | SMD 2835 | PC + opal PC diffuser



IP65



113mm






1515mm



80mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38236M/C	Grey	Cool white	4000K	60W	4800lm	230V		6	Complete with 1050mA driver / Stainless steel clips
38258M/C	Grey	Cool white	4000K	70W	5600lm	230V		6	Complete with 1400mA driver / Stainless steel clips



38136LC/C

38118LC/C

## The IP65 LED Connectable Range


Single



A-A<sup>++</sup>

**38118LC** | 18W | SMD 2835 | Connectable | PC

Supermarket linear range.



IP65



Optional suspension kit.  
Order code 050084.




Connect 20 fittings  
maximum.



A-A<sup>++</sup>

**38136LC** | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.



IP65



Optional suspension kit.  
Order code 050084.




Connect 10 fittings  
maximum.



A-A<sup>++</sup>

**38145LC** | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.



IP65



Optional suspension kit.  
Order code 050084.



Connect 10 fittings  
maximum.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38118LC/C	White	Cool white	4000K	18W	1550lm	120°	100-240V		50cm	20	Complete with driver
38118LC/W	White	Warm white	3000K	18W	1500lm	120°	100-240V		50cm	20	Complete with driver
38136LC/C	White	Cool white	4000K	36W	3100lm	120°	100-240V		50cm	20	Complete with driver
38136LC/W	White	Warm white	3000K	36W	3000lm	120°	100-240V		50cm	20	Complete with driver
38145LC/C	White	Cool white	4000K	45W	4000lm	120°	100-240V		50cm	20	Complete with driver



# The IP65 LED Connectable Range

Double



**38236LC** | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.

**new**

**IP65**

80 CRI

IK08

2 YEAR

LED BUILT IN

CE

Optional suspension kit.  
Order code 050084.

Connect 10 fittings maximum.

79mm

1265mm

40mm

120°



**38245LC** | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.

**new**

**IP65**

80 CRI

IK08

2 YEAR

LED BUILT IN

CE

Optional suspension kit.  
Order code 050084.

Connect 10 fittings maximum.

79mm

1565mm

40mm

120°


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
38236LC/D	White	Daylight	6000K	36W	3100lm	120°	100-240V	☐	50cm	10	Complete with driver
38236LC/C	White	Cool white	4000K	36W	3100lm	120°	100-240V	☐	50cm	10	Complete with driver
38245LC/D	White	Daylight	6000K	45W	4000lm	120°	100-240V	☐	50cm	10	Complete with driver
38245LC/C	White	Cool white	4000K	45W	4000lm	120°	100-240V	☐	50cm	10	Complete with driver

# The IP65 LED Slim Range

PC



**38118LA** | 18W | SMD 2835 | PC



Optional suspension kit.  
Order code 050084.




Complete with 2pcs  
fixing clips.



A-A<sup>++</sup>



**38136LA** | 36W | SMD 2835 | PC



Optional suspension kit.  
Order code 050084.




Complete with 3pcs  
fixing clips.



A-A<sup>++</sup>




**38145LA** | 45W | SMD 2835 | PC



Optional suspension kit.  
Order code 050084.



Complete with 4pcs  
fixing clips.



A-A<sup>++</sup>

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	120°	100-240V		50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	120°	100-240V		50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	120°	100-240V		50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	120°	100-240V		50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	120°	100-240V		50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	120°	100-240V		50cm	20	Complete with driver





# The Supermarket LED Linear Range

Aluminium + PC



**38136R** | 22W | SMD LED | Single | Aluminium + PC



A-A<sup>+</sup>

IP20



**38236R** | 43W | SMD LED | Double | Aluminium + PC



A-A<sup>+</sup>

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38136R/C	Grey	Cool white	4000K	22W	1880lm	120°	100-240V		100cm	10	Complete with driver
38236R/C	Grey	Cool white	4000K	43W	3800lm	120°	100-240V		100cm	10	Complete with driver




## The Batten For T8 LED



**38120E** | 1xT8 LED 60cm | Metal




IP20

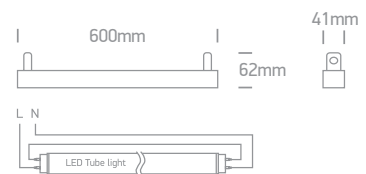

**38140E** | 1xT8 LED 120cm | Metal




IP20

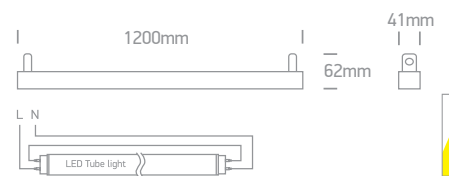

**38165E** | 1xT8 LED 150cm | Metal



IP20

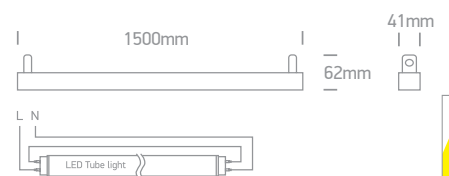


Order Code	Colour	Input	Class		Notes
38120E	White	100-240V		20	Only suitable for T8 LED tubes
38140E	White	100-240V		20	Only suitable for T8 LED tubes
38165E	White	100-240V		20	Only suitable for T8 LED tubes



38120E

38240E

# The Batten For T8 LED


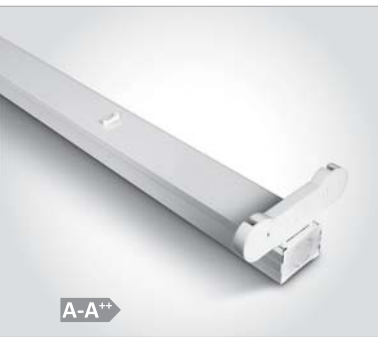


A-A

**38220E** | 2xT8 LED 60cm | Metal



IP20

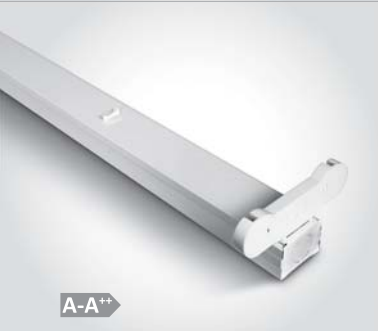
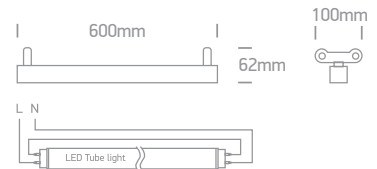


A-A

**38240E** | 2xT8 LED 120cm | Metal



IP20

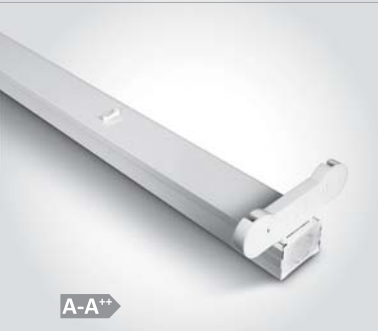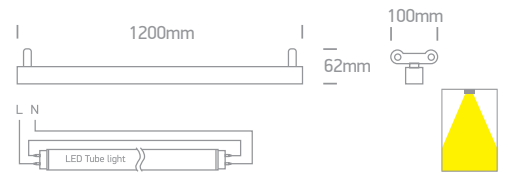


A-A

**38265E** | 2xT8 LED 150cm | Metal



IP20

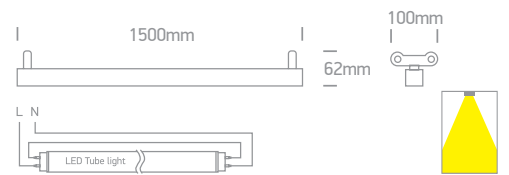

Order Code	Colour	Input	Class	⊞	Notes
38220E	White	100-240V	⊞	20	Only suitable for T8 LED tubes
38240E	White	100-240V	⊞	20	Only suitable for T8 LED tubes
38265E	White	100-240V	⊞	20	Only suitable for T8 LED tubes



# The Industrial LED Lights

Die cast



A-A<sup>++</sup>

7056 | 50W | COB LED | Die cast



IP65<sup>+</sup>




A-A<sup>++</sup>

7056A | 50W | SMD LED | Die cast



IP65<sup>+</sup>

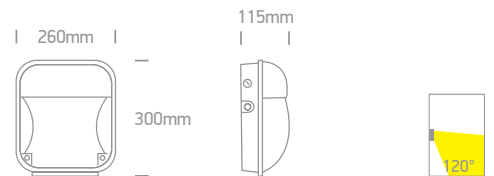


A-A<sup>++</sup>

7056B | 60W | COB LED | Die cast



IP65<sup>+</sup>



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
7056/C	Black	Cool white	4000K	50W	4000lm	120°	100-240V		4	Complete with driver
7056A/C	Black	Cool white	4000K	50W	4250lm	120°	230V		6	Complete with driver
7056B/C	Black	Cool white	4000K	2x30W	4800lm	120°	100-240V		1	Complete with driver

one



# The Industrial IP65 LED High Bay


Waterproof



A-A<sup>++</sup>

IP65

63200A | 200W | COB LED | High Bay | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
63200A/G/C	Grey	Cool white	4000K	200W	13037lm	90°	100-240V	Ⓢ	300cm	1	Complete with driver



# The Industrial LED High Bay



Aluminium



A-A<sup>+</sup>

IP20

63100E | 100W | SMD 3030 | High bay | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊞	Notes
63100E/C	Black	Cool white	4000K	100W	10000lm	100°	100-240V	⊞	1	Complete with 2700mA driver



63150F/C



63100E/C

# The Industrial IP65 LED UFO Range

Waterproof



A-A++

**63100F** | 100W | SMD 2835 | Die cast



IP65




Optional reflector.  
Order code 050114FA.



Optional fixing kit.  
Order code 050116HA.



Optional microwave sensor.  
Order code 22002.



A-A++

**63150F** | 150W | SMD 2835 | Die cast



IP65




Optional reflector.  
Order code 050114FB.



Optional fixing kit.  
Order code 050116HB.



Optional microwave sensor.  
Order code 22002.



A-A++

**63200F** | 200W | SMD 2835 | Die cast



IP65




Optional reflector.  
Order code 050114FB.



Optional fixing kit.  
Order code 050116HB.



Optional microwave sensor.  
Order code 22002.



**22002** | Microwave sensor | DIP switch settings

Sensitivity	ON Time	Daylight Sensor	Suitable for
100% ●●●	4 5 6	7 8 9	ON ● OFF ○ 63100F 63150F 63200F
75% ●●○	5sec ●●●	Disabled ●●●	
50% ●●○	30sec ●●○	200Lux ●●○	
25% ●○●	90sec ●○●	100Lux ●○●	
10% ○○●	3min ○○●	50Lux ○○●	
	20min ●●○		
	30min ○○○		

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
63100F/C	Black	Cool white	4000K	100W	10000lm	90°	230V	⏏	200cm	2	Complete with 2000mA driver
63150F/C	Black	Cool white	4000K	150W	15000lm	90°	230V	⏏	200cm	2	Complete with 2600mA driver
63200F/C	Black	Cool white	4000K	200W	20000lm	90°	230V	⏏	200cm	2	Complete with 4000mA driver



# The Rx7s Floodlight



E-A<sup>++</sup>

7020 | 150W | Rx7s 76mm | Die cast

**IP54**
  
**offer**

Suitable for 7605L LED lamp.

255mm 173mm

Order Code	Colour	Watts	Input	Class		Notes
7020/G/5	Grey	150W	230V	⊕	8	-





7022/G/D



7030/AN/C

# The LED Floodlights




A-A

7030 | 8x1W | LED | Die cast



IP54  
offer

2 YEAR




A-A

7022 | 15x1W | LED | Die cast



IP65  
offer

2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7030/AN/C	Anthracite	Cool white	4000K	8x1W	600lm	20°	230V	⚡	-	12	Complete with driver
7022/G/D	Grey	Daylight	6000K	15x1W	1125lm	40°	100-240V	⚡	200cm	4	Complete with driver

# The RGB & Rechargeable LED Floodlights

Die cast




**7028A/AN/RGB** | 10W | COB LED | Die cast



LED BUILT IN ADJUSTABLE CE



Supplied with remote control.



A-A++




**7028B/AN/RGB** | 30W | COB LED | Die cast



LED BUILT IN ADJUSTABLE CE



Supplied with remote control.



A-A++




**7028AR** | 10W | COB LED | Rechargeable 5Hrs | 3Hrs operation



75 CRI ADJUSTABLE LED BUILT IN CE



Supplied with AC charger 100-240V, EU/BS plug and car charger 12V.



A-A++




**7028BR** | 20W | COB LED | Rechargeable 5Hrs | 3Hrs operation



75 CRI ADJUSTABLE LED BUILT IN CE



Supplied with AC charger 100-240V, EU/BS plug and car charger 12V.



A-A++



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	📦	Notes
7028A/AN/RGB	Anthracite	RGB	-	10W	-	120°	100-240V	Ⓛ	100cm	20	Complete with driver
7028B/AN/RGB	Anthracite	RGB	-	30W	-	120°	100-240V	Ⓛ	100cm	10	Complete with driver
7028AR/G/C	Grey	Cool white	4000K	10W	700lm	120°	8,4V DC	Ⓛ	-	12	Complete with driver and batteries
7028BR/G/C	Grey	Cool white	4000K	20W	1650lm	120°	8,4V DC	Ⓛ	-	8	Complete with driver and batteries




# The Classic LED Floodlights

Die cast



7028A | 10W | COB LED | Die cast

**LED BUILT IN**
  
**70 CRI**
  
  
**ADJUSTABLE**



A-A++

IP65





7028B | 30W | COB LED | Die cast

**LED BUILT IN**
  
**70 CRI**
  
  
**ADJUSTABLE**



offer



A-A++

IP65


offer

Optional stand.  
Order code 7028BP/G.



7032 | 150W | COB LED | Die cast

**LED BUILT IN**
  
**70 CRI**
  
  
**ADJUSTABLE**



A-A++

IP65


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/G/D	Grey	Daylight	6000K	10W	700lm	120°	100-240V		-	30	Complete with driver
7028B/G/W	Grey	Warm white	3000K	30W	2150lm	120°	100-240V		-	4	Complete with driver
7032/AN/C	Anthracite	Cool white	4000K	3x50W	12000lm	120°	100-240V		200cm	1	Complete with driver

# The LED Sensor Floodlights




A-A++

7048 | 12W | COB LED | Sensor | Die cast




A-A++

7060 | 15W | SMD 2835 | Sensor | Aluminium + PC



A-A++

7028BE | 30W | COB LED | Sensor | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7048/G/D	Grey	Daylight	6000K	12W	824lm	90°	230V		-	8	Complete with driver
7060/W/C	White	Cool white	4000K	15W	1400lm	120°	100-240V		-	12	Complete with driver
7028BE/AN/C	Anthracite	Cool white	4000K	30W	2200lm	120°	100-240V		100cm	4	Complete with driver

one


# The Slim Line LED Floodlights

Die cast




7038 | 10W | COB LED | Die cast

**IP65**
  
**offer**
  
**LED BUILT IN**
  
**70 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**2 YEAR**

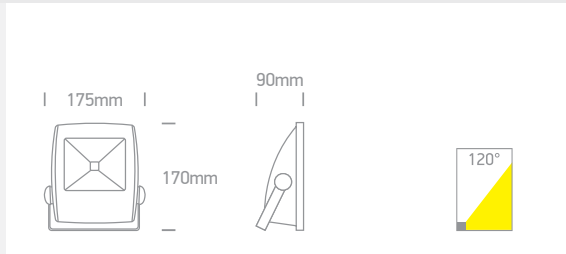


7040 | 30W | COB LED | Die cast

**IP65**
  
**offer**
  
**LED BUILT IN**
  
**70 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**2 YEAR**

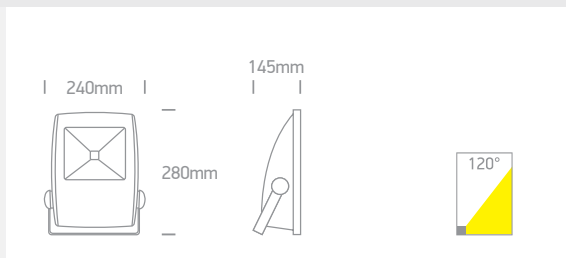

7040E | 30W | COB LED | Sensor | Die cast

**IP65**
  
**LED BUILT IN**
  
**70 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**2 YEAR**

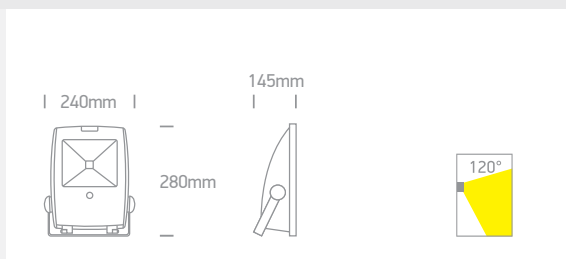

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7038/G/D	Grey	Daylight	6000K	10W	700lm	120°	100-240V		100cm	10	Complete with driver
7038/G/W	Grey	Warm white	3000K	10W	700lm	120°	100-240V		100cm	10	Complete with driver
7040/G/D	Grey	Daylight	6000K	30W	2100lm	120°	100-240V		100cm	5	Complete with driver
7040E/G/C	Grey	Cool white	4000K	30W	2100lm	120°	100-240V		100cm	5	Complete with driver

# The COB LED Slim Line

Die cast



7034D/G/C


7034C/G/C

7034B/G/C




7034B | 50W | COB LED | Die cast

**IP65**
  
**offer**
  
**LED BUILT IN**
  
**75 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**3 YEAR**




7034C | 70W | COB LED | Die cast

**IP65**
  
**offer**
  
**LED BUILT IN**
  
**75 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**3 YEAR**



7034D | 100W | COB LED | Die cast

**IP65**
  
**offer**
  
**LED BUILT IN**
  
**75 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**3 YEAR**



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7034B/G/C	Grey	Cool white	4000K	50W	4050lm	130°	100-240V	⊕	100cm	10	Complete with driver
7034C/G/C	Grey	Cool white	4000K	70W	5600lm	130°	100-240V	⊕	100cm	6	Complete with driver
7034D/G/C	Grey	Cool white	4000K	2x50W	8000lm	130°	100-240V	⊕	100cm	4	Complete with driver





# The COB LED Slim Floodlights





A-A<sup>++</sup>

**7028A** | 10W | COB LED | Die cast

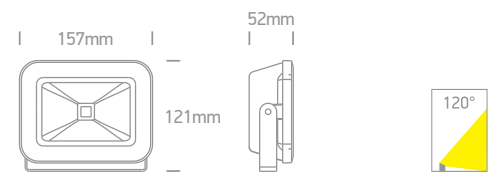



A-A<sup>++</sup>

**7028AB** | 20W | COB LED | Die cast

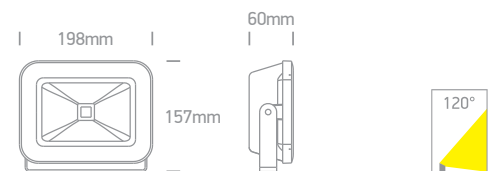

A-A<sup>++</sup>

**7028E** | 100W | COB LED | Die cast

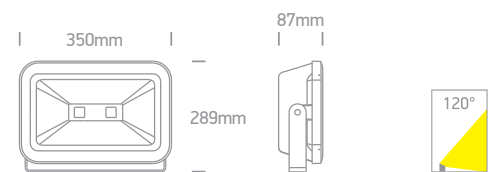

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
<b>7028A/AN/C</b>	Anthracite	Cool white	4000K	10W	700lm	120°	100-240V		100cm	20	Complete with driver
<b>7028A/AN/W</b>	Anthracite	Warm white	3000K	10W	700lm	120°	100-240V		100cm	20	Complete with driver
<b>7028AB/AN/C</b>	Anthracite	Cool white	4000K	20W	1400lm	120°	100-240V		100cm	12	Complete with driver
<b>7028E/AN/C</b>	Anthracite	Cool white	4000K	100W	7000lm	120°	100-240V		100cm	3	Complete with driver

# The LED Retro Floodlight

Die cast




7062A | 10W | SMD 3030 | Die cast



LED BUILT IN 80 CRI ADJUSTABLE



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7062A/AN/C	Anthracite	Cool white	4000K	10W	900lm	120°	230V	⚡	100cm	25	Complete with driver



one


# The COB LED Design Floodlights

Die cast + plastic




A-A<sup>++</sup>

7064 | 10W | COB LED | Die cast + plastic




IP65<sup>°</sup>

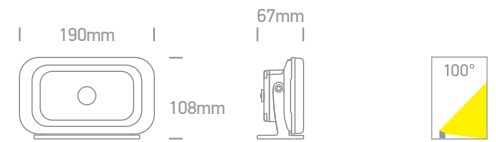


A-A<sup>++</sup>

7066 | 30W | COB LED | Die cast + plastic



IP65<sup>°</sup>

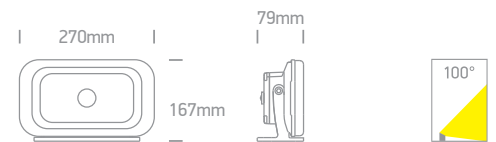

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7064/W/C	White	Cool white	4000K	10W	1135lm	100°	100-240V		100cm	8	Complete with driver
7066/W/C	White	Cool white	4000K	30W	3030lm	100°	100-240V		100cm	4	Complete with driver

# AC LED Floodlights


10-50W




A-A+ 7028CA/B/C

IP65

7028CA | 10W | SMD 2835 | Die cast + tempered glass




7028CA/B/W

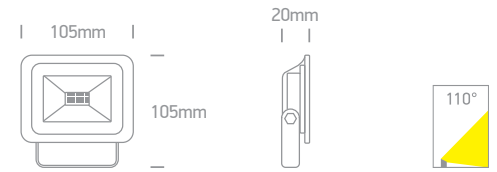


A-A+ 7028CB/B/C

IP65

7028CB | 30W | SMD 2835 | Die cast + tempered glass




7028CB/B/W

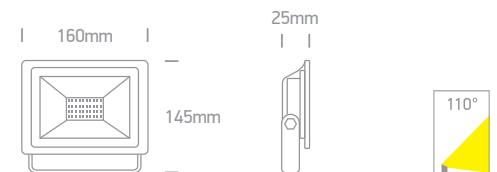


A-A+ 7028CC/B/C

IP65

7028CC | 50W | SMD 2835 | Die cast + tempered glass



7028CC/B/D

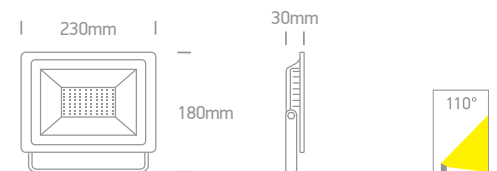

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
7028CA/B/D	Black	Daylight	6000K	10W	900lm	110°	230V	⏏	30cm	60	AC LED
7028CA/B/C	Black	Cool white	4000K	10W	900lm	110°	230V	⏏	30cm	60	AC LED
7028CA/B/W	Black	Warm white	3000K	10W	850lm	110°	230V	⏏	30cm	60	AC LED
7028CB/B/D	Black	Daylight	6000K	30W	2700lm	110°	230V	⏏	30cm	30	AC LED
7028CB/B/C	Black	Cool white	4000K	30W	2700lm	110°	230V	⏏	30cm	30	AC LED
7028CB/B/W	Black	Warm white	3000K	30W	2550lm	110°	230V	⏏	30cm	30	AC LED
7028CC/B/D	Black	Daylight	6000K	50W	4500lm	110°	230V	⏏	30cm	20	AC LED
7028CC/B/C	Black	Cool white	4000K	50W	4500lm	110°	230V	⏏	30cm	20	AC LED




# AC LED Floodlights

100-250W




**7028CD** | 100W | SMD 2835 | Die cast + tempered glass

**LED BUILT IN**
  
**80 CRI**
  
  
**IP65**

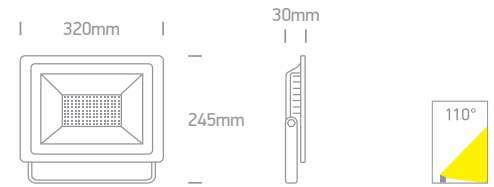


**7028CE** | 150W | SMD 2835 | Die cast + tempered glass

**LED BUILT IN**
  
**80 CRI**
  
  
**IP65**

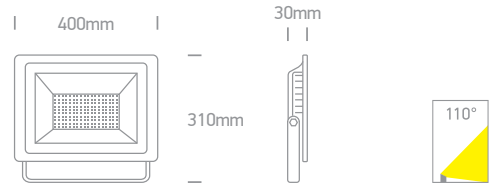

**7028CF** | 250W | SMD 2835 | Die cast + tempered glass

**LED BUILT IN**
  
**80 CRI**
  
  
**IP65**

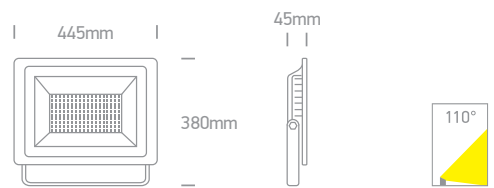



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7028CD/B/C	Black	Cool white	4000K	100W	9000lm	110°	230V	Ⓛ	30cm	10	AC LED
7028CE/B/C	Black	Cool white	4000K	150W	13500lm	110°	230V	Ⓛ	30cm	4	AC LED
7028CF/B/C	Black	Cool white	4000K	250W	22500lm	110°	230V	Ⓛ	30cm	4	AC LED





## The Glass Face AC LED Floodlights

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7028AG/W/C	White	Cool white	4000K	10W	800lm	100°	230V	⚡	50cm	20	AC LED
7028AG/B/C	Black	Cool white	4000K	10W	800lm	100°	230V	⚡	50cm	20	AC LED
7028BG/W/C	White	Cool white	4000K	30W	2400lm	100°	230V	⚡	50cm	12	AC LED
7028BG/B/C	Black	Cool white	4000K	30W	2400lm	100°	230V	⚡	50cm	12	AC LED
7028CG/W/C	White	Cool white	4000K	50W	4000lm	100°	230V	⚡	50cm	8	AC LED
7028CG/B/C	Black	Cool white	4000K	50W	4000lm	100°	230V	⚡	50cm	8	AC LED



**7028AG** | 10W | SMD 3030 | Die cast + tempered glass

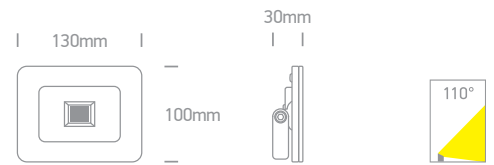

**7028BG** | 30W | SMD 3030 | Die cast + tempered glass

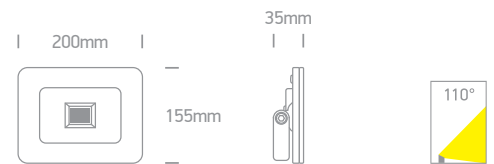

**7028CG** | 50W | SMD 3030 | Die cast + tempered glass

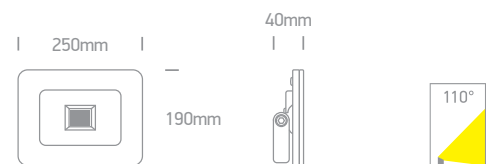

A-A+ 7028AG/W/C



A-A+ 7028BG/W/C



A-A+ 7028CG/W/C






# The COB LED Project Floodlights


Die cast




7050A | 10W | COB LED | Die cast




IP65




Can also be suspended.




7050B | 30W | COB LED | Die cast



IP65




Can also be suspended.




7050C | 50W | COB LED | Die cast



IP65



Can also be suspended.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7050A/G/C	Grey	Cool white	4000K	10W	850lm	80°	100-240V	⚡	100cm	6	Complete with driver
7050B/G/C	Grey	Cool white	4000K	30W	2660lm	80°	100-240V	⚡	100cm	4	Complete with driver
7050C/G/C	Grey	Cool white	4000K	50W	4390lm	80°	100-240V	⚡	100cm	2	Complete with driver



## The LED High Power Boxes Aluminium






A-A<sup>++</sup>

IP65<sup>®</sup>

7058 | 120W | SMD 3030 | Surface mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
7058/W/D	White	Daylight	6000K	120W	10800lm	120°	100-240V		1	Complete with driver
7058/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V		1	Complete with driver



# The LED Wall Washers

## Aluminium




7055A | 12x1W | LED | Aluminium

Connect maximum 10pcs.

**new**  
**IP66**

LED BUILT IN 80 CRI DIMMABLE  
ADJUSTABLE CE 5 YEAR



7055B | 24x1W | LED | Aluminium

Connect maximum 5pcs.

**new**  
**IP66**

LED BUILT IN 80 CRI DIMMABLE  
ADJUSTABLE CE 5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
7055A/C	Grey	Cool white	4000K	12x1W	850lm	60°x20°	24V DC	⚡	100cm	30	Requires 24V DC driver
7055A/W	Grey	Warm white	3000K	12x1W	850lm	60°x20°	24V DC	⚡	100cm	30	Requires 24V DC driver
7055B/C	Grey	Cool white	4000K	24x1W	1700lm	60°x20°	24V DC	⚡	100cm	15	Requires 24V DC driver
7055B/W	Grey	Warm white	3000K	24x1W	1700lm	60°x20°	24V DC	⚡	100cm	15	Requires 24V DC driver



70100/AN/C



70101/AN/C

## The COB LED Street Light

20-50W



A-A


70080 | 20W | COB LED | Die cast



IP65



170mm



A-A


70090 | 30W | COB LED | Die cast



IP65



170mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊕	⊞	Notes
70080/AN/C	Anthracite	Cool white	4000K	20W	1500lm	120°x60°	230V	⊕	60cm	2	Complete with driver
70090/AN/C	Anthracite	Cool white	4000K	30W	2250lm	120°x60°	230V	⊕	60cm	2	Complete with driver



# The COB LED Street Light

80-120W



A-A<sup>++</sup>

70100 | 50W | COB LED | Die cast


LED BUILT IN 70 CRI

CE 3 YEAR

IP65



215mm



A-A<sup>++</sup>

70101 | 80W | COB LED | Die cast


LED BUILT IN 70 CRI

CE 3 YEAR

IP65



260mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
70100/AN/C	Anthracite	Cool white	4000K	50W	3750lm	120°x60°	230V	⚡	60cm	2	Complete with driver
70101/AN/C	Anthracite	Cool white	4000K	80W	6000lm	120°x60°	100-240V	⚡	60cm	1	Complete with driver

# The LED Park Light



Die cast



70108 | 60W | LED | Die cast

**LED BUILT IN**  
**70 CRI**

IP66



70104 | 30W | COB LED | Die cast

**LED BUILT IN**  
**70 CRI**


IP65



70105 | 50W | COB LED | Die cast

**LED BUILT IN**  
**70 CRI**

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70108/AN/C	Anthracite	Cool white	4000K	60W	5300lm	Assymetric	100-240V		100cm	1	Complete with driver
70104/G/C	Grey	Cool white	4000K	30W	2700lm	120°	100-240V		500cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V		500cm	1	Complete with driver




# The LED Park Lantern

Die cast




A-A<sup>++</sup>

70110 | 60W | LED | Die cast



IP66



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	📦	Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V	Ⓢ	100cm	1	Complete with driver