

XEROX®

Technology | Document Management | Consulting Services

Phaser® 6180



color laser printer

Office **color**
made **easy**



XEROX

Phaser® 6180

Color Laser Printer

Introducing fast color performance to your office.

Blazing a new trail among fast, affordable, easy-to-use color laser printers, the Xerox Phaser 6180 delivers the speed and print quality today's small to medium-size businesses have been waiting for. High-performance features and unparalleled ease-of-use deliver spectacular results, page after page.

Step up the pace

The Phaser 6180 laser printer gets your jobs out quickly. Very quickly.

- A print speed of up to 20 ppm in full color brings your work to colorful life without slowing you down.
- Print black-and-white — even complex or large jobs — at up to a speedy 26 ppm thanks to a powerful 400 MHz processor.
- A first-page-out time as quick as 10 seconds means your job's out faster than your trip to the printer.
- Flexible connectivity options, such as 10/100Base-TX Ethernet, USB, parallel and optional wireless adapter, give you the power to support the printing needs of your entire office.

Unleash your potential


With vibrant, true-to-life colors and crisp text and image definition, the Phaser 6180 prints like a pro.

- A print resolution of up to 600 x 600 x 4 dpi delivers sixteen shades of color per pixel, producing exceptional photographic quality.
- Emulsion Aggregation (EA) High Gloss toner uses smaller, more uniform toner "particles" to bring more detail and clarity to every image.
- True Adobe® PostScript® 3™ print language ensures bright, vivid, accurate colors and graphics.
- Onboard color capabilities, including PANTONE® Color approved solid-color simulations, Xerox color correction technology and expert calibration tools, automatically give you the right color or let you fine-tune colors for special applications.
- With the onboard duplexer (standard on DN configuration), the Phaser 6180 gives you fast, automatic two-sided printing.
- The 60,000-page-per-month duty cycle easily handles your demanding workload.



The user-friendly control panel features convenient onscreen status and toner-level indicators.



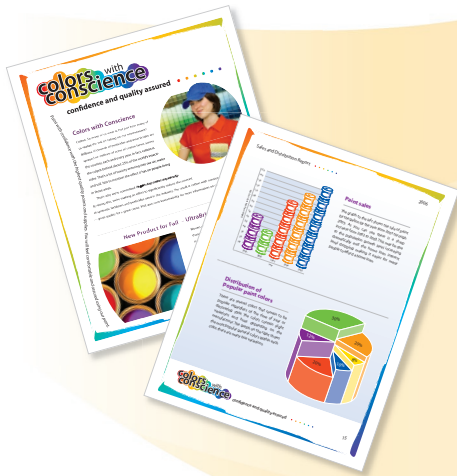

Designed to adapt to the dynamic needs of today's small to medium-size businesses.

- 1 The 150-sheet Tray 1 (MPT) supports a wide range of custom media and sizes.
- 2 A generous 250-sheet Tray 2 feeds up to 80 lb. cover (220 gsm) media.
- 3 Add an optional 550-sheet feeder for a total input capacity of 950 sheets.
- 4 Fast, money-saving, two-sided printing is standard on the DN configuration.
- 5 Standard 128 MB memory is upgradable to 1,152 MB, allowing for seamless printing of even the most demanding, graphic-heavy print jobs.

Work hard, print easy

From installation to everyday operation, the Phaser 6180 laser printer provides a wealth of features to make office life easier.

- Included installation software is extremely fast and easy, getting you up and running in minutes with no IT required.
- Keep tabs on print jobs and get quick access to online support from the comfort of your chair with CentreWare® IS Embedded Web Server which works seamlessly with your browser.
- The front-panel toner gauge provides a quick, visual check of current toner levels, and user-friendly front access means no more moving the printer to replace supplies.
- Less consumables to change for greater ease-of-use.
- Built-in support for Apple Bonjour™ and included Mac drivers make the Phaser 6180 a true team player in PC/Mac environments.
- PrintingScout™ saves precious time by tracking print jobs and providing immediate print-issue alerts with correction suggestions.
- Super-quiet operation makes the Phaser 6180 laser printer office-friendly.



Phaser® 6180

Call today. For more information, call **1-877-362-6567** or visit us at **www.xerox.com/office**



	Phaser 6180N	Phaser 6180DN
Speed	Up to 20 ppm color / 26 ppm black-and-white	
Duty Cycle	60,000 pages / month ¹	
Paper Handling		
Paper input	Standard	Tray 1 (MPT): 150 sheets; Custom sizes: 3 x 5 in. to 8.5 x 14 in. / 76.2 x 127 mm to 220 x 355.6 mm
		Tray 2: 250 sheets; Custom sizes: 5.8 x 8.2 in. to 8.5 x 14 in. / 148 x 210 mm to 220 x 355.6 mm
	Optional	Tray 3: 550 sheets; Custom sizes: 5.8 x 8.2 in. to 8.5 x 14 in. / 148 x 210 mm to 220 x 355.6 mm
Paper output	300 sheets	
Two-sided output	Optional	Standard
Print		
First-page-out time	As fast as 10 seconds color	
Resolution (max)	600 x 600 x 4 dpi	
Processor	400 MHz	
Memory (std / max)	128 MB / 1152 MB	
Connectivity	10/100Base-TX Ethernet, USB 2.0, Parallel, Optional multi-protocol network card, Optional wireless network adapter	
Page Description Languages	Adobe® PostScript® 3™, PCL® 6 emulation	
Print features	Standard	Booklet printing ² , Covers ² , Separators, Transparency separators, N-up, Watermarks ² , Poster printing ² , Banner sheets ² , Fit to page
	Additional ³	Secure Print, Proof Print, RAM collation
Warranty	One-year on-site warranty, Xerox Total Satisfaction Guarantee	

¹ Print volume uniformly distributed over 30 days

² Accessed via PCL driver

³ Requires minimum 256 MB RAM

Device Management

CentreWare® IS Embedded Web Server, CentreWare Web, PrintingScout™, MailLinX email alerts

Print Drivers

Windows® 2000/XP/2003 Server, Vista, Mac OS® X version 10.2 or higher, Unix: Solaris™ 8/9/10, HP-UX® 11.0, AIX® 4.3.3, Linux: SUSE™ 9.2/9.3, Turbo Linux™ 10, Red Hat® ES3/ES4, Fedora™ Core 1, Yellow Dog 3.X

Font Support

PostScript® fonts: 136; PCL® fonts: 81

Media Handling

Tray 1 (MPT), Tray 2, Tray 3 (optional): 17–40 lb. bond to 40–80 lb. cover / 65–220 gsm
Two-sided output: 17–43 lb. bond / 65–163 gsm
Media types: Plain paper, glossy, envelopes, labels, transparencies, card stock, business card stock

Color Standards

PANTONE® Color approved solid-color simulations, Color correction tables

Operating Environment

Temperature: Storage: 32° to 95° F / 0° to 35° C, operating: 50° to 90° F / 10° to 32° C
Humidity: 15% to 80%
Sound pressure levels: Printing: 49.1 dB(A)
Standby: 28.6 dB(A)
Sound power levels: Printing: 6.62 B, Standby: 4 B
Warm-up time (from sleep mode): 20 seconds

Electrical

Power: 110–127 VAC, 50/60 Hz or 220–240 VAC, 50/60 Hz
Power consumption: 110–127 VAC: Standby: 70 W
Printing: 450 W
Power save: 5.4 W
220–240 VAC: Standby: 68.9 W
Printing: 410 W
Power save: 6.3 W
ENERGY STAR® qualified

Dimensions (WxDxH)

15.7 x 19.4 x 18.5 in. / 400 x 493 x 470 mm
Weight: 6180N: 59.8 lb. / 27.2 kg, 6180DN: 62.3 lb. / 28.3 kg
Optional 550-sheet feeder: 15.7 x 19.4 x 5.4 in. / 400 x 493 x 138 mm
Weight: 16.9 lb. / 7.7 kg

Certifications

FCC Part 15, Class B, Listed UL 60950-1/CSA 60950-1-03, CE Mark applicable to Directives 73/23/EEC and 89/336/EEC, Section 508 ADA

Supplies

Standard-Capacity Print Cartridge¹:
Black: 3,000 std. pages 113R00722
Cyan: 2,000 std. pages 113R00719
Magenta: 2,000 std. pages 113R00720
Yellow: 2,000 std. pages 113R00721

High-Capacity Print Cartridge¹:

Black: 8,000 std. pages 113R00726
Cyan: 6,000 std. pages 113R00723
Magenta: 6,000 std. pages 113R00724
Yellow: 6,000 std. pages 113R00725

¹Average Continuous Composite CMY Yield in accordance with ISO/IEC 19798. Yield will vary based on image, area coverage and print mode.

Options

550-Sheet Feeder 097S03744
256 MB Phaser Memory 097S03743
512 MB Phaser Memory 097S03635
Multi-Protocol Network Card 097S03773
Duplex Unit 097S03746
Wireless Network Adapter
–N. America Power Converter 097S03740
–European Power Converter 097S03741
–UK Power Converter 097S03742

