

THUNDER[®]

MARINE


TM904

MTX WARRANTY STATEMENT

MTX products purchased in the USA from an authorized MTX dealer are guaranteed against defects in material and workmanship for the period of 1 year if installed by an authorized MTX dealer (90 days if by customer). The warranty period begins the day the product is purchased by the end user. This warranty is limited to the original retail purchaser of product. Product found to be defective during that period will be repaired or replaced by MTX at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature. Warranty does not extend to cosmetics or finish. Before presuming a defect is present in the product, be certain that all related equipment and wiring is functioning properly. MTX disclaims any liability for other incurred damages resulting from product defects. Any expenses in the removal and reinstallation of products are not covered by this warranty. MTX's total liability will not exceed the purchase price of the product. If a defect is present, your authorized MTX dealer may be able to effect repairs.

Proof of purchase is required when requesting service, so please retain your sales receipt, and take a moment to register your product online at MTX.com. Also, a Return Authorization number (RA) is required before shipping product back to MTX, call 800-225-5689 or 602-438-4545, for amplifier RAs.

REQUIRED INSTALLATION TOOLS




Adjustable Wrench



Power Drill



Utility Knife



Crimper



Screwdriver

Recommended Optional Equipment: Additional Battery - Battery Isolator

SETTINGS

AMPLIFIER CROSSOVER SELECT SWITCH SETTINGS

INPUT SELECT SWITCH

FRONT INPUT ONLY



4CH 2CH

using 1 pair of RCAs


FRONT & REAR



4CH 2CH

using 2 pairs of RCAs

REAR



Subwoofer
HP FR LP



Separates/Coaxial
HP FR LP

FRONT



Separates/Coaxial
HP FR

WHEN USED WITH AN ADDITIONAL SUB AMPLIFIER

REAR



HP FR LP


FRONT



HP FR

1

CONNECT POWER

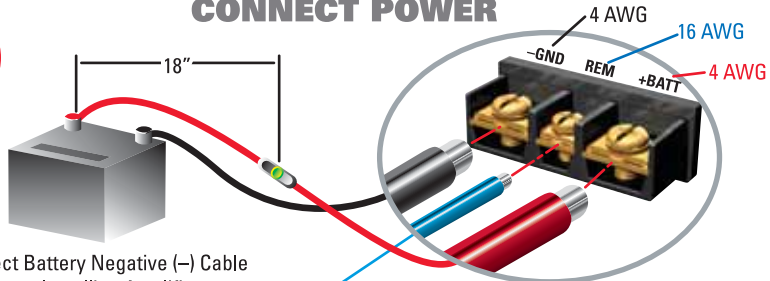

Disconnect Battery Negative (-) Cable
Prior to Installing Amplifier
(Reconnect after step 3)

Connect to Source Unit
Remote Turn-on
/Power Antenna Wire

3

CONNECT SPEAKERS/SUBS

