


### Overview



1. Power Button
  2. 2 External 5.25" Bays
  3. Front I/O: 3 USB 2.0, 1 IEEE 1394a, Headphone, Microphone
-

### Overview

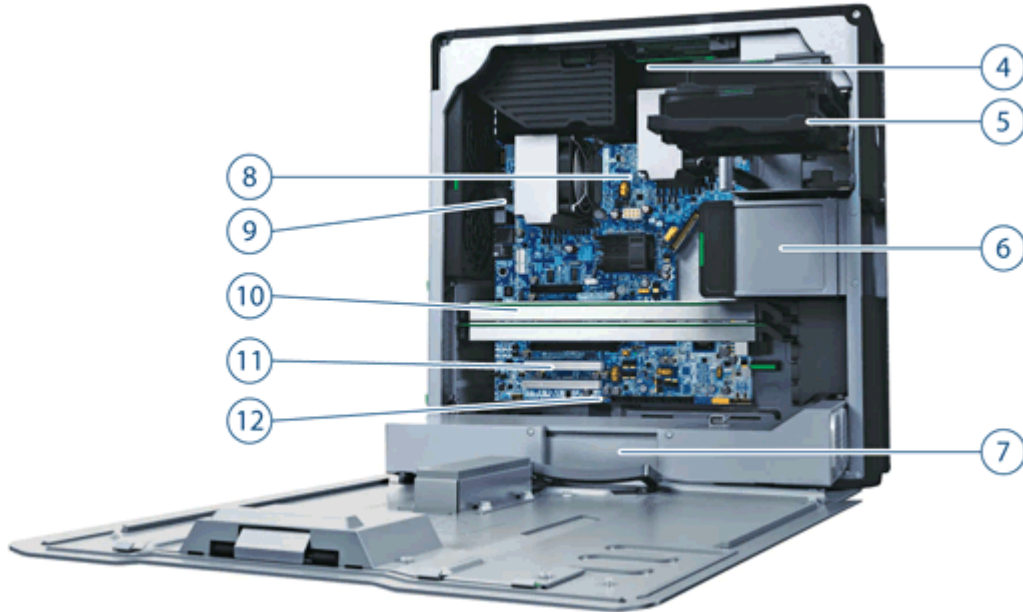

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>4. 6 DIMM Slots for DDR3 ECC Memory</li> <li>5. 2 Internal 3.5" Bays</li> <li>6. 2 External 5.25" Bays</li> <li>7. 650W, 85% efficient Power Supply</li> </ul> | <ul style="list-style-type: none"> <li>8. 2 Quad Core Intel 5500 Series Processors</li> <li>9. Rear I/O: 6 USB 2.0, PS/2 keyboard/mouse<br/>1 RJ-45 to Integrated Gigabit LAN<br/>1 Audio Line In, 1 Audio Line Out, 1 Microphone In</li> <li>10. 2 PCIe x16 Gen2 Slots</li> <li>11. 1 PCIe x4 electrical / x8 mechanical Gen2,<br/>1 PCIe x4 electrical / x8 mechanical Gen1,<br/>2 PCI Slots</li> <li>12. 3 Internal USB 2.0 ports</li> </ul> |
|---|---|

<b>Form Factor</b>	Minitower
<b>Operating Systems</b>	<p>Preinstalled:</p> <ul style="list-style-type: none"> <li>● Genuine Windows 7® Ultimate 64-bit*</li> <li>● Genuine Windows 7® Professional 64-bit*</li> <li>● Genuine Windows 7® Professional 32-bit*</li> <li>● HP Linux Installer Kit for Linux [includes drivers for 32-bit &amp; 64-bit OS versions of Red Hat Enterprise Linux(RHEL) 4 Workstation, Red Hat Enterprise Linux (RHEL) 5 Workstation, Red Hat Enterprise Linux (RHEL) 6 Workstation, 64-bit SUSE Linux Enterprise Desktop (SLED) 11]</li> <li>● Red Hat Enterprise Linux Desktop (Preinstall NOT available; 1 year paper license only)</li> </ul> <p>Supported:</p> <ul style="list-style-type: none"> <li>● Genuine Windows® 7 Enterprise 32/64</li> <li>● Genuine Windows® XP Professional 32/64</li> <li>● Genuine Windows® Vista Business 32/64</li> <li>● SUSE Linux Enterprise Desktop 11</li> </ul> <p>Certified:</p>

### Overview

	<ul style="list-style-type: none"> <li>• Solaris 10, 11</li> <li>• Ubuntu 10.10, 11.04</li> </ul> <p><b>Notes:</b> For detailed OS/hardware support information for Linux, see: <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a></p> <p>*Systems may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <a href="http://www.microsoft.com/windows/windows-7/">http://www.microsoft.com/windows/windows-7/</a> for details.</p>
<b>Available Processors</b>	<p>Intel® Xeon® Processor X5675 6C 3.06 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo          Intel® Xeon® Processor X5672 4C 3.20 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo          Intel® Xeon® Processor X5660 6C 2.80 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo          Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo          Intel® Xeon® Processor E5649 6C 2.53 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo          Intel® Xeon® Processor X5647 4C 2.93 GHz, 130W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo          Intel® Xeon® Processor E5645 6C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo          Intel® Xeon® Processor E5640 4C 2.66 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo          Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo          Intel® Xeon® Processor E5607 4C 2.26 GHz, 80W, 8M cache, 4.80GT/s QPI, DDR3 1066MHz          Intel® Xeon® Processor E5606 4C 2.13 GHz, 80W, 8M cache, 4.80GT/s QPI, DDR3 1066MHz</p>
<b>Available Processor Disclaimers</b>	<p>When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: <a href="http://www.intel.com/products/processor_number/">http://www.intel.com/products/processor_number/</a> for details.</p> <p>Quad-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.</p> <p>64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <a href="http://www.intel.com/info/em64t">http://www.intel.com/info/em64t</a> for more information.</p>
<b>Additional Details</b>	<ul style="list-style-type: none"> <li>• Intel® Nehalem Architecture</li> <li>• Up to 6.40GT/s QPI support</li> <li>• 3-channel 800/1066/1333 MHz DDR3 memory* subsystem</li> <li>• Up to 48 GB Memory capacity with 6 DIMM slots and 8 GB DIMMs</li> <li>• PCI Express I/O and PCIe x16 Gen2 graphics</li> <li>• Integrated Broadcom 5764 Gigabit LAN on Motherboard (LOM)</li> <li>• 6 channels of Serial ATA (SATA) 3.0 Gb/s natively supported internally</li> <li>• SATA RAID** 0, 1, 5, and 10 support standard on motherboard</li> <li>• SAS RAID 0, 1, and 10 supported using the LSI 3041E PCIe controller or the LSI 9212-4i 6Gb/s controller</li> <li>• SATA optical drives</li> <li>• High Definition integrated audio with internal speaker</li> <li>• 650W 85% efficient power supply</li> <li>• ENERGY STAR® qualification and energy-saving features available on selected configurations (Not supported by Linux)</li> </ul>

### Overview

	<ul style="list-style-type: none"> <li>Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.</li> </ul> <p>*Each processor supports up to 3 channels of DDR3 memory. To realize full performance at least 1 DIMM must be inserted into each channel. To get full 6 channel support, 2 processors MUST be installed.</p> <p>**SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit: <a href="http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf">http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf</a> for RAID capabilities with Linux.</p>
<b>Form Factor</b>	Rackable Minitower
<b>Color</b>	Black/Silver
<b>I/O Slots</b> (see system board section for more details)	<ul style="list-style-type: none"> <li>2 PCI Express Gen2 x16 slots (full-length, full-height)</li> <li>1 PCI Express Gen2 x4/x8* slot – with x8 open-ended connectors (full-length, full-height)</li> <li>1 PCI Express Gen1 x4/x8* slot – with x8 open-ended connectors (full-length, full-height)</li> <li>2 PCI 32bit/33MHz slot, (full-length, full-height)</li> </ul> <p>*These slots have 4 PCI Express lanes routed to them. They are sometimes called "x4 electrical, x8 mechanical" slots.</p> <p>The PCIe x8 open-ended connectors allow a PCIe x 16 card to be seated in the slot.</p>
<b>Bays</b> (see storage section for more details)	Total Bays = 4
<b>Internal Bays</b>	2 internal 3.5" bays (with acoustic dampening rail assemblies)
<b>External Bays</b>	2 external 5.25" bays (3rd & 4th HDDs occupy one external bay)
<b>Front I/O</b>	3 USB 2.0, 1 Headphone Out, 1 Microphone In. 1 IEEE 1394a integrated with systems manufactured beginning 3/22/10.
<b>Rear I/O</b>	6 USB 2.0 1 RJ-45 to integrated Gigabit LAN 2 legacy PS/2 1 Audio Line In, 1 Audio Line Out, 1 Microphone In; audio ports can be retasked to function as line in, line out, microphone, or headphone. Serial supported with optional rear bulkhead adapter.
<b>Internal USB</b>	3 USB 2.0 headers [3 USB 2.0 ports available by one 2x5 header and one 1x5 header: supports either up to two HP Internal USB Port Kits, AMO- EM165AA (one port on each Kit), or one Internal Port kit and one USB Media Card Reader.]
<b>Chassis Dimensions</b> (H x W x D)	44.51 x 16.53 x 44 cm (17.5 x 6.5 x 17.3 in)
<b>System Weight</b>	Exact weights depend upon configuration Minimum config - 15.0 kg (33.0 lb) Typical config - 16.9 kg (37.4 lb) Maximum config - 19.6 kg (43.3 lb) (Maximum shipping weight - 23.6 kg/52.0 lb)
<b>Temperature</b>	Operating: 5° to 35° C (40° to 95° F)
	Non-operating -40° to 60° C (-40° to 140° F)
<b>Humidity</b>	Operating: 8% to 85%
	Non-operating 8% to 90%

### Overview

<b>Maximum Altitude</b> (non-pressurized)	Operating:	3,000 m; 10,000 feet
	Non-operating	9,100 m; 30,000 feet
<b>Power Supply</b>	650W 85% (80PLUS) Efficient wide-ranging, active Power Factor Correction, with tool-free & cable-free connection  The Power Supply Efficiency Report for this product may be found at this link: <a href="http://www.80plus.org/manu/psu/psu_reports/S0-034_DELTA_DPS-25AB%20A_650W_Report_mod.pdf">http://www.80plus.org/manu/psu/psu_reports/S0-034_DELTA_DPS-25AB%20A_650W_Report_mod.pdf</a>	
<b>Interfaces Supported</b>	6-channel SATA 3.0 Gb/s Interface (6 Serial-ATA connectors on the motherboard, 4 channels are eSATA configurable for use with eSATA CTO/AMO Kit) SAS interface supported with optional LSI 3041E 4-port SAS/SATA PCIe card. 1 Floppy interface (1 Floppy connector), USB 2.0. 1 IEEE 1394a interface with systems manufactured beginning 3/22/10.	
<b>Hard Drive Controllers Supported</b>	SATA and SAS controllers	
<b>Backup Devices</b>	For a complete listing of compatible DAT tape drives, LTO tape drives and RDX Removable Disk Backup System offerings, please visit: <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a>	

### Supported Components

#### Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Four-Core and Six-Core Intel Xeon Processor 5600 Series with Intel® 64 Architecture</b>				
Intel® Xeon® Processor X5675 6C 3.06 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB215AA	
Intel® Xeon® Processor X5672 4C 3.20 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB214AA	
Intel® Xeon® Processor X5660 6C 2.80 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	WG732AA	
Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	WG731AA	
Intel® Xeon® Processor E5649 6C 2.53 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB212AA	
Intel® Xeon® Processor X5647 4C 2.93 GHz, 130W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	Y	Y	LB213AA	
Intel® Xeon® Processor E5645 6C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB211AA	
Intel® Xeon® Processor E5640 4C 2.66 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	Y	Y	WG730AA	
Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	Y	Y	WG728AA	
Intel® Xeon® Processor E5607 4C 2.26 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	Y	Y	LB210AA	
Intel® Xeon® Processor E5606 4C 2.13 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	Y	Y	LB209AA	

**NOTE 1:** When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details.

Quad-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <http://www.intel.com/info/em64t> for more information.

Intel's numbering is not a measurement of higher performance.

Support for Xeon 5600 Series processors requires the C2 revision of the Intel 5520 chipset. Two methods are available to determine if a specific Z600 system has the C2 revision of the chipset. 1. Use the BIOS setup menu to access the "Boot Block Date" from the "System Information Menu". All B3-based systems will have a "1/30/09" date and C2-based systems will have a "01/07/10" date. 2. HP Performance Advisor SW can be used to determine the PCA ID, which is reported by Performance Advisor under "System Configuration" and "Baseboard ID". All B3-based systems will have the ID "0AE8h" and all C2-based

### Supported Components

systems will have the ID "0B54h".

#### Monitors / Displays

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP LP2065 20-inch LCD Monitor	Y	Y	EF227A4	
HP LP2475w 24-inch Widescreen LCD Monitor	Y	Y	KD911A4	
HP DreamColor LP2480zx Professional Display	Y	Y	GV546A4	
HP LP3065 30-inch Widescreen LCD Monitor	Y	Y	EZ320A4	
HP ZR22w 21.5-inch S-IPS LCD Monitor	Y	Y	VM626A4	
HP ZR24w 24-inch S-IPS LCD Monitor	Y	Y	VM633A4	
HP ZR30w 30-inch S-IPS LCD Monitor	Y	Y	VM617A4	

Supported by all Operating Systems available from HP

Screen size diagonally measured

#### SAS Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>				
300GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU967AA	
450GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU968AA	
600GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	VM647AA	
HP 300GB SAS 10K SFF HDD	Y	Y	A2Z20AA	
HP 450GB SAS 10K SFF HDD	Y	Y	B0A48AA	
HP 600GB SAS 10K SFF HDD	Y	Y	A2Z21AA	

#### Sub-Section Description/Notes

(SAS Controller, not integrated, is required)

#### SATA Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>SATA (Serial ATA) Hard Drives for HP Workstations</b>				
250GB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	PY278AA	
500GB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	PV943A	
1TB SATA 7200 rpm 3.0Gb/s 3.5" HDD	Y	Y	GE262AA	
1.5TB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	VH997AA	
2.0TB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	WE464AA	
160GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	EW222AA	
300GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	FM802AA	
600GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	XP309AA	

#### Sub-Section Description/Notes

(2.5" SFF drives cannot be mixed with 3.5" drives)

#### SATA Solid State Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>HP Solid State Drives for Workstations</b>				
HP 128GB SATA SSD	Y	Y	A3D25AA	



### Supported Components

HP 160GB SATA SSD	Y	Y	LZ704AA
HP 256GB SATA SSD	Y	Y	A3D26AA
HP 300GB SATA SSD	Y	Y	LZ069AA

For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion bytes. Actual formatted capacity is less.

Up to 3 of the following 3.5" SATA and 3.5" 15K SAS drives, or up to 4 of the 2.5" small form factor (SFF) 10K SATA drives are allowed.

### Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Integrated SATA 3.0 Gb/s Controller</b>				
Integrated SATA 3.0 Gb/s Controller	Y	N		
<b>Factory integrated RAID on motherboard for SATA drives</b>				
RAID 0 Configuration - Striped Array	Y	N		See note 1
RAID 1 Configuration - Mirrored Array	Y	N		See note 1
<b>LSI 3041E 4-Port SAS 3.0 Gb/s RAID Card</b>				
LSI 3041E 4-Port SAS 3.0 Gb/s RAID Card	Y	Y	EH417AA	
<b>LSI 9212 4-Port SAS 6Gb/s RAID Card</b>				
LSI 9212 4-Port SAS 6Gb/s RAID Card	Y	Y	XP310AA	
<b>LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)</b>				
LSI 8888ELP 8-port SAS HW RAID Card	N	Y	GE258AA	
<b>LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit</b>				
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card	N	Y	WE465AA	
Optional: LSI iBBU08 Battery Backup Unit for LSI 9260-8i	N	Y	LA783AA	

All RAID arrays must be less than 2 TB in size

**NOTE 1:** Requires 2 identical hard drives (speeds, capacity, interface). RAID 1 does not support a 3rd HDD. No Linux support for SATA RAID.

**NOTE:** Specific user-configured hardware SAS RAID configurations are supported on this system with Linux. Please visit: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix) for details.

LSI RAID Definitions:

SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit: <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

IS: Striping of 2 or more HDDs into a single logical volume

IM: Mirroring of 2 HDDs into a single logical volume

IME: Mirroring of 3 or more HDDs into a single logical volume

**NOTE:** Specific user-configured hardware SAS RAID configurations are supported on this Linux system. Please visit: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix) for details



### Supported Components

#### Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported Multi Mixed
<b>Professional 2D</b>					
NVIDIA Quadro NVS 295 256MB PCIe Graphics Card	Y	Y	FY943AA	2nd card must be NVS 450 or NVS 295	2 X
NVIDIA Quadro NVS 450 512 MB PCIe Graphics Card	Y	Y	FH519AA	2nd card must be NVS 450 or NVS 295	2 X
NVIDIA NVS300 512MB PCIe Graphics Card	Y	Y	XP612AA	2nd card must be NVS 450 or NVS 300	2 X
AMD FirePro 2270 512MB Graphics Card	Y	Y	LA524AA	2nd card must be FirePro 2270	2
NVIDIA Quadro NVS 290 256 MB PCIe Graphics Card with 'DMS-59 to Dual DVI cable' included - for Workstations	N	Y	GN502AA	1 or 2 of these cards are supported - 2nd card must be NVS 290	2
<b>Entry 3D</b>					
NVIDIA Quadro 400 512MB Graphics Card	Y	Y	LD542AA		2
NVIDIA Quadro 600 1GB Graphics Card	Y	Y	WS093AA		2
AMD FirePro V3900 1GB Graphics Card	Y	Y	A6R69AA		2
AMD FirePro V4900 1GB Graphics Card	Y	Y	A3J92AA		2
<b>Mid-range 3D</b>					
NVIDIA Quadro 2000 1GB Graphics Card	Y	Y	WS094AA		2
NVIDIA Quadro 2000D (Spec DVI only card)	N	Y	A9C88AA		1
ATI FirePro V5800 1GB Graphics Card	Y	Y	WL050AA		2
AMD FirePro V5900 2GB Graphics	Y	Y	LS992AA		2
<b>High End 3D</b>					
NVIDIA Quadro 4000 2GB Graphics Card	Y	Y	WS095AA		1
NVIDIA Quadro 5000 2.5GB Graphics Card	Y	Y	WS096AA		1
AMD FirePro V7900 2GB Graphics	Y	Y	LS993AA		1

#### Memory

#### CTO

#### Option Kit Part Number

#### Support Notes

**PC3-10600 DDR3-1333 ECC Unbuffered DIMMs CTO**  
 2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU  
 4GB (2x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU  
 6GB (3x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU  
 8GB (2x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

### Supported Components

8GB (2x2GB + 1x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

12GB (3x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

4GB (2x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

8GB (4x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

8GB (2x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

12GB (6x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

16GB (4x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

16GB (4x2GB + 2x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

24GB (6x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

#### **PC3-10600 DDR3-1333 ECC Registered DIMMs CTO**

8GB (2x4GB) DDR3-1333 ECC Registered RAM 1-CPU

12GB (3x4GB) DDR3-1333 ECC Registered RAM 1-CPU

16GB (2x8GB) DDR3-1333 ECC Registered RAM 1-CPU

24GB (3x8GB) DDR3-1333 ECC Registered RAM 1-CPU

8GB (2x4GB) DDR3-1333 ECC Registered RAM 2-CPU

16GB (4x4GB) DDR3-1333 ECC Registered RAM 2-CPU

24GB (6x4GB) DDR3-1333 ECC Registered RAM 2-CPU

32GB (4x8GB) DDR3-1333 ECC Registered RAM 2-CPU

48GB (6x8GB) DDR3-1333 ECC Registered RAM 2-CPU

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

Both processor sockets must be populated.

#### **Sub-Section Description/Notes**

### Supported Components

The Z600 has a three-channel memory architecture. Three channels are associated with each processor. For optimal performance, populate a DIMM in each channel.

#### AMO

##### PC3-10600 DDR3-1333 ECC Unbuffered DIMMs AMO

2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM	FX699AA
4GB (1x4GB) DDR3-1333 ECC Unbuffered RAM	NL797AA

##### PC3-10600 DDR3-1333 ECC Registered DIMMs AMO

8GB (1x8GB) DDR3-1333 ECC Registered RAM	FX622AA
4GB (1x4GB) DDR3-1333 ECC Registered RAM	FX621AA

Although all of these memory configurations incorporate 1333MHz memory modules, the speed at which they operate is dependent upon the processor.

Support for Registered DIMMs on the Z600 requires a systemboard with the C2 revision of the Intel 5520 chipset. Two methods are available to determine if a specific Z600 system has the C2 revision of the chipset. 1. Use the BIOS setup menu to access the "Boot Block Date" from the "System Information Menu". All B3-based systems will have a "1/30/09" date and C2-based systems will have a "01/07/10" date. 2. HP Performance Advisor SW can be used to determine the PCA ID, which is reported by Performance Advisor under "System Configuration" and "Baseboard ID". All B3-based systems will have the ID "0AE8h" and all C2-based systems will have the ID "0B54h".

### Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel/Realtek HD ALC262 Audio	Y	N		
HP Thin USB Powered Speakers	Y	Y	KK912AA	
Creative X-Fi Titanium PCIe Audio Card	Y	Y	NH222AA	See note 1

**NOTE 1:** The Creative Sound Blaster X-Fi Titanium audio card is supported on the HP Z Series Workstations with Microsoft Windows XP Pro 32-bit and 64-bit and Microsoft Vista 32-bit and 64-bit versions. Linux is not supported.

### Supported Components

#### Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 16X DVD-ROM SATA Drive (non-Lightscribe version)	Y	Y	AR629AA	See note 1
HP 16X DVD+/-RW SuperMulti SATA Drive (non-Lightscribe)	Y	Y	QS208AA	
HP Slot Load DVD+/-RW Drive	Y	N		
HP Blu-ray Writer	Y	Y	AR482AA	
HP 22-in-1 Media Card Reader Kit (Workstations)	Y	Y	NK361AA	
<b>HP DX115 Removable Drive Enclosure</b>				
HP DX115 Carrier with 160GB SATA HDD	N	Y	FZ577AA	
HP DX115 Removable HDD Frame/Carrier	N	Y	FZ576AA	
HP DX115 Removable HDD Carrier	N	Y	NB792AA	

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

**NOTE 1:** Not supported as a 2nd Optical Drive.

#### Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP USB 3.0 2x2 Port SuperSpeed PCIe x1 Card	Y	Y	QT587AA	
HP SuperSpeed USB 3.0 PCIe x1 Card	Y	Y	BM867AA	
HP FireWire/IEEE 1394a PCI Card	Y	Y	PA997A	
HP IEEE 1394b FireWire PCIe Card	Y	Y	NK653AA	

### Supported Components

#### Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Broadcom 5764 PCIe LOM Controller	Y	N		
Broadcom NetXtreme Gigabit Ethernet Plus NIC (PCIe)	Y	Y	FS215AA	
HP NC360T PCI Express Dual Port Gigabit NIC	N	Y	KU004AA	
Intel Gigabit CT Desktop NIC	N	Y	FH969AA	

The Broadcom NetXtreme Plus card may be used, along with the integrated 5764 LOM, for teaming, redundancy, or additional network bandwidth.

"Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

#### Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Security Cable with Kensington Lock	N	Y	PC766A	
HP (CMT) Solenoid Lock	N	Y	DE618A	
HP Solenoid Hood Lock & Hood Sensor	Y	N		
HP Z6/Z8 Adjustable Sliding Rail Rack Kit	N	Y	NN124AA	

#### Input Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP PS/2 Standard Keyboard	Y	Y	DT527A	
HP USB Standard Keyboard	Y	Y	DT528A	
HP PS/2 Optical Scroll Mouse	Y	Y	EY703AA	
HP USB 2-Button Optical Scroll Mouse	Y	Y	DC172B	
HP USB Laser Mouse	Y	Y	GW405AA	
HP USB Optical 3-Button Mouse	Y	Y	DY651A	
HP USB Smart Card Keyboard	Y	Y	ED707AA	
HP 2.4GHz Wireless Keyboard & Mouse	N	Y	NB896AA	
HP USB Optical 3-Button 2.9M OEM Mouse	N	Y	ET424AA	
HP SpaceExplorer 3D USB Controller	N	Y	RY429AA	
HP SpacePilot 3D USB Intelligent Controller	N	Y	EF390AA	

### Supported Components

#### Other Hardware

	<b>Factory Configured</b>	<b>Option Kit</b>	<b>Option Kit Part Number</b>	<b>Support Notes</b>
HP Workstation Mouse Pad	Y	N		Japan only.
HP Power Cord Kit	N	Y	DM293A	
HP eSATA PCI Cable Kit	N	Y	GM110AA	
HP Serial Port Adapter	N	Y	PA716A	Provides 1st Serial Port for the Z600.
HP Internal USB Port Kit	N	Y	EM165AA	
HP Workstation to LTO SAS Int. Cable	N	Y	EH925A	
HP Optical Bay HDD Mounting Bracket	Y	Y	NQ099AA	For 3.5" HDDs
HP ENERGY STAR 5.0 Enabled Configuration	Y	N		

#### Software

	<b>Factory Configured</b>	<b>Option Kit</b>	<b>Option Kit Part Number</b>	<b>Support Notes</b>
HP Performance Advisor	Y	N		Supported on Windows 7 only. Available as a web download starting 1/7/2010. Included in Windows 7 preload starting 3/1/2010.
Roxio Easy Media Creator (DVD/Blu-ray Disc burner software)	Y	N		
Intervideo WinDVD (DVD player/burner software)	Y	N		
HP ProtectTools Security	Y	N		Must select as a Configure to Order Option. Delivered as a "Drop in the Box" CD
PDF Complete - Corporate Edition	Y	N		
HP Power Assistant	Y	N		
Buy Office	Y	N		
Parallels Workstation 4.0 Extreme	Y	N		Supported with dual NVIDIA Quadro 2000 graphics cards and a minimum of 8GB of

### Supported Components

HP Remote Graphics Software (RGS) V5	Y	N	system memory. Will be preloaded starting 12/1/11. Supports both 32 and 64 bit versions of Windows 7 Professional and Enterprise, Windows XP Professional and Enterprise, Windows Vista Business, Ultimate and Enterprise, and RHEL V6
--------------------------------------	---	---	--

### Operating Systems

### Support Notes

Genuine Windows® 7 Ultimate 64-bit	See Note 1
Genuine Windows® 7 Professional 64-bit	See Note 1
Genuine Windows® 7 Professional 32-bit	See Note 1
HP Linux Installer Kit	See: <a href="http://www.hp.com/go/linux">http://www.hp.com/go/linux</a>
SUSE Linux Enterprise Desktop 11	SUSE Linux Enterprise Desktop 11
Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr)	This second OS must be ordered with The HPIKL as the first OS. It is a Drop In the Box (DIB) Red Hat registration card redeemed directly with Red Hat SW company (using the URL and Subscription / registration number), NOT through HP.

**NOTE 1:** Systems may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.



### System Technical Specifications

<b>System Board</b>																																																																												
<b>System Board Form Factor</b>	36 x 28 cm 14.2 x 11 inches																																																																											
<b>Processor Socket</b>	Dual LGA 1366																																																																											
<b>CPU Bus Speed</b>	QPI: Up to 6.4GT/second, depending on processor																																																																											
<b>Chipset</b>	Intel® 5520																																																																											
<b>Super I/O Controller</b>	SMSC SCH5327, Rev B																																																																											
<b>Memory Expansion Slots</b>	6 (3 per processor)																																																																											
<b>Memory Type Supported</b>	DDR3, UDIMM (Unbuffered), ECC: 1GB, 2GB, and 4GB DDR3, RDIMM (Registered), ECC: 4GB and 8GB																																																																											
<b>Memory Modes</b>	NUMA (Non-Uniform Memory Architecture), Memory Node Interleave																																																																											
<b>Memory Speed Supported</b>	800, 1066, & 1333MHz																																																																											
<b>Maximum Memory</b>	Supports up to 48GB																																																																											
	<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="3">Single Processor CPU0</th> </tr> <tr> <th>Capacity</th> <th>Type</th> <th>DIMM1</th> <th>DIMM2</th> <th>DIMM3</th> </tr> </thead> <tbody> <tr> <td>1GB</td> <td>UDIMM</td> <td>1GB</td> <td></td> <td></td> </tr> <tr> <td>2GB</td> <td>UDIMM</td> <td>1GB</td> <td>1GB</td> <td></td> </tr> <tr> <td>3GB</td> <td>UDIMM</td> <td>1GB</td> <td>1GB</td> <td>1GB</td> </tr> <tr> <td>4GB</td> <td>UDIMM</td> <td>2GB</td> <td>2GB</td> <td></td> </tr> <tr> <td>4GB</td> <td>RDIMM</td> <td>4GB</td> <td></td> <td></td> </tr> <tr> <td>6GB</td> <td>UDIMM</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> </tr> <tr> <td>8GB</td> <td>UDIMM</td> <td>4GB</td> <td>4GB</td> <td></td> </tr> <tr> <td>8GB</td> <td>RDIMM</td> <td>4GB</td> <td>4GB</td> <td></td> </tr> <tr> <td>8GB</td> <td>RDIMM</td> <td>8GB</td> <td></td> <td></td> </tr> <tr> <td>12GB</td> <td>UDIMM</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> </tr> <tr> <td>12GB</td> <td>RDIMM</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> </tr> <tr> <td>16GB</td> <td>RDIMM</td> <td>8GB</td> <td>8GB</td> <td></td> </tr> <tr> <td>24GB</td> <td>RDIMM</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> </tr> </tbody> </table>			Single Processor CPU0			Capacity	Type	DIMM1	DIMM2	DIMM3	1GB	UDIMM	1GB			2GB	UDIMM	1GB	1GB		3GB	UDIMM	1GB	1GB	1GB	4GB	UDIMM	2GB	2GB		4GB	RDIMM	4GB			6GB	UDIMM	2GB	2GB	2GB	8GB	UDIMM	4GB	4GB		8GB	RDIMM	4GB	4GB		8GB	RDIMM	8GB			12GB	UDIMM	4GB	4GB	4GB	12GB	RDIMM	4GB	4GB	4GB	16GB	RDIMM	8GB	8GB		24GB	RDIMM	8GB	8GB	8GB
		Single Processor CPU0																																																																										
Capacity	Type	DIMM1	DIMM2	DIMM3																																																																								
1GB	UDIMM	1GB																																																																										
2GB	UDIMM	1GB	1GB																																																																									
3GB	UDIMM	1GB	1GB	1GB																																																																								
4GB	UDIMM	2GB	2GB																																																																									
4GB	RDIMM	4GB																																																																										
6GB	UDIMM	2GB	2GB	2GB																																																																								
8GB	UDIMM	4GB	4GB																																																																									
8GB	RDIMM	4GB	4GB																																																																									
8GB	RDIMM	8GB																																																																										
12GB	UDIMM	4GB	4GB	4GB																																																																								
12GB	RDIMM	4GB	4GB	4GB																																																																								
16GB	RDIMM	8GB	8GB																																																																									
24GB	RDIMM	8GB	8GB	8GB																																																																								

### System Technical Specifications

		Dual Processor					
		CPU0			CPU1		
Capacity	Type	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6
2GB	UDIMM	1GB			1GB		
4GB	UDIMM	1GB	1GB		1GB	1GB	
4GB	UDIMM	2GB			2GB		
6GB	UDIMM	1GB	1GB	1GB	1GB	1GB	1GB
8GB	UDIMM	2GB	2GB		2GB	2GB	
8GB	UDIMM	4GB			4GB		
8GB	RDIMM	4GB			4GB		
12GB	UDIMM	2GB	2GB	2GB	2GB	2GB	2GB
16GB	UDIMM	4GB	4GB		4GB	4GB	
16GB	RDIMM	4GB	4GB		4GB	4GB	
16GB	RDIMM	8GB			8GB		
24GB	UDIMM	4GB	4GB	4GB	4GB	4GB	4GB
24GB	RDIMM	4GB	4GB	4GB	4GB	4GB	4GB
32GB	RDIMM	8GB	8GB		8GB	8GB	
48GB	RDIMM	8GB	8GB	8GB	8GB	8GB	8GB

**Memory Configuration**  
(Supported)

- Not all memory configurations possible are represented above.
- Only ECC DIMMs are supported.
- Do not install memory modules into memory slots if corresponding processor is not installed.
- Dual processor configurations with memory modules installed for only one processor is not supported.
- UDIMM (Unbuffered) and RDIMM (Registered) memory cannot be mixed. All memory installed in the system must be either UDIMM or RDIMM.

**PCI Express Connectors**

2 PCI Express x16 Gen2 graphics  
 1 PCI Express Gen2 (x8 mechanically, x4 electrically)  
 1 PCI Express Gen1 (x8 mechanically, x4 electrically)

**PCI Connectors (5.0V)**

2 full length 33 MHz 32-Bit

**Supported Drive Interfaces**

<b>SATA</b>	Integrated 6-channel SATA 3.0Gb/sec controller with RAID 0, 1, 5, 10 and NCQ. (Factory integrated RAID is Microsoft Windows only)
<b>Serial Attached SCSI</b>	Requires Optional PCIe card
<b>Integrated RAID</b>	Integrated SATA RAID <ul style="list-style-type: none"> <li>• RAID 0, RAID 1*, RAID 5, RAID 10</li> <li>• Supports one RAID array with 2-4 drives</li> <li>• RAID 0 configuration - striped array (supported and configure to order)</li> <li>• RAID 1 configuration - mirrored array (supported and configure to order)</li> <li>• RAID 5 parity striping (supported but not configure to order)</li> <li>• RAID 10 striped and mirrored array (supported but not</li> </ul>

### System Technical Specifications

		configure to order)
		<a href="#">*HW RAID functionality not supported by Linux. Use SW RAID functionality provided in the Red Hat Operating system instead.</a>
	<b>Integrated Graphics</b>	No
	<b>Network Controller</b>	Controller Broadcom 5764 PCI-E LAN Controller Memory Integrated 48KB receive buffer and 8KB transmit buffer Data rates supported 10/100/1000 Mb/s Compliance IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control Bus architecture PCIe 1.0a Data path width X1 Data path speed 2.5Gbit per sec per direction transfer rate Data transfer mode Bus-master DMA Power requirement 1.0 watts @ +3.3V AUX supply Boot ROM support Yes Network transfer rate 10BASE-T (half-duplex) 10 Mb/s 10BASE-T (full-duplex) 20 Mb/s 100BASE-TX (half-duplex) 100 Mb/s 100BASE-TX (full-duplex) 200 Mb/s 1000BASE-T (full-duplex) 2000 Mb/s Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional 32 and 64 Management capabilities WOL, PXE 2.1 and ASF 2.0
	<b>SATA Connectors</b>	6 ports/connectors (Include 4 are eSATA configurable with optional eSATA After-Market Option cable kit)
	<b>IEEE 1394a or 1394b</b>	Integrated 1394a (beginning with systems manufactured 3/22/10) No integrated 1394b - optional PCIe card required. Cable from Front IO can be plugged into PCI Card. Not supported in Linux
<b>IEEE 1394 Connector(s)</b>	<b>Front</b>	1 IEEE 1394a (requires optional PCI card to function with systems manufactured before 3/22/10 only)
	<b>Rear</b>	No
	<b>Internal</b>	No
<b>USB Connector(s)</b>	<b>Front</b>	3 on header for front
	<b>Rear</b>	6
	<b>Internal</b>	3 [3 USB 2.0 ports available by one 2x5 header and one 1x5 header: supports either up to two HP Internal USB Port Kits, AMO- EM165AA (one port on each Kit), or one Internal Port kit and one USB Media Card Reader.]
<b>HD Integrated Audio</b>	High Definition Integrated Realtek ALC262 Audio with Line in, Line Out, Microphone, Headphone Line-in, Line-out, Mic-in x2, and Headphone jacks	
<b>Flash ROM</b>	Yes	
<b>CPU Fan Header</b>	One for each CPU socket	

### System Technical Specifications

<b>Chassis Fan Header</b>	2 Rear System Chassis Fan Header 1 Front Chassis Fan Header
<b>Front PCI Fan Header</b>	Yes
<b>Front Control Panel/Speaker Header</b>	Yes
<b>CMOS Battery Holder – Lithium</b>	Yes
<b>Integrated Trusted Platform Module</b>	TPM 1.2, Infineon
<b>Power Supply Headers</b>	Yes
<b>Power Switch, Power LED &amp; Hard Drive LED Header</b>	Yes
<b>Clear Password Jumper</b>	Yes
<b>Serial Port</b>	Optional
<b>Parallel Port</b>	No
<b>Keyboard/Mouse</b>	PS/2
<b>Power Supply</b>	650 watt 85% efficient custom power supply (Wide Ranging, Active PFC)
<b>Operating Voltage Range</b>	90 – 269 VAC
<b>Rated Voltage Range</b>	100 - 240 VAC
<b>Rated Line Frequency</b>	50/60Hz
<b>Operating Line Frequency Range</b>	47-66Hz
<b>Rated Input Current</b>	10 A @ 100-240 VAC
<b>Heat Dissipation</b>	Typical = 434 btu/hr (109 kg-cal/hr) Maximum = 964 btu/hr (243 kg-cal/hr)
<b>Power Supply Fan</b>	92x25 mm variable speed
<b>ENERGY STAR® qualified (Config Dependent)</b>	Yes
<b>80 PLUS Compliant</b>	Yes. For the ECOs PSU Efficiency Report for the power supply, please go to this link: <a href="http://www.plugloadsolutions.com/psu_reports/S0-034_DELTA_DPS-725AB%20A_650W_Report_mod.pdf">http://www.plugloadsolutions.com/psu_reports/S0-034_DELTA_DPS-725AB%20A_650W_Report_mod.pdf</a> .
<b>FEMP Standby Power Compliant</b>	Yes
<b>Power consumption in sleep mode (as defined by ENERGY STAR) – Suspend to RAM (S3)</b>	<5W
<b>Built-in Self Test (BIST) LED</b>	Yes

### System Technical Specifications

<b>Surge Tolerant Full Ranging Power Supply</b> (withstands power surges up to 2000V)	Withstands power surges up to 2000V	
<b>Hood Lock Header</b>	Yes	
<b>Hood Sensor Header</b>	Yes Integrated in Front Control Panel Cable	
<b>Multibay Header</b>	No	
<b>Integrated Gigabit Ethernet</b>	Integrated Broadcom 5764 Gigabit Ethernet LOM	
<b>Wake on LAN</b>	Yes	
<b>ASF 1.0/2.0</b> (Alert Standard Format)	Yes	
<b>TPM</b>	Integrated TPM 1.2; Infineon	
<b>Password Clear Header</b>	Yes	
<b>CD-ROM; analog audio cable</b>	No	
<b>AUX; analog audio in</b>	No	
<b>Clear CMOS Button</b>	Yes	
<b>Chassis Speaker Header</b>	Yes (Integrated in Front Control Panel Cable)	
<b>ENERGY STAR® qualified</b> (Config Dependent)	Yes	
<b>Z600 Required Power Supply Info</b>		
<b>Power Supply</b>	<b>650 watt custom power supply – (Wide Ranging Active PFC)</b>	
<b>Operating Voltage Range</b>	90 - 269 VAC	
<b>Rated Voltage Range</b>	100 – 240 VAC	118 VAC
<b>Rated Line Frequency</b>	50-60 Hz	400 Hz
<b>Operating Line Frequency Range</b>	47 – 66 Hz	393 – 407 Hz
<b>Rated Input Current</b>	10 A @ 110-127 VAC 6 A @ 200-240 VAC	10 A @118 VAC
<b>Heat Dissipation (Configuration and software dependent)</b>	Typical 1578 btu/hr (397.7 kg-cal/hr) Maximum 2705 btu/hr (681.8 kg-cal/hr)	
<b>Power Supply Fan</b>	2x60x25 mm variable speed (sleeve-bearing) fans	
<b>Energy Star Compliant (config dependent)</b>	YES	
<b>80 PLUS® Compliant</b>	Yes. For the ECOs PSU Efficiency Report for the power supply, please go to this link: <a href="http://www.pluginloadsolutions.com/psu_reports/SO-034_DELTA_DPS-725AB%20A_650W_Report_mod.pdf">http://www.pluginloadsolutions.com/psu_reports/SO-034_DELTA_DPS-725AB%20A_650W_Report_mod.pdf</a> .	
<b>FEMP Standby Power Compliant@115V (Wake-on LAN disabled)(&lt;2W in S5-Power Off)</b>	YES	
<b>EuP Compliant@230V (&lt;1 W in S5-Power Off)</b>	YES	

### System Technical Specifications

<b>Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC) measured at 115V.</b>	<9W
<b>Built-in Self Test LED</b>	YES
<b>Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)</b>	YES

#### System Configuration

##### Example Configuration #1

Processor Info	1x Intel Xeon E5506
Memory Info	1x1 GB DDR3 1333 (UDIMM)
Graphics Info	NVS290
Disks/Optical/Floppy	1x160GB SATA / 0 Optical / 0 Floppy
PSU	650W 80PLUS® BRONZE

#### Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	62.2 W		61.8 W		63.1 W	
Windows Busy Typ(S0)	117.9 W		114.9 W		118.2 W	
Windows Busy Max (S0)	156.9 W		155.1 W		157.5 W	
Sleep (S3)	3.71 W	3.47 W	4.05 W	3.84 W	3.69 W	3.44 W
Off (S5)	1.14 W	1.32 W	1.45 W	1.32 W	1.12 W	0.99 W
Zero Power Mode (EuP)	0.24 W		0.52 W		0.29W	

#### Heat Dissipation\*\*

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	212.4 btu/hr		210.8 btu/hr		215.2 btu/hr	
Windows Busy Typ(S0)	402.3 btu/hr		392.0 btu/hr		403.4 btu/hr	
Windows Busy Max (S0)	535.6 btu/hr		529.3 btu/hr		538.1 btu/hr	
Sleep (S3)	12.7 btu/hr	11.8 btu/hr	13.8 btu/hr	13.1 btu/hr	12.6 btu/hr	11.7 btu/hr
Off (S5)	3.9 btu/hr	4.5 btu/hr	4.9 btu/hr	4.5 btu/hr	3.8 btu/hr	3.4 btu/hr
Zero Power Mode (EuP)	0.8 btu/hr		1.77 btu/hr		0.7 btu/hr	

##### Example Configuration #2

Processor Info	2 x Intel Xeon E5506
Memory Info	2x1 GB DDR3 1333MHz (UDIMM)
Graphics Info	1xFX580
Disks/Optical/Floppy	1x250GB SATA / 0 Optical / 0 Floppy
PSU	650W 80PLUS® BRONZE

#### Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	89.2 W		87.8 W		90.0 W	
Windows Busy Typ(S0)	294.1 W		287.8 W		294.9 W	
Windows Busy Max (S0)	313.5 W		307.3 W		317.0 W	
Sleep (S3)	5.08 W	4.84 W	5.43W	5.25 W	5.05 W	4.82 W
Off (S5)	1.14 W	1.01 W	1.45 W	1.32 W	1.12 W	0.99 W



### System Technical Specifications

#### Heat Dissipation\*\*

Zero Power Mode (EuP)	0.24 W		0.52 W		0.22 W	
	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	304.5 btu/hr		299.5 btu/hr		307 btu/hr	
Windows Busy Typ (S0)	1003.8 btu/hr		982.3 btu/hr		1006.5 btu/hr	
Windows Busy Max (S0)	1070 btu/hr		1048.8 btu/hr		1081.9 btu/hr	
Sleep (S3)	17.3 btu/hr	16.5 btu/hr	18.5 btu/hr	17.9 btu/hr	17.2 btu/hr	16.5 btu/hr
Off (S5)	3.9 btu/hr	3.5 btu/hr	5.0 btu/hr	4.5 btu/hr	3.8 btu/hr	3.38 btu/hr
Zero Power Mode (EuP)	0.8 btu/hr		1.8 btu/hr		0.8 btu/hr	

#### Example Configuration #3

Processor Info: 2x Intel Xeon X5570  
 Memory Info: 6x2GB DDR3 1333MHz (UDIMM)  
 Graphics Info: 1 x FX4800  
 Disks/Optical/Floppy: 2x1000GB SATA / 1 Optical / 1 Floppy  
 PSU: 1xBroadcom 5761 Gigabit PCIe NIC  
 650W 80PLUS® BRONZE

#### Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	123.3 W		119.9 W		123.6 W	
Windows Busy Typ (S0)	455.7 W		443.0 W		462.3 W	
Windows Busy Max (S0)	564.8 W		554.4 W		570.7 W	
Sleep (S3)	7.0 W	6.28 W	7.2 W	6.61 W	7.0 W	6.27 W
Off (S5)	1.6 W	0.90W	1.9 W	1.21W	1.6 W	0.88 W
Zero Power Mode (EuP)	0.24 W		0.51 W		0.22 W	

#### Heat Dissipation\*\*

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	420.8 btu/hr		409.2 btu/hr		421.8 btu/hr	
Windows Busy Typ (S0)	1555.3 btu/hr		1512.0 btu/hr		1577.8 btu/hr	
Windows Busy Max (S0)	1927.7 btu/hr		1892.2 btu/hr		1947.8 btu/hr	
Sleep (S3)	23.9 btu/hr	21.4 btu/hr	24.6 btu/hr	22.6 btu/hr	23.9 btu/hr	21.4 btu/hr
Off (S5)	5.5 btu/hr	3.1 btu/hr	6.5 btu/hr	4.1 btu/hr	5.5 btu/hr	3.0 btu/hr
Zero Power Mode (EuP)	0.8 btu/hr		1.7 btu/hr		0.8 btu/hr	



### System Technical Specifications

**Example Configuration #4 (ENERGY STAR Qualified)**

Processor Info	2x Intel Xeon X5570
Memory Info	6x2GB DDR3 1333MHz (UDIMM)
Graphics Info	1 x FX4800
Disks/Optical/Floppy I/O	2x1000GB SATA / 1 Optical / 1 Floppy
PSU	1xBroadcom 5761 Gigabit PCIe NIC 650W 80PLUS® BRONZE

#### Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
<i>On-Idle (ENERGY STAR® Idle (S0))</i>	123.3 W		119.9 W		123.6 W	
<i>ENERGY STAR® P<sub>MAX</sub></i> <i>Windows running Linpack and Vmperf</i>	455.7 W		443.0 W		462.3 W	
<i>ENERGY STAR® "Sleep" (S3)</i>	7.0 W	-	7.2 W	-	7.0 W	-
<i>ENERGY STAR® "Standby" (Off) (S5)</i>	1.6 W	-	1.9 W	-	1.6 W	-

#### Heat Dissipation\*\*

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
<i>On-Idle (ENERGY STAR® Idle (S0))</i>	420.8 btu/hr		409.2 btu/hr		421.8 btu/hr	
<i>ENERGY STAR® P<sub>MAX</sub></i> <i>Windows running Linpack and Vmperf</i>	1555.3 btu/hr		1512.0 btu/hr		1577.8 btu/hr	
<i>ENERGY STAR® "Sleep" (S3)</i>	23.9 btu/hr	-	24.6 btu/hr	-	23.9 btu/hr	-
<i>ENERGY STAR® "Standby" (Off) (S5)</i>	5.5 btu/hr	-	6.5 btu/hr	-	5.5 btu/hr	-

#### NOTES:

\* Energy Star low energy mode

\*\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

#### Declared Noise Emissions (Entry-level and High-end configurations)

Declared Noise Emissions (Entry-level and High-end configurations)		
<b>System Configuration (Entry level)</b>	<b>Processor Info</b>	Dual Intel® Xeon® X5570 2.93Ghz processors
	<b>Memory Info</b>	4 x 1GB 1333Mhz
	<b>Graphics Info</b>	NVIDIA Quadro NVS 295
	<b>Disks/Optical/Floppy</b>	250GB 7200 rpm SATA / 1 DVD-ROM/ 1 Floppy

### System Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	<b>Idle</b>	4.1	22
	<b>Hard drive Operating</b> (random reads)	4.1	23
	<b>Floppy Drive Operating</b> (continuous copy)		
	<b>DVD-ROM Operating</b> (sequential reads)	5.1	37

System Configuration (High-end)	Processor Info	Dual Intel® Xeon® X5570 2.93GHz processors
	Memory Info	6 x 2GB 1333 Mhz
	Graphics Info	NVIDIA FX4800
	Disks/Optical/Floppy	2x300GB 15k SAS / 1 DVD-ROM/ 1 Floppy

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	<b>Idle</b>	4.8	32
	<b>Hard drive Operating</b> (random reads)	4.9	33
	<b>Floppy Drive Operating</b> (continuous copy)		
	<b>DVD-ROM Operating</b> (sequential reads)	5.3	38

Environmental Requirements	Temperature	Operating: 5°C to 35°C (40°F to 95°F) Non-operating: -40°C to 60°C (-40°F to 140°F)
	Humidity	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	Maximum Altitude	Operating: 3,048 m (10,000 ft) Non-operating: 9,100 m (30,000 ft)
	Dynamic (new)	Shock Operating: ½-sine: 40g, 2-3ms Non-operating: ½-sine: 160 cm/s, 2-3ms (~100g) square: 422 cm/s, 20g <b>NOTE:</b> Values represent individual shock events and do not indicate repetitive shock events.  Vibration Operating random: 0.5g (rms), 5-300 Hz Non-operating random: 2.0g (rms), 10-500 Hz <b>NOTE:</b> Values do not indicate continuous vibration.

### System Technical Specifications

	<b>Cooling</b>	Above 1524m (5,000 ft) altitude, maximum operating temperature is de-rated by 1°C (1.8°F) per 305m (1,000 ft) elevation increase
--	----------------	--

### Physical Security and Serviceability

<b>Access Panel</b>	Tool-less Includes system board and memory information
<b>Optical Drive</b>	Tool-less, no carrier or rails required
<b>Floppy Drive</b>	Tool-less
<b>Hard Drives</b>	Tool-less
<b>Expansion Cards</b>	Tool-less
<b>Processor Socket</b>	Yes
<b>Green User Touch Points</b>	Yes, on tool-free internal chassis components
<b>Color-coordinated Cables and Connectors</b>	Yes
<b>Memory</b>	Tool-less
<b>System Board</b>	Tool-less
<b>Dual Color Power and HD LED on Front of Computer</b>	Yes
<b>Configuration Record SW</b>	Yes
<b>Over-Temp Warning on Screen</b>	Yes
<b>Restore CD/DVD Set</b>	Restores the computer to its original factory shipping image - Can be obtained via HP Support
<b>Dual Function Front Power Switch</b>	Also acts as a reset switch when held for 4 seconds
<b>Padlock Support</b>	No
<b>Cable Lock Support</b>	Yes, Kensington Cable Lock (optional): Prevents entire system theft only. 3mm x 7mm slot at rear of system
<b>Universal Chassis Clamp Lock Support</b>	No
<b>Solenoid Lock and Hood Sensor</b>	Yes (optional)
<b>Rear Port Control Cover</b>	Yes, locks rear IO cables to prevent cable theft
<b>Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control</b>	Enables or disables serial, parallel, USB, 1394, audio, and network ports
<b>Removable Media Write/Boot Control</b>	User can prevent the workstation from writing to or booting from removable media
<b>Power-On Password</b>	Prevents an unauthorized person from booting up the computer
<b>Setup Password</b>	Prevents an unauthorized person from changing the system configuration

### System Technical Specifications

<b>3.3V Aux Power LED on System PCA</b>	No
<b>NIC LEDs (integrated) (Green &amp; Amber)</b>	Yes
<b>CPUs and Heatsinks</b>	A torx driver (T15) is needed to remove the CPU heatsink(s) before the CPU can be removed. CPU removal is tool-less
<b>Power Supply Diagnostic LED</b>	Yes
<b>Front Power Button</b>	Yes
<b>Rear Power Button</b>	Yes
<b>Front Power LED</b>	Yes, blue (normal), red (fault)
<b>Front Hard Drive Activity LED</b>	Yes, green
<b>Front ODD Activity LED</b>	Yes
<b>Internal Speaker</b>	Yes
<b>System/Emergency ROM Flash Recovery</b>	Recovers corrupted system BIOS
<b>Alert Standard Format (ASF) Specification</b>	Industry-standard specification for network alerting in operating system-absent environments
<b>Cooling Solutions</b>	Air cooled forced convection
<b>Power Supply Fans</b>	2x -- 60mm x 25mm
<b>CPU Heatsink Fan</b>	80mm x 15mm
<b>MXM Heatsink Fan</b>	Rear: 2x -- 92mm x 25mm Front: 80mm x 25mm
<b>Memory Heatsink Fan</b>	80mm x 25mm
<b>HP Advanced System Diagnostics Offline Edition</b>	<p>HP Vision Diagnostics Offline Edition</p> <p>The diagnostics utility must be booted from USB or CD, and enables you to perform testing and to view critical computer hardware and software configuration information from various sources.</p> <p>This utility enables you to:</p> <ul style="list-style-type: none"> <li>● Run diagnostics</li> <li>● View the hardware configuration of the system</li> </ul> <p>Key features and benefits</p> <p>HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest insight into potential system issues, is the configuration of the system. Vision Diagnostics helps provide higher system availability. Typical uses of Vision Diagnostics are:</p> <ul style="list-style-type: none"> <li>● Testing and diagnosing apparent hardware failures</li> <li>● Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance</li> </ul>

### System Technical Specifications

	<ul style="list-style-type: none"> <li>• Sending configuration information to another location for more in-depth analysis</li> </ul>
<b>Access Panel Key Lock</b>	Yes, prevents removal of the access panel and all internal components including optical and floppy drives
<b>ACPI-Ready Hardware</b>	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> <li>• Allows the system to wake from a low power mode</li> <li>• Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul>
<b>Trusted Platform Module Chip with optional ProtectTools Software</b>	Yes, Infineon SLB9635TT1.2
<b>Integrated Chassis Handles</b>	Yes
<b>Power Supply</b>	Tool-less, direct-connect (blind-mate)
<b>PCI Card Retention</b>	Yes, rear (all), middle (full-height cards), front (full-length with extender cards)
<b>Flash ROM</b>	SPI ROM
<b>Diagnostic Power Switch LED on board</b>	Yes
<b>Clear Password Jumper</b>	Yes
<b>Clear CMOS Button</b>	Yes
<b>CMOS Battery Holder</b>	Yes
<b>DIMM Connectors</b>	Yes
<b>HP ProtectTools Security Manager</b>	Yes - Not supported on Microsoft XP x64 or Linux

<b>BIOS</b>	
<b>BIOS 32-bit Services</b>	Standard BIOS 32-Bit Service Directory Proposal v0.4
<b>PCI 3.0 Support</b>	Full BIOS support for PCI Express through industry standard interfaces
<b>ATAPI</b>	ATAPI Removable Media Device BIOS Specification Version 1.0
<b>BBS</b>	BIOS Boot Specification v1.01
<b>WMI Support</b>	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
<b>BIOS Boot Spec 1.01+</b>	Provides more control over how and from what devices the workstation will boot
<b>BIOS Power On</b>	Users can define a specific date and time for the system to power on
<b>ROM Based Computer Setup Utility (F10)</b>	Review and customize system configuration settings controlled by the BIOS
<b>System/Emergency ROM Flash Recovery with Video</b>	Recovers system BIOS in corrupted Flash ROM
<b>Replicated Setup</b>	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
<b>SMBIOS</b>	System Management BIOS 2.5, previously known as DMI BIOS, for system management information

### System Technical Specifications

<b>Boot Control</b>	Disables the ability to boot from removable media on supported devices
<b>Memory Change Alert</b>	Alerts management console if memory is removed or changed
<b>Thermal Alert</b>	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>• NORMAL - normal temperature ranges.</li> <li>• ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.</li> <li>• SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.</li> </ul>
<b>Remote ROM Flash</b>	Provides secure, fail-safe ROM image management from a central network console
<b>ACPI (Advanced Configuration and Power Management Interface)</b>	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems.
<b>Ownership Tag</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
<b>Remote Wakeup/Remote Shutdown</b>	System administrators can power on, restart, and power off a client computer from a remote location
<b>ASF 2.0 Compliant</b>	Allows workstation status to be monitored on a remote console
<b>Instantly Available PC (Suspend to RAM - ACPI sleep state S3)</b>	Allows for very low power consumption with quick resume time
<b>Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)</b>	Allows a new or existing system to boot over the network and download software, including the operating system
<b>ROM revision levels</b>	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
<b>System board revision level</b>	Allows management SW to read revision level of the system board Revision level is digitally encoded into the HW and cannot be modified
<b>Start-up Diagnostics (Power-on Self-Test)</b>	Assesses system health at boot time with selectable levels of testing
<b>Auto Setup when new hardware installed</b>	System automatically detects the addition of new hardware
<b>Keyboard-less Operation</b>	The system can be booted without a keyboard
<b>Localized ROM Setup</b>	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings
<b>Asset Tag</b>	Allows the user or MIS to set a unique tag string in non-volatile memory
<b>Per-slot Control</b>	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually
<b>Adaptive Cooling</b>	Fan control parameters are set according to detected hardware configuration for optimal acoustics
<b>Pre-boot Diagnostics</b>	Early (pre-video) critical errors are reported via beeps and blinks on the power LED
<b>Industry Standard Specification Support</b>	

### System Technical Specifications

<b>Industry Standard</b>	Revision Supported by the BIOS
<b>ACPI</b>	Advanced Configuration and Power Management Interface, Version 2.0
<b>ASF</b>	Alert Standard Format Specification, Version 2.0
<b>ATA (IDE)</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
<b>CD Boot</b>	"El Torito" Bootable CD-ROM Format Specification Version 1.0
<b>EDD</b>	<ul style="list-style-type: none"> <li>Enhanced Disk Drive Specification Version 1.1</li> <li>BIOS Enhanced Disk Drive Specification Version 3.0</li> </ul>
<b>EHCI</b>	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
<b>PCI</b>	<ul style="list-style-type: none"> <li>PCI Local Bus Specification, Revision 2.3</li> <li>PCI Power Management Specification, Revision 1.1</li> <li>PCI Firmware Specification, Revision 3.0, Draft 0.7</li> </ul>
<b>PCI Express</b>	PCI Express Base Specification, Revision 2.0
<b>PMM</b>	POST Memory Manager Specification, Version 1.01
<b>SATA</b>	<ul style="list-style-type: none"> <li>Serial ATA Specification, Revision 1.0a</li> <li>Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0</li> </ul>
<b>SPD</b>	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
<b>TPM</b>	Trusted Computing Group TPM Specification Version 1.2
<b>UHCI</b>	Universal Host Controller Interface Design Guide, Revision 1.1
<b>USB</b>	Universal Serial Bus Revision 1.1 Specification  Universal Serial Bus Revision 2.0 Specification
<b>SMBIOS</b>	System Management BIOS Reference Specification, Version 2.6

### Social and Environmental Responsibility

<b>Eco-Label Certifications &amp; Declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>ENERGY STAR® (Configuration dependent, Microsoft Windows only)</li> <li>EPEAT Gold® for all ENERGY STAR® configurations. For more details and a list of countries in which this product is registered, please visit the following link:  <a href="http://www.epeat.net/ProductDisplay.aspx?return=search&amp;action=view&amp;search=true&amp;productid=2485&amp;ProductType=5&amp;epeatcountryid=1">http://www.epeat.net/ProductDisplay.aspx?return=search&amp;action=view&amp;search=true&amp;productid=2485&amp;ProductType=5&amp;epeatcountryid=1</a></li> <li>US Federal Energy Management Program (FEMP)</li> <li>China Energy Conservation Program</li> <li>IT ECO declaration</li> <li>Japan PC Green label*</li> </ul> <p>* This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'</p>
<b>Batteries</b>	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> <li>EU Directive 91/ 157/ EEC</li> <li>EU Directive 93/ 86/ EEC</li> <li>EU Directive 98/ 101/ EEC</li> </ul> <p>Batteries used in the product do not contain:</p>



### System Technical Specifications

	<ul style="list-style-type: none"> <li>• Mercury greater than 5ppm by weight</li> <li>• Cadmium greater than 10ppm by weight</li> <li>• Lead greater than 4,000ppm by weight</li> </ul> <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
<b>Restricted Material Usage</b>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html</a>):</p> <ul style="list-style-type: none"> <li>• Asbestos</li> <li>• Batteries – Mercury</li> <li>• Batteries – Cadmium</li> <li>• Batteries – Lead (non-rechargeable)</li> <li>• Batteries – Non-rechargeable Alkaline and Carbon-Zinc Batteries</li> <li>• Batteries – Classification as "Not Restricted" for Transport</li> <li>• Brominated Flame Retardants (PBBs, PBDEs, including DecaBDE)</li> <li>• Brominated Flame Retardants (all BFRs in external case plastic parts)</li> <li>• Cadmium and its compounds</li> <li>• Certain Azo Colorants</li> <li>• Chlorinated Hydrocarbons</li> <li>• Chlorinated Paraffins</li> <li>• Formaldehyde</li> <li>• Formaldehyde – emissions</li> <li>• Hexavalent Chromium and its compounds in metallic applications</li> <li>• Hexavalent Chromium and its compounds in non-metallic applications</li> <li>• Lead and its compounds</li> <li>• Lead in paint</li> <li>• Lead in Polyvinyl Chloride (PVC) coating of external cables, wires and cords</li> <li>• Mercury and its compounds</li> <li>• Nickel on external surfaces</li> <li>• Ozone Depleting Substances (ODS)</li> <li>• Polycyclic Aromatic Hydrocarbons (PAH)</li> <li>• Perfluorooctane sulfonates (PFOS) in parts</li> <li>• Perfluorooctane sulfonates (PFOS) in preparations</li> <li>• Polychlorinated Biphenyls (PCBs) and Polychlorinated Terphenyls (PCTs)</li> <li>• Polychlorinated Naphthalenes</li> <li>• Polyvinyl Chloride (PVC) in external case plastic parts</li> <li>• Radioactive Substances</li> <li>• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul>
<b>End-of-Life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
<b>Hewlett-Packard Corporate Environmental Information</b>	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report: <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a></p>

### System Technical Specifications

	ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a>
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.</li> <li>Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>This product contains 0% recycled materials (by wt.)</li> <li>This product is &gt;90% recycle-able when properly disposed of at end of life.</li> </ul>
<b>Packaging</b>	<p>HP Workstation product packaging meets the following (refer to the HP General Specification for the Environment at: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html</a>):</p> <ul style="list-style-type: none"> <li>Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment (see link above).</li> <li>Does not contain ozone-depleting substances (ODS).</li> <li>Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed.</li> <li>Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>All packaging material is recyclable.</li> <li>All packaging material is designed for ease of disassembly.</li> <li>Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
<b>Packaging Materials</b>	
<b>Internal</b>	LDPE Foam: .740 kg
<b>External</b>	Cardboard carton and insert: 1.537 kg

<b>Manageability</b>	
<b>Industry Standard Specifications</b>	<p>This product meets the following industry standard specifications for manageability functionality:</p> <ul style="list-style-type: none"> <li>ASF 2.0 (via integrated Broadcom LAN)</li> </ul>
<b>Remote Manageability Software Solutions</b>	<p>The HP Z600 Workstation is supported on the following remote manageability software consoles:</p> <ul style="list-style-type: none"> <li>LANDesk Management Suite (PSG recommended solution)</li> <li>Microsoft System Center Configuration Manager</li> <li>HP Client Automation Enterprise</li> </ul> <p>For questions or support for manageability needs, please visit: <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a></p>
<b>System Software Manager</b>	<p>For questions or support for SSM, please visit: <a href="http://www.hp.com/go/ssm">http://www.hp.com/go/ssm</a></p>
<b>Service, Support, and Warranty</b>	<p>On-site Warranty and Service (<b>Note 1</b>): Three-years, limited warranty and service offering delivers on-site, next business-day (<b>Note 2</b>) service for parts and labor and includes free telephone support (<b>Note 3</b>) 8am - 5pm. Global coverage (<b>Note 2</b>) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.</p> <p><b>NOTE 1:</b> Terms and conditions may vary by country. Certain restrictions and exclusions apply. <b>NOTE 2:</b> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on</p>

### System Technical Specifications

	<p>commercially reasonable best effort and may vary by country.</p> <p><b>NOTE 3:</b> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <a href="http://www.hp.com/go/lookuptool">http://www.hp.com/go/lookuptool</a>. Additional HP Care Pack Services information by product is available at: <a href="http://www.hp.com/hps/carepack">http://www.hp.com/hps/carepack</a>. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>
<b>Product Change Notification</b>	<ul style="list-style-type: none"> <li>• Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile</li> <li>• PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition</li> <li>• Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support</li> </ul>

Global Series SKUs	
<b>Title</b>	Z600 /Zl2.40+/250K /8Wa /XA/kp (A9F62AW)
<b>OS</b>	Genuine Windows® 7 Professional 64-bit
<b>Base Unit</b>	WD059AV - HP Z600 RDIMM Workstation w/ 650W 85% PSU
<b>Localization Unit</b>	FY914AV (with all WS supported localizations)
<b>Processor 1</b>	Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo
<b>Processor 2</b>	Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo
<b>Memory</b>	8GB (4x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU
<b>Hard Drive</b>	250GB SATA 7200 rpm 3Gb/s 3.5" HDD
<b>Optical Drive</b>	HP 16X DVD-ROM SATA Drive (non Lightscribe)
<b>Keyboard</b>	HP USB Standard Keyboard
<b>Mouse</b>	HP USB 2-Button Optical Scroll Mouse

<b>Title</b>	Z600e/ZL2.66+/300L /6.0W /295+A/kp (XN057AW)
<b>OS</b>	Genuine Windows® 7 Professional 64-bit
<b>Base Unit</b>	WD059AV - HP Z600 RDIMM Workstation w/ 650W 85% PSU
<b>Localization Unit</b>	FY914AV (with all WS supported localizations)
<b>Processor 1</b>	Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo
<b>Processor 2</b>	Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo
<b>Memory</b>	6GB (6x1GB) DDR3-1333 ECC Unbuffered RAM 2-CPU
<b>Hard Drive</b>	300GB SATA 10K rpm SFF HDD
<b>Graphics</b>	NVIDIA Quadro NVS 295 256MB PCIe Graphics Card
<b>Keyboard</b>	HP USB Standard Keyboard
<b>Mouse</b>	HP USB 2-Button Optical Scroll Mouse

### System Technical Specifications

<b>Copyright/Disclaimers</b>	<ul style="list-style-type: none"><li>• The above SKU, XN057AW, also includes a 2nd NVS 295 Graphics Card and is Energy Star 5.0 qualified.</li></ul> <p>© 2011 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.</p>
------------------------------	--

### Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section. HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers—no special programs, no additional cost—no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

<b>Processors</b>	<b>Product #</b>	<b>Offering</b>
	WG712AV	Intel Xeon E5620 2.40 12MB/1066 4C CPU-1
	WG720AV	Intel Xeon E5620 2.40 12MB/1066 4C CPU-2
	WG715AV	Intel Xeon X5650 2.66 12MB/1333 6C CPU-1
	WG723AV	Intel Xeon X5650 2.66 12MB/1333 6C CPU-2

---

<b>Hard Drives</b>	<b>Product #</b>	<b>Offering</b>
	FX560AV	HP 250GB SATA 7200 1st HDD
	FX570AV	HP 250GB SATA 7200 2nd HDD
	FX562AV	HP 500GB SATA 7200 1st HDD
	FX572AV	HP 500GB SATA 7200 2nd HDD

---

<b>Graphics</b>	<b>Product #</b>	<b>Offering</b>
	FY915AV	NVIDIA Quadro NVS 295 256MB Graphics Card
	FY924AV	NVIDIA Quadro NVS 295 256MB Graphics (2nd)
	WS077AV	NVIDIA Quadro 2000 1GB Graphics Card
	WS078AV	NVIDIA Quadro 2000 1GB Graphics Card (2nd)

---

<b>Memory</b>	<b>Product #</b>	<b>Offering</b>
	NL786AV	6GB (3x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
	NL787AV	12GB (3x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
	NL794AV	12GB (6x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

---

<b>Optical and Removable Storage</b>	<b>Product #</b>	<b>Offering</b>
	FX600AV	HP 16X DVD+-RW SuperMulti SATA 1st Drive
	FX602AV	HP 16X DVD+-RW SuperMulti SATA 2nd Drive

---

<b>Input Devices</b>	<b>Product #</b>	<b>Offering</b>
	FX596AV	HP USB Optical Scroll Mouse
	FY931AV	HP USB Standard Keyboard

---

### Stable & Consistent Offerings

**Operating Systems****Product #****Offering**

VM436AV

Genuine Windows® 7 Professional 64-bit

### Technical Specifications - Processors

<b>Processors</b>	Intel® Xeon® Processor X5675 6C 3.06 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	LB215AA
	Intel® Xeon® Processor X5672 4C 3.20 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	LB214AA
	Intel® Xeon® Processor X5660 6C 2.80 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	WG732AA
	Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	WG731AA
	Intel® Xeon® Processor E5649 6C 2.53 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	LB212AA
	Intel® Xeon® Processor X5647 4C 2.93 GHz, 130W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	LB213AA
	Intel® Xeon® Processor E5645 6C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	LB211AA
	Intel® Xeon® Processor E5640 4C 2.66 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	WG730AA
	Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	WG728AA
	Intel® Xeon® Processor E5607 4C 2.26 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	LB210AA
	Intel® Xeon® Processor E5606 4C 2.13 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	LB209AA

### Introduction

Intel's latest-generation microarchitecture represents the next step in unprecedented processor performance and dynamic scalability. Designed from the ground up to take advantage of hafnium-based Intel® 32nm hi-k metal gate silicon technology, Intel® Microarchitecture (Westmere) unleashes parallel processing performance enabled by Intel® QuickPath technology providing an integrated memory controller and high-speed interconnect per independent processing core.

### Performance and Features

Maximum multitasking performance Intel® Microarchitecture (Westmere) offers the latest in processor innovation, including:

Dynamic scalability, managed cores, threads, cache, interfaces, and power for energy-efficient performance on demand.

Design and performance scalability for servers, workstations, notebooks and desktops with support for 4-12 cores and up to 24+ threads with Intel® Hyper-Threading Technology (Intel® HT Technology), and scalable cache sizes, system interconnects, and integrated memory controllers.

Intel® Turbo Boost Technology delivers additional performance automatically when needed by taking advantage of the processor's power and thermal headroom. This enables increased performance of both multi-threaded and single-threaded workloads.

Intel Hyper-Threading Technology brings high-performance applications into mainstream computing with 1-24 threads optimized for a new generation multi-core processor architecture.



### Technical Specifications - Processors

Scalable shared memory of Intel® QuickPath technology features memory distributed to each processor with integrated memory controllers and high-speed point-to-point interconnects to unleash the performance of future versions of next-generation Intel® multi-core processors.

Multi-level shared cache improves performance and efficiency by reducing latency to frequently used data.

---

### **Turbo Boost Technology**

This technology, now built into Xeon 5600 processors, will increase the speed of your processor on demand (from OS) if the CPU is operating below power / thermal specifications:

Benefit of Turbo Boost (how much CPU speed up) depends on number of active cores.

Likelihood of Turbo Boost operation increases when fewer cores are active.

Likelihood of Turbo Boost operation increases when dynamic power mgt is enabled

### Technical Specifications - Monitors / Displays

<b>HP LP2065 20-inch LCD Monitor</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/12377_div/12377_div.html">http://h18000.www1.hp.com/products/quickspecs/12377_div/12377_div.html</a>
	<b>Part Number</b>	Workstation Volume Channel EF227A4
		Workstation Value Channel EF227A5
<b>HP LP2475w 24-inch Widescreen LCD Monitor</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/13134_div/13134_div.html">http://h18000.www1.hp.com/products/quickspecs/13134_div/13134_div.html</a>
	<b>Part Number</b>	KD911A8
<b>HP DreamColor LP2480zx Professional Display</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/13081_div/13081_div.html">http://h18000.www1.hp.com/products/quickspecs/13081_div/13081_div.html</a>
	<b>Part Number</b>	GV546A8
<b>HP LP3065 30-inch Widescreen LCD Monitor</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/12621_div/12621_div.html">http://h18000.www1.hp.com/products/quickspecs/12621_div/12621_div.html</a>
	<b>Part Number</b>	Workstation Volume and Business Desktop Channel EZ320A4#XXX
		Workstation Value Channel EZ320A5#XXX
<b>HP ZR22w 21.5-inch S-IPS LCD Monitor</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/13556_div/13556_div.html">http://h18000.www1.hp.com/products/quickspecs/13556_div/13556_div.html</a>
	<b>Part Number</b>	VM626A4
<b>HP ZR24w 24-inch S-IPS LCD Monitor</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/13557_div/13557_div.html">http://h18000.www1.hp.com/products/quickspecs/13557_div/13557_div.html</a>
	<b>Part Number</b>	VM633A8
<b>HP ZR30w 30-inch S-IPS LCD Monitor</b>	<b>QuickSpecs URL</b>	<a href="http://h18000.www1.hp.com/products/quickspecs/13635_div/13635_div.html">http://h18000.www1.hp.com/products/quickspecs/13635_div/13635_div.html</a>
	<b>Part Number</b>	VM617A8

### Technical Specifications - Hard Drives

<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>	<b>600GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	600GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6.0 Gb/s
		<b>Buffer</b>	16 MB
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b> 0.2 ms
			<b>Average</b> 3.4 ms
		<b>Rotational Speed</b>	<b>Full Stroke</b> 6.6 ms
		<b>Logical Blocks</b>	15,000 rpm
		<b>Operating Temperature</b>	1,172,123,568 - 512 byte blocks
			50° to 95° F (10° to 35° C)

	<b>450GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	450GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s
		<b>Buffer</b>	16MB
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b> 0.2 ms
			<b>Average</b> 3.4 ms
		<b>Rotational Speed</b>	<b>Full Stroke</b> 6.6 ms
		<b>Operating Temperature</b>	15,000 rpm
			50° to 95° F (10° to 35° C)

	<b>300GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	300GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s
		<b>Buffer</b>	16MB

### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
		<b>Average</b>	3.4 ms
		<b>Full Stroke</b>	6.6 ms
	<b>Rotational Speed</b>		15,000 rpm
	<b>Operating Temperature</b>		50° to 95° F (10° to 35° C)
<b>HP 300GB SAS 10K SFF HDD</b>	<b>Capacity</b>		300GB
	<b>Height</b>		0.6 in; 1.53 cm
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>		SAS 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		64MB
	<b>Cache</b>		multi-segmentable cache buffer
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.4 ms (max)
		<b>Average</b>	3.6 ms
		<b>Full Stroke</b>	7.3 ms
	<b>Rotational Speed</b>		10,000 rpm
	<b>Logical Blocks</b>		585,937,500
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>HP 450GB SAS 10K SFF HDD</b>	<b>Capacity</b>		450GB
	<b>Height</b>		0.6 in; 1.53 cm
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>		SAS 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		64MB
	<b>Cache</b>		multi-segmentable cache buffer
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.4ms (max)
		<b>Average</b>	3.6ms
		<b>Full Stroke</b>	7.3ms
	<b>Rotational Speed</b>		10,000 rpm
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>HP 600GB SAS 10K SFF</b>	<b>Capacity</b>		600GB

### Technical Specifications - Hard Drives

#### HDD

<b>Height</b>	0.6 in; 1.53 cm
<b>Width</b>	<b>Media Diameter</b> 2.5 in; 6.36 cm
	<b>Physical Size</b> 2.75 in; 6.99 cm
<b>Interface</b>	SAS 6Gb/s
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
<b>Buffer</b>	64MB
<b>Cache</b>	multi-segmentable cache buffer
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 0.4 ms (max)
	<b>Average</b> 3.6 ms
	<b>Full Stroke</b> 7.3 ms
<b>Rotational Speed</b>	10,000 rpm
<b>Logical Blocks</b>	1,172,123,568
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### SATA (Serial ATA) Hard Drives for HP Workstations

##### 600GB SATA 10K rpm SFF in 3.5" Frame HDD

<b>Capacity</b>	600GB
<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 2.5 in; 6.36 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (3.0Gb/s)
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300MB/s
<b>Buffer</b>	32MB
<b>Cache</b>	Segmentable
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 0.4 ms (max)
	<b>Average</b> 3.6 ms
	<b>Full Stroke</b> 9.0 ms
<b>Rotational Speed</b>	10,000 rpm
<b>Logical Blocks</b>	1,172,123,568
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

##### 300GB SATA 10K rpm SFF in 3.5" Frame HDD

<b>Capacity</b>	300,069,052,416 bytes
<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 2.5 in; 6.36 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300 MB/s

### Technical Specifications - Hard Drives

	<b>Buffer</b>	16 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 0.7 ms (maximum)
			<b>Average</b> 4.4 ms
			<b>Full Stroke</b> 9.5 ms
	<b>Rotational Speed</b>	10,000 rpm	
	<b>Logical Blocks</b>	586,072,368	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>160GB SATA 10K rpm SFF in 3.5" Frame HDD</b>	<b>Capacity</b>	160,041,885,696 bytes	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>		<b>Media Diameter</b> 2.5 in; 6.36 cm
			<b>Physical Size</b> 4 in; 10.17 cm
	<b>Interface</b>	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 300 MB/s	
	<b>Buffer</b>	16 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 0.7 ms (maximum)
			<b>Average</b> 4.4 ms
			<b>Full Stroke</b> 9.5 ms
	<b>Rotational Speed</b>	10,000 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>2.0TB SATA 7200 rpm 3Gb/s 3.5" HDD</b>	<b>Capacity</b>	2.0TB	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>		<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4.0 in; 10.17 cm
	<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing Enabled	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 300MB/s	
	<b>Buffer</b>	64MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 1.0 ms
			<b>Average</b> 10 ms
			<b>Full Stroke</b> Not Specified
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	3,907,029,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### Technical Specifications - Hard Drives

#### 1.5TB SATA 7200 rpm 3Gb/s 3.5" HDD

<b>Capacity</b>	1.5TB
<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
	<b>Physical Size</b> 4.0 in; 10.17 cm
<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300MB/s
<b>Buffer</b>	32MB
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 2 ms
	<b>Average</b> 11 ms
	<b>Full Stroke</b> 21 ms
<b>Rotational Speed</b>	7,200 rpm
<b>Logical Blocks</b>	2,930,277,168
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### 1TB SATA 7200 rpm 3.0Gb/s 3.5" HDD

<b>Capacity</b>	1,000,204,886,016 bytes
<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300 MB/s
<b>Buffer</b>	32 MB
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 2 ms
	<b>Average</b> 11 ms
	<b>Full Stroke</b> 21 ms
<b>Rotational Speed</b>	7,200 rpm
<b>Logical Blocks</b>	1,953,525,168
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### 500GB SATA 7200 rpm 3Gb/s 3.5" HDD

<b>Capacity</b>	500,107,862,016 bytes
<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled

### Technical Specifications - Hard Drives

	<b>Synchronous Transfer Rate (Maximum)</b>	300 MB/s	
	<b>Buffer</b>	16 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 2 ms
			<b>Average</b> 11 ms
			<b>Full Stroke</b> 21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	976,773,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>320GB SATA 7200 rpm 3Gb/s 3.5" HDD</b>	<b>Capacity</b>	320,072,933,376 bytes	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>		<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4.0 in; 10.17 cm
	<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	300 MB/s	
	<b>Buffer</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 2 ms
			<b>Average</b> 12 ms
			<b>Full Stroke</b> 21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	625,142,448	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>250GB SATA 7200 rpm 3Gb/s 3.5" HDD</b>	<b>Capacity</b>	250,059,350,016 bytes	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>		<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
	<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	300 MB/s	
	<b>Buffer</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 2 ms
			<b>Average</b> 11 ms
			<b>Full Stroke</b> 21 ms
	<b>Rotational Speed</b>	7,200 rpm	



### Technical Specifications - Hard Drives

	<b>Logical Blocks</b>	488,397,168		
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)		
<b>160GB SATA 7200 rpm 3Gb/s 3.5" HDD</b>	<b>Capacity</b>	160,041,885,696 bytes		
	<b>Height</b>	1 in; 2.54 cm		
	<b>Width</b>		<b>Media Diameter</b> 3.5 in; 8.9 cm	
			<b>Physical Size</b> 4 in; 10.2 cm	
	<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled		
	<b>Synchronous Transfer Rate (Maximum)</b>	300 MB/s		
	<b>Buffer</b>	8 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms	
		<b>Average</b>	11 ms	
		<b>Full Stroke</b>	21 ms	
		<b>Rotational Speed</b>	7,200 rpm	
		<b>Logical Blocks</b>	312,581,808	
		<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### HP Solid State Drives for Workstations

<b>HP 160GB SATA SSD</b>	<b>Capacity</b>	160GB	
	<b>Width</b>		<b>Media Diameter</b> NaN in; NaN cm
			<b>Physical Size</b> 2.5 in; 6.36 cm
	<b>Interface</b>	SATA	
	<b>Synchronous Transfer Rate (Maximum)</b>	3Gb/s	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP 300GB SATA SSD</b>	<b>Capacity</b>	300GB	
	<b>Width</b>		<b>Physical Size</b> 2.5 in; 6.36 cm
	<b>Interface</b>	SATA	
	<b>Synchronous Transfer Rate (Maximum)</b>	3Gb/s	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications - Hard Drive Controllers

<b>LSI 3041E 4-Port SAS 3.0 Gb/s RAID Card</b>	<b>PCI Bus</b>	PCI-Express x4 lanes	
	<b>PCI Modes</b>	Bus Master DMA	
	<b>RAID Levels</b>	RAID 0, 1, 1E and 10E	
	<b>PCI Data Burst Transfer Rate</b>	250 MB/s per lane half duplex 500 MB/s per lane full duplex 1,000 MB/s 4-lane half duplex	
	<b>SAS Bandwidth</b>	<b>Half Duplex</b>	Single lane – 300 MB/s Wide Port (2 lanes) – 600 MB/s Wide Port (4 lanes) – 1200 MB/s
		<b>Full Duplex</b>	Single SAS Lane – 600 MB/s Wide Port (2 lanes) – 1200 MB/s Wide Port (4 lanes) – 2400 MB/s
	<b>PCI Card Type</b>	3.3 volt add-in card	
	<b>PCI Voltage</b>	12 V ± 10%	
	<b>PCI Power</b>	7.5 Watts	
	<b>Bracket</b>	Full height and Low-profile	
	<b>Certification Level</b>	PCI-Express 1.0a	
	<b>IO Bus</b>	Four 3 Gb/s SAS/SATA ports	
	<b>SAS Processor</b>	LSISAS1064E	
	<b>Internal Connectors</b>	Four- SATA x1 connectors	
	<b>External Connectors</b>	None	
<b>Maximum Number of SCSI Devices</b>	122		
<b>LED Indicators</b>	On-board activity and fault LEDs		
<b>Integrated Mirroring</b>	Integrated Mirroring option available		

---

<b>LSI 9212 4-Port SAS 6Gb/s RAID Card</b>	<b>PCI Bus</b>	8-lane, 5GT/s PCI Express 2.0	
	<b>PCI Modes</b>	Bus Master DMA	
	<b>RAID Levels</b>	RAID 0, 1, 1E and 10	
	<b>PCI Data Burst Transfer Rate</b>	Half Duplex, x4 PCIe 2000 MB/s Full Duplex, x8 PCIe 4000 MB/s	
	<b>SAS Bandwidth</b>	<b>Half Duplex</b>	Single lane - 600 MB/s Wide Port (2 lanes) - 1200 MB/s Wide Port (4 lanes) - 2400 MB/s
		<b>Full Duplex</b>	Single SAS Lane - 1200 MB/s Wide Port (2 lanes) - 2400 MB/s Wide Port (4 lanes) - 4800 MB/s
	<b>PCI Card Type</b>	3.3V Add-in card	
	<b>PCI Voltage</b>	12 V ± 10%	
	<b>PCI Power</b>	<13.5 Watts	
	<b>Bracket</b>	Full height and Low-profile	

### Technical Specifications - Hard Drive Controllers

<b>Certification Level</b>	PCI-Express 2.0
<b>IO Bus</b>	1x4 6Gb/s SAS ports
<b>SAS Processor</b>	LSISAS2004
<b>Internal Connectors</b>	Four x1 SATA
<b>External Connectors</b>	None
<b>Maximum Number of SCSI Devices</b>	256
<b>LED Indicators</b>	Internal Activity/Fault per x4 port - Heartbeat

#### LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)

<b>PCI Bus</b>	PCI-Express x8 lanes
<b>PCI Modes</b>	Bus Master DMA
<b>RAID Levels</b>	RAID 0, 1, and 5 RAID spans 10 and 50
<b>PCI Data Burst Transfer Rate</b>	Up to 3Gb/s per port
<b>Full Duplex</b>	Up to 1.5 GB/s
<b>PCI Voltage</b>	+3.3V Add-in Card
<b>PCI Power</b>	19.2 Watts Maximum
<b>Certification Level</b>	PCI-Express 1.0a
<b>IO Bus</b>	Eight 3Gb/s SAS/SATA ports
<b>Internal Connectors</b>	Two SAS SFF8087 x4
<b>External Connectors</b>	Two SAS SFF8088 x4
<b>Maximum Number of SCSI Devices</b>	32
<b>LED Indicators</b>	Connector LEDs indicate whether the internal or external connector is active for ports 0-3 and 4-7

### Technical Specifications - Hard Drive Controllers

<b>LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit</b>	<b>PCI Bus</b>	PCI-Express (Gen2) V2.0 x8 lanes
	<b>PCI Modes</b>	Bus Master DMA
	<b>RAID Levels</b>	RAID 0, 1, 5, and 6
		RAID spans 10, 50 and 60
	<b>PCI Data Burst Transfer Rate</b>	Up to 4GB/s
	<b>PCI Card Type</b>	Low profile, single PCIe slot design with full height bracket.
		The optional iBBU08 Battery Backup unit mounts on the controller card and the assembly remains within a single PCIe slot width.
	<b>PCI Voltage</b>	+3.3V Add-in Card
	<b>PCI Power</b>	12.5 Watts
	<b>Certification Level</b>	PCI-Express 2.0
	<b>IO Bus</b>	Eight 3 Gb/s and 6Gb/s compatible SAS/SATA ports
	<b>Internal Connectors</b>	Two SAS SFF8087 x4
	<b>External Connectors</b>	None
	<b>Maximum Number of SCSI Devices</b>	32. <b>NOTE:</b> HP Workstations do not support this many internal drives.
<b>LED Indicators</b>	Connector LEDs indicate whether the internal connector is active for ports 0-3 and 4-7	

### Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 295 256MB Graphics Card</b>	<b>Form Factor</b>	2.731 inches (H) × 6.600 inches (L), Half-Height
	<b>Graphics Controller</b>	NVIDIA Quadro NVS 295 Graphics Board
	<b>Bus Type</b>	PCI Express x16, Generation 2.0
	<b>Memory</b>	256 MB GDDR3 SDRAM unified graphics memory
	<b>Connectors</b>	2 DisplayPort Comes with 2 DisplayPort to DVI-D Adapters (‘DisplayPort to VGA’ and ‘DisplayPort to DL DVI’ adapters available as an accessory)
	<b>Maximum Resolution</b>	Two DisplayPort outputs drive two digital displays up to 2560 x 1600
	<b>Display Output</b>	<b>NOTE: This card supports up to two displays</b> <ul style="list-style-type: none"><li>• Drives DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking</li><li>• Drives DVI enabled digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)</li></ul>
	<b>Supported Graphics APIs</b>	OpenGL 3.0 DirectX 10.0
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) <i>* WS4 not supported on Z200 &amp; Z200 SFF</i> Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation (64-bit and 32-bit) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Power Consumption</b>	<24 Watts

### Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 450 512 MB PCIe Graphics Card</b>	<b>Form Factor</b>	ATX Full Height, 1/2 length Passive cooling
	<b>Bus Type</b>	PCI Express x16, Generation 2.0
	<b>Memory</b>	512 MB GDDR3 (256MB per GPU)
	<b>Connectors</b>	Four DisplayPort; Four DisplayPort to DVI-D adapters included. (‘DisplayPort to VGA’ and ‘DisplayPort to Dual Link DVI’ adapters available as an accessory)
	<b>Maximum Resolution</b>	DisplayPort connectors support ultra-high-resolution panels (up to 2560 x 1600)
		<b>NOTE:</b> This card supports up to four displays
	<b>Supported Graphics APIs</b>	OpenGL 3.0 DirectX 10.0
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Microsoft Windows Vista (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
		SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Power Consumption</b>	<40 Watts

---

<b>NVIDIA NVS 300 512MB Graphics Card</b>	<b>Form Factor</b>	2.7 inches (H) x 5.7 inches (L), Half-Height
	<b>Graphics Controller</b>	NVIDIA NVS 300 Graphics Board
	<b>Bus Type</b>	PCI Express x16, Generation 2.0
	<b>Memory</b>	512 MB GDDR3 SDRAM unified graphics memory
	<b>Connectors</b>	DMS-59 Includes DMS-59 to Dual DVI-I adapter DMS-59 to Dual DisplayPort adapter and DMS-59 to Dual VGA adapter available as an option DMS-59 to Dual DisplayPort adapter required for HP ZR30w Display
	<b>Maximum Resolution</b>	DVI: two digital displays up to 1920 x 1200 DisplayPort: two digital displays up to 2560 x 1600 VGA: two analog displays up to 1920 x 1080
	<b>Image Quality Features</b>	
	<b>Display Output</b>	This card support up to two displays: <ul style="list-style-type: none"><li>• Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking</li><li>• Drives DisplayPort enabled digital displays at resolutions up to 2560 x</li></ul>

### Technical Specifications - Graphics

1600 at 60 Hz with reduced blanking (through optional DMS-59 to DisplayPort adapter)

- Drives VGA enabled analog displays at resolutions up to 1920 x 1080 (through optional DMS-59 to VGA adapter)

**Supported Graphics APIs**

OpenGL 3.3  
DirectX 10.1

**Available Graphics Drivers**

Genuine Windows 7 Professional (64-bit and 32-bit)  
Genuine Windows Vista Business (64-bit and 32-bit)  
Microsoft Windows XP Professional (64-bit and 32-bit)  
Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation  
Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation  
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

**Power Consumption**

<18 Watts

**AMD FirePro 2270 512MB Graphics Card****Form Factor**

Low Profile, Half Length, 2.3" x 6.6"

**Graphics Controller**

AMD FirePro™ 2270 Professional Graphics

**Bus Type**

PCI Express™ x16 Generation 2.0

**Memory**

512MB DDR3

**Connectors**

DMS-59 connector to support breakout cables for dual DisplayPort, DVI and VGA output.

DMS-59 to Dual DVI adapter included.

(Display Port and VGA adapters sold separately)

**Maximum Resolution**

Digital 2560x1600 (DisplayPort)

Analog 1920x1200 (DVI 60 Hz/ VGA 75Hz)

**RAMDAC**

400 MHz DAC, 10-bit per channel

**Display Output**

Card supports up to two displays

**Supported Graphics APIs**

DirectX 11 and OpenGL 4.0

**Available Graphics Drivers**

Genuine Windows 7 Professional (64-bit and 32-bit)

Genuine Windows Vista Business (64-bit and 32-bit)

Microsoft Windows XP Professional (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

**Power Consumption**

17W Maximum

### Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 290</b>	<b>Form Factor</b>	Low Profile
<b>256 MB PCIe Graphics Card</b>	<b>Bus Type</b>	PCIe x16
	<b>Memory</b>	256 MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	DMS-59, includes DMS-59 to Dual DVI-I cable. DMS-59 to Dual VGA cable available as an option.
	<b>Maximum Resolution</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	<b>RAMDAC</b>	Integrated dual 400MHz
	<b>Image Quality Features</b>	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	<b>Supported Graphics APIs</b>	OGL 2.1 & DX10 Support; Shader Model 4.0
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>



### Technical Specifications - Graphics

<b>NVIDIA Quadro 400 512MB Form Factor Graphics Card</b>	<b>Form Factor</b>	Low Profile, 2.7 inches (H) x 5.6 inches (L)
	<b>Graphics Controller</b>	NVIDIA Quadro 400 Graphics Board
	<b>Bus Type</b>	PCI Express x 16, Generation 2.0
	<b>Memory</b>	512MB DDR3 SDRAM
	<b>Connectors</b>	One (1) Dual-link DVI-I One (1) DisplayPort 1.1 Includes one DisplayPort to DVI-D adapter
	<b>Maximum Resolution</b>	DisplayPort 1.1: 2560 x 1600 @ 60 Hz Dual Link DVI-I: 2560 x 1600 @ 60 Hz Analog: 2048 x 1536 @ 85 Hz
	<b>RAMDAC</b>	Dual internal 400 MHz DACs
	<b>Display Output</b>	This card supports up to two displays
	<b>Supported Graphics APIs</b>	OpenGL 3.2 DirectX 10.1 Shader Model 4.1
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
		Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Power Consumption</b>	< 35 Watts

---

<b>NVIDIA Quadro 600 1GB Graphics Card</b>	<b>Form Factor</b>	2.731" H x 6.6" L Single Slot Small Form Factor
	<b>Graphics Controller</b>	NVIDIA Quadro 600 Graphics Card
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	1 GB GDDR3 128-bit
	<b>Connectors</b>	1 DVI-I output, 1 DisplayPort output One DP to DVI adapter included with card
		DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories
	<b>Maximum Resolution</b>	DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	<b>Shading Architecture</b>	Shader Model 5.0

### Technical Specifications - Graphics

<b>Supported Graphics APIs</b>	OpenGL 4.1 DirectX 11
<b>Available Graphics Drivers</b>	CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Power Consumption</b>	40 Watts

<b>AMD FirePro V3900 1GB Graphics Card</b>	<b>Form Factor</b>	Full height, half length (full-height bracket included)
	<b>Graphics Controller</b>	AMD FirePro™ V3900 professional graphics
	<b>Bus Type</b>	PCI Express® x16, Generation 2.1
	<b>Memory</b>	1GB DDR3 memory
	<b>Connectors</b>	1 DL DVI, 1 DP output One DP to DVI adapter included
	<b>Maximum Resolution</b>	2560x1600 per display (5120x1600 max. horizontal resolution)
	<b>Display Output</b>	1 DisplayPort® 1.2 1 Dual-link DVI
	<b>Supported Graphics APIs</b>	OpenCL™ 1.1, DirectX® 11 and OpenGL 4.2
	<b>Available Graphics Drivers</b>	Genuine Windows® 7 Professional (64-bit and 32-bit) Genuine Windows Vista® Business (64-bit and 32-bit) Microsoft® Windows XP® Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
	<b>Power Consumption</b>	<50W
<b>Note</b>	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See <a href="http://www.amd.com/firepro">www.amd.com/firepro</a> for details.	

### Technical Specifications - Graphics

---

<b>AMD FirePro V4900 1GB Graphics Card</b>	<b>Form Factor</b>	Full height (4.37 in) , half length (6.61 in)
	<b>Graphics Controller</b>	AMD FirePro™ V4900 Professional Graphics
	<b>Bus Type</b>	PCI Express™ x16, Generation 2.1
	<b>Memory</b>	1GB GDDR5
	<b>Connectors</b>	2 DisplayPort, 1 dual link DVI Output, One DP to DVI adapter included
	<b>Maximum Resolution</b>	Up to three digital displays at resolutions up to 2560 x 1600 @ 60Hz or up to three analog displays, one at resolutions up to 2048 x 1536 @ 85Hz, plus two resolutions up to 1920 x 1200 @ 60Hz (165 MHz dot clock) Note: This card supports up to three displays with Windows 7, Vista or Linux, and up to two displays on XP
	<b>RAMDAC</b>	
	<b>Image Quality Features</b>	Up to 3 independent outputs with ATI Eyefinity technology support (More information at: <a href="http://www.amd.com/us/products/technologies/eyefinity/">www.amd.com/us/products/technologies/eyefinity/</a> ). Full 30-bit display pipeline. Advanced video capabilities, including high fidelity gamma, color correction and scaling. Dedicated hardware (UVD2) for H.264, VC-1, and MPEG2 decode <b>NOTE:</b> The use of more than two displays on Linux requires support for xrandr 1.2 or greater in the X server.
	<b>Supported graphics APIs</b>	DirectX 11 and OpenGL 4.1. OpenCL 1.2 DirectCompute 11
	<b>Available graphics drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
<b>Power Consumption</b>	<75W	
<b>Note</b>	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See <a href="http://www.amd.com/firepro">www.amd.com/firepro</a> for details.	

---

### Technical Specifications - Graphics

<b>NVIDIA Quadro 2000 1GB Graphics Card</b>	<b>Form Factor</b>	4.376" H x 7" L Single Slot
	<b>Graphics Controller</b>	NVIDIA Quadro 2000 Graphics Card
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	1 GB GDDR5 128-bit
	<b>Connectors</b>	1 DVI-I output, 2 DisplayPort outputs One DP to DVI adapter included with card
		DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories
	<b>Maximum Resolution</b>	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	<b>Image Quality Features</b>	<ul style="list-style-type: none"><li>• Up to 16K x16K texture and render processing</li><li>• Transparent multisampling and super sampling</li><li>• 16x angle independent anisotropic filtering</li><li>• 128-bit floating point performance</li><li>• 32-bit per-component floating point texture filtering and blending</li><li>• Support for any combination of two connected displays</li><li>• DisplayPort 1.1a, HDMI 1.3a, and HDCP support</li><li>• NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support</li><li>• Full OpenGL quad buffered stereo support</li><li>• Underscan/overscan compensation and hardware scaling</li><li>• NVIDIA® nView® multi-display technology</li></ul>
	<b>Shading Architecture</b>	Shader Model 5.0
	<b>Supported Graphics APIs</b>	OpenGL 4.1 DirectX 11
		CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
		SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Power Consumption</b>	62 Watts

### Technical Specifications - Graphics

<b>NVIDIA Quadro 2000D (Spec DVI only card)</b>	<b>Form Factor</b>	4.376" H x 7" L Single Slot
	<b>Graphics Controller</b>	NVIDIA Quadro 2000D Graphics Card
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	1 GB GDDR5 128-bit
	<b>Connectors</b>	2 Dual Link DVI outputs
	<b>Maximum Resolution</b>	Dual-link DVI output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	<b>Image Quality Features</b>	<ul style="list-style-type: none"> <li>● Up to 16K x16K texture and render processing</li> <li>● Transparent multisampling and super sampling</li> <li>● 16x angle independent anisotropic filtering</li> <li>● 128-bit floating point performance</li> <li>● 32-bit per-component floating point texture filtering and blending</li> <li>● Support for any combination of two connected displays</li> <li>● Dual Link DVI, HDMI 1.3a, and HDCP support</li> <li>● NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support</li> <li>● Full OpenGL quad buffered stereo support</li> <li>● Underscan/overscan compensation and hardware scaling</li> <li>● NVIDIA® nView® multi-display technology</li> </ul>
	<b>Shading Architecture</b>	Shader Model 5.0
	<b>Supported Graphics APIs</b>	OpenGL 4.0 DirectX 11
	<b>Available Graphics Drivers</b>	<p>CUDA API support includes:            CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</p> <p>Genuine Windows 7 Professional (64-bit and 32-bit)            Genuine Windows Vista Business (64-bit and 32-bit)            Microsoft Windows XP Professional (64-bit and 32-bit)            Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)            Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation            SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a></p> <p>SUSE Linux Enterprise drivers may also be obtained from:  <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a></p>
<b>Power Consumption</b>	62 Watts	

---

<b>ATI FirePro V5800 1GB Graphics Card</b>	<b>Form Factor</b>	4.38 in (H) x 9.0 in (L)
	<b>Graphics Controller</b>	ATI FirePro V5800 Graphics Card
	<b>Bus Type</b>	PCI Express x 16, Generation 2.0
	<b>Memory</b>	1GB GDDR5 SDRAM

### Technical Specifications - Graphics

<b>Connectors</b>	2 DP, 1 DL DVI
<b>Maximum Resolution</b>	One DP to DVI adapter included Up to three digital displays at resolutions up to 2560 x 1600 @ 60Hz or up to three analog displays, one resolution up to 2048 x 1536 @ 85Hz, plus two display resolutions up to 1920 x 1200 @ 60 Hz (165 MHz dot clock)
	<b>NOTES:</b> This card supports up to three displays with Vista, Win7, or Linux, up to two displays with XP  The use of more than two displays on Linux requires support for xrandr 1.2 or greater in the X server
<b>RAMDAC</b>	400 MHz DAC, 10-bits per channel
<b>Image Quality Features</b>	<ul style="list-style-type: none"><li>• 3 independent outputs with ATI Eyefinity1 technology support (More information at: <a href="http://www.amd.com/us/products/technologies/eyefinity/">www.amd.com/us/products/technologies/eyefinity/</a>)</li><li>• Full 30-bit display pipeline for more accurate color reproduction superior image quality2</li><li>• Advanced video capabilities, including high fidelity gamma, color correction and scaling</li><li>• Dedicated hardware (UVD2) for H.264, VC-1, and MPEG2 decode</li></ul>
<b>Shading architecture</b>	<ul style="list-style-type: none"><li>• Support for Full Shader Model 5.0</li><li>• Dynamic load balancing and resource allocation for vertex, geometry, and pixel shaders</li><li>• Common instruction set and texture unit access supported for all types of shaders</li><li>• Dedicated branch execution units and texture address processors</li><li>• Anti-aliases Shaders and Textures as well as Polygon Edges</li></ul>
<b>Supported graphics APIs</b>	DirectX 11, OpenGL 3.2, OpenCL 1.0 and full implementation of DirectCompute 11  (OpenCL™ compliant driver and SDK release scheduled in 2010)
<b>Available graphics drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) * WS4 not supported on Z200 & Z200 SFF Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
<b>Power Consumption</b>	75 Watts

### Technical Specifications - Graphics

<b>AMD FirePro V5900 2GB Graphics Card</b>	<b>Form Factor</b>	Full-height, full length, single slot
	<b>Graphics Controller</b>	AMD FirePro™ V5900 Professional Graphics
	<b>Bus Type</b>	PCI Express™ x16, Generation 2.1
	<b>Memory</b>	2GB GDDR5
	<b>Connectors</b>	2 x Display Port 1.2 1 x Dual-link DVI One DP to DVI adapter included with card
	<b>Maximum Resolution</b>	2560 x 1600
	<b>Display Output</b>	Up to 3 simultaneous displays (using AMD Eyefinity with Windows 7 or Linux)
	<b>Shading Architecture</b>	Shader Model 5.0
	<b>Supported Graphics APIs</b>	DirectX 11 and OpenGL 4.1
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	<b>Power Consumption</b>	< 75W
	<b>Note</b>	HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See <a href="http://www.amd.com/firepro">www.amd.com/firepro</a> for details.

<b>NVIDIA Quadro 4000 2GB Graphics Card</b>	<b>Form Factor</b>	4.376" H x 9.50" L Single Slot
	<b>Graphics Controller</b>	NVIDIA Quadro 4000 Graphics Card
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	2 GB GDDR5 256-bit
	<b>Connectors</b>	1 DVI-I output, 2 DisplayPort outputs; One DP to DVI adapter included with card
	<b>Maximum Resolution</b>	DVI to VGA, DisplayPort to VGA and DisplayPort to DVI (single- link or dual-link) adapters available as accessories (Optional stereo bracket available from 3rd party)
	<b>RAMDAC</b>	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	<b>Image Quality Features</b>	400 MHz integrated RAMDAC ● Up to 16K x16K texture and render processing

### Technical Specifications - Graphics

- Transparent multisampling and super sampling
- 16x angle independent anisotropic filtering
- 128-bit floating point performance
- 32-bit per-component floating point texture filtering and blending
- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.0 DirectX 11 CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
	Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Power Consumption</b>	142 Watts

#### NVIDIA Quadro 5000 2.5GB Graphics Card

<b>Form Factor</b>	4.376" H x 9.75" L Dual Slot
<b>Graphics Controller</b>	NVIDIA Quadro 5000 Graphics Card
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	2.5 GB GDDR5 320-bit
<b>Connectors</b>	DVI-I (1), DP (2), Stereo (1) One DP to DVI adapter included with card
	DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories
<b>Maximum Resolution</b>	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
<b>Image Quality Features</b>	<ul style="list-style-type: none"> <li>• Up to 16K x16K texture and render processing</li> <li>• Transparent multisampling and super sampling</li> <li>• 16x angle independent anisotropic filtering</li> <li>• 128-bit floating point performance</li> </ul>



### Technical Specifications - Graphics

- 32-bit per-component floating point texture filtering and blending
- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.0 DirectX 11 CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
	Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Power Consumption</b>	152 Watts

#### AMD FirePro V7900 2GB Graphics Card

<b>Form Factor</b>	Full height, full length, single slot
<b>Graphics Controller</b>	AMD FirePro™ V7900 Professional Graphics
<b>Bus Type</b>	PCI Express™ x16, Generation 2.1
<b>Memory</b>	2GB GDDR5
<b>Connectors</b>	4 x DisplayPort 1.2 Two DP to DVI adapters included with card
<b>Maximum Resolution</b>	2560 x1600
<b>Display Output</b>	Up to 4 simultaneous displays (using AMD Eyefinity with Windows 7 or Linux)
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	DirectX 11 and OpenGL 4.1
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
<b>Power Consumption</b>	< 150W

### Technical Specifications - Graphics

**Note**

AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See [www.amd.com/firepro](http://www.amd.com/firepro) for details.

### Technical Specifications - Multimedia and Audio Devices

<b>SoundBlaster (Creative Labs) X-Fi Titanium PCIe Audio Card</b>	<b>24-bit Analog-to-Digital conversion of analog inputs</b>	96kHz sample rate
	<b>24-bit Digital-to-Analog conversion of digital sources</b>	96kHz to analog 7:1 speaker output
	<b>24-bit Digital-to-Analog conversion of stereo digital sources</b>	8, 11.025, 16, 22.05, 24, 32, 44.1, 48 and 96kHz
	<b>16-bit to 24-bit recording sampling rates</b>	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz, 24-bit/48kHz and 24-bit/96kHz with direct monitoring
	<b>Enhanced SoundFont support</b>	Up to 24-bit resolution
	<b>Signal-to-Noise Ratio</b> (20kHz Low-pass filter, A-Weighted)	109dB
	<b>Total Harmonic Distortion + Noise at 1kHz</b> (20kHz Low-pass filter)	.004%
	<b>Frequency Response</b> (-3dB, 24-bit/96kHz input)	10Hz to 46kHz
	<b>Frequency Response</b> (-3dB, 24-bit/192kHz input)	10Hz to 46kHz
	<b>Speaker and Headphone connections</b>	Stereo to 7.1 (Line Out via three 3.5mm mini jacks)
	<b>Flexijack</b>	Line In/ Microphone In/Optical Out via shared 3.5mm mini jack
	<b>Front Panel Header</b>	Intel HD Audio Compatible (2x5 pin)
	<b>Operating System</b>	Windows 7 Professional 32-bit and 64-bit Microsoft Windows Vista Business 32-bit and 64-bit Microsoft® Windows® XP Professional SP2 Microsoft Windows XP Professional x64 Edition
<b>Minimum System Requirements</b>	<b>System RAM</b> 512MB <b>Operating System</b> Windows Vista 32-bit and 64-bit version or Windows XP 32-bit or 64-bit version	

### Technical Specifications - Optical and Removable Storage

<b>HP DVD-ROM Drive</b>	<b>Description</b>	5.25-inch, half-height, tray-load	
	<b>Mounting Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	SATA/ATAPI	
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	
	<b>Disc Capacity</b>	<b>DVD-ROM</b> Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	
	<b>Access Times</b>	<b>DVD-ROM Single Layer</b>	< 140 ms (typical)
		<b>CD-ROM Mode 1</b>	< 125 ms (typical)
		<b>Full Stroke DVD</b>	< 250 ms (seek)
		<b>Full Stroke CD</b>	< 210 ms (seek)
	<b>Power</b>	<b>Source</b>	SATA DC power receptacle
		<b>DC Power Requirements</b>	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
		<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
		<b>Relative Humidity</b>	10% to 90%
		<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)
<b>Operating Systems Supported</b>		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, Removed reference to "Novell" because of acquisition and changed product reference to "SUSE Linux Enterprise Desktop 10 & 11", No driver is required for this device. Native support is provided by the operating system.	

<b>HP DVD+/-RW Drive</b>	<b>Description</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Either horizontal or vertical
	<b>Interface Type</b>	SATA/ATAPI
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)
	<b>Disc Formats</b>	DVD-RAM
		DVD+R
DVD+RW		
DVD+R DL		
DVD-R DL		
	DVD-R	
	DVD-RW	

### Technical Specifications - Optical and Removable Storage

	CD-R CD-RW		
<b>Disc Capacity</b>	<b>DVD-ROM</b>		8.5 GB DL or 4.7 GB standard
	<b>Full Stroke DVD</b>		< 250 ms (seek)
	<b>Full Stroke CD</b>		< 210 ms (seek)
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>		CD-ROM, CD-R Up to 40X CD-RW Up to 32X
	<b>DVD ROM Read</b>	DVD-RAM	Up to 12X
		DVD+RW	Up to 8X
		DVD-RW	Up to 8X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 16X
		DVD-R	Up to 16X
<b>Power</b>	<b>Source</b>		SATA DC power receptacle
	<b>DC Power Requirements</b>		5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	<b>DC Current</b>		5 VDC - <1000 mA typical, <1600 mA maximum 12 VDC - <600 mA typical, <1400 mA maximum
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>		41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b>		10% to 90%
	<b>Maximum Wet Bulb Temperature</b>		86° F (30° C)
	<b>Operating Systems Supported</b>		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11
	<b>Kit Contents</b>		No driver is required for this device. Native support is provided by the operating system. HP SATA SuperMulti DVD Writer Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.

### Technical Specifications - Optical and Removable Storage

<b>HP Slot Load DVD+/-RW Drive</b>	<b>Description</b>	Slim-Line, Slot-load	
	<b>Mounting Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	SATA	
	<b>Dimensions (WxHxD)</b>	12.7 x 1.2 x 12.9 cm (5 x 0.5 x 5 in)	
	<b>Disc Formats</b>	DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW	
	<b>Disc Capacity</b>	<b>DVD-ROM</b>	5/9/10/18 G DVD-Single / Dual (PTP, OTP) (Read Only)
			4.7G DVD±R/RW (Read & Write)
			DVD±R Dual (Read & Write)
			80mm DVD
			DVD-RAM (Read & Write)
		<b>CD-ROM</b>	650 MB CD-ROM (Read Only)
			80mm CD
			800/700/650/ CD-Recordable (Read & Write)
			700/650MB CD-Rewritable (Read & Write)
		700/650MB High Speed CD-Rewritable (Read & Write)	
	700/650MB Ultra & Ultra+ Speed CD-Rewritable (Read & Write)		
	<b>Full Stroke DVD</b>	< 270 ms (seek)	
	<b>Full Stroke CD</b>	< 250 ms (seek)	
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>	CD-ROM, CD-R and CD-RW Up to 24X	
	<b>DVD ROM Read</b>	DVD-RAM Up to 5X DVD Single layer Up to 8X DVD Dual Layer up to 6X	
<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
	<b>DC Power Requirements</b>	5 VDC ± 5%-100 mV ripple p-p	
	<b>DC Current</b>	5 VDC 40 mA typical, 800 mA maximum	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative Humidity</b>	10% to 90%	
	<b>Operating Systems Supported</b>	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*.	
		Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11, No driver is required for this device. Native support is provided by the operating system.	
	<b>Kit Contents</b>	Factory integrated only. Not available as a kit.	

<b>HP Blu-Ray Writer</b>	<b>Description</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Either horizontal or vertical
	<b>Interface Type</b>	SATA
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)

### Technical Specifications - Optical and Removable Storage

<b>Disc Formats</b>	BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
<b>Disc Capacity</b>	<b>DVD-ROM</b>	8.5 GB DL or 4.7 GB standard	
	<b>Blu-ray</b>	50 GB DL or 25 GB standard	
	<b>Full Stroke DVD</b>	< 250 ms (seek)	
	<b>Full Stroke CD</b>	< 210 ms (seek)	
	<b>Blu-ray</b>	<275 ms (seek)	
	<b>Startup Time</b> (Time to drive ready from tray loading)	BD-ROM (SL/DL)	25S / 28S
		BD-R (SL/DL)	25S / 28S
		BD-RE (SL/DL)	25S / 28S
		DVD-ROM (SL/DL)	18S / 18S
		DVD-R (SL/DL)	25S / 25S
		DVD-RW	25S
		DVD+R (SL/DL)	25S / 25S
		DVD+RW	25S
		DVD-RAM	45S
		CD-ROM	45S
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>	CD-ROM	Up to 40X
		CD-R	Up to 40X
		CD-RW	Up to 40X
	<b>DVD ROM Read</b>	DVD-RAM	Up to 5X
		DVD+RW	Up to 10X
		DVD-RW	Up to 10X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 12X
		DVD-R	Up to 12X
	<b>Blu-Ray</b>	BD-ROM	Up to 6X
		BD-ROM DL	Up to 4.8X
		BD-R	Up to 6X
		BD-R DL	Up to 4.8X



### Technical Specifications - Optical and Removable Storage

<b>Power</b>	<b>Source</b>	BD-R	Up to 6X
	<b>DC Power Requirements</b>	BD-RE SL/DL	Up to 4.8X
	<b>DC Current</b>	SATA DC power receptacle	
	<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 10%-100 mV ripple p-p
	<b>Relative Humidity</b>	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum	
	<b>Maximum Wet Bulb Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Operating Systems Supported</b>	15% to 80%	
		86° F (30° C)	
		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11	
		<a href="#">* No driver is required for this device. Native support is provided by the operating system.</a>	
		<a href="#">** RHEL WS4 not supported on Z200/Z200SFF</a>	
	<b>Kit Contents</b>	HP Blue Laser RW Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide.	
<b>Disclaimer</b>	As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.		

### Technical Specifications - Optical and Removable Storage

<b>HP 22-in-1 Media Card Reader</b>	<b>Description</b>	The Media Card Reader device uses the same physical form factor and mounting as a Floppy Disk Drive. The device connects to a 2x5 two-channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.
	<b>Mounting Orientation</b>	The Media Card Reader can be mounted in a dedicated Floppy Drive bay (if the chassis provides one) or in an appropriate Optical Bay adapter. It will operate in any orientation.
	<b>Interface Type</b>	USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)
	<b>Dimensions (WxHxD)</b>	124.5 x 101.6 x 25.4 mm (4.9 x 4.0 x 1.0 in)
	<b>Disc Formats</b>	<ul style="list-style-type: none"> <li>Picture</li> <li>Micro SD</li> <li>Micro SDHC</li> <li>SD</li> <li>SDHC</li> <li>SDXC</li> <li>Mini SD</li> <li>Mini SDHC</li> <li>MultiMediaCard</li> <li>Reduced Size MultiMediaCard (RS MultiMediaCard)</li> <li>MultiMedia Card 4.2 (MultiMediaCard Plus, including MultiMediaCard Plus HC)</li> <li>Reduced Size MultiMedia Card 4.2 (MultiMediaCard Mobile, including MultiMediaCard Mobile HC)</li> <li>CompactFlash Card Type I</li> <li>CompactFlash Card Type II</li> <li>MicroDrive</li> <li>Memory Stick (MS)</li> <li>MagicGate Memory Stick (MG)</li> <li>MagicGate Memory Stick Duo</li> <li>Memory Stick Select</li> <li>Memory Stick Duo (MS Duo)</li> <li>Memory Stick PRO (MS PRO)</li> <li>Memory Stick PRO Duo (MS PRO Duo)</li> <li>Memory Stick PRO-HG Duo</li> </ul> <p>Two additional formats are usable with adapters (not supplied):</p> <ul style="list-style-type: none"> <li>MultiMediaCard Micro</li> <li>Memory Stick Micro (M2)</li> </ul>

---

<b>HP DX115 Removable Drive Enclosure</b>	<b>Interface Type</b>	Compatible with SAS or SATA controllers
	<b>Dimensions (WxHxL)</b>	147.6 x 41.1 x 205 mm (5.81 x 1.62 x 8.08 in)
	<b>Weight</b>	<ul style="list-style-type: none"> <li>Frame and Carrier: 1.73 kg (3.8 lbs)</li> <li>Carrier: 0.45 kg (1 lbs)</li> </ul>

### Technical Specifications - Controller Cards

<b>HP USB 3.0 2x2 Port SuperSpeed PCIe x1 Card</b>	<b>Dimensions (HxD)</b>	TBD
	<b>Ports</b>	2 External, 2 internal
	<b>Operating Systems Supported</b>	Microsoft Windows 7, Windows Vista*, Windows XP Professional (32-bit and 64-bit); Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop 11 Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a> . For Windows Vista system requirements, visit: <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a> .
	<b>Kit Contents</b>	I/O and Security Software and Documentation CD with software drivers and documentation, HP SuperSpeed USB 3.0 PCIe x1 card (with full-height expansion bracket attached), SATA to SATA split power extension cable, Low profile expansion bracket to replace the full-height expansion bracket required on some computer models and HP SuperSpeed USB 3.0 PCIe x1 Card Quick Setup.
	<b>Regulatory Approvals and registrations</b>	FCC 15B, CE EN55022+ EN55024, VCCI, CISPR 22 AS/NZS CISPR 22, LCIE CB service(ITE/AV) IEC 60950-1, Korea EMC, UL USB-IF
	<b>Weight</b>	0.21 lb (95.0 g)
<b>Warranty</b>	The HP USB 3.0 2x2 Port Super Speed PCIe x1 Card has either a one-year limited warranty or the remainder of the warranty of the HP product in which it is installed. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.	

---

<b>HP SuperSpeed USB 3.0 PCIe x1 Card</b>	<b>Dimensions (HxD)</b>	Full-height: 4.13 x 2.32 in; Low profile: 2.68 x 2.32 in (Full-height: 104.89 x 59.04 mm; Low profile: 68.09 x 59.04 mm)
	<b>Ports</b>	2 External
	<b>Operating Systems Supported</b>	Microsoft Windows 7, Windows Vista*, Windows XP Professional (32-bit and 64-bit); Red Hat Enterprise Linux 6.0, SuSE Linux Enterprise Desktop 11  * Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a> . For Windows Vista system requirements, visit: <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a> .
	<b>Kit Contents</b>	I/O and Security Software and Documentation CD with software drivers and documentation, HP SuperSpeed USB 3.0 PCIe x1 card (with full-height expansion bracket attached), SATA to SATA split power extension cable, Low profile expansion bracket to replace the full-height expansion bracket required on some computer models and HP SuperSpeed USB 3.0 PCIe x1 Card Quick Setup.
	<b>Regulatory Approvals and registrations</b>	FCC 15B, CE EN55022+ EN55024, VCCI, CISPR 22 AS/NZS CISPR 22, LCIE CB service (ITE/AV) IEC 60950-1, Korea EMC, UL USB-IF
	<b>Weight</b>	0.21 lb (95.0 g)

### Technical Specifications - Controller Cards

<b>Warranty</b>	The HP Super Speed USB 3.0 PCIe x1 Card has either a one-year limited warranty or the remainder of the warranty of the HP product in which it is installed. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.
-----------------	--

---

<b>HP FireWire/IEEE 1394a PCI Card</b>	<b>Data Transfer Rate</b>	Burst Data Rate up to 400 Mbps
	<b>Device Interface Protocol</b>	IEEE-1394a
	<b>Devices Supported</b>	IEEE-1394 compliant devices
	<b>Bus Type</b>	PCI card with brackets for low profile and full height PCI slots.
	<b>Certification Level</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	<b>Ports</b>	Two IEEE 1394 6-Pin Connector (Rear)
	<b>Internal Connectors</b>	One 10-Pin (9 Contacts) Custom Connector
	<b>System Requirements</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. No driver is required for this device. Native support is provided by the operating system. * Certain Windows Vista product features require advanced or additional hardware. See <a href="http://microsoft.com/windowsvista/getready/hardwarereqs.mspx">http://microsoft.com/windowsvista/getready/hardwarereqs.mspx</a> and <a href="http://www.microsoft.com/windowsvista/getready/capable.mspx">http://www.microsoft.com/windowsvista/getready/capable.mspx</a> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a> . For Windows Vista system requirements, visit: <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a> .
		Pentium II 266 or above 128-MB RAM 1-GB Hard Drive CD-ROM drive Built-in sound system Available PCI slot
	<b>Temperature - Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature - Storage</b>	-22° to 140° F (-30° to 60° C)
	<b>Relative Humidity - Operating</b>	20% to 80%
	<b>Operating Systems Supported</b>	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*  * Certain Windows Vista product features require advanced or additional hardware. See <a href="http://microsoft.com/windowsvista/getready/hardwarereqs.mspx">http://microsoft.com/windowsvista/getready/hardwarereqs.mspx</a> and <a href="http://www.microsoft.com/windowsvista/getready/capable.mspx">http://www.microsoft.com/windowsvista/getready/capable.mspx</a> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:

### Technical Specifications - Controller Cards

<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

<b>HP IEEE 1394b FireWire PCIe Card</b>	<b>Data Transfer Rate</b>	Supports up to 800 Mbps
	<b>Devices Supported</b>	IEEE-1394 compliant devices
	<b>Bus Type</b>	PCIe card full height PCIe slots
	<b>Ports</b>	Two IEEE-1394b bilingual 9-Pin connectors (Rear)
	<b>Internal Connectors</b>	One 10-Pin Header connector
	<b>System Requirements</b>	Windows 7 Professional 32-bit and 64-bit, Microsoft® Windows® XP Professional, Windows XP Home, Windows Vista, SLED 11 and RHEL 6. Intel Pentium® G series or higher processor, 128-MB RAM, 1-GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot.
	<b>Temperature – Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature – Storage</b>	–22° to 140° F (–30° to 60° C)
	<b>Relative Humidity – Operating</b>	20% to 80%
	<b>Compliances</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	<b>Operating Systems Supported</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista® Business 32-bit and 64-bit, Windows® XP Professional, XP Professional 64-bit. Not supported on Linux.

### Technical Specifications - Networking and Communications

<b>Integrated Broadcom 5764 PCIe LOM Controller</b>	<b>Connector</b>	RJ45
	<b>Data Rates Supported</b>	10/100/1000BT
	<b>Bus Architecture</b>	PCIe X1
	<b>Alerting</b>	ASF 2.0

<b>Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Broadcom 5761 PCI-Express LAN Controller
	<b>Memory</b>	8 MB NVRAM serial Flash
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
	<b>Bus Architecture</b>	PCI-Express
	<b>Data Path Width</b>	Single Channel PCI-Express
	<b>Data Transfer Mode</b>	Bus Master DMA
	<b>Hardware Certifications</b>	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
	<b>Power Requirement</b>	1.8W @ 3.3V
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Mode</b>	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating Humidity</b>	131° F (55° C) with 5% to 95% non-condensing humidity
	<b>Dimensions</b>	7 cm x 10.5 cm (2.75 in x 4.13 in), low profile compatible
<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64 Red Hat Enterprise Linux (RHEL) 5, 6; Novell SLED 10 & 11	
<b>Management Capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles	
<b>Kit Contents</b>	Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install guide, product warranty statement	

### Technical Specifications - Networking and Communications

<b>HP NC360T PCI Express Dual Port Gigabit NIC</b>	<b>Connector</b>	Two RJ-45
	<b>Controller</b>	Intel 82571EB
	<b>Memory</b>	Integrated 96KB
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q
	<b>Bus Architecture</b>	PCI-E 1.0a
	<b>Data Path Width</b>	Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots
	<b>Data Transfer Mode</b>	Bus-master DMA
	<b>Hardware Certifications</b>	FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B, UL, Canada UL, EN60950
	<b>Power Requirement</b>	1280 mA @ 3.3V typical
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating Humidity</b>	0% to 95% non-condensing
	<b>Dimensions</b>	12.95 x 6.8 cm (5.1 x 2.7 in)
	<b>Operating System Driver Support</b>	Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP Professional x64 Edition. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11
	<b>Management Capabilities</b>	WOL , PXE 2.1
	<b>Kit Contents</b>	HP NC360T PCI Express Dual Port Gigabit NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

### Technical Specifications - Networking and Communications

<b>Intel Gigabit CT Desktop NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel WG82574L Gigabit Ethernet Controller
	<b>Memory</b>	Integrated Dual 48K configurable transmit receive FIFO Buffers
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus Architecture</b>	PCI-E 1.0a
	<b>Data Path Width</b>	X1, 250 MB/s, Bi-directional interface
	<b>Data Transfer Mode</b>	Bus-master DMA
	<b>Hardware Certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	<b>Power Requirement</b>	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating Humidity</b>	85% at 131° F (55° C)
	<b>Dimensions</b>	12.1 x 5.7 x 2.0 cm (4.75 x 2.25 x 0.8 in)
	<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64, Red Hat Enterprise Linux 4 (RHEL4.8 or newer)*, Red Hat Enterprise Linux 5 (RHEL5.3 or newer), Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop (SLED) 11  RHEL 4 and 5, SLED 10, are not supported on the Z220 CMT/SFF
	<b>Management Capabilities</b>	WOL , PXE, DMI, WFM 2.0
	<b>Kit Contents</b>	Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

© 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.