


### Overview



1. Handle in Top Optical Bay (optional)
2. 3 External 5.25" Bays
3. 22-in-1 Media Card Reader (optional)
4. Power Button
5. HDD Activity LED
6. Front I/O: 1 USB 2.0, 2 USB 3.0, 1 Headphone, 1 Microphone, 1 1394a
7. Easy-open Side Panel

### Overview

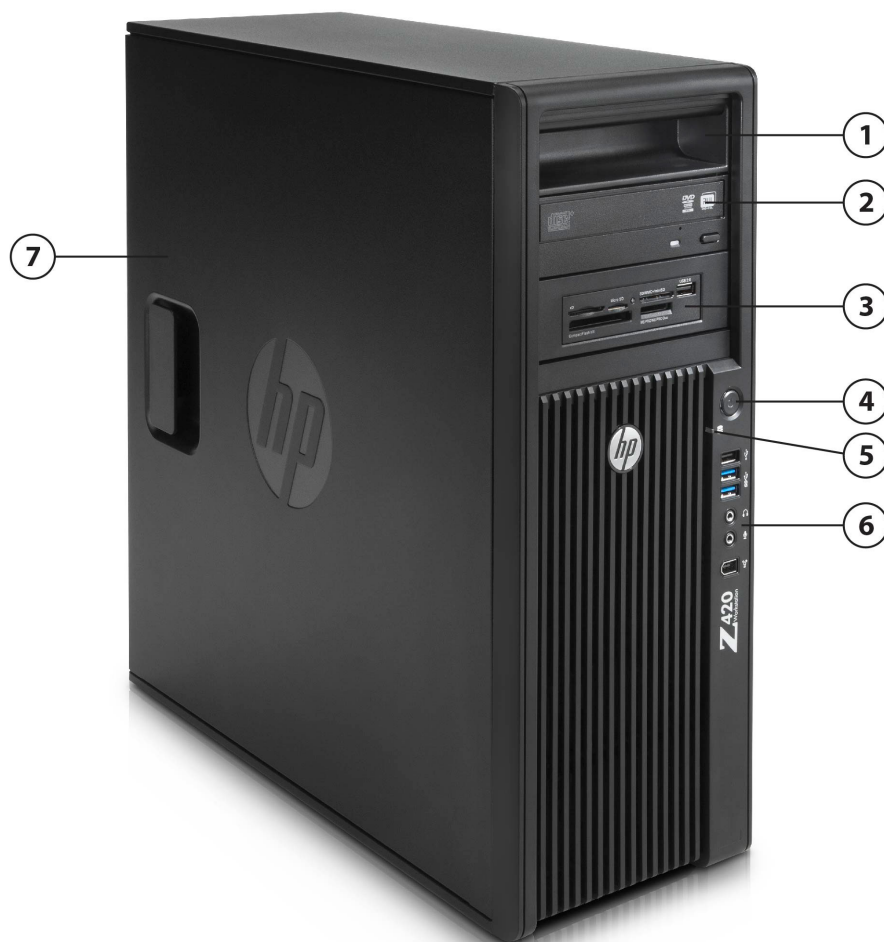

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>8. 3 External 5.25" Bays</li> <li>9. 3 Internal 3.5" Bays</li> <li>10. 8 DIMM Slots for DDR3 ECC Memory</li> <li>11. 600W, 90% Efficient Power Supply</li> <li>12. Rear I/O: Rear Power Button &amp; LED, PS/2 Ports, 1 1394a, 4 USB 2.0, 2 USB 3.0, 1 RJ-45 to Integrated GbE, 1 Audio Line In, 1 Audio Line Out, 1 Microphone</li> </ul> | <ul style="list-style-type: none"> <li>13. Intel Xeon Processors E5-1600 family (4C/6C) or E5-2600 family (8C)</li> <li>14. 2 PCIe x16 Gen3 Slots</li> <li>15. 1 PCIe x8 Gen3, 1 PCIe x8(x4) Gen2, 1 PCIe x4(x1) Gen2, 1 PCI Slot</li> <li>16. 6 Internal USB 2.0 Ports</li> <li>17. 6 SATA Ports</li> </ul> |
|---|--|

<b>Form Factor</b>	Convertible Minitower
<b>Operating Systems</b>	Preinstalled: <ul style="list-style-type: none"> <li>• Windows 7 Ultimate 64-Bit</li> </ul>

### Overview

- Windows 7 Professional 32-Bit
- Windows 7 Professional 64-Bit
- Windows 8 Pro 64-bit
- Windows 8 Simplified Chinese Edition 64-bit
- Windows 8 Pro Downgrade to Windows 7 Professional 32-bit
- Windows 8 Pro Downgrade to Windows 7 Professional 64-bit
- SUSE Linux Enterprise Desktop 11 (90 day license)
- HP Installer Kit for Linux (includes drivers for 64-bit OS versions of RHEL 5 & 6 and SUSE Linux Enterprise Desktop 11)
- Red Hat Enterprise Linux Desktop (Preinstall NOT available; 1 year paper license only)

#### Supported:

- Genuine Windows® 7 Enterprise 32/64
- Windows® XP Professional 32/64 (on select configurations)\*

Notes: \*See the "Windows XP Support Matrix for Z Workstations" at: [http://www.hp.com/support/workstation\\_manuals](http://www.hp.com/support/workstation_manuals)

Notes: For detailed OS/hardware support information for Linux, see: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

### Available Processors

Name	Cores	Clock Speed (GHz)	Cache (MB)	Memory Speed (MHz)	QPI Speed (GT/s)	Hyper-Threading	Featuring Intel® vPro™ Technology	Intel® Turbo Boost Technology <sup>1</sup>	TDP (W)
Intel® Xeon® E5-2687W processor	8	3.1	20	1600	8.0	Y	Y	3, 7	150
Intel Xeon E5-2665 processor	8	2.4	20	1600	8.0	Y	Y	4, 7	115
Intel Xeon E5-1660 processor	6	3.3	15	1600	-	Y	Y	3, 6	130
Intel Xeon E5-1650 processor	6	3.2	12	1600	-	Y	Y	3, 6	130
Intel Xeon E5-1620 processor	4	3.6	10	1600	-	Y	Y	2, 3	130
Intel Xeon E5-1607 processor	4	3.0	10	1066	-	N	Y	N/A	130
Intel Xeon E5-1603 processor	4	2.8	10	1066	-	N	Y	N/A	130

<sup>1</sup>The specifications shown in this column represent the following: (all core maximum turbo steps, one core maximum turbo steps). Turbo boost stepping occurs in 100MHz increments. Processors that do not have turbo functionality are denoted as N/A.

**NOTE:** Although the Intel Xeon E5-2600 processor family supports dual processors, the HP Z420 Workstation does not support dual processor configurations.

### Available Processor Disclaimers

Intel's numbering is not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers and applications enabled for Intel 64 architecture. Processor will not operate (including 32-bit operation) without an Intel 64 architecture-enabled BIOS. Performance will vary

### Overview

	<p>depending on your hardware and software configurations. See: <a href="http://www.intel.com/info/em64t">http://www.intel.com/info/em64t</a> for more information.</p> <p>Quad-Core, Six-Core, and Eight-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits. Check with software provider to determine suitability. Not all customers or software applications will necessarily benefit from use of these technologies.</p>
<b>Color</b>	Jack Black
<b>Convertibility</b>	Yes. 5.25" drives rotate for Minitower or Desktop orientation.
<b>Expansion Slots</b> (see system board section for more details)	<p>Slot 1 (top): PCI Express Gen2 x4(1)* Full-height, Full-length</p> <p>Slot 2: PCI Express Gen3 x 16 Full-height, Full-length (with extender)</p> <p>Slot 3: PCI Express Gen2 x 8(4)* with open-ended connector** Full-height, Full-length (with extender)</p> <p>Slot 4: PCI Express Gen3 x8 with open-ended connector** Full-height, Full-length (with extender)</p> <p>Slot 5: PCI Express Gen3 x16 Full-height, Full-length (with extender)</p> <p>Slot 6: PCI 32bit/33MHz Full-height, Full-length (with extender)</p> <p>* x&lt;number&gt; = number of lanes or size of the physical/mechanical connector. (number) = number of lanes supported electrically. Typically communicated as x# mechanical, x(#)electrical.</p> <p>** open-ended connector allows a greater bandwidth (e.g. x16) card to be installed physically into a lower bandwidth connector/slot.</p>
<b>Expansion Bays</b> (see storage section for more details)	<p>3 internal 3.5" bays (with acoustic dampening rail assemblies pre-installed)</p> <p>3 external 5.25" bays (4th HDD occupies one external bay)</p> <p>Top and Middle 5.25" bay device depth limit: 206mm (8.11 inches)</p> <p>Bottom 5.25" bay device depth limit: 173mm (6.81 inches)</p>
<b>Front I/O</b>	2 USB 3.0, 1 USB 2.0, 1 IEEE 1394a standard, 1 Headphone, 1 Microphone
<b>Internal I/O</b>	6 USB 2.0 ports available by three separate 2x5 headers. Each 2x5 header supports either one HP Internal USB Port Kit (EM165AA) or one 22-in-1 Media Card Reader.
<b>Rear I/O</b>	2 USB 3.0, 4 USB 2.0, 1 IEEE 1394a port, 2 PS/2, RJ-45 (NIC), 1 Audio Line-In, 1 Audio Line-Out, 1 Microphone. Serial supported with optional connector on PCI bracket cabled to system board connector

### Overview

<b>Interfaces Supported</b>	22-in-1 Media Card Reader (optional) 10-channel SATA interface (2 @ 6.0 Gb/s, 8 @ 3.0 Gb/s). 6 channels are eSATA configurable (2 @ 6Gb/s, 4 @ 3Gb/s) for use with eSATA CTO/AMO Kit. USB 2.0, USB 3.0, IEEE 1394a interface	
<b>Chassis Dimensions (HxWxD)</b>	Standard minitower orientation: 44.76 x 17.78 x 44.52 cm (17.6 x 7.0 x 17.5 in) Converted desktop orientation: 17.9 x 44.76 x 44.52 cm (7.0 x 17.6 x 17.5 in)	
<b>Weight</b>	Exact weights depend upon configuration. Minimum: 12.5kg (27.5 lbs) Standard: 13.2kg (29.2 lbs) Maximum: 17.7kg (39 lbs)	
<b>Temperature</b>	Operating:	5° to 35°C (40° to 95°F)
	Non-operating	-40° to 60°C (-40° to 140°F)
<b>Humidity</b>	Operating:	8% to 85% relative humidity, non-condensing
	Non-operating	8% to 90% relative humidity, non-condensing
<b>Maximum Altitude (non-pressurized)</b>	Operating:	3,048m (10,000ft)
	Non-operating	9,144m (30,000ft)
<b>Power Supply</b>	600 watts wide-ranging, active Power Factor Correction, 90% Efficient The Z420 600W power supply efficiency report can be found at this link: <a href="http://www.plugloadsolutions.com/psu_reports/HEWLETT_PACKARD_623193-001_ECOS_2619_1_600W_Report.pdf">http://www.plugloadsolutions.com/psu_reports/HEWLETT_PACKARD_623193-001_ECOS_2619_1_600W_Report.pdf</a>	
<b>Workstation ISV Certifications</b>	See the latest list of certifications at <a href="http://www.hp.com/united-states/campaigns/workstations/partnerships.html">http://www.hp.com/united-states/campaigns/workstations/partnerships.html</a>	

### Supported Components

#### Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Intel Xeon E5-2600 Series - CTO</b>				
Intel® Xeon® Processor E5-2687W 8C 3.10GHz	Y	N		See note 1
Intel® Xeon® Processor E5-2665 8C 2.40GHz	Y	N		
<b>Intel Xeon E5-1600 Series</b>				
Intel® Xeon® Processor E5-1660 6C 3.30GHz	Y	N		
Intel® Xeon® Processor E5-1650 6C 3.20GHz	Y	N		
Intel® Xeon® Processor E5-1620 4C 3.60GHz	Y	N		
Intel® Xeon® Processor E5-1607 4C 3.00GHz	Y	N		
Intel® Xeon® Processor E5-1603 4C 2.80GHz	Y	N		

**NOTE 1:** HP Liquid Cooling option available for all the above processors. HP Liquid Cooling option is required on the E5-2687W processor model.

**NOTE 2:** Intel's numbering is not a measurement of higher performance.

#### Monitors / Displays

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP DreamColor LP2480zx Professional Display				
HP ZR30w 30-inch S-IPS LCD Monitor				
HP ZR2740w 27-inch LED Backlit IPS Monitor				
HP ZR2440w 24-inch LED Backlit IPS Monitor				
HP ZR2240w 21.5-inch LED Backlit IPS Monitor				
HP ZR2040w 20-inch LED Backlit IPS Monitor				
Supported by all operating systems available from HP				
Screen size measured diagonally				

#### Hard Drives

##### Sub-Section Description/Notes

Up to (4) 3.5-inch 15K rpm SAS drives: 300, 450, 600 GB; 2.4 TB max

Up to (4) 2.5-inch 10K rpm SAS drives: 300, 600 GB; 2.4 TB max

**NOTE:** SAS controller add-in card required

**NOTE:** 4th SFF HDDs will be automatically installed into the top optical bay in a Handle/HDD carrier

Removable Boot Drive option

#### SAS Hard Drives

#### Option



### Supported Components

	Factory Configured	Option Kit	Kit Part Number	Support Notes
<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>				
600GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	VM647AA	
450GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU968AA	
300GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU967AA	
HP 600GB SAS 10K SFF HDD	Y	Y	A2Z21AA	
HP 300GB SAS 10K SFF HDD	Y	Y	A2Z20AA	

#### Sub-Section Description/Notes

Up to (4) 3.5-inch 7200 rpm SATA drives: 250, 500 GB, 1.0, 2.0, 3.0 TB; 12.0 TB max

Up to (4) 2.5-inch 10K rpm SATA drives: 250, 500 GB, 1.0 TB; 4.0 TB max

Up to (1) 2.5-inch SATA Self-Encrypting Drive (SED): 500 GB

**NOTE:** 3.0 TB drive not available as HDD1 due to GPT restrictions

Removable Boot Drive option

#### SATA Hard Drives

#### SATA (Serial ATA) Hard Drives for HP Workstations

250GB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ034AA
500GB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ036AA
1TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ037AA
2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	QB576AA
3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	QF298AA
250GB SATA 10K rpm SFF HDD	Y	Y	B8X18AA
500GB SATA 10K rpm SFF HDD	Y	Y	B8X19AA
1TB SATA 10K rpm SFF HDD	Y	Y	B8X20AA
500GB SATA 7.2K SED SFF HDD	Y	N	

#### Sub-Section Description/Notes

Up to (4) 2.5-inch SATA Solid State Drives: (Micron 6Gb/s) 128, 256 GB; Up to (2) 2.5-inch SATA Solid State Drives (Micron 6Gb/s) 512 GB; 1.5TB max

Up to (1) 2.5-inch SATA Self-Encrypting Solid State Drive (SED SSD): (Micron 6Gb/s) 256 GB

**NOTE:** 4th SSDs will be automatically installed into the top optical bay in a Handle/HDD carrier

#### SATA Solid State Drives

#### HP Solid State Drives (SSDs) for Workstations

HP 128GB SATA 6Gb/s SSD	Y	Y	A3D25AA
HP 256GB SATA 6Gb/s SSD	Y	Y	A3D26AA
HP 512GB SATA 6Gb/s SSD	Y	Y	D8F30AA
HP 256GB SATA 6Gb/s SED SSD	Y	N	

For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion bytes. Actual formatted capacity is less.

### Supported Components

#### Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Integrated SATA 6.0 Gb/s Controller</b>				
Integrated SATA 6.0 Gb/s Controller	Y	N		Two ports
<b>Integrated SATA 3.0 Gb/s Controller</b>				
Integrated SATA 3.0 Gb/s Controller	Y	N		Four ports
<b>Factory integrated RAID on motherboard for SATA drives</b>				
RAID 0 Configuration - Striped Array	Y	N		Note 1
RAID 0 Data Configuration -- Boot/OS Drive + 2 Drive Striped Array	Y	N		Note 1
RAID 1 Configuration - Mirrored Array	Y	N		Note 1
RAID 10 Configuration - Striped/Mirrored Array	Y	N		Note 1
<b>LSI 9212 4-Port SAS 6Gb/s RAID Card</b>				
LSI 9212 4-Port SAS 6Gb/s RAID Card	Y	Y	XP310AA	Note 2
<b>LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit</b>				
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card	N	Y	WE465AA	Note 2
Optional: LSI iBBU08 Battery Backup Unit for LSI 9260-8i	N	Y	LA783AA	

SATA hardware RAID is supported on Linux systems that have support for the Intel RSTe technology. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix) for RAID capabilities with Linux.

All drives must be identical in type and capacity.  
RAID arrays greater than 2 TB are fully supported.

**NOTE 1:** Requires hard drives with identical speed, capacity, and interface. Specific user-configured hardware SAS RAID configurations are supported on this Linux system. For details, please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

**NOTE 2:** Specific user-configured hardware SAS RAID configurations are supported on this Linux system. IS:

Striping of 2 or more HDDs into a single logical volume

IM: Mirroring of 2 HDDs into a single logical volume

IME: Mirroring of 3 or more HDDs into a single logical volume.

For details, please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)



### Supported Components

#### Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported # of cards	Mixed?
<b>Professional 2D</b>						
NVIDIA NVS300 512MB Graphics	Y	Y	XP612AA	Note 1	3	NO
NVIDIA NVS 310 512MB Graphics	Y	Y	A7U59AA	Note 1	3	YES
NVIDIA NVS 510 2GB Graphics	Y	Y	C2J98AA	Note 2	2	YES
NVIDIA NVS 315 1GB Graphics	Y	Y	E1U66AA	Note 1	3	NO
<b>Entry 3D</b>						
NVIDIA Quadro 410 512MB Graphics	Y	Y	A7U60AA		2	NO
NVIDIA Quadro K600 1GB Graphics	Y	Y	C2J92AA		2	NO
AMD FirePro V3900 1GB Graphics	Y	Y	A6R69AA		2	NO
<b>Mid-range 3D</b>						
NVIDIA Quadro K2000 2GB Graphics	Y	Y	C2J93AA		2	NO
<b>High End 3D</b>						
AMD FirePro W7000 4GB Graphics	Y	Y	C2K00AA	Note 3	1	NO
NVIDIA Quadro K4000 3GB Graphics	Y	Y	C2J94AA		1	NO
NVIDIA Quadro K5000 4GB Graphics	Y	Y	C2J95AA	Note 3	1	NO
NVIDIA Quadro 6000 6GB Graphics	N	Y	WS097AA	Note 3	1	NO

**NOTE 1:** When configuring with a 3rd NVS 300, 310, or 315--the configuration requires the Z4 Fan and Front Card Guide Kit, which is available both CTO (QE150AV) and AMO (A2Z46AA).

**NOTE 2:** If 1st graphics card is NVS 510 then 2nd graphics card must be NVS 510 or NVS 310.

**NOTE 3:** Configuration requires the Z4 Fan and Front Card Guide Kit, which is available both CTO (QE150AV) and AMO (A2Z46AA).

#### High Performance GPU Computing

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
NVIDIA Tesla C2075 Compute Processor	Y	Y	QB035AA	Notes 1, 2
NVIDIA Tesla K20c Compute Processor	Y	Y	C2J97AA	Notes 1, 2

**NOTE 1:** This device does not have an operational graphics output.

Tesla C2075 configurations require the addition of either NVIDIA Quadro 600 1st graphics or NVIDIA Quadro 2000 1st graphics.

Tesla K20c configurations require the addition of either NVIDIA Quadro K600 1st graphics or NVIDIA Quadro K2000 1st graphics.

**NOTE 2:** All Tesla configurations require the Z4 Fan and Front Card Guide Kit, which is available both CTO (QE150AV) and AMO (A2Z46AA).

### Supported Components

Memory	CTO	Option Kit Part Number	Support Notes
	<b>DDR3-1600 ECC Unbuffered DIMMs - CTO</b>		
	8GB DDR3-1600 ECC Unbuffered RAM		
	4GB DDR3-1600 ECC Unbuffered RAM		
	2GB DDR3-1600 ECC Unbuffered RAM		
	<b>Sub-Section Description/Notes</b>		
	For details on the supported memory configurations on the HP Z420 Workstation, please refer to the System Technical Specifications - System Board section of this document.		
	Each processor supports up to 4 channels of DDR3 memory. To realize full performance at least 1 DIMM must be inserted into each channel.		
	The CPUs determine the speed at which the memory is clocked. If a 1066MHz capable CPU is used in the system, the maximum speed the memory will run at is 1066MHz regardless of the specified speed of the memory.		
	<b>AMO</b>		
	<b>DDR3-1600 ECC Unbuffered DIMMs - AMO</b>		
	HP 8GB (1x8GB) DDR3-1600 ECC RAM	A2Z50AA	
	HP 4GB (1x4GB) DDR3-1600 ECC RAM	A2Z48AA	
	HP 2GB (1x2GB) DDR3-1600 ECC RAM	A2Z47AA	
	<b>NOTE:</b> Only unbuffered DDR3 DIMMs are supported.		

### Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel/Realtek HD ALC262 Audio	Y	N		
HP Thin USB Powered Speakers	Y	Y	KK912AA	
Creative Recon3D PCIe Audio Card	Y	Y	B0U68AA	

### Supported Components

#### Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 16X DVD-ROM SATA Drive (non Lightscribe)	Y	Y	AR629AA	Note 1
HP 16X DVD+/-RW SuperMulti SATA Drive (non-Lightscribe)	Y	Y	QS208AA	
HP Blu-ray Writer	Y	Y	AR482AA	Note 2
HP 22-in-1 Media Card Reader Kit (Workstations)	Y	Y	NK361AA	
HP CMT Handle in Top Optical Bay	Y	Y	A9A48AA	Note 3

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

**NOTE 1:** Not supported as a 2nd drive option.

**NOTE 2:** Cannot be ordered in combination with another Blu-ray Writer.

**NOTE 3:** The HP CMT Handle in Top Optical Bay kit, which contains two SFF internal drive bays, is installed automatically when customers order a 4th SFF hard drive.

#### Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP IEEE 1394b FireWire PCIe Card	Y	Y	NK653AA	

### Supported Components

#### Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel 82579LM PCIe GbE Controller	Y	N		
Intel Gigabit CT Desktop NIC	Y	Y	FH969AA	Note 1
Broadcom NetXtreme Gigabit Ethernet Plus NIC (PCIe)	Y	Y	FS215AA	Notes 1 & 2
HP 361T PCIe Dual Port Gigabit NIC	N	Y	C3N37AA	Note 1
HP Wireless NIC 802.11b/g/n PCIe Card	N	Y	FH971AA	
HP X520 10GbE Dual Port Adapter	Y	Y	C3N52AA	
HP 10GbE SFP+ SR Transceiver	Y	Y	C3N53AA	

**NOTE 1:** Gigabit Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

**NOTE 2:** This is a PCI Express card based on the Broadcom 5761 chip. This card does not support DASH 1.1 manageability on this platform.

#### Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Solenoid Hood Lock & Hood Sensor	Y	Y	DE618A	
HP Business PC Security Lock Kit	N	Y	PV606AA	
HP xw4/Z2/Z4 Depth Adjustable Fixed Rail Rack Kit	N	Y	WH340AA	

#### Input Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP PS/2 Standard Keyboard	Y	Y	DT527A	
HP USB Standard Keyboard	Y	Y	DT528A	
HP PS/2 Optical Scroll Mouse	Y	Y	EY703AA	
HP USB 2-Button Optical Scroll Mouse	Y	Y	DC172B	
HP USB Laser Mouse	Y	Y	GW405AA	
HP USB Optical 3-Button Mouse	Y	Y	DY651A	
HP USB Smart Card Keyboard	N	Y	ED707AA	
HP 2.4GHz Wireless Keyboard & Mouse	N	Y	NB896AA	
HP USB Optical 3-Button 2.9M OEM Mouse	N	Y	ET424AA	
HP SpaceExplorer 3D USB Controller	N	Y	RY429AA	
HP SpacePilot 3D USB Intelligent Controller	N	Y	WH343AA	
HP PS/2 Keyboard	Y	Y	QY774AA	
HP PS/2 Mouse	Y	Y	QY775AA	
HP USB Keyboard	Y	Y	QY776AA	
HP USB Optical Mouse	Y	Y	QY777AA	

### Supported Components

HP USB 1000dpi Laser Mouse	Y	Y	QY778AA
Product numbers QY774AA-QY778AA represent the new 2012 products with the updated product design. The previous models will be phased out over time			

### Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Z420 Front Memory Duct	Y	Y	C4J29AA	Note 1
HP Z4 Fan and Front Card Guide Kit	Y	Y	A2Z46AA	
HP Serial Port Adapter	Y	Y	PA716A	
HP eSATA PCI Cable Kit	Y	Y	GM110AA	
HP Internal USB Port Kit	N	Y	EM165AA	Note 2
HP Optical Bay HDD Mounting Bracket	N	Y	NQ099AA	
HP Power Cord Kit	N	Y	DM293A	
Configure minitower in desktop orientation	Y	N		
HP Workstation Mouse Pad	Y	N		Japan only
HP Energy Star Enabled Configuration	Y	N		

**Note 1:** The HP Z420 Front Memory Duct is available to add to any configuration for improved system cooling, but is required for 4 x 8GB and 8 x 8GB memory configurations and for configurations including the HP Liquid Cooling Solution thermal kit.

**Note 2:** The HP Internal USB Port kit has a single USB 2.0 type A connector.

### Software

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Performance Advisor	Y	Y		Note 1
HP Remote Graphics Software (RGS) 6.0	Y	N		Note 2
HP ProtectTools Security	Y	N		Note 3
MS Office Home & Business 2013	Y	N		Note 4
HP Power Assistant	Y	N		
PDF Complete - Corporate Edition	Y	N		
Cyberlink Media Suite & PowerDVD	Y	N		Media playback/authoring software

**NOTE 1:** Available as a free download here: [www.hp.com/go/performanceadvisor](http://www.hp.com/go/performanceadvisor)

**NOTE 2:** Supports both 32 and 64 bit versions of Windows 7 Professional and Enterprise, Windows XP Professional and Enterprise, and RHEL V6

**NOTE 3:** Must select as a Configure to Order option. Delivered as a "Drop in the Box" CD

**NOTE 4:** Must select as a Configure to Order option

### Supported Components

#### Operating Systems

#### Support Notes

Windows 8 Pro 64-bit

Windows 8 Simplified Chinese Edition 64-bit

Windows 8 Pro Downgrade to Windows 7 Professional 32-bit

Windows 8 Pro Downgrade to Windows 7 Professional 64-bit

Genuine Windows® 7 Ultimate 64-bit

Note 1

Genuine Windows® 7 Professional 32-bit

Note 1

Genuine Windows® 7 Professional 64-bit

Note 1

SUSE Linux Enterprise Desktop 11

HP Linux Installer Kit

Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr)

Note 2

**NOTE 1:** See <http://www.microsoft.com/windows/windows-7/> for support details.

**NOTE 2:** This second OS must be ordered with the HP Linux Installer Kit as the first OS.

### System Technical Specifications

<b>System Board</b>									
<b>System Board Form Factor</b>	ATX 243.84 x 304.8 mm (9.6 x 12 inches)								
<b>Processor Socket</b>	Single LGA2011								
<b>CPU Bus Speed</b>	QPI: Up to 8.0GT/sec								
<b>Chipset</b>	Intel® C602 Chipset								
<b>Super I/O Controller</b>	Nuvoton NPCD379H (SIO-12)								
<b>Memory Expansion Slots</b>	8 DDR3 memory slots								
<b>Memory Type Supported</b>	DDR3, UDIMM (Unbuffered), ECC								
<b>Memory Modes</b>	Channel Interleaved								
<b>Memory Speed Supported</b>	1066MHz, 1333MHz, and 1600MHz DDR3								
<b>Memory Protection</b>	ECC available on data, parity on address and command								
<b>Memory</b>									
<b>Memory Configuration Table</b>	Please refer to the table below for details on how supported memory configurations are installed in your system.								
		Front Slots				Rear Slots			
Capacity (GB)	Type	DIMM 1	DIMM 2	DIMM 3	DIMM 4	DIMM 5	DIMM 6	DIMM 7	DIMM 8
2	UDIMM	2GB							
4	UDIMM	2GB							2GB
6	UDIMM	2GB		2GB					2GB
8	UDIMM	2GB		2GB			2GB		2GB
8	UDIMM	4GB							4GB
12	UDIMM	4GB		4GB					4GB
16	UDIMM	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB
16	UDIMM	4GB		4GB			4GB		4GB
32	UDIMM	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB
32	UDIMM	8GB		8GB			8GB		8GB
64	UDIMM	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB
<b>Slot Load Order</b>		<b>1</b>	<b>5</b>	<b>3</b>	<b>7</b>	<b>8</b>	<b>4</b>	<b>6</b>	<b>2</b>
<a href="#">For a detailed diagram, please refer to the label located on the inside of the system side panel.</a>									
<b>Maximum Memory</b>	Supports up to 64GB								
<b>Memory Configuration (Supported)</b>	Only ECC DIMMs are supported.								
<b>Note on Maximum Memory</b>	*Maximum memory capacities assume 64-bit operating systems such as Genuine Windows® 7 Ultimate 64-bit or Genuine Windows® 7 Professional 64-bit. Genuine Windows® 7 Professional 32-bit supports up to 4GB. Linux 32-bit supports up to 8GB.								

### System Technical Specifications

<b>PCI Express Connectors</b>	2 x16 PCIe Gen3 1 x8 PCIe Gen3 1 x8 PCIe (x4) Gen2 1 x4 PCIe (x1) Gen2	
<b>PCI Connectors (5.0V)</b>	1 PCI	
<b>Supported Drive Interfaces</b>	<b>SATA</b>	Integrated 10-channel SATA interface (2@6Gb/s, 8@3Gb/s). Supports RAID 0, 1, 5, 10 and NCQ. Factory integrated RAID is Microsoft Windows only.
	<b>Integrated RAID</b>	<b>NOTE:</b> Requires identical hard drives (speeds, capacity, interface)
<b>Integrated Graphics</b>	No	
<b>Network Controller</b>	Integrated Intel 82579 Gbit LAN  Supports the following management functionalities: Intel AMT7.0, TXT, DASH 1.1, WOL, and PXE 2.1	
<b>External SATA (eSATA)</b>	6 ports are eSATA configurable with optional eSATA After-Market Option cable kit.	
<b>IDE connector</b>	No	
<b>Floppy connector</b>	No	
<b>Serial</b>	1 internal header	
<b>2nd Serial</b>	No	
<b>Parallel</b>	No	
<b>AUX IN (audio)</b>	No	
<b>IEEE 1394 Connector(s)</b>	<b>Front</b>	1 IEEE 1394a standard
	<b>Rear</b>	1 IEEE 1394a standard; 2 IEEE 1394b (requires optional PCIe card)
	<b>Internal</b>	No
<b>USB Connector(s)</b>	<b>Front</b>	2 USB 3.0 1 USB 2.0
	<b>Rear</b>	2 USB 3.0 4 USB 2.0
	<b>Internal</b>	6 USB 2.0 ports available by three separate 2x5 headers: each header supports either a HP Internal USB Port Kit or USB Media Card Reader, one on each header. Each Internal Port Kit has two USB 2.0 connectors.
<b>HD Integrated Audio</b>	Realtek ALC262	
<b>Flash ROM</b>	Yes	
<b>CPU Fan Header</b>	Yes	
<b>Chassis Fan Header</b>	1 Rear System Chassis Fan Header	
<b>Front PCI Fan Header</b>	Yes	
<b>Front Control Panel/Speaker Header</b>	Yes	
<b>CMOS Battery Holder - Lithium</b>	Yes	
<b>Integrated Trusted Platform Module</b>	Integrated TPM 1.2	
<b>Power Supply Headers</b>	Yes	



### System Technical Specifications

<b>Power Switch, Power LED &amp; Hard Drive LED Header</b>	Yes
<b>Clear Password Jumper</b>	Yes
<b>Serial Port</b>	1 internal header
<b>Parallel Port</b>	No
<b>Keyboard/Mouse</b>	USB or PS/2

### Power Supply

<b>Power Supply</b>	<b>600W 90% Efficient, Custom PSU (Wide Ranging, Active PFC)</b>	
<b>Operating Voltage Range</b>	<b>90–269 VAC</b>	
<b>Rated Voltage Range</b>	<b>100–240 V</b>	<b>118 V</b>
<b>Rated Line Frequency</b>	<b>50–60 Hz</b>	<b>400 Hz</b>
<b>Operating Line Frequency Range</b>	<b>47–66 Hz</b>	<b>393–407 Hz</b>
<b>Rated Input Current</b>	<b>100–240 V @ 8.0 A</b>	<b>118 V @ 8.0 A</b>
<b>Heat Dissipation</b>	<b>Typical: 1365btu/hr (344 kg-cal/hr) Maximum: 2354btu/hr (593 kg-cal/hr)</b>	
<b>Power Supply Fan</b>	<b>92x25 mm variable speed</b>	
<b>ENERGY STAR Qualified (Configuration dependent)</b>	<b>Yes</b>	
<b>80 PLUS® Compliant</b>	<b>90% Efficient</b>	
	<b>The Z420 600W power supply efficiency report can be found at this link:</b> <a href="http://www.pluginloadsolutions.com/psu_reports/HEWLETT_PACKARD_623193-001_ECOS_2619_1_600W_Report.pdf">http://www.pluginloadsolutions.com/psu_reports/HEWLETT_PACKARD_623193-001_ECOS_2619_1_600W_Report.pdf</a>	
<b>FEMP Standby Power Compliant @115V (Wake-on LAN disabled) (&lt;2W in S5 - Power Off)</b>	<b>Yes</b>	
<b>EuP Compliant @ 230V (&lt;1 W in S5 - Power Off)</b>	<b>Yes</b>	
<b>CECP Compliant @ 220V (&lt;4W in S3 - Suspend to RAM)</b>	<b>Yes; Configuration dependent</b>	
<b>Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC) measured at 115V.</b>	<b>&lt;10W</b>	
<b>Built-in Self Test LED</b>	<b>Yes</b>	
<b>Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)</b>	<b>Yes</b>	

<b>Hood Lock Header</b>	<b>Yes</b>
<b>Hood Sensor Header</b>	<b>Yes</b>
<b>Memory Fan</b>	<b>1 Memory Fan Header</b>

### System Technical Specifications

System Configurations							
<b>Example Configuration #1 (ENERGY STAR QUALIFIED)</b>	Processor Info	1x Intel Xeon E5-1603 (Quad-Core)					
	Memory Info	1x 2GB DDR3 1600 (UDIMM)					
	Graphics Info	1x NVIDIA NVS 300					
	Disks/Optical/Floppy	1x 250GB SATA 7200/1x 16X DVD-ROM SATA					
	PSU	600W 90% Custom PSU					
	Other	-					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	50.0 W		48.9 W		49.5 W	
	Windows Busy Typ (S0)	118 W		115 W		118 W	
	Windows Busy Max (S0)	130 W		127 W		129 W	
	Sleep (S3)	3.56 W	3.42 W	3.782 W	3.66 W	3.53 W	3.41 W
	Off (S5)	1.34 W	1.20 W	1.58 W	1.45 W	1.31 W	1.18 W
	Zero Power Mode (ErP)	0.20 W		0.43 W		0.17 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	171 btu/hr		167 btu/hr		169 btu/hr	
	Windows Busy Typ (S0)	403 btu/hr		392 btu/hr		403 btu/hr	
	Windows Busy Max (S0)	444 btu/hr		433 btu/hr		440 btu/hr	
	Sleep (S3)	12.2 btu/hr	11.7 btu/hr	12.9 btu/hr	12.5 btu/hr	12.0 btu/hr	11.6 btu/hr
	Off (S5)	4.57 btu/hr	4.09 btu/hr	5.39 btu/hr	4.95 btu/hr	4.47 btu/hr	4.03 btu/hr
	Zero Power Mode (ErP)	0.68 btu/hr		1.47 btu/hr		0.58 btu/hr	

<b>Example Configuration #2 (ENERGY STAR QUALIFIED)</b>	Processor Info	1x Intel Xeon E5-1650 (Six-Core)					
	Memory Info	2x 4GB DDR3 1600 (UDIMM)					
	Graphics Info	1x NVIDIA Quadro 2000					
	Disks/Optical/Floppy	2x 500GB SATA 7200/1x 16X DVD+-RW SuperMulti SATA					
	Power Supply	600W 90% Custom PSU					
	Other	-					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	73.9 W		72.9 W		73.8 W	
	Windows Busy Typ (S0)	272 W		270 W		277 W	
	Windows Busy Max (S0)	298 W		294 W		300 W	
	Sleep (S3)	4.31 W	4.18 W	4.53 W	4.41 W	4.27 W	4.17 W
	Off (S5)	1.35 W	1.20 W	1.59 W	1.44 W	1.32 W	1.17 W
	Zero Power Mode (ErP)	0.21 W		0.43 W		0.17 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	252 btu/hr		249 btu/hr		252 btu/hr	
	Windows Busy Typ (S0)	928 btu/hr		921 btu/hr		945 btu/hr	
	Windows Busy Max (S0)	1017 btu/hr		1003 btu/hr		1024 btu/hr	
	Sleep (S3)	14.7 btu/hr	14.3 btu/hr	15.5 btu/hr	15.1 btu/hr	14.6 btu/hr	14.2 btu/hr
	Off (S5)	4.61 btu/hr	4.09 btu/hr	5.43 btu/hr	4.91 btu/hr	4.50 btu/hr	3.99 btu/hr

### System Technical Specifications

	Zero Power Mode (ErP)	0.72 btu/hr	1.47 btu/hr	0.58 btu/hr
--	-----------------------	-------------	-------------	-------------

<b>Example Configuration #3</b>	Processor Info	1x Intel Xeon E5-2665 (Eight-Core)					
	Memory Info	8x 4GB DDR3 1600 (UDIMM)					
	Graphics Info	1x NVIDIA Quadro 5000					
	Disks/Optical/Floppy	4x 600GB SAS 15K/1x 16X DVD+-RW SuperMulti SATA					
	Power Supply	600W 90% Custom PSU					
	Other	LSI 9212 SAS Card					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	152 W		151 W		154 W	
	Windows Busy Typ (S0)	347 W		346 W		354 W	
	Windows Busy Max (S0)	421 W		430 W		432 W	
	Sleep (S3)	6.77 W	6.68 W	6.96 W	6.82 W	6.79 W	6.63 W
	Off (S5)	1.33 W	1.20 W	1.55 W	1.42 W	1.30 W	1.18 W
	Zero Power Mode (ErP)	0.19 W		0.41 W		0.16 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	519 btu/hr		515 btu/hr		525 btu/hr	
	Windows Busy Typ (S0)	1184 btu/hr		1181 btu/hr		1208 btu/hr	
	Windows Busy Max (S0)	1437 btu/hr		1467 btu/hr		1474 btu/hr	
	Sleep (S3)	23.1 btu/hr	23.8 btu/hr	23.8 btu/hr	23.3 btu/hr	23.2 btu/hr	22.6 btu/hr
	Off (S5)	4.54 btu/hr	4.09 btu/hr	5.29 btu/hr	4.85 btu/hr	4.44 btu/hr	4.03 btu/hr
	Zero Power Mode (ErP)	0.65 btu/hr		1.40 btu/hr		0.55 btu/hr	

### Declared Noise Emissions (Entry-level and High-end configurations)

<b>System Configuration (Entry level)</b>	<b>Processor Info</b>	Intel Xeon E5-2665 2.40 GHz
	<b>Memory Info</b>	4 - DDR3 2 GB 1600 MHz UDIMM
	<b>Graphics Info</b>	NVIDIA Q400
	<b>Disks/Optical/Floppy</b>	Single 500 GB 7200 RPM SATA DVD-RW

<b>Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)</b>		<b>Sound Power (LWAd, bels)</b>	<b>Deskside Sound Pressure (LpAm, decibels)</b>
	Idle	3.5	18
	SATA Hard drive Operating (random reads)	3.6	19
	DVD-ROM Operating (sequential reads)	5.2	37

### System Technical Specifications

<b>System Configuration (High-end)</b>	<b>Processor Info</b>	Intel Xeon E5-1660 3.30 GHz
	<b>Memory Info</b>	8 - 4 GB DDR3 1600 MHz UDIMM
	<b>Graphics Info</b>	NVIDIA Q4000
	<b>Disks/Optical/Floppy</b>	2 - 600 GB 15K RPM SAS 3.5" DVD-RW

<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)		<b>Sound Power (LWAd, bels)</b>	<b>Deskside Sound Pressure (LpAm, decibels)</b>
	Idle	4.9	32
	SATA Hard drive Operating (random reads)	5.0	34
	DVD-ROM Operating (sequential reads)	5.3	41

<b>Environmental Requirements</b>	<b>Temperature</b>	Operating: 5° to 35° C (40° to 95° F) Non-operating: -40° to 60° C (-40° to 140° F)
	<b>Humidity</b>	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	<b>Maximum Altitude</b>	Operating: 3,000 m (10,000 feet) Non-operating: 9,100 m (30,000 feet)
	<b>Dynamic (new)</b>	Shock Operating: ½-sine: 40g, 2-3ms (~62 cm/sec) Non-operating: ½-sine: 160 cm/s, 2-3ms (~105g) square: 422 cm/s, 20g <b>NOTE:</b> Values represent individual shock events and do not indicate repetitive shock events.  Vibration Operating random: 0.5g (rms), 5-300 Hz, up to 0.0025g <sup>2</sup> /Hz Non-operating random: 2.0g (rms), 5-500 Hz, up to 0.0150 g <sup>2</sup> /Hz <b>NOTE:</b> Values do not indicate continuous vibration.
	<b>Cooling</b>	Above 1524 m (5,000 ft) altitude, maximum operating temperature is de-rated by 1° C (1.8° F) per 305 m (1,000 ft) elevation increase

<b>Physical Security and Serviceability</b>	
<b>Access Panel</b>	Tool-less Includes system board and memory information.
<b>Optical Drive</b>	Tool-less
<b>Hard Drives</b>	Tool-less
<b>Expansion Cards</b>	Tool-less
<b>Processor Socket</b>	Tool-less
<b>Green User Touch Points</b>	Yes, on primary serviceable components.

### System Technical Specifications

<b>Color-coordinated Cables and Connectors</b>	Yes
<b>Memory</b>	Tool-less
<b>System Board</b>	Screw-In
<b>Dual Color Power and HD LED on Front of Computer</b>	Yes
<b>Configuration Record SW</b>	Yes
<b>Over-Temp Warning on Screen</b>	Yes, at POST screen on reboot
<b>Restore CD/DVD Set</b>	Restores the computer to its original factory shipping image; can be obtained via HP Support.
<b>Dual Function Front Power Switch</b>	Yes, causes a fail-safe power off when held for 4 seconds
<b>Padlock Support</b>	Yes (optional): Locks side cover and secures chassis from theft 5.56 mm (0.2188 in) diameter padlock loop at rear of system
<b>Cable Lock Support</b>	Yes, Kensington Cable Lock (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system
<b>Universal Chassis Clamp Lock Support</b>	Yes (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system
<b>Solenoid Lock and Hood Sensor</b>	Yes (optional) The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed
<b>Rear Port Control Cover</b>	Yes (optional);locks rear IO cables to prevent cable theft
<b>Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control</b>	Yes, enables or disables serial, USB, audio, and network ports
<b>Removable Media Write/Boot Control</b>	Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media)
<b>Power-On Password</b>	Yes, prevents an unauthorized person from booting up the workstation
<b>Setup Password</b>	Yes, prevents an unauthorized person from changing the workstation configuration
<b>3.3V Aux Power LED on System PCA</b>	Yes
<b>NIC LEDs (integrated) (Green &amp; Amber)</b>	Yes
<b>CPUs and Heatsinks</b>	A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less
<b>Power Supply Diagnostic LED</b>	Yes
<b>Front Power Button</b>	Yes, ACPI multi-function
<b>Rear Power Button</b>	Yes
<b>Front Power LED</b>	Yes, blue (normal), red (fault)

### System Technical Specifications

<b>Front Hard Drive Activity LED</b>	Yes, green
<b>Front ODD Activity LED</b>	Yes
<b>Internal Speaker</b>	Yes
<b>System/Emergency ROM Flash Recovery</b>	Recovers corrupted system BIOS.
<b>Cooling Solutions</b>	Air cooled forced convection, liquid cooling (optional)
<b>Power Supply Fans</b>	92 mm x 92 mm x 25 mm 4-wire (non-serviceable)
<b>CPU Heatsink Fan</b>	92 x 25 mm 5-wire PWM
<b>Chassis Fan</b>	92 mm x 92mm x 25 mm 4-wire PWM
<b>Memory Heatsink Fan</b>	Yes, rear memory
<b>HP Advanced System Diagnostics Offline Edition</b>	<p>HP Vision Diagnostics Offline Edition</p> <p>The diagnostics utility enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to:</p> <ul style="list-style-type: none"> <li>• Run diagnostics</li> <li>• View the hardware configuration of the system</li> </ul> <p>Key features and benefits</p> <p>HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest Vision into potential system issues, is the configuration of the system. Vision Diagnostics helps provide higher system availability. Typical uses of the Vision Diagnostics are:</p> <ul style="list-style-type: none"> <li>• Testing and diagnosing apparent hardware failures</li> <li>• Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance</li> <li>• Sending configuration information to another location for more in-depth analysis</li> </ul>
<b>Access Panel Key Lock</b>	No
<b>ACPI-Ready Hardware</b>	<p>Advanced Configuration and Power Management Interface (ACPI).</p> <ul style="list-style-type: none"> <li>• Allows the system to wake from a low power mode.</li> <li>• Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul>
<b>Trusted Platform Module Chip with optional ProtectTools Software</b>	Yes, Infineon SLB9635TT1.2
<b>Integrated Chassis Handles</b>	<p>No</p> <p>Optional Handle in Top Optical Bay kit</p>
<b>Power Supply</b>	Requires T15 Torx or flat blade screwdriver
<b>PCI Card Retention</b>	Yes, rear (all), middle (optional), front (full-length cards with extender, used in with the front card guide and fan holder)

### System Technical Specifications

<b>Flash ROM</b>	Yes
<b>Diagnostic Power Switch LED on board</b>	Yes
<b>Clear Password Jumper</b>	Yes
<b>Clear CMOS Button</b>	Yes
<b>CMOS Battery Holder</b>	Yes
<b>DIMM Connectors</b>	Yes
<b>HP ProtectTools Security Manager</b>	Yes - Not supported on Linux

<b>BIOS</b>	
<b>BIOS 32-bit Services</b>	Standard BIOS 32-bit Service Directory Proposal v0.4
<b>PCI 3.0 Support</b>	Full BIOS support for PCI Express through industry standard interfaces.
<b>ATAPI</b>	ATAPI Removable Media Device BIOS Specification Version 1.0.
<b>BBS</b>	BIOS Boot Specification v1.01.
<b>WMI Support</b>	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications
<b>BIOS Boot Spec 1.01+</b>	Provides more control over how and from what devices the workstation will boot.
<b>BIOS Power On</b>	Users can define a specific date and time for the system to power on.
<b>ROM Based Computer Setup Utility (F10)</b>	Review and customize system configuration settings controlled by the BIOS.
<b>System/Emergency ROM Flash Recovery with Video</b>	Recovers system BIOS in corrupted Flash ROM
<b>Replicated Setup</b>	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
<b>SMBIOS</b>	System Management BIOS 2.7, for system management information.
<b>Boot Control</b>	Disables the ability to boot from removable media on supported devices.
<b>Memory Change Alert</b>	Alerts management console if memory is removed or changed.
<b>Thermal Alert</b>	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>● NORMAL - normal temperature ranges.</li> <li>● ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.</li> <li>● SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.</li> </ul>
<b>Remote ROM Flash</b>	Provides secure, fail-safe ROM image management from a central network console.

### System Technical Specifications

<b>ACPI (Advanced Configuration and Power Management Interface)</b>	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems.
<b>Ownership Tag</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen.
<b>Remote Wakeup/ Remote Shutdown</b>	System administrators can power on, restart, and power off a client computer from a remote location.
<b>Instantly Available PC (Suspend to RAM - ACPI sleep state S3)</b>	Allows for very low power consumption with quick resume time.
<b>Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)</b>	Allows a new or existing system to boot over the network and download software, including the operating system.
<b>ROM revision levels</b>	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
<b>System board revision level</b>	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.
<b>Start-up Diagnostics (Power-on Self-Test)</b>	Assesses system health at boot time with selectable levels of testing
<b>Auto Setup when new hardware installed</b>	System automatically detects addition of new hardware.
<b>Keyboard-less Operation</b>	The system can be booted without a keyboard.
<b>Localized ROM Setup</b>	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings.
<b>Asset Tag</b>	The user or MIS to set a unique tag string in non-volatile memory.
<b>Per-slot Control</b>	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually.
<b>Adaptive Cooling</b>	Control parameters are set according to detected hardware configuration for optimal acoustics.
<b>Pre-boot Diagnostics</b>	(Pre-video) critical errors are reported via beeps and blinks on the power LED
<b>Industry Standard Specification Support</b>	
<b>UEFI Specification Revision</b>	2.3.1
<b>Industry Standard</b>	Revision Supported by the BIOS
<b>ACPI</b>	Advanced Configuration and Power Management Interface, Version 2.0c
<b>ATA (IDE)</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
<b>CD Boot</b>	"El Torito" Bootable CD-ROM Format Specification Version 1.0
<b>EDD</b>	<ul style="list-style-type: none"> <li>Enhanced Disk Drive Specification Version 1.1</li> <li>BIOS Enhanced Disk Drive Specification Version 3.0</li> </ul>
<b>EHCI</b>	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0



### System Technical Specifications

<b>PCI</b>	PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
<b>PCI Express</b>	PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0
<b>PMM</b>	POST Memory Manager Specification, Version 1.01
<b>SATA</b>	<ul style="list-style-type: none"> <li>Serial ATA Specification, Revision 1.0a</li> <li>Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5</li> <li>Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0</li> </ul>
<b>SPD</b>	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
<b>TPM</b>	Trusted Computing Group TPM Specification Version 1.2
<b>UHCI</b>	Universal Host Controller Interface Design Guide, Revision 1.1
<b>USB</b>	Universal Serial Bus Revision 1.1 Specification  Universal Serial Bus Revision 2.0 Specification  Universal Serial Bus Revision 3.0 Specification
<b>SMBIOS</b>	System Management BIOS Reference Specification, Version 2.7

### Social and Environmental Responsibility

<b>Eco-Label Certifications &amp; Declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>ENERGY STAR® (energy-saving features available on selected configurations-Windows only)</li> <li>US Federal Energy Management Program (FEMP)</li> <li>China Energy Conservation Program</li> <li>IT ECO declaration</li> </ul>
<b>Batteries</b>	<p>The battery in this product complies with EU Directive 2006/66/EC Battery size: CR2032 (coin cell) Battery type: Lithium Metal</p> <p>The battery in this product does not contain:</p> <ul style="list-style-type: none"> <li>Mercury greater than 5ppm by weight</li> <li>Cadmium greater than 10ppm by weight</li> <li>Lead greater than 40ppm by weight</li> </ul>
<b>Restricted Material Usage</b>	<p>This product meets the material restrictions specified in HP's General Specification for the Environment. <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a> Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis.</p>
<b>Low Halogen Statement</b>	<p>This product is low halogen except for power cords, cables and peripherals, as well as the following customer-configurable internal components: 3 ½" SAS HDDs, LSI 9260-8i SAS 6Gb/s ROC RAID Card, Creative Recon3D PCIe Audio Card, Liquid Cooling Solution, and Broadcom 5761 Gigabit PCIe NIC are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.</p>

### System Technical Specifications

<b>End-of-Life Management and Recycling</b>	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life.
<b>Hewlett-Packard Corporate Environmental Information</b>	For more information about HP's commitment to the environment: Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a>
<b>Additional Information</b>	This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. <ul style="list-style-type: none"> <li>● Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>● This product is &gt;90% recycle-able when properly disposed of at end of life.</li> </ul> <p>EPEAT Gold - ENERGY STAR qualified configurations of this product are in compliance with the IEEE 1680 (EPEAT) standard at the Gold level where HP registers workstation products. See <a href="http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24">http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24</a> for registration status in your country.</p>
<b>Packaging</b>	HP Workstation product packaging meets the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html</a> <ul style="list-style-type: none"> <li>● Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment</li> <li>● Does not contain ozone-depleting substances (ODS)</li> <li>● Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed</li> <li>● Maximizes the use of post-consumer recycled content materials in packaging materials</li> <li>● All packaging material is recyclable</li> <li>● All packaging material is designed for ease of disassembly</li> <li>● Reduced size and weight of packages to improve transportation fuel efficiency</li> <li>● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards formatting</li> </ul>
<b>Packaging Materials</b>	
<b>Internal</b>	Cushions and plastic bags made of low density polyethylene (LDPE).
<b>External</b>	Outer carton, accessories carton, and insert made of corrugated paper board.

<b>Manageability</b>	
<b>Industry Standard Specifications</b>	This product meets the following industry standard specifications for manageability functionality: <ul style="list-style-type: none"> <li>● DASH 1.1 required functionalities via Intel LAN on motherboard</li> </ul>
<b>Intel Active Management Technology (AMT)</b>	Intel Active Management Technology (AMT) 7.0  An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 7.0 includes the following advanced management functions: <ul style="list-style-type: none"> <li>● Power Management (on, off, reset)</li> <li>● Hardware Inventory (includes BIOS and firmware revisions)</li> <li>● Hardware Alerting</li> <li>● Agent Presence</li> <li>● System Defense Filters</li> <li>● SOL/IDER</li> </ul>

### System Technical Specifications

	<ul style="list-style-type: none"> <li>● Cisco NAC/SDN Support</li> <li>● ME Wake-on-LAN</li> <li>● DASH 1.1 compliance</li> <li>● IPv6 Support</li> <li>● Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection</li> <li>● Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance.</li> <li>● Remote Alerts - automatically alert IT or service provider if issues arise</li> <li>● Access Monitor - Provides oversight into Intel® AMT actions to support security requirements</li> <li>● PC Alarm Clock</li> <li>● Microsoft NAP Support</li> <li>● Host Base set-up and configuration</li> <li>● Management Engine (ME) firmware roll back</li> </ul>
<b>Intel® vPro™ Technology</b>	<p>The HP Z420 Workstation supports Intel vPro technology when configured as outlined below:</p> <ul style="list-style-type: none"> <li>● Intel Xeon processor E5-1600 product family or E5-2600 product family featuring Intel vPro Technology</li> <li>● Intel C602 chipset</li> <li>● Intel 82579LM GbE LAN</li> </ul>
<b>Remote Manageability Software Solutions</b>	<p>The HP Z420 Workstation is supported on the following remote manageability software consoles:</p> <ul style="list-style-type: none"> <li>● LANDesk Management Suite (HP recommended solution)</li> <li>● Microsoft System Center Configuration Manager</li> <li>● HP Client Automation Enterprise</li> </ul> <p>For questions or support for manageability needs, please visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a></p>
<b>System Software Manager</b>	<p>For questions or support for SSM, please visit: <a href="http://www.hp.com/go/ssm">http://www.hp.com/go/ssm</a></p>
<b>Service, Support, and Warranty</b>	<p>On-site Warranty and Service (<b>Note 1</b>): Three-years, limited warranty and service offering delivers on-site, next business-day (<b>Note 2</b>) service for parts and labor and includes free telephone support (<b>Note 3</b>) 8am - 5pm. Global coverage (<b>Note 2</b>) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.</p> <p><b>NOTE 1:</b> Terms and conditions may vary by country. Certain restrictions and exclusions apply.</p> <p><b>NOTE 2:</b> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.</p> <p><b>NOTE 3:</b> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at <a href="http://www.hp.com/go/lookuptool">http://www.hp.com/go/lookuptool</a>. Additional HP Care Pack Services information by product is available at <a href="http://www.hp.com/hps/carepack">http://www.hp.com/hps/carepack</a>. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>
<b>Product Change Notification</b>	<ul style="list-style-type: none"> <li>● Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.</li> <li>● PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.</li> <li>● Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.</li> </ul>

### Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers—no special programs, no additional cost, no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

<b>Processors</b>	<b>Product #</b>	<b>Offering</b>
	A2H76AV	Intel® Xeon® Processor E5-1620 4C 3.60GHz

---

<b>Hard Drives</b>	<b>Product #</b>	<b>Offering</b>
	QE198AV	HP 500 GB SATA 7200 1st HDD
	QE199AV	HP 500 GB SATA 7200 2nd HDD
	QE200AV	HP 500 GB SATA 7200 3rd HDD
	QE201AV	HP 500 GB SATA 7200 4th HDD
	QE190AV	HP 1 TB SATA 7200 1st HDD
	QE191AV	HP 1 TB SATA 7200 2nd HDD
	QE192AV	HP 1 TB SATA 7200 3rd HDD
	QE193AV	HP 1 TB SATA 7200 4th HDD

---

<b>Graphics</b>	<b>Product #</b>	<b>Offering</b>
	A7U44AV	NVIDIA NVS 310 512MB Graphics
	A7U45AV	NVIDIA NVS 310 512MB Graphics (2nd)

---

<b>Memory</b>	<b>Product #</b>	<b>Offering</b>
	QE252AV	2GB (1x2GB) DDR3-1600 ECC Unbuffered RAM
	QE254AV	4GB (2x2GB) DDR3-1600 ECC Unbuffered RAM
	B0Q75AV	6GB (3x2GB) DDR3-1600 ECC Unbuffered RAM
	QE256AV	8GB (4x2GB) DDR3-1600 ECC Unbuffered RAM
	E4W55AV	8GB (2x4GB) DDR3-1600 ECC Unbuffered RAM
	QE258AV	16GB (8x2GB) DDR3-1600 ECC Unbuffered RAM
	QE257AV	16GB (4x4GB) DDR3-1600 ECC Unbuffered RAM
	QE260AV	32GB (8x4GB) DDR3-1600 ECC Unbuffered RAM

---

<b>Optical and Removable Storage</b>	<b>Product #</b>	<b>Offering</b>
	QE236AV	HP 16X DVD+-RW SuperMulti SATA 1st Drive
	QE237AV	HP 16X DVD+-RW SuperMulti SATA 2nd Drive

### Stable & Consistent Offerings

---

<b>Operating Systems</b>	<b>Product #</b>	<b>Offering</b>
	QD971AV	Genuine Windows® 7 Professional 64-bit

### Technical Specifications - Processors

<b>Processors</b>	Intel® Xeon® Processor E5-2665 8C 2.40GHz Intel® Xeon® Processor E5-2687W 8C 3.10GHz
-------------------	---

### Introduction

The Intel® Xeon® processor E5-1600/E5-2600/E5-4600 product families are the next generation of 64-bit, multi-core enterprise processors built on 32-nanometer process technology. Throughout this document, the Intel® Xeon® processor E5-1600/E5-2600/E5-4600 product families may be referred to as simply the processor. Where information differs between the EP and EP 4S SKUs, this document uses specific Intel® Xeon® processor E5-1600 product family, Intel® Xeon® processor E5-2600 product family, and Intel® Xeon® processor E5-4600 product family notation. Based on the low-power/high performance 2nd Generation Intel® Core™ Processor Family microarchitecture, the processor is designed for a two chip platform consisting of a processor and a Platform Controller Hub (PCH) enabling higher performance, easier validation, and improved x-y footprint. The Intel® Xeon® processor E5-1600 product family and the Intel® Xeon® processor E5-2600 product family are designed for Efficient Performance server, workstation and HPC platforms. The Intel® Xeon® processor E5-4600 product family processor supports scalable server and HPC platforms of two or more processors, including "glueless" 4-way platforms.

**NOTE:** some processor features are not available on all platforms.

These processors feature per socket, two Intel® QuickPath Interconnect point-to-point links capable of up to 8.0 GT/s, up to 40 lanes of PCI Express\* 3.0 links capable of 8.0 GT/s, and 4 lanes of DMI2/PCI Express\* 2.0 interface with a peak transfer rate of 5.0 GT/s. The processor supports up to 46 bits of physical address space and 48-bit of virtual address space.

Included in this family of processors is an integrated memory controller (IMC) and integrated I/O (IIO) (such as PCI Express\* and DMI2) on a single silicon die. This single die solution is known as a monolithic processor.

### Performance and Features

- Up to 8 execution cores
- Each core supports two threads (Intel® Hyper-Threading Technology), up to 16 threads per socket
- 46-bit physical addressing and 48-bit virtual addressing
- 1 GB large page support for server applications
- A 32-KB instruction and 32-KB data first-level cache (L1) for each core
- A 256-KB shared instruction/data mid-level (L2) cache for each core
- Up to 20 MB last level cache (LLC): up

Intel® Xeon® Processor E5-1660 6C 3.30GHz

Intel® Xeon® Processor E5-1650 6C 3.20GHz

Intel® Xeon® Processor E5-1620 4C 3.60GHz

Intel® Xeon® Processor E5-1607 4C 3.00GHz

Intel® Xeon® Processor E5-1603 4C 2.80GHz

### Processor Note

For detailed processor specifications, please refer to the Overview section at the beginning of this document.

### Technical Specifications - Hard Drives

<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>	<b>600GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	600GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6.0 Gb/s
		<b>Buffer</b>	16 MB
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b> 0.2 ms
			<b>Average</b> 3.4 ms
		<b>Rotational Speed</b>	<b>Full Stroke</b> 6.6 ms
		<b>Logical Blocks</b>	15,000 rpm
		<b>Operating Temperature</b>	1,172,123,568 - 512 byte blocks
			50° to 95° F (10° to 35° C)

	<b>450GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	450GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s
		<b>Buffer</b>	16MB
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b> 0.2 ms
			<b>Average</b> 3.4 ms
		<b>Rotational Speed</b>	<b>Full Stroke</b> 6.6 ms
		<b>Operating Temperature</b>	15,000 rpm
			50° to 95° F (10° to 35° C)

	<b>300GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	300GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s
		<b>Buffer</b>	16MB

### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
		<b>Average</b>	3.4 ms
		<b>Full Stroke</b>	6.6 ms
	<b>Rotational Speed</b>		15,000 rpm
	<b>Operating Temperature</b>		50° to 95° F (10° to 35° C)
<b>HP 300GB SAS 10K SFF HDD</b>	<b>Capacity</b>		300GB
	<b>Height</b>		0.6 in; 1.53 cm
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>		SAS 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		64MB
	<b>Cache</b>		multi-segmentable cache buffer
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.4 ms (max)
		<b>Average</b>	3.6 ms
		<b>Full Stroke</b>	7.3 ms
	<b>Rotational Speed</b>		10,000 rpm
	<b>Logical Blocks</b>		585,937,500
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>HP 600GB SAS 10K SFF HDD</b>	<b>Capacity</b>		600GB
	<b>Height</b>		0.6 in; 1.53 cm
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>		SAS 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		64MB
	<b>Cache</b>		multi-segmentable cache buffer
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.4 ms (max)
		<b>Average</b>	3.6 ms
		<b>Full Stroke</b>	7.3 ms
	<b>Rotational Speed</b>		10,000 rpm
	<b>Logical Blocks</b>		1,172,123,568
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)



### Technical Specifications - Hard Drives

<b>SATA (Serial ATA) Hard Drives for HP Workstations</b>	<b>250GB SATA 10K rpm SFF HDD</b>	<b>Capacity</b>	250GB		
		<b>Height</b>	0.6 in; 1.53 cm		
		<b>Width</b>		<b>Media Diameter</b>	2.5 in; 6.36 cm
				<b>Physical Size</b>	2.75 in; 6.99 cm
		<b>Interface</b>	Serial ATA (6Gb/s)		
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s		
		<b>Buffer</b>	64MB		
		<b>Cache</b>	Adaptive		
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>		<b>Single Track</b>	1.2ms (typical)
				<b>Average</b>	3.6ms
				<b>Full Stroke</b>	9.0ms (typical)
		<b>Rotational Speed</b>	10K rpm		
		<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)		
	<b>500GB SATA 10K rpm SFF HDD</b>	<b>Capacity</b>	500GB		
		<b>Height</b>	0.6 in; 1.53 cm		
		<b>Width</b>		<b>Media Diameter</b>	2.5 in; 6.36 cm
				<b>Physical Size</b>	2.75 in; 6.99 cm
		<b>Interface</b>	Serial ATA (6Gb/s)		
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s		
		<b>Buffer</b>	64MB		
		<b>Cache</b>	Adaptive		
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>		<b>Single Track</b>	1.2ms (typical)
				<b>Average</b>	3.6ms
				<b>Full Stroke</b>	9.0ms (typical)
		<b>Rotational Speed</b>	10K rpm		
		<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)		
	<b>1TB SATA 10K rpm SFF HDD</b>	<b>Capacity</b>	1TB		
		<b>Height</b>	0.6 in; 1.53 cm		
		<b>Width</b>		<b>Media Diameter</b>	2.5 in; 6.36 cm
				<b>Physical Size</b>	2.75 in; 6.99 cm
		<b>Interface</b>	Serial ATA (6Gb/s)		
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600 MB/s		
		<b>Buffer</b>	64MB		
		<b>Cache</b>	Adaptive		

### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.2ms (typical)
		<b>Average</b>	3.6ms
		<b>Full Stroke</b>	9.0ms (typical)
	<b>Rotational Speed</b>		10K rpm
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>250GB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		250 GB
	<b>Height</b>		1 in; 2.54 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4.0 in; 10.17 cm
	<b>Interface</b>		Serial ATA (6.0Gb/s), NCQ enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		8 MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	21 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		488,397,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>500GB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		500GB
	<b>Height</b>		1 in; 2.5 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4 in; 10.17 cm
	<b>Interface</b>		Serial ATA (6.0Gb/s), NCQ enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		16 MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	21 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		976,773,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>1TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		1 Terabyte (1000 GB)
	<b>Height</b>		1 in; 2.54 cm

### Technical Specifications - Hard Drives

	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4.0 in; 10.17 cm
	<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600 MB/s	
	<b>Buffer</b>	32MB	
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	1,953,525,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	2.0TB	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4 in; 10.17 cm
	<b>Interface</b>	Serial ATA (6.0 Gb/s), NCQ Enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600 MB/s	
	<b>Buffer</b>	64MB	
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	1.0 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	18 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	3,907,029,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	3.0TB	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4.0 in; 10.17 cm
	<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 6.0 Gb/s	
	<b>Buffer</b>	64MB	
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.6 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	Not Specified

### Technical Specifications - Hard Drives

	<b>Rotational Speed</b>	7,200 rpm	
	<b>Operating Temperature</b>	41° to 140° F (5° to 60° C)	
<b>500GB SATA 7.2K SED SFF HDD</b>	<b>Capacity</b>	500GB	
	<b>Height</b>	0.275 in; 0.7 cm	
	<b>Width</b>		<b>Media Diameter</b> 2.5 in; 6.36 cm
			<b>Physical Size</b> 2.75 in; 6.99 cm
	<b>Interface</b>	Serial ATA (6Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s	
	<b>Buffer</b>	32MB	
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>		<b>Single Track</b> 1ms
			<b>Average</b> 4.2ms
			<b>Full Stroke</b> 25ms (typical)
		<b>Rotational Speed</b>	7,200 rpm
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)	

#### HP Solid State Drives (SSDs) for Workstations

<b>HP 128GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	128GB	
	<b>Height</b>	0.28 in; 0.7 cm	
	<b>Width</b>		<b>Physical Size</b> 2.5 in; 6.36 cm
	<b>Interface</b>	SATA 6Gb/s	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP 256GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	256GB	
	<b>Height</b>	0.28 in; 0.7 cm	
	<b>Interface</b>	SATA 6Gb/s	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications - Hard Drives

<b>HP 256GB SATA 6Gb/s SED SSD</b>	<b>Capacity</b>	256GB	
	<b>Height</b>	0.28 in; 0.7 cm	
	<b>Width</b>	<b>Physical Size</b>	2.5 in; 6.36 cm
	<b>Interface</b>	6Gb/s SATA	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP 512GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	512GB	
	<b>Height</b>	0.28 in; 0.7 cm	
	<b>Width</b>	<b>Physical Size</b>	2.5 in; 6.36 cm
	<b>Interface</b>	6Gb/s SATA	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications - Hard Drive Controllers

<b>LSI 9212 4-Port SAS 6Gb/s RAID Card</b>	<b>PCI Bus</b>	8-lane, 5GT/s PCI Express 2.0
	<b>PCI Modes</b>	Bus Master DMA
	<b>RAID Levels</b>	RAID 0, 1, 1E and 10
	<b>PCI Data Burst Transfer Rate</b>	Half Duplex, x4 PCIe 2000 MB/s Full Duplex, x8 PCIe 4000 MB/s
	<b>SAS Bandwidth</b>	<b>Half Duplex</b> Single lane - 600 MB/s Wide Port (2 lanes) - 1200 MB/s Wide Port (4 lanes) - 2400 MB/s
		<b>Full Duplex</b> Single SAS Lane - 1200 MB/s Wide Port (2 lanes) - 2400 MB/s Wide Port (4 lanes) - 4800 MB/s
	<b>PCI Card Type</b>	3.3V Add-in card
	<b>PCI Voltage</b>	12 V ± 10%
	<b>PCI Power</b>	13.5 Watts
	<b>Bracket</b>	Full height and Low-profile
	<b>Certification Level</b>	PCI-Express 2.0
	<b>IO Bus</b>	1x4 6Gb/s SAS ports
	<b>SAS Processor</b>	LSISAS2008
<b>Internal Connectors</b>	Four x1 SATA	
<b>External Connectors</b>	None	
<b>Maximum Number of SCSI Devices</b>	256	
<b>LED Indicators</b>	Internal Activity/Fault per x4 port - Heartbeat	

<b>LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit</b>	<b>PCI Bus</b>	PCI-Express (Gen2) V2.0 x8 lanes
	<b>PCI Modes</b>	Bus Master DMA
	<b>RAID Levels</b>	RAID 0, 1, 5, and 6 RAID spans 10, 50 and 60
	<b>PCI Data Burst Transfer Rate</b>	Up to 4GB/s
	<b>PCI Card Type</b>	Low profile, single PCIe slot design with full height bracket.
		The optional iBBU08 Battery Backup unit mounts on the controller card and the assembly remains within a single PCIe slot width.
	<b>PCI Voltage</b>	+3.3V Add-in Card
	<b>PCI Power</b>	12.5 Watts
	<b>Certification Level</b>	PCI-Express 2.0
	<b>IO Bus</b>	Eight 3 Gb/s and 6Gb/s compatible SAS/SATA ports
	<b>Internal Connectors</b>	Two SAS SFF8087 x4
	<b>External Connectors</b>	None

### Technical Specifications - Hard Drive Controllers

**Maximum Number of SCSI** 32.

**Devices**

**NOTE:** HP Workstations do not support this many internal drives.

**LED Indicators**

Connector LEDs indicate whether the internal connector is active for ports 0-3 and 4-7

### Technical Specifications - Graphics

<b>NVIDIA NVS 300 512MB Graphics</b>	<b>Form Factor</b>	2.7 inches (H) x 5.7 inches (L), Half-Height
	<b>Graphics Controller</b>	NVIDIA NVS 300 Graphics Board
	<b>Bus Type</b>	PCI Express x16, Generation 2.0
	<b>Memory</b>	512 MB GDDR3 SDRAM unified graphics memory
	<b>Connectors</b>	DMS-59 Includes DMS-59 to Dual DVI-I adapter DMS-59 to Dual DisplayPort adapter and DMS-59 to Dual VGA adapter available as an option DMS-59 to Dual DisplayPort adapter required for HP ZR30w Display
	<b>Maximum Resolution</b>	DVI: two digital displays up to 1920 x 1200 DisplayPort: two digital displays up to 2560 x 1600 VGA: two analog displays up to 1920 x 1080
	<b>Image Quality Features</b>	
	<b>Display Output</b>	This card support up to two displays: <ul style="list-style-type: none"> <li>● Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking</li> <li>● Drives DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking (through optional DMS-59 to DisplayPort adapter)</li> <li>● Drives VGA enabled analog displays at resolutions up to 1920 x 1080 (through optional DMS-59 to VGA adapter)</li> </ul>
	<b>Supported Graphics APIs</b>	OpenGL 3.3 DirectX 10.1
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Power Consumption</b>	<18 Watts

---

<b>NVIDIA NVS 310 512MB Graphics</b>	<b>Form Factor</b>	Low Profile: 2.713 inches in height x 6.150 inches in length Weight: ~142 grams
	<b>Graphics Controller</b>	NVIDIA NVS 310 GPU: GF119-825
	<b>Bus Type</b>	PCI Express x16, 2.0 compliant



### Technical Specifications - Graphics

<b>Memory</b>	Size: 512MB DDR3 Clock: 875Mhz Memory Bandwidth: 14GB/s
<b>Connectors</b>	2 x DisplayPort
<b>Maximum Resolution</b>	Up to 2560 x 1600 (digital display) per display.
<b>Image Quality Features</b>	The following video formats are supported: <ul style="list-style-type: none"><li>- MPEG2</li><li>- MPEG4 Part 2 Advanced Simple Profile</li><li>- H.264 SVC codec support</li><li>- Support for 3D Blu Ray</li><li>- VC1</li><li>- DivX version 3.11 and later</li><li>- MVC</li></ul> <p>A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i. The NVS 310 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode.</p>
<b>Display Output</b>	Up to 2 displays in the following configurations:  DisplayPort output: <ul style="list-style-type: none"><li>• Drives two DisplayPort enabled digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card</li><li>• Supports 2 monitors up to resolution of 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort 1.2 multi stream topology technology.</li></ul> DVI-D output: <ul style="list-style-type: none"><li>• Drives two digital display at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors</li><li>• Drives two digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors</li></ul> HDMI output: <ul style="list-style-type: none"><li>• NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 x 1080P at 60 Hz using DisplayPort to HDMI cable adaptors</li></ul> VGA display output: <ul style="list-style-type: none"><li>• Drives two analog display at resolutions up to 1920 x 1200 at 60 Hz using DisplayPort to VGA cable adaptors</li></ul>
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	DX11, OpenGL 4.1
<b>Available Graphics Drivers</b>	Windows 8 Genuine Windows 7 Professional (64-bit and 32-bit)

### Technical Specifications - Graphics

Microsoft Windows XP Professional (64-bit and 32-bit)  
 Red Hat Enterprise Linux(RHEL)  
 SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site:  
<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:  
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

**Power Consumption**

19.5 Watts

**Note**

1. The thermal solution used on this card is an active fan heatsink.
2. Factory configured NVS 310 graphics card have no cable adapters included. Adapters must be ordered separately.
3. Option kit NVS 310 includes 2 DP to DVI-D cable adapters.

**NVIDIA NVS 510 2GB Graphics**

**Form Factor**

Low Profile, 2.713 inches × 6.3 inches, single slot

**Graphics Controller**

NVS 510 GPU  
 Core Clock: 797 Mhz  
 Memory Clock: 891 Mhz  
 CUDA Cores: 192

**Bus Type**

PCI Express x16, Generation 2.0

**Memory**

2GB DDR3

**Connectors**

Four mini-DisplayPort.  
 Four mini-DisplayPort to DisplayPort adapters included.  
 (DisplayPort to DVI-D, DisplayPort to VGA, DisplayPort to HDMI, and DisplayPort to Dual-Link DVI adapters available as separate accessories)

**Maximum Resolution**

Mini-DisplayPort connectors support ultra-high-resolution panels (up to 3840 x 2160 @ 60Hz)

**NOTE:** This card supports up to four displays. For Windows XP, only 2 active displays are supported.

**Image Quality Features**

10-bit internal display processing, including hardware support for 10-bit scan-out

**Display Output**

DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2) support.

Digital Display Support

1. DisplayPort Output
  - Drives four DisplayPort enabled digital display at resolutions up to 3840 × 2160 at 60 Hz with reduced blanking, when connected natively using the 4 DisplayPort connectors on the NVS 510 graphics card.
  - DisplayPort Multi-Stream Topology (MST) Technology: Supports various combinations of display resolutions and number of displays when using DisplayPort multi stream topology technology - up to a maximum of 4 monitors at a resolution of 1920 × 1200 at 60 Hz with reduced blanking.

### Technical Specifications - Graphics

#### 2. DVI-D Output

- Drives four digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors.

- Drives four digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors.

#### 3. HDMI Output

- The NVS 510 graphics board is capable of driving four high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors.

#### Analog Display Support

##### 1. VGA display output

- Drives four analog displays at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors.

#### Supported Graphics APIs

Full Microsoft DirectX 11, Shader Model 5.0 support

Full OpenGL 4.3 support

#### Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)

Microsoft Windows XP Professional (64-bit and 32-bit)

Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation

SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

#### Power Consumption

33.4 Watts

#### Note

Heatsink cooler design is active.

#### NVIDIA NVS 315 1GB Graphics (for HP Workstations)

##### Form Factor

Low Profile:

2.713 inches in height × 5.7 inches in length

Weight: ~142 grams

##### Graphics Controller

NVIDIA NVS 315 (using GF119-825 GPU)

Number of Cores: 48 CUDA cores

Max. Power: 19.3W

Cooling Solution: Active fan heatsink

##### Bus Type

PCI Express x16, 2.0 compliant

##### Memory

Size: 1GB DDR3

Clock: 875Mhz

Memory Bandwidth: 14GB/s

##### Connectors

DMS-59 output

Cables included:

- For CTO: DMS-59 to DVI cable

- For AMO: DMS-59 to DVI cable and DMS-59 to VGA cable

### Technical Specifications - Graphics

<b>Maximum Resolution</b>	Maximum number of displays supported: 2  Maximum Resolution Support: <ul style="list-style-type: none"><li>- DMS-59 to VGA: 2048 x 1536 @ 85Hz</li><li>- DMS-59 to DVI: 1980 x 1200 @ 60Hz</li><li>- DMS-59 to DP: 2560 x 1600 @ 60Hz</li></ul>
<b>Image Quality Features</b>	See Display Output section.  The following video formats are supported: <ul style="list-style-type: none"><li>- MPEG2</li><li>- MPEG4 Part 2 Advanced Simple Profile</li><li>- H.264 SVC codec support</li><li>- Support for 3D Blu Ray</li><li>- VC1</li><li>- DivX version 3.11 or later</li></ul> A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i. The NVS 315 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode.
<b>Display Output</b>	Up to 2 displays using one of the following DMS-59 cables: DMS-59 to DVI DMS-59 to VGA DMS-59 to DP  DisplayPort output: <ul style="list-style-type: none"><li>- Drives two DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking, when connected via the DMS-59 to DP adapter.</li></ul> DVI-D output: <ul style="list-style-type: none"><li>- Drives two digital display at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking using DMS-59 to DVI-D single-link cable adaptor</li></ul> VGA display output: <ul style="list-style-type: none"><li>- Drives two analog display at resolutions up to 2048 x 1536 at 85 Hz using DMS-59 to VGA cable adaptor.</li></ul>
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	DX11, OpenGL 4.3
<b>Available Graphics Drivers</b>	Windows 8 Microsoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from:

### Technical Specifications - Graphics

#### Notes

<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

1. The thermal solution used on this card is an active fan heatsink.
2. Factory configured graphics card includes DMS-59 to DVI cable.
3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each).

#### NVIDIA Quadro 410 512MB Graphics

##### Form Factor

Low Profile:  
2.713 inches × 5.7 inches, single slot

##### Graphics Controller

NVIDIA Quadro 410  
GPU: GK107

##### Bus Type

PCI Express x16, 3.0 compliant

##### Memory

Size: 512MB DDR3  
Clock: 900MHz  
Memory Bandwidth: 14GB/s

##### Connectors

One dual-link DVI-I connector  
One DisplayPort connector

##### Maximum Resolution

VGA (through DVI to VGA cable):

- 2048 × 1536 × 32 bpp at 85 Hz

Dual-link DVI

- 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)

Single-link DVI

- 1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)

DisplayPort 1.2

- 3840 × 2160 × 36 bpp at 60 Hz

##### RAMDAC

400 MHz integrated RAMDAC

##### Display Output

Maximum number of displays supported: 2

##### Shading Architecture

Shader Model 5.0

##### Supported Graphics APIs

DX11, OpenGL 4.2

##### Available Graphics Drivers

Windows 8  
Genuine Windows 7 Professional (64-bit and 32-bit)  
Microsoft Windows XP Professional (64-bit and 32-bit)  
Red Hat Enterprise Linux(RHEL)  
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:

<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

### Technical Specifications - Graphics

**Notes**

1. Factory configured Quadro 410 does not include any video adapters. Adapters must be ordered separately.
2. Option kit Quadro 410 includes one DP to DVI-D adapter

**NVIDIA Quadro K600 1GB Graphics****Form Factor**

2.731" H x 6.3" L  
Single Slot, Low Profile  
Full Height Profile bracket installed  
Low Profile bracket included

**Graphics Controller**

NVIDIA Quadro K600 Graphics Card  
Kepler GK107 GPU  
192 CUDA cores  
Max Power: 41 Watts

**Bus Type**

PCI Express 2.0 x16

**Memory**

1 GB GDDR3, 891 Mhz  
128-bit memory I/O path  
29 GB/s memory bandwidth

**Connectors**

1 DL-DVI(I) output, 1 DisplayPort output  
CTO: No video cable adapter included  
AMO: One DP-to-DVI adapter included with card

**Maximum Resolution**

Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories

DisplayPort:  
- up to 3840 x 2160 x 30 bpp @ 60Hz  
- supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)

**Image Quality Features**

DL-DVI(I) output:  
- up to 2560 x 1600 x 32 bpp @ 60Hz

10-bit internal display processing pipeline  
10-bit scan-out support

**Display Output**

VGA:  
- requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters  
- 400 Mhz integrated RAMDAC  
- Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz

**Shading Architecture**

DL-DVI(I):  
- Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz

SL-DVI(I):  
- Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz

DisplayPort:  
- Supports HBR2 and MST  
- Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to the Quadro K600 DisplayPort connector at this resolution)  
- Max number of daisy-chained monitors: 2

Full Microsoft DirectX 11 Shader Model 5.0

### Technical Specifications - Graphics

<b>Supported Graphics APIs</b>	OpenGL 4.3 DirectX 11 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Windows 8 Pro 64-bit Windows 8 (China) 64-bit Genuine Windows 7 Professional (64-bit and 32-bit)  Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from: <a href="http://download.nvidia.com/novell">http://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Notes</b>	<ol style="list-style-type: none"> <li>1. Quadro K600 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.</li> <li>2. Quadro K600 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.</li> <li>3. Quadro K600 is Windows 8 Compliant.</li> <li>4. A total maximum of 2 active monitors are supported across all display output types.</li> </ol>

---

<b>AMD FirePro V3900 1GB Graphics</b>	<b>Form Factor</b>	Full height, half length (full-height bracket included)
	<b>Graphics Controller</b>	AMD FirePro™ V3900 professional graphics
	<b>Bus Type</b>	PCI Express® x16, Generation 2.1
	<b>Memory</b>	1GB DDR3 memory
	<b>Connectors</b>	1 DL DVI, 1 DP output One DP to DVI adapter included
	<b>Maximum Resolution</b>	2560x1600 per display (5120x1600 max. horizontal resolution)
	<b>Display Output</b>	1 DisplayPort® 1.2 1 Dual-link DVI
	<b>Supported Graphics APIs</b>	OpenCL™ 1.1, DirectX® 11 and OpenGL 4.2
	<b>Available Graphics Drivers</b>	Genuine Windows® 7 Professional (64-bit and 32-bit) Genuine Windows Vista® Business (64-bit and 32-bit) Microsoft® Windows XP® Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
	<b>Power Consumption</b>	<50W
	<b>Note</b>	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays

### Technical Specifications - Graphics

varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See [www.amd.com/firepro](http://www.amd.com/firepro) for details.

#### **NVIDIA Quadro K2000 2GB Form Factor Graphics**

<b>Graphics Controller</b>	4.38" H x 7.97" L Single Slot, Full Height NVIDIA Quadro K2000 Graphics Card Kepler GK107 GPU 384 CUDA cores Max Power: 51.1 Watts
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	2 GB GDDR5, 2000 Mhz 128-bit memory I/O path 64 GB/s memory bandwidth
<b>Connectors</b>	1 DL-DVI(I) output, 2 DisplayPort outputs CTO: No video cable adapter included AMO: One DP-to-DVI adapter included with card
<b>Maximum Resolution</b>	Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories DisplayPort: - up to 3840 x 2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)
<b>Image Quality Features</b>	DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60Hz <ul style="list-style-type: none"><li>• 10-bit internal display processing pipeline</li><li>• 10-bit scan-out support</li></ul>
<b>Display Output</b>	VGA: - requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters - 400 Mhz integrated RAMDAC - Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz  DL-DVI(I): - Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz  SL-DVI(I): - Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz  DisplayPort: - Supports HBR2 and MST - Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K2000 DisplayPort connector at this resolution) - Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K2000 DisplayPort connector: 4 with maximum resolution of 1920 x 1200



### Technical Specifications - Graphics

<b>Shading Architecture</b>	Maximum number of monitors across all available Quadro K2000 outputs is 4. Full Microsoft DirectX 11 Shader Model 5
<b>Supported Graphics APIs</b>	OpenGL 4.3 DirectX 11 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Windows 8 Pro 64-bit Windows 8 (China) 64-bit Genuine Windows 7 Professional (64-bit and 32-bit)  Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Notes</b>	<ol style="list-style-type: none"> <li>1. Quadro K2000 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.</li> <li>2. Quadro K2000 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.</li> </ol>

#### AMD FirePro W7000 4GB Graphics

<b>Form Factor</b>	Full height, full length, single slot
<b>Graphics Controller</b>	AMD FirePro™ W7000 Professional Graphics Max Power: <150 Watts
<b>Bus Type</b>	PCI Express™ x16, Generation 3.0
<b>Memory</b>	4GB GDDR5, 153.6 GB/s bandwidth, ECC support
<b>Connectors</b>	4 x DisplayPort with HBR2 and MST support.
<b>Maximum Resolution</b>	DisplayPort: 4096x2160 @24bpp 60Hz Dual Link DVI: 2560x1600 (requires DP to DL-DVI adapter) Single Link DVI: 1920x1200 (requires DP to DVI adapter) VGA: 1920x1200 (requires DP to VGA adapter)
<b>Image Quality Features</b>	Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component
<b>Display Output</b>	Max number of monitors supported using DisplayPort: 6  Monitor chaining from a single DisplayPort options(subject to a max of 6 total monitors across all outputs, requires use of DisplayPort Monitors supporting MST or the use of DisplayPort hubs): <ul style="list-style-type: none"> <li>● 1 4096x2169 display</li> <li>● 2 2560x1600 displays</li> <li>● 4 1920x1200 displays</li> </ul>
<b>Shading Architecture</b>	Shader Model 5.0

### Technical Specifications - Graphics

<b>Supported Graphics APIs</b>	OpenGL® 4.2 with OpenGL Shading Language OpenCL 1.1 Microsoft® DirectX® 11.1
<b>Available Graphics Drivers</b>	Windows 8 Windows 7 Professional (64-bit and 32-bit) Windows 8 (64bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
<b>Note</b>	<p>HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a></p> <ol style="list-style-type: none"> <li>1. AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See <a href="http://www.amd.com/firepro">www.amd.com/firepro</a> for details.</li> <li>2. Factory configured FirePro W7000 graphics card does not include any video adapter cables. Adapters must be ordered separately.</li> <li>3. Option Kit FirePro W7000 graphics card does not include any video cable adapters. Adapters must be ordered separately.</li> </ol>

### NVIDIA Quadro K4000 3GB Form Factor Graphics

<b>Graphics Controller</b>	4.376" H x 9.5" L Single Slot, Full Height NVIDIA Quadro K4000 Graphics Card Kepler GK106 GPU 768 CUDA cores Max Power: 80 Watts
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	3 GB GDDR5, 2800 Mhz 192-bit memory I/O path 134 GB/s memory bandwidth
<b>Connectors</b>	1 DL-DVI(I) output, 2 DisplayPort outputs CTO: No video cable adapter included AMO: One DP-to-DVI adapter included with card
<b>Maximum Resolution</b>	Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories DisplayPort: - up to 3840 x 2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)  DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60Hz

### Technical Specifications - Graphics

<b>Image Quality Features</b>	<ul style="list-style-type: none"><li>• 10-bit internal display processing pipeline</li><li>• 10-bit scan-out support</li></ul>
<b>Display Output</b>	<p>VGA:</p> <ul style="list-style-type: none"><li>- requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters</li><li>- 400 Mhz integrated RAMDAC</li><li>- Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz</li></ul> <p>DL-DVI(I):</p> <ul style="list-style-type: none"><li>- Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz</li></ul> <p>SL-DVI(I):</p> <ul style="list-style-type: none"><li>- Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz</li></ul> <p>DisplayPort:</p> <ul style="list-style-type: none"><li>- Supports HBR2 and MST</li><li>- Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K4000 DisplayPort connector at this resolution)</li><li>- Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K4000 DisplayPort connector: 4 with maximum resolution of 1920 x 1200</li></ul> <p>HDMI:</p> <ul style="list-style-type: none"><li>- Requires use of DP-to-HDMI cable</li><li>- Max Resolution: 1920 x 1080 x 32 bpp @ 60Hz</li></ul> <p>Maximum number of monitors across all available Quadro K4000 outputs is 4.</p>
<b>Shading Architecture</b>	Full Microsoft DirectX 11 Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.3 DirectX 11 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Windows 8 Pro 64-bit Windows 8 (China) 64-bit Genuine Windows 7 Professional (64-bit and 32-bit)  Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Notes</b>	<ol style="list-style-type: none"><li>1. Quadro K4000 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.</li><li>2. Quadro K4000 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.</li><li>3. Quadro K4000 is Windows 8 Compliant.</li><li>4. A total maximum of 4 active monitors are supported across all display</li></ol>

### Technical Specifications - Graphics

output types. To get 4 monitors, at least one monitor must be daisy chained on a DisplayPort output.

5. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K4000 DisplayPort output.

<b>NVIDIA Quadro K5000 4GB Graphics</b>	4.376" H x 10.5" L Dual Slot
<b>Graphics Controller</b>	NVIDIA Quadro K5000 Graphics Card based on the GK104 GPU
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	4GB GDDR5 173GB/s memory bandwidth
<b>Connectors</b>	DVI-I (1), DVI-D (1), DP (2), Optional 3D Stereo bracket with 3-pin mini-DIN connector. No adapter included with card.
<b>Image Quality Features</b>	DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories <ul style="list-style-type: none"> <li>• DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP support</li> <li>• NVIDIA 3D Vision™ technology</li> </ul>
<b>Display Output</b>	400 MHz integrated RAMDAC <ul style="list-style-type: none"> <li>• Maximum resolution over VGA (through DVI to VGA cable): 2048 × 1536 × 32 bpp at 85 Hz</li> </ul> <p>Dual-link internal TMDS (DVI 1.0)</p> <ul style="list-style-type: none"> <li>• Maximum resolution over digital port (single GPU and SLI mode): 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)</li> </ul> <p>Single-link internal TMDS (DVI 1.0)</p> <ul style="list-style-type: none"> <li>• Maximum resolution over digital port (single GPU and SLI mode): 1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)</li> </ul> <p>DisplayPort with MST and HBR2.</p> <ul style="list-style-type: none"> <li>• Maximum resolution: 3840 × 2160 × 36 bpp at 60Hz</li> </ul> <p>HDMI</p> <ul style="list-style-type: none"> <li>• Maximum resolution: 1920 × 1080 × 32 bpp at 60Hz</li> </ul>
<b>Supported Graphics APIs</b>	OpenGL 4.2 DirectX 11 Shader model 5.0 Support API support for NVIDIA's CUDA™ C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, Fortran
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit)

### Technical Specifications - Graphics

Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)  
 Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation  
 SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

**Power Consumption**

122 Watts

**Note**

No display output adapter included.

**NVIDIA Quadro 6000 6GB Graphics**

**Form Factor**

4.376" H x 9.75" L  
 Dual Slot

**Graphics Controller**

NVIDIA Quadro 6000 Graphics Card

**Bus Type**

PCI Express 2.0 x16

**Memory**

6 GB GDDR5  
 384-bit  
 ECC Memory

**Connectors**

1 DVI-I output, 2 DisplayPort outputs, 1 Stereo(3-pin mini DIN);  
 One DP to DVI adapter included with card

DVI to VGA, DisplayPort to VGA and DisplayPort to dual link DVI adapters available as accessories

**Maximum Resolution**

Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)  
 Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)

**Image Quality Features**

- 30-bit color
- Up to 16K x16K texture and render processing
- Transparent multisampling and super sampling
- 16x angle independent anisotropic filtering
- 128-bit floating point performance
- 32-bit per-component floating point texture filtering and blending
- 64x full scene antialiasing (FSAA) / 128x FSAA in SLI Mode
- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

**Shading Architecture**

Shader Model 5.0

**Supported Graphics APIs**

OpenGL 4.0  
 DirectX 11  
 CUDA API support includes:  
 CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

**Available Graphics Drivers**

Genuine Windows 7 Professional (64-bit and 32-bit)  
 Genuine Windows Vista Business (64-bit and 32-bit)  
 Microsoft Windows XP Professional (64-bit and 32-bit)  
 Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)

### Technical Specifications - Graphics

Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation  
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from:  
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

### **Power Consumption**

<250 Watts

### Technical Specifications - High Performance GPU Computing

#### NVIDIA Tesla C2075 Compute Processor

<b>Form Factor</b>	4.376 inches by 9.75 inches Dual Slot
<b>System Interface</b>	PCI Express Gen2 ×16
<b>Video Outputs</b>	One Dual Link DVI-I  (Entry graphics level of performance)
<b>Memory</b>	6GB GDDR5
<b>Peak Memory Bandwidth</b>	+170 GB/s
<b>Supported APIs</b>	CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Supported Operating Systems</b>	Genuine Windows 7 Professional (64-bit) Genuine Windows Vista Business (64-bit) Microsoft Windows XP Professional (64-bit) Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Processor Cores</b>	448 CUDA cores
<b>Power Consumption</b>	~215 Watts

**NOTE 1:** A 1110W PSU is required for Tesla C2075 on the Z800

**NOTE 2:** A 600W PSU is required for Tesla C2075 on the Z400

**NOTE 3:** A 1125W PSU is required for Tesla C2075 on the Z820

#### NVIDIA Tesla K20c Compute Processor

<b>Form Factor</b>	4.376 inches by 10.5 inches Dual Slot
<b>System Interface</b>	PCI Express Gen2 ×16
<b>Video Outputs</b>	None.
<b>Memory</b>	5GB GDDR5, 320-bit memory path
<b>Peak Memory Bandwidth</b>	208 GB/s (with ECC off)
<b>Supported APIs</b>	CUDA and OpenACC API support includes: CUDA C, CUDA C++, Java, Python, and Fortran
<b>Supported Operating Systems</b>	Windows 8 (64-bit) Genuine Windows 7 Professional (64-bit) Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>

### Technical Specifications - High Performance GPU Computing

	Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Processor Cores</b>	GK110 GPU, 706 MHz clock 2496 CUDA cores
<b>Power Consumption</b>	~225 Watts

**NOTE 1:** A 1125W PSU is required for any K20 configuration on the Z820



### Technical Specifications - Multimedia and Audio Devices

**HP Thin USB Powered  
Speakers**

**Frequency Response (-**  
3dB, 24-bit/96kHz input) F0 to 20kHz

**Dimensions** Speakers: 14.52 x 9.50 x 2.45 cm (5.72 x 3.74 x 0.96 in) per speaker

### Technical Specifications - Optical and Removable Storage

<b>HP DVD-ROM Drive</b>	<b>Description</b>	5.25-inch, half-height, tray-load	
	<b>Mounting Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	SATA/ATAPI	
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	
	<b>Disc Capacity</b>	<b>DVD-ROM</b> Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	
	<b>Access Times</b>	<b>DVD-ROM Single Layer</b>	< 140 ms (typical)
		<b>CD-ROM Mode 1</b>	< 125 ms (typical)
		<b>Full Stroke DVD</b>	< 250 ms (seek)
		<b>Full Stroke CD</b>	< 210 ms (seek)
	<b>Power</b>	<b>Source</b>	SATA DC power receptacle
		<b>DC Power Requirements</b>	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
		<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
		<b>Relative Humidity</b>	10% to 90%
<b>Maximum Wet Bulb Temperature</b>		86° F (30° C)	
<b>Operating Systems Supported</b>		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, Removed reference to "Novell" because of acquisition and changed product reference to "SUSE Linux Enterprise Desktop 10 & 11", No driver is required for this device. Native support is provided by the operating system.	

<b>HP DVD+/-RW Drive</b>	<b>Description</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Either horizontal or vertical
	<b>Interface Type</b>	SATA/ATAPI
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 17.5 cm (5.9 x 1.7 x 8.0 in)
	<b>Disc Formats</b>	DVD-RAM
		DVD+R
DVD+RW		
DVD+R DL		
DVD-R DL		
	DVD-R	
	DVD-RW	

### Technical Specifications - Optical and Removable Storage

		CD-R	
		CD-RW	
<b>Disc Capacity</b>	<b>DVD-ROM</b>		8.5 GB DL or 4.7 GB standard
	<b>Full Stroke DVD</b>		< 240 ms (seek)
	<b>Full Stroke CD</b>		< 200 ms (seek)
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>		CD-ROM, CD-R Up to 40X CD-RW Up to 32X
	<b>DVD ROM Read</b>	DVD-RAM	Up to 12X
		DVD+RW	Up to 8X
		DVD-RW	Up to 8X
		DVD+R DL	Up to 12X
		DVD-R DL	Up to 12X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 12X
		DVD+R	Up to 16X
		DVD-R	Up to 16X
<b>Power</b>	<b>Source</b>		SATA DC power receptacle
	<b>DC Power Requirements</b>		5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>		5 VDC -<1000 mA typical, <1600 mA maximum 12 VDC -<1200 mA typical, <2000 mA maximum
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>		41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b>		10% to 90%
	<b>Maximum Wet Bulb Temperature</b>		86° F (30° C)
	<b>Operating Systems Supported</b>		Windows 8 32-bit and 64-bit, Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11
	<b>Kit Contents</b>		No driver is required for this device. Native support is provided by the operating system. HP SATA SuperMulti DVD Writer Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.

<b>HP Blu-Ray Writer</b>	<b>Description</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Either horizontal or vertical
	<b>Interface Type</b>	SATA

### Technical Specifications - Optical and Removable Storage

<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)		
<b>Disc Formats</b>	BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
<b>Disc Capacity</b>	<b>DVD-ROM</b>	8.5 GB DL or 4.7 GB standard	
	<b>Blu-ray</b>	50 GB DL or 25 GB standard	
	<b>Full Stroke DVD</b>	< 250 ms (seek)	
	<b>Full Stroke CD</b>	< 210 ms (seek)	
	<b>Blu-ray</b>	Blu-ray	
	<b>Startup Time (Time to drive ready from tray loading)</b>	<b>BD-ROM (SL/DL)</b>	25S / 28S
		<b>BD-R (SL/DL)</b>	25S / 28S
		<b>BD-RE (SL/DL)</b>	25S / 28S
		<b>DVD-ROM (SL/DL)</b>	18S / 18S
		<b>DVD-R (SL/DL)</b>	25S / 25S
		<b>DVD-RW</b>	25S
		<b>DVD+R (SL/DL)</b>	25S / 25S
		<b>DVD+RW</b>	25S
		<b>DVD-RAM</b>	45S
		<b>CD-ROM</b>	45S
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>	<b>CD-ROM</b>	Up to 40X
		<b>CD-R</b>	Up to 40X
		<b>CD-RW</b>	Up to 40X
	<b>DVD ROM Read</b>	<b>DVD-RAM</b>	Up to 5X
		<b>DVD+RW</b>	Up to 10X
		<b>DVD-RW</b>	Up to 10X
		<b>DVD+R DL</b>	Up to 8X
		<b>DVD-R DL</b>	Up to 8X
		<b>DVD-ROM</b>	Up to 16X
		<b>DVD-ROM DL</b>	Up to 8X
		<b>DVD+R</b>	Up to 12X
		<b>DVD-R</b>	Up to 12X
	<b>Blu-Ray</b>	<b>BD-ROM</b>	Up to 6X
		<b>BD-ROM DL</b>	Up to 4.8X
		<b>BD-R</b>	Up to 6X

### Technical Specifications - Optical and Removable Storage

		BD-R DL	Up to 4.8X
		BD-R	Up to 6X
		BD-RE SL/DL	Up to 4.8X
<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
	<b>DC Power Requirements</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 10%-100 mV ripple p-p	
	<b>DC Current</b>	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative Humidity</b>	15% to 80%	
	<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)	
	<b>Operating Systems Supported</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11	
		<a href="#">* No driver is required for this device. Native support is provided by the operating system.</a>	
		<a href="#">** RHEL WS4 not supported on Z200/Z200SFF</a>	
	<b>Kit Contents</b>	HP Blue Laser RW Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide.	
<b>Disclaimer</b>	As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.		

### Technical Specifications - Optical and Removable Storage

<b>HP 22-in-1 Media Card Reader</b>	<b>Description</b>	The Media Card Reader device uses the same physical form factor and mounting as a Floppy Disk Drive. The device connects to a 2x5 two-channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.
	<b>Mounting Orientation</b>	The Media Card Reader can be mounted in a dedicated Floppy Drive bay (if the chassis provides one) or in an appropriate Optical Bay adapter. It will operate in any orientation.
	<b>Interface Type</b>	USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)
	<b>Dimensions (WxHxD)</b>	124.5 x 101.6 x 25.4 mm (4.9 x 4.0 x 1.0 in)
	<b>Disc Formats</b>	<p>Picture</p> <p>Micro SD</p> <p>Micro SDHC</p> <p>SD</p> <p>SDHC</p> <p>SDXC</p> <p>Mini SD</p> <p>Mini SDHC</p> <p>MultiMediaCard</p> <p>Reduced Size MultiMediaCard (RS MultiMediaCard)</p> <p>MultiMedia Card 4.2 (MultiMediaCard Plus, including MultiMediaCard Plus HC)</p> <p>Reduced Size MultiMedia Card 4.2 (MultiMediaCard Mobile, including MultiMediaCard Mobile HC)</p> <p>CompactFlash Card Type I</p> <p>CompactFlash Card Type II</p> <p>MicroDrive</p> <p>Memory Stick (MS)</p> <p>MagicGate Memory Stick (MG)</p> <p>MagicGate Memory Stick Duo</p> <p>Memory Stick Select</p> <p>Memory Stick Duo (MS Duo)</p> <p>Memory Stick PRO (MS PRO)</p> <p>Memory Stick PRO Duo (MS PRO Duo)</p> <p>Memory Stick PRO-HG Duo</p> <p>Two additional formats are usable with adapters (not supplied):</p> <p>MultiMediaCard Micro</p> <p>Memory Stick Micro (M2)</p>

---

<b>HP CMT Handle in Top Optical Bay</b>	<b>Features</b>	<ul style="list-style-type: none"> <li>● Front panel handle/grip for Z4 and Z2 when loaded in top 5.25" external bay</li> <li>● Two tool-free 2.5" SFF drive carriers (drives not included)</li> </ul>
	<b>Dimensions (HxWxD)</b>	42.7 x 149.0 x 205.5 mm
	<b>Weight</b>	0.6 kg (1.3 lbs)
	<b>Operating Temperature</b>	5° to 35°C (40° to 94°F)

### Technical Specifications - Controller Cards

<b>HP IEEE 1394b FireWire PCIe Card</b>	<b>Data Transfer Rate</b>	Supports up to 800 Mbps
	<b>Devices Supported</b>	IEEE-1394 compliant devices
	<b>Bus Type</b>	PCIe card full height PCIe slots
	<b>Ports</b>	Two IEEE-1394b bilingual 9-Pin Connector (Rear)
	<b>Internal Connectors</b>	One 10-Pin header Custom Connector
	<b>System Requirements</b>	Windows 7 Professional 32-bit and 64-bit, Microsoft® Windows® XP Professional, Windows XP Home, Windows Vista, SLED 11 and RHEL 6. Intel Pentium® G series or higher processor, 128-MB RAM, 1-GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot.
	<b>Temperature – Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature – Storage</b>	-22° to 140° F (-30° to 60° C)
	<b>Relative Humidity – Operating</b>	20% to 80%
	<b>Compliances</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
<b>Operating Systems Supported</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista® Business 32-bit and 64-bit, Windows® XP Professional, XP Professional 64-bit. Not supported on Linux.	

### Technical Specifications - Networking and Communications

<b>Integrated Intel 82579LM PCIe GbE Controller</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel 82579LM GbE platform LAN connect networking controller
	<b>Memory</b>	24 KB FIFO packet buffer memory
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	802.1P, 802.1Q, 802.2, 802.3, 802.3ab, 802.3az, 802.3u
	<b>Bus Architecture</b>	PCI Express and SMBus
	<b>Data Transfer Mode</b>	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
	<b>Power Requirement</b>	Requires 3.3V and 1.05V or just 3.3V with integrated regulators
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Mode</b>	Full-duplex; Half-duplex (not supported for the 1000BASE-T transceiver)
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Management Capabilities</b>	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic. AMT 7.0 support

<b>Intel Gigabit CT Desktop NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel WG82574L Gigabit Ethernet Controller
	<b>Memory</b>	Integrated Dual 48K configurable transmit receive FIFO Buffers
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus Architecture</b>	PCI-E 1.0a
	<b>Data Path Width</b>	X1, 250 MB/s, Bi-directional interface
	<b>Data Transfer Mode</b>	Bus-master DMA
	<b>Hardware Certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	<b>Power Requirement</b>	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
<b>Operating Humidity</b>	85% at 131° F (55° C)	
<b>Dimensions</b>	12.1 x 5.7 x 2.0 cm (4.75 x 2.25 x 0.8 in)	



### Technical Specifications - Networking and Communications

<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64. Red Hat Enterprise Linux 4 (RHEL4.8 or newer)*, Red Hat Enterprise Linux 5 (RHEL5.3 or newer), Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop (SLED) 11
	RHEL 4 and 5, SLED 10, are not supported on the Z220 CMT/SFF
<b>Management Capabilities</b>	WOL , PXE, DMI, WFM 2.0
<b>Kit Contents</b>	Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

#### Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC

<b>Connector</b>	RJ-45
<b>Controller</b>	Broadcom 5761 PCI-Express LAN Controller
<b>Memory</b>	8 MB NVRAM serial Flash
<b>Data Rates Supported</b>	10/100/1000 Mbps
<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
<b>Bus Architecture</b>	PCI-Express
<b>Data Path Width</b>	Single Channel PCI-Express
<b>Data Transfer Mode</b>	Bus Master DMA
<b>Hardware Certifications</b>	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
<b>Power Requirement</b>	1.8W @ 3.3V
<b>Boot ROM Support</b>	Yes
<b>Network Transfer Mode</b>	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
<b>Operating Humidity</b>	131° F (55° C) with 5% to 95% non-condensing humidity
<b>Dimensions</b>	7 cm x 10.5 cm (2.75 in x 4.13 in), low profile compatible
<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64 Red Hat Enterprise Linux (RHEL) 5, 6; Novell SLED 10 & 11
<b>Management Capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles
<b>Kit Contents</b>	Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install guide, product warranty statement

### Technical Specifications - Networking and Communications

<b>HP 361T PCIe Dual Port Gigabit NIC</b>	<b>Connector</b>	Two RJ-45
	<b>Controller</b>	Intel® Ethernet I350 Controller
	<b>Data Rates Supported</b>	10/100/1000 Mbps, Half- and full-duplex
	<b>Compliance</b>	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q, 802.3az, IEEE 1588 PCIe v2.0 standard RoHS (6 of 6) FCC (U.S. only) Class B DOC (Canada) Class B CE EN 55024, EN55022 Class B VCCI Class II UL 1950 CSA 950 EN 60950 CE ACPI 1.1a Microsoft WHQL (Windows Hardware Quality Labs)
	<b>Bus Architecture</b>	PCI-E 1.0a
	<b>Data Path Width</b>	Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots
	<b>Power Requirement</b>	4.1W idle without EEE link partner 3.2W idle with EEE link partner 4.2W maximum
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mb/s 10BASE-T (full-duplex) 20 Mb/s 100BASE-TX (half-duplex) 100 Mb/s 100BASE-TX (full-duplex) 200 Mb/s 1000BASE-T (full-duplex) 2000 Mb/s
	<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating Humidity</b>	10% to 95% non-condensing
	<b>Dimensions (H x W x D)</b>	5.3 x 2.5 in (13.50 cm x 6.4 cm) (without brackets)
	<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11
	<b>Management Capabilities</b>	WOL , PXE 2.1
	<b>Kit Contents</b>	HP 361T PCIe Dual Port Gigabit NIC PCA with a standard height bracket attached to it (the low profile bracket is included in the clamshell that the PCA ships in) Product Warranty statement and the Quick Install Card (QIC).

---

<b>HP X520 10GbE Dual Port Adapter</b>	<b>Hardware Certifications</b>	FCC B, UL, CE, VCCI, BSMI, CTICK, KCC
--	--------------------------------	---------------------------------------

---

### Technical Specifications - Networking and Communications

<b>HP 10GbE SFP+ SR Transceiver</b>	<b>Operating Temperature</b>	0°C to 45°C (32°F to 113°F)
	<b>Operating Humidity</b>	0% to 85%, noncondensing
	<b>Dimensions (H x W x D)</b>	0.47(h) x 0.54(w) x 2.19(d) inches (1.19 x 1.38 x 5.57 cm)

---

© 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.