
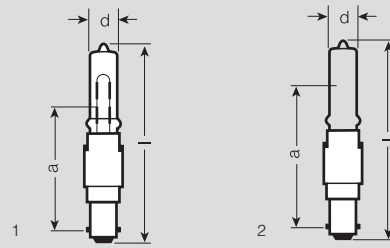


# HALOLUX CERAM® with B15d base for mains voltage



**OSRAM HALOLUX CERAM® permits unshielded operation with no need for a protective cover glass to IEC 60598-1 on the luminaire, thanks to an integral safety fuse and UV FILTER quartz (to IEC 60432-2).**

Product reference

Product number



## HALOLUX CERAM® with B15d base

clear

64466	4050300 <b>500928</b>	25	260	1500	B15d	18	67	39	1	10
64467	4050300 <b>467306</b>	40	490	1500	B15d	18	67	39	1	10
64481	4050300 <b>468839</b>	60	820	2000	B15d	18	67	39	1	10
64469	4050300 <b>314969</b>	60	820	2000	B15d	18	86	55	1	10
64473	4050300 <b>011851</b>	75	1100	2000	B15d	18	86	55	1	10
64475	4050300 <b>011899</b>	100	1500	2000	B15d	18	86	55	1	10
64471	4050300 <b>019505</b>	150	2500	2000	B15d	18	86	55	1	10
64477	4050300 <b>004099</b>	150	2500	2000	B15d	18	98	67	1	10
64479	4050300 <b>004112</b>	250	4350	2000	B15d	18	98	67	1	10

frosted, outside

64466AM	4050300 <b>582344</b>	25	230	1500	B15d	18	67	39	2	10
64467AM	4050300 <b>467320</b>	40	460	1500	B15d	18	67	39	2	10
64481AM	4050300 <b>468853</b>	60	790	2000	B15d	18	67	39	2	10
64469AM	4050300 <b>314983</b>	60	790	2000	B15d	18	86	55	2	10
64473AM	4050300 <b>011868</b>	75	1050	2000	B15d	18	86	55	2	10
64475AM	4050300 <b>011905</b>	100	1470	2000	B15d	18	86	55	2	10
64471AM	4050300 <b>019512</b>	150	2400	2000	B15d	18	86	55	2	10
64477AM	4050300 <b>004105</b>	150	2400	2000	B15d	18	98	67	2	10
64479AM	4050300 <b>004129</b>	250	4210	2000	B15d	18	98	67	2	10



**For small narrow luminaires there are clear and frosted HALOLUX CERAM® lamps with B15d base.**

\* To ensure that your order reaches you quickly, please order standard pack quantities