
Overview



HP ProLiant BL685c Server Blade

- 1. Two small form factor (SFF) hot-plug drive bays
- 2. Local I/O connector
- 3. System power LED

- 5. Three mezzanine I/O expansion slots
- 6. Four Gigabit Ethernet network adapters ports, two are multifunction
- 7. Smart Array E200i storage controller (optional battery-backed write cache)

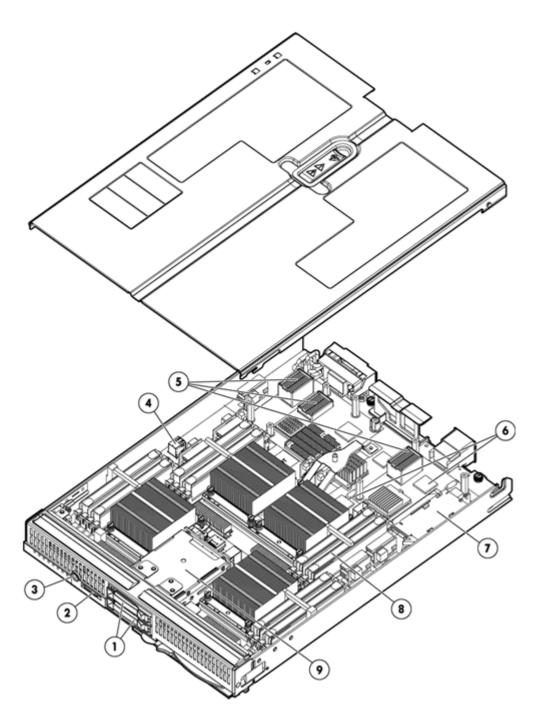

Overview

4. Internal USB connector

- Sixteen PC2-5300 Registered DIMM (DDR2-667) memory slots
- 9. Up to four AMD Opteron™ 8000 series processors

At A Glance

This document covers the HP ProLiant BL685c server blade only. For more information on HP BladeSystem c-Class Infrastructure and HP BladeSystem c-Class Interconnects, please see the following QuickSpecs:

- HP BladeSystem c-Class Infrastructure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.html
- HP BladeSystem c-Class Interconnect Components QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12524_na/12524_na.html

The HP ProLiant BL685c delivers no-compromise performance and expansion in the densest 4P server blade form-factor available to handle your most demanding applications.

HP ProLiant BL685c server blade includes:

- Processor:
 - O Up to four AMD Opteron™ 8200 Series processors
 - , Supports up to 3.0 GHz 1 GHz HyperTransport™; 1MB Level 2 cache memory per core
- Memory:
 - O Up to 64 GB of memory, supported by (16) slots of PC2-5300 Registered DIMMs at 667 MHz
 - O Supporting memory interleaving (2:1)
- Storage Controller:
 - O Integrated Smart Array E200i RAID controller with 64 MB cache (with optional battery-backed write-cache with an upgrade to 128MB cache (BBWC). Supports RAID 0,1.
- Internal Drive Support:
 - O Up to 2 small form factor (SFF) SAS or SATA hot plug hard disk drives
- Network Controller:
 - O Four (4) integrated network adapters
 - One (1) embedded NC326i Dual Port Gigabit Server Adapter
 - Two (2) embedded NC373i Multifunction Gigabit Server Adapters
 - One (1) additional 10/100 NIC dedicated to iLO 2 Management
- Mezzanine Support:
 - O Three (3) additional I/O expansion slots via mezzanine card.
 - O Supports up to (3) mezzanine cards
 - Dual-Port Fibre Channel Mezzanine (4-Gb) options for SAN connectivity (Choice of Emulex or QLogic).
 - Ethernet server adapter mezzanine options for additional network ports
 - HP NC512m Dual Port 10GbE Multifunction BL-c Adapter
 - HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter for c-Class BladeSystem
 - HP NC364m Quad Port 1GbE BL-c Adapter
 - HP NC360m Dual Port 1GbE BL-c Adapter
 - HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem
 - HP NC325m PCI Express Quad Port 1Gb server Adapter for c-Class BladeSystem
 - 4X DDR InfiniBand (IB) Mezzanine (20 Gb/s) options for low latency server interconnectivity (based on Mellanox technology)
- Internal USB Support:
 - O One (1) internal USB 2.0 connector for security key devices and USB drive key
- Form Factor:



Overview

- O HP ProLiant BL685c server blade plugs into the BladeSystem c3000 and c7000 enclosures
- Management:
 - O Integrated Lights-Out 2 (iLO 2) Standard Blade Edition with virtual KVM and graphical remote console at no additional cost
- Operating Systems:
 - O Supports Windows and Linux
- Warranty:
 - O Protected by HP Services and a worldwide network of HP Authorized Channel Partners. Three-year parts, 3 Year Labor and 3 Year on-site limited global warranty. Certain restrictions and exclusions apply. SATA hard drives have a one year warranty.



DA - 12576

Page 3

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: http://h71028.www7.hp.com/ERC/downloads/4AA0-6122ENW.pdf

Processor AMD Opteron[™] processor Model 8222 (3.0 GHz, 95W)

AMD Opteron[™] processor Model 8220 (2.8 GHz, 95W)
AMD Opteron[™] processor Model 8218 (2.6 GHz, 95W)
AMD Opteron[™] processor Model 8216 (2.4 GHz, 95W)
AMD Opteron[™] processor Model 8214 (2.2 GHz, 95W)

Low Power AMD Opteron™ processor Model 8218 HE (2.6 GHz, 68W)*

*Offered through Configure-To-Order process only. See Factory Integration Models section for more

details.

NOTE: AMD Opteron™ 8200 series processors are 64-bit, dual-core, and support AMD

Virtualization™.

Upgradeability Upgradeable to quad (4) processors

NOTE: The HP ProLiant BL685c only supports 2 and 4 processor configurations.

Cache Memory 1MB Level 2 cache memory per core

Chipset nVidia CK8-04, IO-04

Memory Type PC2-5300 DDR2 Registered DIMMs at 667 MHz

Standard 4 GB (4 x 1 GB)

Maximum 64 GB (16 x 4 GB)

NOTE: Memory must be installed in pairs.

NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the banks

furthest away from each processor.

Network Controller Four (4) embedded NIC ports, plus one (1) additional management NIC port consisting of:

One (1) embedded NC326i Dual Port Gigabit Server Adapter

Two (2) embedded NC373i Multifunction Gigabit Server Adapters with TCP/IP Offload Engine for

Microsoft Windows

One (1) additional 10/100 NIC dedicated to iLO 2 Management



Standard Features

Multifunction Networking

The embedded multifunction NC373i combines standard Gigabit Ethernet networking, TCP/IP offload engine (TOE) acceleration, and iSCSI boot capability into a single adapter.

- TOE moves the processing of data in the TCP protocol stack from the server CPU to the network card, freeing CPU cycles for other activities. With TOE, network communications are improved, and server efficiency is increased. The NC373i offers TOE for Microsoft® Windows environments.
- iSCSI network boot (iSCSI boot) allows the BL685c to boot from a remote operating system (OS) image located on a storage area network (SAN). The BL685c uses an iSCSI firmware image (iSCSI boot option ROM) making the remote disk drive appear as a local, bootable C: drive. The BL685c is configured to connect to and boot from the iSCSI target disk on the network and download the OS image from the iSCSI target disk. The iSCSI boot option ROM is supplied by HP at no cost. The additional cost and mezzanine slot usage of an add-in iSCSI HBA card is not required. Additionally, the HP iSCSI boot solution includes scripts to significantly simplify the installation process.

I/O Expansion Slots	Three I/O expansion mezzanine slots (All x8 PCI Express)					
Integrated Manageability	y Integrated Lights-Out 2 (iLO 2) Standard Blade Edition (integrated on motherboard)					
Storage Controller	Smart Array E200i Controller	64MB memory module supports RAID 0,1 Available upgrades: 128MB with Battery-backed write cache				
Maximum Internal Storage	Hot Plug Serial Attach SCSI (SAS) Hot Plug Serial ATA (SATA)	292GB SAS 240GB SATA	2 x 146GB Serial SCSI 2 x 120GB Serial ATA			
Graphics	Integrated ATI RN-50 1280 x 1024 x 16M color (32 MB DDR memory)					
Graphics Resolution Supported	Resolution Color Depths	1280 x 1024, 16.7M , 64k, 256,16 1024 x 768, 16.7M, 64k, 256, 16 800 x 600, 16.7M, 64k, 256, 16 640 x 480, 16.7M, 64k, 256, 16				



Standard Features

Fiber Channel on the HP ProLiant BL685c server blade Two optional Fibre Channel HBAs are supported by the HP ProLiant BL685c. Both mezzanine circuit boards connect directly to the server blade system board. These Fibre Channel HBAs are available via option kits ordered separately.

Two option kits

Emulex LPe1105-HP 4Gb FC HBA for HP c-Class BladeSystem (403621-B21)

 Based on the same field-proven ASIC, firmware, and driver technology as Emulex's renowned LPe1150 HBA, the Emulex LPe1105-HP is fully driver compatible with all Emulex HBAs

QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem (403619-B21)

 Uses common drivers which means that customers can standardize on one QLogic driver whether they are using the QMH2462 or other 4Gb and 2Gb HBAs powered by QLogic

Emulex and QLogic Fibre Channel HBAs feature

- Optimal performance utilizing PCI Express
- 4/2/1Gb/s auto negotiating speeds
- Dual-ports for redundant path connections
- Up to two FC HBAs per server blade providing redundant FC HBA support
- Optimized for HP StorageWorks and supported by third party SAN vendors
- Support for Microsoft® Windows® and Linux operating systems environments

Compatible SAN

HP ProLiant BL685c server blades are optimized for HP StorageWorks MSA, EVA, and XP

HP ProLiant BL685c server blades are compatible with select third party SANs (please see blade storage page for more details: http://h18000.www1.hp.com/products/servers/proliant-bl/c-Class/storage.html)



Standard Features

Insight Control Management Suites for BladeSystem Insight Control Environment for BladeSystem delivers foundation management for HP BladeSystem lifecycles, including hardware resource deployment, health monitoring, software version control, performance monitoring, vulnerability scanning and patch management.

Installs and licenses the following components by default using a wizard-based integrated installer:

- HP Systems Insight Manager
- HP iLO Select Pack
- HP Insight Power Manager
- HP ProLiant Essentials Rapid Deployment Pack
- HP ProLiant Essentials Performance Management Pack
- HP ProLiant Essentials Vulnerability and Patch Management Pack
- HP ProLiant Essentials Virtual Machine Management Pack

Additional ProLiant Essentials software and management tools included on the Insight Control Management kit can be installed manually.

- HP Server Migration Pack Universal Edition
- HP Open Service Event Manager
- HP Instant Support Enterprise Edition

NOTE: HP Server Migration Pack – Universal Edition can be installed from the SMP-P2P CD included in the Insight Control Management media kit.

NOTE: Insight Control Environment for BladeSystem can be installed from the Insight Control Management DVD, which can be delivered with HP BladeSystem c-Class enclosures with a choice of licensing options. Licensing options include a free 30 day evaluation license for 8 servers (default option for every enclosure order), a full purchased license for 8 blade servers or a full purchased license for 16 blade servers). For additional information on HP c-Class Infrastructure please visit: HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517_na/12517_na.html

NOTE: For additional product and licensing information about Insight Control Environment for BladeSystem, HP Systems Insight Manager and Essentials software refer to http://www.hp.com/servers/proliantessentials.

HP Insight Control management suites and most HP ProLiant Essentials include one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: http://www.hp.com/services/insight.

Server Management Stand Alone Software Product - ProLiant Essentials HP Systems Insight Manager HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms.

ProLiant Essentials Rapid Deployment Pack Rapid Deployment Pack (RDP) extends HP Systems Insight Manager with a complete deployment solution for HP ProLiant blade servers. RDP provides a central location to configure server hardware, deploy Windows, Linux and VMware ESX operating environments and install HP ProLiant Support Pack drivers using images and scripted profiles.



Standard Features

ProLiant Essentials Pack

Performance Management Pack (offered exclusively through the Insight Performance Management Control suites) - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.

Server Migration Pack -Universal Edition

Upgrading, replacing, or virtualizing your existing server? Effortlessly transition to new virtual or physical HP ProLiant servers or BladeSystem with automated, accurate and affordable migration of OS, application and data. SMP Universal automates the manual processes required for migrating servers between physical or virtual platforms, whether migrating to VMware or Microsoft virtual machines. SMP Universal allows all of the following:

- Physical to ProLiant
- Physical to virtual
- Virtual to virtual
- Virtual to ProLiant

Virtual Machine Management Pack

Get the most out of server virtualization by unifying the management of physical and virtual servers in HP Systems Insight Manager. The Virtual Machine Management Pack plug-in provides central management and control of VMware and Microsoft virtual machines and provides physical host to virtual machine association.

Vulnerability and Patch Management Pack

Vulnerability and Patch Management Pack (offered exclusively through the Insight Control suites) - identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats.

Integrated Lights-Out Select Pack

Upgrades the iLO 2 processor with enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and twofactor authentication) for servers managed using remote consoles available in iLO 2 Standard and iLO 2 Standard Blade Edition.

Insight Power Manager (IPM)

Upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager, IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.

iLO Power Management Pack for BladeSystem

Is energy-efficient management software that delivers centralized control, reliable security, and energy savings for your BladeSystem infrastructure. iPMP combines the total control of iLO 2 Advanced in the area of remote management with the energy monitoring and control of the Insight Power Manager to deliver a robust solution capable of full remote control and power management of ProLiant servers through a unified interface within HP Systems Insight Manager.

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to:

http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information. NOTE: Selected software packages listed here include one year of 24 x 7 Software Technical Support and Update Service. If you have any questions about this service please visit the HP website at:

http://www.hp.com/services/insight



Standard Features

Core Infrastructure
Management

SmartStart

SmartStart is a tool that simplifies single server setup, providing a rapid way to deploy reliable and consistent server configurations. SmartStart 7.60 and later can now deploy the HP ProLiant BL685c using the I/O port with an attached USB CD-ROM device. To obtain a copy of SmartStart for your blade server order or download your copy from the SmartStart web site. For more information, please visit the SmartStart Web site at:

http://www.hp.com/servers/smartstart.

SmartStart version supported (minimum): SmartStart 7.60

Core Infrastructure Management **SmartStart** Insight Management

Agents

The Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a

consolidated browser-based interface for managing individual servers.

Subscriber's Choice Subscriber's Choice Driver and Support Alerts/Notifications is a web-based

email subscription service that provides software and driver change

notifications for ProLiant products. Sign up at: http://www.hp.com/go/subscriberschoice

and customize your profile to receive various new alerts as they become

available, on a weekly or monthly basis.

ProLiant Support Packs and ROMPaq, software The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options, available through ProLiant Support Packs the ProLiant Essentials Rapid Deployment Pack, SmartStart or downloaded from

Software and Drivers download pages website at:

http://www.hp.com/go/support.

OS Support

Microsoft Windows Server 2003 Microsoft Windows Compute Cluster Server 2003 Microsoft Windows Server 2008 Red Hat Enterprise Linux SUSE Linux Enterprise Server Solaris 10 32/64-bit VMware Virtualization Software

NOTE: For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix at: http://www.hp.com/go/supportos.

NOTE: For an up-to-date listing of the latest software and drivers available for your server, please select your server: http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?lang=en&cc =us&taskld=135&prodTypeld=15351&prodCatld=241435.

NOTE: For a more complete and up-to-date information on Linux support, please visit HP Linux website at: http://h18000.www1.hp.com/products/servers/linux/hpLinuxcert.html.

NOTE: For more Linux OS support & certification information, please visit our the ProLiant & Bladesystem Server Linux matrix http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html NOTE: For more information on HP's Certified and Supported HP ProLiant Servers, please visit the VMware Server Support Matrix at:

http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html



Standard Features

Integrated Manageability Integrated Lights-Out 2 (iLO 2) Standard Blade Edition (integrated on motherboard)

- Virtual KVM based remote console
- Virtual media (single server, browser based access only)
- Remote Serial Console
- Virtual Power Button Control
- Virtual Unit ID control
- Integrated Remote Console (ActiveX Control client)
- Dedicated network connectivity
- OS independent hardware health status
- Present server power consumption
- Browser, command line and scripted access
- Automatic IP Configuration via DHCP/DNS/WINS
- Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)
- Advanced Encryption Standard (AES)/Triple Data Encryption Standard (3DES)
- IML and iLO Event Logging
- Support for 12 user accounts with customizable access privilege
- Single sign-on from HP BladeSystem Onboard Administrator

NOTE: Advanced features such as Graphical Remote Console and browser accessible Virtual Floppy/CD-ROM are included with the BL685c server blade.

Availability

Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection

Two embedded Gigabit Ethernet adapters for redundant LAN connections

Two hot-plug SAS/SATA hard drive bays and integrated RAID (Smart Array E200i) controller on every server blade (Battery-backed write cache is optional.)

server blade (Battery-backed write cache is opt Redundant ROM on each server blade

Multiple mezzanine I/O expansion

ECC Memory

Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load

balancing)

Industry Standard Compliance

ACPI 2.0 Compliant PCI 2.2 Compliant

WOL Support

Microsoft® Logo certifications

USB 2.0 Support

Security

Power-on password

Administrator's password

Integrated Lights-Out 2 has 12 customizable user accounts and SSL encryption

Integrated Lights-Out 2 can be disabled via a Global Setting



Standard Features

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to http://www.hp.com/go/factory-express.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html

HP Care Pack services provide total care and support expertise with committed response designed to meet your IT and business needs.

The HP Care Pack service for HP ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

To fully capitalize on your HP BladeSystem servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a HP BladeSystem server support offer to help you speedily deploy and maximize system uptime.

Recommended Service - Simplify ProLiant solution implementation, maintenance and management.

- Support Service 4-Hour Response Coverage, 3-Year, 24 x 7, Same Business Day
- Deployment Service Installation and Start Up for HP BladeSystem Infrastructure

Enhanced Service - Optimize service level to increase IT performance and availability

• Support Service - HP Proactive BladeSystem Service, 1-Year



Standard Features

• Deployment Service - Enhanced Network Installation and Start-up for HP BladeSystem Switches

Installation & Start-Up service for HP BladeSystem Infrastructure plus HP BladeSystem Enhanced Network Installation and Start-UP as per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

For a complete listing of service offerings and information visit:

http://www.hp.com/services/bladesystemservices

http://www.hp.com/go/proliant/carepack



Models

Dual-Core Models

HP ProLiant BL685c 8222 Processor(s)

DC 4 GB (2P) 454906-One of the following B21 depending on model

HP ProLiant BL685c 8220

DC 4 GB (2P) 438818-Cache Memory B21

Memory

HP ProLiant BL685c 8214 Network Adapter

4 GB (2P) 405659-B21

Storage Controller HP ProLiant BL685c 8216

DC 4 GB (2P)

Hard Drives 405660-B21

Internal Storage

HP ProLiant BL685c 8218

DC 4 GB (2P) 405661-B21

Optical Drive Form Factor

(2) AMD Opteron[™] processor Model 8222 (3.0 GHz)

(2) AMD Opteron processors Model 8220 (2.8 GHz)

(2) AMD Opteron processors Model 8218 (2.6 GHz)

(2) AMD Opteron processors Model 8216 (2.4 GHz)

(2) AMD Opteron processors Model 8214 (2.2 GHz)

1MB Level 2 cache memory per core

4 GB (4 x 1 GB) PC2-5300, Registered DDR2-667

One (1) embedded NC326i Dual Port Gigabit Server Adapter, Two (2) embedded NC370i Multifunction Gigabit Server Adapters plus one (1) additional 10/100 server adapter dedicated to iLO 2 management

Smart Array E200i Controller with 64MB (optional battery-backed write cache)

No drives included; (2) SFF SAS/SATA drive bays

292GB SAS 240GB SATA

None

Up to 4 full-height blades supported in the HP BladeSystem c3000 Enclosure Up to 8 full-height blades supported in HP BladeSystem c7000 Enclosure



Configuration Information - Factory Integrated Models (North America only)

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option is available only as a Factory Installable Option.

Step 1: Base Server Blade Configuration

Models HP ProLiant BL685c CTO Blade 405024-B21

One (1) embedded NC326i Dual Port Gigabit Server Adapter, two (2) embedded NC373i Multifunction Gigabit Server Adapters, and one (1) additional 10/100 NIC

dedicated to iLO 2 Management

Integrated Smart Array E200i RAID controller

NOTE: Controller cache module selection is required. Select either the standard 64

MB module or the optional 128 MB module in step 2 below.

Two small form factor (SFF) SAS/SATA hot plug hard drive bays

Integrated Lights-Out 2 Standard Blade Edition

Step 2: Choose Required Options (one of the following from each list unless otherwise noted):

noicaj.							
Processors	For dual (2) processor configurations choose (one of the following):						
	AMD Opteron™ processor Model 8222 (3.0 GHz, 95W) Option Kit, FIO Base	454907-L21					
	AMD Opteron™ processor Model 8220 (2.8 GHz, 95W) Option Kit, FIO Base	438820-L21					
	AMD Opteron™ processor Model 8218 (2.6 GHz, 95W) Option Kit, FIO Base	409613-L21					
	AMD Opteron™ processor Model 8216 (2.4 GHz, 95W) Option Kit, FIO Base	409612-L21					
	AMD Opteron™ processor Model 8214 (2.2 GHz, 95W) Option Kit, FIO Base	409611-L21					
	Low Power AMD Opteron™ processor Model 8218 HE (2.6 GHz, 68W), FIO Base	440936-L21					
	OR						
	For quad (4) processor configurations choose (one of the following):						
	AMD Opteron™ processor Model 8222 (3.0 GHz, 95W) Option Kit, FIO Base	454907-L21					
	AMD Opteron™ processor Model 8220 (2.8 GHz, 95W) Option Kit, FIO Base	438820-L21					
	AMD Opteron™ processor Model 8218 (2.6 GHz, 95W) Option Kit, FIO Base	409613-L21					
	AMD Opteron™ processor Model 8216 (2.4 GHz, 95W) Option Kit, FIO Base	409612-L21					
	AMD Opteron™ processor Model 8214 (2.2 GHz, 95W) Option Kit, FIO Base	409611-L21					
	Low Power AMD Opteron™ processor Model 8218 HE (2.6 GHz, 68W) Option Kit, FIO Base	440936-L21					
	Plus (one of the following):						
	AMD Opteron™ processor Model 8222 (3.0 GHz, 95W) Option Kit	454907-B21					
	AMD Opteron™ processor Model 8220 (2.8 GHz, 95W) Option Kit	438820-B21					
	AMD Opteron™ processor Model 8218 (2.6 GHz, 95W) Option Kit	409613-B21					
	AMD Opteron™ processor Model 8216 (2.4 GHz, 95W) Option Kit	409612-B21					
	AMD Opteron™ processor Model 8214 (2.2 GHz, 95W) Option Kit	409611-B21					



408854-B21

QuickSpecs

Configuration Information - Factory Integrated Models (North America only)

Low Power AMD Opteron™ processor Model 8218 HE (2.6 GHz, 68W) Option Kit 440936-B21

NOTE: All HP ProLiant BL685c processor option kits contain two processors.

NOTE: The HP ProLiant BL685c only supports 2 and 4 processor configurations.

Memory 1 GB PC2-5300 DDR2 2 x 512 MB Kit, single rank 408850-B21

2 GB PC2-5300 DDR2 2 x 1 GB Kit, single rank 408851-B21 4 GB PC2-5300 DDR2 2 x 2 GB Kit, dual rank 408853-B21

NOTE: Must be installed in pairs.

8 GB PC2-5300 DDR2 2 x 4GB Kit, dual rank

NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs

installed in the banks furthest away from each processor.

Storage Controller Cache 64 MB Cache - FIO Only 405102-B21

128 MB Battery-Backed Cache Enabler 351580-B21

NOTE: Supports the Smart Array E200i Controller, Smart Array 641 Controller, and

Smart Array 642 Controller.

Step 3: Choose Additional Options for Factory Integration

NOTE: For additional options, including server blade enclosures interconnect options and power subsystem options; please see the following QuickSpecs:

HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.html

and HP BladeSystem c-Class Interconnect Components QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12524_na/12524_na.html.



Options

Ethernet Mezzanine Options	HP NC325m PCI Express Quad Port 1Gb Server Adapter for c-Class BladeSystem HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem HP NC360m Dual Port 1GbE BL-c Adapter HP NC364m Quad Port 1GbE BL-c Adapter HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter for c-Class BladeSystem HP NC512m Dual Port 10GbE Multifunction BL-c Adapter NOTE: An NC512m network adapter card is required for each server blade connecting to the HP 10Gb Ethernet BL-c Switch. NOTE: A maximum of one NC512m is supported per server in a type II mezzanine slot. For more information, see the Mezzanine Slot Compatibility matrix within the HP NC512m Dual Port 10GbE Multifunction BL-c Adapter QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12752_na/12752_na.html NOTE: The NC512m requires a minimum of 4 GB of server memory and supports a maximum of 32 GB. Therefore, when an NC512m is installed in a blade server, the server is limited to a maximum of 32 GB of memory.	416585-B21 406771-B21 445978-B21 447883-B21 406770-B21 440910-B21
Fibre Channel Mezzanine Options	Emulex LPe1105 FC Dual Channel 4Gb, PCI-E-to-Fibre Channel Host Bus Adapter QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem	403621-B21 403619-B21
HP InfiniBand Mezzanine Options	HP 4X DDR IB Dual Port Mezzanine HCA for HP BladeSystem c-Class HP 4X DDR IB Mezzanine HCA for HP BladeSystem c-Class HP Cisco 4X DDR IB Mezzanine HCA for HP BladeSystem c-Class HP HPCD 4X DDR IB Mezzanine HCA for HP BladeSystem c-Class	448262-B21 410533-B21 438670-B21 409377-B21
c-Class Mezzanines	HP PCI Express Mezzanine Pass-Thru Card for HP BladeSystem c-Class NOTE: Required to support the HP StorageWorks SB40c Storage Blade HP BladeSystem PCI Expansion Blade, HP StorageWorks Ultrium 448c Tape Blade, and HP StorageWorks SB920c Tape Blade with HP c-Class BladeSystem full-height server blades (e.g. BL480c, BL680c, BL685c)	431643-B21
HP StorageWorks SB40c Storage Blade	HP StorageWorks SB40c Storage Blade NOTE: Please see the SB40c Storage Blade QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12587_na/12587_na.html	411243-B21
HP PCI Expansion Blade	HP PCI Expansion Blade NOTE: Ships with one pre-installed PCI-X connect board. Also includes one PCIe connect board which requires installation. NOTE: Please see the HP PCI Expansion Blade QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12753_na/12753_na.html	448018-B21



Options

HP c-Class Tape Blades

HP StorageWorks Ultrium 448c Tape Blade

440947-B21

HP StorageWorks SB920c Tape Blade

AJ401A

NOTE: Please see the HP StorageWorks Ultrium 448c Tape Blade QuickSpecs for

additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12729_na/12729_na.html NOTE: Please visit the BladeSystem c-Class enclosure QuickSpecs for a complete list

of recommended data protection solutions for BladeSystem c-Class enclosures:

http://www.hp.com/go/blades

HP Insight Control Management Suites for HP BladeSystem **NOTE:** Electronic licensing options are available for select ProLiant Essentials software products. Please see the appropriate ProLiant Essentials QuickSpecs for additional information.

Insight Control Environment for BladeSystem

HP Insight Control Environment for BladeSystem, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates

453484-B21

NOTE: Contains 1 license for each of RDP, PMP, VMM, VPM, IPM and iLO Select. Includes one year of 24 x 7 HP Software Technical Support and Update Service

NOTE: Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

HP Insight Control Management Software Media Kit

436222-B21

442937-B21

NOTE: Insight Control Management DVD media without licenses. Contains Insight Manager and Essentials software products and components licensed by Insight Control Management suites. Uses an integrated installer to perform quick and accurate software installation and updates.

NOTE: For additional HP Insight Control Environment license kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12631 na/12631 na.html

HP iLO Power Management Pack for BladeSystem

HP iLO Power Management Pack for BladeSystem, No Media, 1-Server License including 1 year of 24x7 Technical Support and Updates

NOTE: This option kit includes 1 license for iLO Select and Insight Power Manager. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional HP iLO Power Management Pack for BladeSystem license kits please see the QuickSpecs at:

http://h18013.www1.hp.com/products/quickspecs/12632 na/12632 na.html

Stand Alone Software Product - ProLiant Essentials **NOTE**: Electronic licensing options are available for select ProLiant Essentials software products. Please see the appropriate ProLiant Essentials QuickSpecs for additional information.

Deploy

ProLiant Essentials Rapid Deployment Pack



Options

ProLiant Essentials Rapid Deployment Pack No Media 1-Server License including 1 year of 24x7 Technical Support and Updates

452151-B21

NOTE: This license allows 1 server to be deployed and managed via RDP. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional ProLiant Essentials Rapid Deployment Pack license kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11053 na/11053 na.html

HP Server Migration Pack - Universal Edition

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to ProLiant Single Migration License, including 1 year of 24x7 Technical Support

460750-B21

NOTE: This license allows 1 physical to ProLiant or virtual to ProLiant migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to Virtual Single Migration License, including 1 year of 24x7 Technical Support

NOTE: This license allows 1 physical to virtual or virtual to virtual migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP

460753-B21

Software Technical Support and Update Service. HP Server Migration Pack - Universal Edition, No Media, 1-Year Unlimited Migration

460756-B21

License, including 1 year of 24x7 Technical Support and Updates NOTE: This license allows unlimited migrations (physical to ProLiant, physical to virtual, virtual to virtual, and virtual to ProLiant) for one year. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional HP Server Migration Pack - Universal Edition license kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12855 na/12855 na.html

Control

Integrated Lights-Out Select Pack

ProLiant Essentials Integrated Lights-Out Select Pack, No Media, 1-Server License

452158-B21

Featuring: Sophisticated remote control and security features for HP BladeSystem servers and ProLiant BL servers in text console environments.

NOTE: For additional ProLiant Essentials Integrated Lights-Out Value Packs please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362 na/12362 na.html

Optimize

HP Insight Power Manager (IPM)

HP Insight Power Manager, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates

452677-B21



452153-B21

QuickSpecs

Options

NOTE: Customers purchasing this upgrade must already have an iLO Advanced or Select license on each managed server. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional HP Insight Power Manager Pack license kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12623 na/12623 na.html

ProLiant Essentials Virtual Machine Management Pack

ProLiant Essentials Virtual Machine Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates

NOTE: Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: For additional ProLiant Virtual Machine Management Pack license kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12328_na/12328_na.html NOTE: Electronic licensing options are available for Insight Control suites and select ProLiant Essentials software products. Please see the appropriate Insight Control and ProLiant Essentials QuickSpecs for additional information.

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: http://www.hp.com/servers/proliantessentials.

Processors	AMD Opteron™ processor Model 8222 (3.0 GHz, 95W) Option Kit	454907-B21
	AMD Opteron processor Model 8220 (2.8 GHz, 95W) Option Kit	438820-B21
	AMD Opteron processor Model 8218 (2.6 GHz, 95W) Option Kit	409613-B21
	AMD Opteron processor Model 8216 (2.4 GHz, 95W) Option Kit	409612-B21
	AMD Opteron processor Model 8214 (2.2 GHz, 95W) Option Kit	409611-B21
	Low Power AMD Opteron processor Model 8218HE (2.6 GHz, 68W) Option Kit	440936-B21
	NOTE: HP ProLiant BL685c processor option kits contain two processors.	
	NOTE: The ProLiant BL685c only supports 2 and 4 processor configurations.	
Memory	1 GB PC2-5300 DDR2 2 x 512 MB Kit, single rank	408850-B21
·	2 GB PC2-5300 DDR2 2 x 1 GB Kit, single rank	408851-B21
	4 GB PC2-5300 DDR2 2 x 2 GB Kit, dual rank	408853-B21
	8 GB PC2-5300 DDR2 2 x 4 GB Kit, dual rank	408854-B21
	NOTE: Must be installed in pairs.	
	NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the banks furthest away from each processor.	



Options

Serial Attached SCSI (SAS) SFF Hot Plug	
HP 72GB 3G SAS 15k SFF DP HDD	418371-B21
HP 72GB 3G SAS 15K SFF SP HDD	431935-B21
HP 36GB 3G SAS 15k SFF DP HDD	418369-B21
HP 36GB 3G SAS 15K SFF SP HDD	431933-B21
HP 146GB 3G SAS 10K SFF DP HDD	418367-B21
HP 146GB 3G SAS 10K SFF HDD	431958-B21
HP 72GB 3G SAS 10K SFF DP HDD	384842-B21
HP 72GB 3G SAS 10K SFF SP HDD	375861-B21
HP 36GB 3G SAS 10K SFF SP HDD	375859-B21
NOTE: SAS drives have a 3 year warranty. NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html SEE SATA Hot Plug	
· · · · · · · · · · · · · · · · · · ·	431786-B21
	379306-B21
	37 7300-021
QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/11940_na/11940_na.html	
128MB Battery-Backed Cache Enabler NOTE: Supports the Smart Array E200 Controller.	351580-B21
NOTE: For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: http://www.hp.com/solutions/highavailability/oracle	
NOTE: For additional information regarding the HP ProLiant Cluster for HA/F500 please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10232_ng/10232_ng.html	
ProLiant Cluster Starter Kit NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see	364023-B22
the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html	
the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html HP Serviceguard for Linux ProLiant Cluster, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES10)	307754-B27
http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html HP Serviceguard for Linux ProLiant Cluster, A.11.18 (single license version - Red Hat	307754-B27
http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html HP Serviceguard for Linux ProLiant Cluster, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES10) HP Serviceguard for Linux A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4	307754-B27 305199-B27
	HP 72GB 3G SAS 15k SFF DP HDD HP 72GB 3G SAS 15k SFF SP HDD HP 36GB 3G SAS 15k SFF DP HDD HP 36GB 3G SAS 15k SFF DP HDD HP 146GB 3G SAS 10K SFF DP HDD HP 146GB 3G SAS 10K SFF DP HDD HP 146GB 3G SAS 10K SFF DP HDD HP 72GB 3G SAS 10K SFF DP HDD HP 72GB 3G SAS 10K SFF DP HDD HP 72GB 3G SAS 10K SFF SP HDD NOTE: SAS drives have a 3 year warranty. NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html SFF SATA Hot Plug HP 120GB 1.5G SATA 5.4K SFF HDD NOTE: SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/11940_na/11940_na.html 128MB Battery-Backed Cache Enabler NOTE: Supports the Smart Array E200 Controller. NOTE: For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: http://www.hp.com/solutions/highavailability/oracle NOTE: For additional information regarding the HP ProLiant Cluster for HA/F500 please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10232_na/10232_na.html ProLiant Cluster Starter Kit



Options

NOTE: For additional information regarding the HP Serviceguard for Linux License, please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11518 na/11518 na.html

USB Options	
-------------	--

DC172B
442085-B21
442084-B21
PA509A
PA849A
DT528A#xxx
DC141B

Service and Support Offerings

(HP Care Pack Services)

NOTE: The HP Care Pack service part numbers below for ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

Hardware Services On-site Service

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	UE458E
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE459E
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years,	UE460E
Electronic	

Support Plus 24

Onsite HW support 24x/, 4hr response and Microsoft O/S SW Tech support offsite,	UE4/3E
onsite at HP's discretion, 24x7 2hr response time including HP holidays, Electronic	



Memory

DIMM installation guidelines:

- 1. All DIMMs must be PC2-5300 Registered DDR2 DIMMs (667 MHz).
- 2. Both DIMM slots in a memory bank must be populated.
- 3. Banks must be populated in sequential alphabetic order, starting with bank A.
- 4. Both DIMMs in a memory bank must be identical. Install identical DIMMs as pairs only, starting with DIMM socket 1, bank A.
- 5. Multiple advanced memory protection (AMP) modes are supported, based on DIMM population and RBSU selection. The server blade defaults to Advanced ECC.
- 6. DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the banks furthest away from each processor.
- 7. DIMM banks are active only when the corresponding processor socket is populated.

HP ProLiant BL685c Server Blade

Standard Memory

4096-MB (4 x 1024 MB) of PC2-5300, Registered DDR2-667 ECC DIMMs.

Standard Memory Plus Optional Memory

Up to 53248-MB of PC2-5300, Registered DDR2-667 ECC DIMMs. Memory is available with the installation of optional PC2-5300, Registered DDR2-667 DIMM memory expansion kits.

Standard Memory Replaced with Optional Memory

Up to 65536-MB of PC2-5300, Registered DDR2-667 ECC DIMMs. Memory is available with the removal of standard memory and the installation of optional PC2-5300, Registered DDR2-667 DIMM memory expansion kits.

Memory		Slot							
Standard	8192 MB	1A	2A	3B	4B	5C	6C	7D	8D
		1024 MB	1024 MB	Empty	Empty	1024 MB	1024 MB	Empty	Empty
		9E	10E	11F	12F	13G	14G	15H	16H
		Empty							
Optional	53248 MB	1A	2A	3B	4B	5C	6C	7D	8D
		4096 MB	4096 MB	1024 MB	1024 MB	4096 MB	4096 MB	1024 MB	1024 MB
		9E	10E	11F	12F	13G	14G	15H	16H
		4096 MB							
Maximum	65536 MB	1A	2A	3B	4B	5C	6C	7D	8D
		4096 MB							
		9E	10E	11F	12F	13G	14G	15H	16H
		4096 MB							



Memory

Following are memory options available from HP:


1 GB PC2-5300 DDR2 2 x 512 MB Kit, single rank	408850-B21
2 GB PC2-5300 DDR2 2 x 1 GB Kit, single rank	408851-B21
4 GB PC2-5300 DDR2 2 x 2 GB Kit, dual rank	408853-B21
8 GB PC2-5300 DDR2 2 x 4 GB Kit, dual rank	408854-B21

NOTE: Must be installed in pairs.

NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the banks furthest away from each processor.



Storage



1-2 2 x SFF SAS or SATA Hot Plug Hard Drives

Hard Drives SAS Hard Drive

	Quantity Supported	Position Supported	Controller
72GB 15,000 rpm SAS SFF	2	1-2	Smart Array E200i Controller
36GB 15,000 rpm SAS SFF			
146GB 10,000 rpm SAS SFF			
72GB 10,000 rpm SAS SFF			

Serial-ATA (SATA) Hard Drive

Sendi-ATA (SATA) Fidra Driv	Quantity Supported	Position Supported	Controller
120 GB 5,400 rpm SATA	2	1-2	Smart Array E200i Controller
60 GB 5,400 rpm SATA	2	1-2	Smart Array E200i Controller



Technical Specifications

System Unit **Dimensions** 14.42 x 2.19 x 20.058 in (36.63 x 2.19 x 50.95 cm)

 $(H \times W \times D)$

Shipping Dimensions

 $(H \times W \times D)$

21.50 x 9.94 x 23.13 in (54.61 x 25.25 x 58.75 cm)

Weight 22.8 lbs (10.3 kg) Maximum

(approximate) (all hard drives and

System Inlet Temperature Operating

processors installed)

Minimum 19.35 lbs (8.75 kg)

(one hard drive and processor

installed)

Power Specifications For power specifications including input requirements, BTU rating, and power

supply output, please see the HP BladeSystem c-Class Infrastructure

QuickSpecs located at:

http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.html

To review typical system power ratings use the HP BladeSystem Power Sizer

available at: http://www.hp.com/go/bladesystem/powercalculator.

 10° to 35° C (50° to 95° F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct

sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C

(86°F).

Non-operating -30° to 60° C (-22° to 140° F), maximum rate of

change is 20°C/hr (36°F/hr).

Relative Humidity (non-condensing)

Operating

10 to 90% relative humidity (Rh), 28°C (82.4°F)

maximum wet bulb temperature, non-

condensing.

10 to 95% relative humidity (Rh), 38.7°C Non-operating

(101.7°F) maximum wet bulb temperature, non-

condensing.

Altitude 3050 m (10,000 ft). This value may be limited Operating

by the type and number of options installed.

Maximum allowable altitude change rate is 457

m/min (1500 ft/min).

9144 m (30,000 ft). Maximum allowable Non-operating

altitude change rate is 457 m/min (1500

ft/min).

Acoustic Noise For acoustic noise specifications, please see the HP BladeSystem c-Class

Infrastructure QuickSpecs located at:

http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.html

Technical Specifications

Smart Array E200i Controller

Disk Drive and Enclosure 3G SAS (Serial Attached SCSI)

Interface 1.5G SATA (Serial Advanced Technology Attachment)

SAS Connectors 2 internal (SFF8484) x4 wide port connectors

Cache Memory Speed DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.

Server Interface x4 2.5G PCle provides 2GB/s maximum bandwidth. SAS Speed x2 3G SAS provides 600MB/s maximum bandwidth.

40-bit 64MB or 128MB cache: ECC protection, battery-backed, and Cache Memory

transportable

Logical Drives Supported Up to 32 logical volumes Maximum Logical Drive 292GB (2 x 146GB)

Capacity

Host Memory Addressing 64-bit, supporting greater than 4GB server memory space

RAID Support RAID 1 (Mirroring)

RAID 0 (Striping)

Upgradeable Firmware Upgradeable Firmware

Embedded NC326i Dual Network Processor Port Gigabit Server Adapter

Data Transfer Method

Network Transfer Rate **IEEE Compliance**

Standard Features

Broadcom 5715S

Four lane (x4) PCI Express Two ports, each at 1000 Mb/s

802.1p, 802.1Q, 802.3, 802.3ad, and 802.3x

- Jumbo frames
- TCP/IP checksum offload (TCO)
- Large send offload (LSO)
- Interrupt coalescence
- Dual address cycles (DAC)
- Wake-on-LAN (WOL)
- Pre-boot execution environment (PXE)
- ProLiant Teaming including Network Fault Tolerance, Transmit Load Balancing, and Switch-Assisted Load Balancing
- Advanced teaming and Virus Throttle via the optional HP ProLiant Essentials Intelligent Networking Pack



Technical Specifications

Embedded NC373i Multifunction Gigabit Server Adapter Network Processor Data Transfer Method Network Transfer Rate IEEE Compliance Standard Features

Broadcom 5708S

Four lane (x4) PCI Express

1000 Mb/s half duplex (theoretical maximum value) 802.1p, 802.1Q, 802.3, 802.3ad, and 802.3x

- TCP/IP offload engine (TOE) for Microsoft Windows
- iSCSI Boot for Linux
- Jumbo frames
- TCP/IP checksum offload (TCO)
- Large send offload (LSO)
- Interrupt coalescence
- Dual address cycles (DAC)
- Wake-on-LAN (WOL)
- Pre-boot execution environment (PXE)
- ProLiant Teaming including Network Fault Tolerance, Transmit Load Balancing, and Switch-Assisted Load Balancing
- IPv6 packet transmit and receive (excluding all offload capabilities);
 IPv6 aware SNMPv1 agents for Microsoft Windows

Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

AMD, the AMD Arrow logo, AMD Opteron™, and combinations thereof, are trademarks of Advanced Micro Devices, Inc.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.

