

PRODUCT INFORMATION



Zebra ZT200 Series Label Printers

On the following pages you will find detailed manufacturer information about this product from our TISWARE hardware and software portfolio.

If you need more information, please contact us!

If you have any questions about or are interested in this or other products from our portfolio, please contact our sales team. Our colleagues are happy to help.

Phone: +49 2871 2722-0 E-mail: contact@tis-gmbh.com



TISLOG TELEMATICS SOFTWARE

TISLOG logistics and transport software provides powerful and flexible solutions for mobile order management, capable of exactly what you need for the individual work processes of your business.

www.tislog.com



TISPLUS HARDWARE ACCESSORIES

TISPLUS - Clever accessories for ergonomic handling on the go and in the warehouse. und im Lager. Development, design and production of our TISPLUS products take place at 100% in Germany.



BACKGROUND TIS GMBH

The TIS GmbH, based in Bocholt is one of the market leaders for sophisticated telematics projects. TIS stands for "Technical Information Systems". Since 1985 the company develops intelligent telematics solutions for freight forwarders, transport and logistics companies and retail chains. Currently, more than 50 employees work for TIS. The latest generation of products are the platform-independent software solutions under the brand name TISLOG Logistics & Mobility. Together with the powerful



hardware of renowned partners and the in-house developed hardware accessories TISLOG builds the optimal solution for companies looking for professional telematics solutions.

More information on the TIS Gmbh and our portfolio of software, hardware and accessories on **www.tis-gmbh.com**



Zebra[®] ZT200[™] Series



SEE MORE. DO MORE.



Zebra's most affordable industrial printers, the ZT200 Series, incorporate extensive customer feedback and the learnings from legacy printers—creating innovative printers with a spacesaving design. Featuring Zebra's Link-OS[®] environment, the ZT200 Series provides users with effortless setup, intuitive operation and ease of service and maintenance.

Whether you are adopting barcode technology for the first time or upgrading existing printer models, the ZT200 Series is the right choice for a variety of labeling applications. These innovative printers provide many user benefits. The ZT200 Series offers a streamlined design and smaller footprint that takes up less physical space than the Stripe and S4M models. ZT200 Series printers require minimal operator training and benefit from tool-less standard component maintenance and a durable design to minimize service.

Your IT staff will appreciate the backwards compatibility, since it allows for new printers to be up and running with minimal time and effort.

The ZT200 Series has been designed for ease of use, versatility and outstanding value.

Ideal for These Applications

Manufacturing: work-in-process, product ID/serial numbers, packaging labels, receiving/ put-away labeling

Transportation & Logistics: order picking/packing, shipping/ receiving, cross-docking, compliance labeling

Healthcare: orders, specimen labels, asset-tracking, unit-of-use labeling

Retail: shelf-labeling, shipping, returns, item tags

Government: asset-tracking, logistics labeling, warehousing

YOU SPOKE. WE LISTENED. ZT200 SERIES PRINTER BENEFITS— DESIGNED WITH YOU IN MIND.

The ZT200 Series design is the culmination of extensive feedback from our customers and understanding their printing applications, evolving business needs and operational challenges. The ZT200 Series offers outstanding functionality and features at an exceptional value.

Space-Saving Design

- Compact footprint and streamlined design fits easily in confined areas where space is at a premium
- Space saving design with unique bi-fold door (requires 4 in./102 mm of opening space) fits easily into tight spaces maximizing work space

Fast Installation and Integration

- Ideal replacement printer for previous generation Stripe and S4M models
- Multiple connectivity options: Parallel, 10/100 Ethernet, 802.11a/b/g/n wireless
- Icon-based status LEDs provide immediate and easily visible printer status
- Virtual Devices apps enable Link-OS printers to support well-known legacy and competitor printer languages—in addition to ZPL[®] and EPL[™]—for a future-proofed investment

Intuitive, Effortless Media Loading

- Side-loading design eliminates complicated threading of supplies
- Color-coded cues give even first-time users visual guidance for loading ribbon and media
- Illuminated multi-position transmissive and reflective sensors are visible through the media for trouble-free sensor-position adjustment

Print Quality

- Engineered for greater print precision with finetuned adjustments
- Crisp, clean text and barcodes—even on narrow media

Zebra Reliability and Durability

- Built for light industrial and commercial environments
- ENERGY STAR[®] qualified printer
- Drive system designed for optimal performance, with minimal maintenance required

Simplified Serviceability

- Easy, tool-less platen and printhead removal enable simple cleaning and replacement
- Simple interchangeable connectivity options enable rapid printer changes and upgrade
- Only three common tools needed for basic service


The Link-OS Environment In-depth

To meet changing expectations and growing demands for devices that are mobile, intelligent and connected to the Cloud, Zebra created a new software platform to support its devices: Zebra's Link-OS environment. This innovative solution makes Zebra printers even easier to integrate, manage and maintain than ever before—from any location.

The Link-OS environment is highly flexible, allowing new and creative ways for users to develop applications that interact with Zebra printers from mobile devices located anywhere in the world. Users can perform updates, gather data, and make smarter business choices from new analytic-driven insights.



COMPARING THE ZT220[™] AND THE ZT230[™]

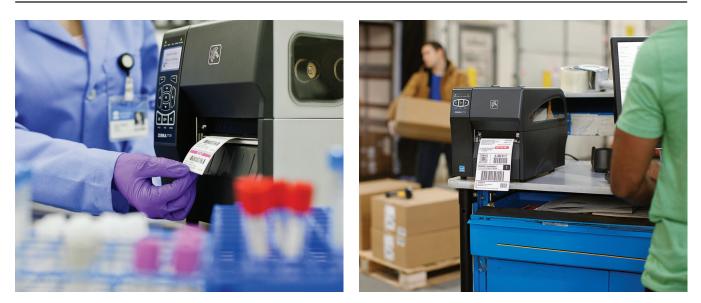

The ZT200 Series offers two models—the ZT220 and the ZT230. Compare the features to see which printer best suits your needs.

ZT220
Zebra's most affordable industrial printer
Durable high-impact polymer case for long-lasting use
• 300 m/984' ribbon capacity
Simple single-use three-button user interface
 Ideally suited for barcode labeling applications where minimal format or printer setting changes are required

ZebraCare[™] Services

Increase printer uptime and reduce lost productivity and unbudgeted repair costs by selecting a ZebraCare service agreement. A cost-effective means of planning and budgeting for your annual maintenance expenditures, your agreement ensures that trained Zebra technicians will bring your printer back to factory specifications. Zebra offers a variety of plans to fit your budget and business needs.

Genuine Zebra[™] Supplies

Zebra's comprehensive range of specialty supplies consists of self-adhesive labels, ribbons, card supplies, batteries and software for label design and printer network management. The Supplies R&D team carefully selects materials by conducting extensive tests to ensure consistent, high-quality cards, paper, labels and ribbon. We manufacture each supplies product using the same material every time to ensure crisp, readable and scannable output.

SPECIFICATIONS AT A GLANCE*

Printer Name

ZT210 (not available in all Regions) ZT220 ZT230

Standard Features

- Print methods: direct-thermal or thermaltransfer (optional)
- Construction: metal frame with choice of metal (ZT230) or plastic (ZT220) media cover
- Bi-fold media door with large clear window
- Side-loading supplies path for simplified media and ribbon loading
- Element Energy Equalizer™ (E^{3™}) for superior print quality
- · Bi-color LEDs for quick printer status
- Icon-based LCD multilingual graphical user interface and full function keypad (ZT230)
- Simple keypad (ZT220)
- USB 2.0 and RS-232 Serial ports
- ENERGY STAR qualified

Printer Specifications

Resolution

- 203 dpi/8 dots per mm
- 300 dpi/12 dots per mm (optional)

Memory

- 128 MB SDRAM memory
- 128 MB on-board linear Flash memory

Maximum Print Width

4.09"/104 mm

Maximum Print Speed

6"/152 mm per second

Media Sensors

Transmissive and reflective sensors

Media Characteristics

- Maximum label and liner width: 4.5"/114 mm
- Maximum non-continuous label length: 39"/991 mm

Media Width

0.75"/19.4 mm to 4.50"/114 mm

Print Length

- 203dpi: 157"/3,988 mm
- 300dpi: 73"/1,854 mm

Maximum Media Roll Size

• 8.0"/203 mm O.D on a 3.0"/76 mm I.D. core

• 6.0"/152 mm O.D. on a 1.0"/25 mm I.D. core

Media Thickness

0.003"/0.076 mm to 0.010"/0.25 mm

Media Types

ZEBRA

Continuous, die-cut, notch, black mark

Corporate Headquarters

*Specifications subject to change without notice. *EPL available on 203 dpi models only.

Centronics Data Computer Corporation. All other trademarks are the property of their respective owners.

+1 800 423 0442

inguirv4@zebra.com

Ribbon characteristics

(Thermal-transfer option only)

Outside diameter

3.2"/81.3 mm on a 1.0"/25 mm I.D. core (ZT230) Standard length

300 m/984' (ZT220) or 450 m/1,476' (ZT230)

Ratio

- 2:1 media-roll-to-ribbon ratio for ZT220
- 3:1 media-roll-to-ribbon ratio for ZT230

Width

1.57"/40 mm to 4.33"/110 mm

Ribbon Setup

Ribbon wound ink-side out, core to core

Operating Characteristics

Environmental

- Operating Temperature: 40° F/5° C to 105° F/ 40° C (Thermal Transfer) 32° F/0° C to 105° F/ 40° C (Direct Thermal)
- Storage/Transport Environment:-40° F/-40° C to 140° F/60° C
- Operating humidity: 20% to 85% non-condensing
- Storage humidity: 5% to 85% non-condensing Electrical

lectrical

Universal auto-ranging (PFC-compliant) power supply 100-240 VAC; 47-63 Hz
ENERGY STAR qualified

Agency Approvals

- IEC 60950, EN 55022 Class B, EN 55024, EN 61000-3-2, EN 61000-3-3
- **ZT210**: CCC
- ZT220: cTUVus, CE, FCC, ICES-003, VCCI, C-Tick, NOM, Gost-R, BSMI, S-Mark (Argentina), KC, CCC, UkrSepro, SII, SABS
- **ZT230**: cTUVus, CE, FCC, ICES-003, VCCI, C-Tick, NOM, Gost-R, BSMI, S-Mark (Argentina),
- KC, CCC, UkrSepro, SII, SABS

Physical Characteristics

	ZT220 closed	ZT230 closed
Width:	9.4"/239 mm	9.5"/242 mm
Height:	11"/280 mm	10.9″/277 mm
Depth:	17"/432 mm	17"/432 mm
Weight:	17 lbs/7.8 kg	20 lbs/9.1 kg

Options and Accessories

Media Handling

- Peel a front-mount, passive-peel with no take-up spindle
- Peel a front-mount, passive-peel with liner take-up spindle (factory-fit only)
- Cutter a front-mount guillotine cutter

Real Time Clock (RTC)

- Real Time Clock
- · Date/time for standalone applications

Keyboard Display Unit

apacchannelmarketing@zebra.com

Latin America: Argentina, Brazil, Colombia, Florida (LA Headquarters in USA), Mexico Africa/Middle East: Dubai, South Africa

Asia-Pacific Headquarters

 $+65\,6858\,0722$

Supports KDU Plus[™] and ZKDU: Enter variable data and retrieve stored forms for standalone applications

Other Locations / USA: California, Georgia, Illinois, Rhode Island, Texas, Wisconsin Europe: France, Germany, Italy, the Netherlands, Poland, Spain, Sweden, Turkey,

United Kingdom Asia Pacific: Australia, China, Hong Kong, India, Indonesia, Japan, Malaysia, Phillipines, Singapore, South Korea, Taiwan, Thailand, Vietnam

©2015 ZIH Corp. Zebra, representation of Zebra Head, ZebraNet, ZPL II, Element Energy Equalizer, E3, ZBI 2.0, ZBI-Developer, ZebraDesigner, and all product names and numbers are Zebra trademarks, and may be registered trademarks of ZIH Corp in certain jurisdictions. All rights reserved. ENERGY STAR and the ENERGY STAR mark are registered marks owned by the U.S. government. CG Triumvirate and UFST are trademarks of Monotype Imaging, Inc. and may be registered in certain jurisdictions. Unicode is a trademark of Unicode, Inc. IBM is a registered trademark of International Business Machines Corporation in the United States, other countries, or both. Centrolics is a trademark of

EMEA Headquarters

+44(0)1628556000

mseurope@zebra.com

Communication

- ZebraNet® a/b/g/n Print Server (internal)
- ZebraNet® 10/100 Print Server (internal or external)
- Centronics[®] Parallel port (internal)

Link-OS Solutions

Software Tools

- Document Design: Quickly design a customized print solution using your business data and Zebra's intuitive, plug-and-print design tools.
- **Device Integration**: Zebra offers apps and products designed to help you integrate Zebra devices into your existing systems.
- Device Management: Manage your print operations locally and globally with Zebra's suite of device management tools.
- **Developer Tools**: Provides you the tools you need to create your own apps, including documentation, source code, programming languages, templates and more.

Firmware

- ZPL II®
- Zebra Global Printing Solution
- EPL^{™†}
- Web View & Alert
- ZBI 2.0 (optional)

Barcode Symbologies

- Linear barcodes: Code 11, Code 39, Code 93, Code 128 with subsets A/B/C and UCC Case Codes, ISBT-128, UPC-A, UPC-E, EAN-8, EAN-13, UPC and EAN with 2 or 5 digit extensions, Plessey, Postnet, Standard 2-of-5, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Codabar, Planet Code
- 2-Dimensional: Aztec, Codablock, PDF417, Code 49, Data Matrix, MaxiCode, QR Code, MicroPDF417, TLC 39, RSS-14 (and composite)

Pre-loaded Unicode[™]-compliant scalable fonts

Fonts and Graphics

• 7 bitmapped, 1 smooth-scalable

for EMEA character sets

including custom logos

and lines

(CG Triumvirate[™] Bold Condensed).

Contains UFST® from Agfa Monotype

· International character sets supporting the

Supports user-defined fonts and graphics,

ZPL II drawing commands including boxes

• 58 MB user available non-volatile memory

storage for downloadable objects

For optimum print quality and printer

Latin America Headquarters

(2/15)

1 847 955 2283

inquirv4@zebra.com

4 MB user-available SDRAM

performance, use genuine

Zebra supplies.

following code page: IBM® Code Page 850







ZT220 Printer

Standard ZT200 features include UK and Euro Power Cords USB 2.0 & Serial ports, ZPL and EPL (203dpi only) firmware, 128MB RAM memory (4MB User Available), 128MB Flash memory (32MB User Available), Fixed transmissive and adjustable reflective sensors

Item number	Description
ZT22042-D0E000FZ	ZT220 - 8 dot/mm (203 dpi), Direct Thermal
ZT22042-D0E200FZ	ZT220 - 8 dot/mm (203 dpi), Direct Thermal, 10/100
ZT22042-T0E000FZ	ZT220 - 8 dot/mm (203 dpi), Thermal Transfer
ZT22042-T0E200FZ	ZT220 - 8 dot/mm (203 dpi), Thermal Transfer, 10/100
ZT22043-D0E000FZ	ZT220 - 12 dot/mm (300 dpi), Direct Thermal
ZT22043-D0E200FZ	ZT220 - 12 dot/mm (300 dpi), Direct Thermal, 10/100
ZT22043-T0E000FZ	ZT220 - 12 dot/mm (300 dpi), Thermal Transfer
ZT22043-T0E200FZ	ZT220 - 12 dot/mm (300 dpi), Thermal Transfer, 10/100

ZT230 Printer

Item number	Description
ZT23042-D0E000FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal
ZT23042-D0E100FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Parallel
ZT23042-D0E200FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, 10/100
ZT23042-D0EC00FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, 802.11 a/b/g/n1
ZT23042-D1E000FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Peel
ZT23042-D1E200FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Peel, 10/100
ZT23042-D2E000FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Cutter
ZT23042-D2E200FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Cutter, 10/100
ZT23042-D3E000FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Peel, Liner Take Up
ZT23042-D3E200FZ	ZT230 - 8 dot/mm (203 dpi), Direct Thermal, Peel, Liner Take Up, 10/100
ZT23042-T0E000FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer
ZT23042-T0E100FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Parallel
ZT23042-T0E200FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, 10/100
ZT23042-T0EC00FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, 802.11 a/b/g/n1
ZT23042-T1E000FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Peel
ZT23042-T1E200FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Peel, 10/100
ZT23042-T1EC00FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Peel, 802.11 a/b/g/n1
ZT23042-T2E000FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Cutter
ZT23042-T2E200FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Cutter, 10/100
ZT23042-T2EC00FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Cutter, 802.11 a/b/g/n1
ZT23042-T3E000FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Peel, Liner Take Up







ZT230 Printer

Item number	Description
ZT23042-T3E200FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Peel, Liner Take Up, 10/100
ZT23042-T3EC00FZ	ZT230 - 8 dot/mm (203 dpi), Thermal Transfer, Peel, Liner Take Up, 802.11 a/b/g/n1
ZT23043-D0E000FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal
ZT23043-D0E200FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, 10/100
ZT23043-D1E000FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, Peel
ZT23043-D1E200FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, Peel, 10/100
ZT23043-D2E000FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, Cutter
ZT23043-D2E200FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, Cutter, 10/100
ZT23043-D3E000FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, Peel, Liner Take Up
ZT23043-D3E200FZ	ZT230 - 12 dot/mm (300 dpi), Direct Thermal, Peel, Liner Take Up, 10/100
ZT23043-T0E000FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer
ZT23043-T0E200FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, 10/100
ZT23043-T0EC00FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, 802.11 a/b/g/n1
ZT23043-T1E000FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Peel
ZT23043-T1E200FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Peel, 10/100
ZT23043-T1EC00FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Peel, 802.11 a/b/g/n1
ZT23043-T2E000FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Cutter
ZT23043-T2E200FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Cutter, 10/100
ZT23043-T2EC00FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Cutter, 802.11 a/b/g/n1
ZT23043-T3E000FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Peel, Liner Take Up
ZT23043-T3E200FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Peel, Liner Take Up, 10/100
ZT23043-T3EC00FZ	ZT230 - 12 dot/mm (300 dpi), Thermal Transfer, Peel, Liner Take Up, 802.11 a/b/g/n1

ZT200 Series Kits

Media Handling

Item number	Description
P1037974-007	Kit Cutter Upgrade ZT200 Series (includes catch tray)
P1037974-008	Kit Peel Upgrade ZT200 Series







ZT200 Series Kits

Print Heads

Item number	Description
P1037974-010	ZT200 Series Printhead 203 dpi
P1037974-011	ZT200 Series Printhead 300 dpi
P1037974-005	Kit Convert 203 to 300dpi ZT200 Series
P1037974-006	Kit Convert 300 to 203dpi ZT200 Series

Comms

Item number	Description
P1037974-001	ZT200 Series Internal ZebraNet PrintServer 10/100
P1037974-002	ZT200 Series Parallel Port
P1058930-093C	ZT200 Series Internal ZebraNet PrintServer Wireless 802.11a/b/g/n radio1

Other

Item number	Description
P1037974-004	Kit Real Time Clock ZT200
P1037974-028	Kit Platen Roller ZT200
P1037974-045	Kit Packaging ZT230 (Not for use with Liner Rewind configurations)
P1037990-018	Kit Packaging ZT220
ZKDU-001-00	Zebra Keyboard Display Unit (ZKDU)
48766-001	ZBI 2 Programming Language License (1 Printer)
47362	Print Head Cleaning Foam Tip Swabs, pack of 6

ZT200 Series Zebra OneCare

Zebra OneCare Service Agreements deliver assurance, helping to reduce operational disruption and printer downtime. They provide service and support coverage to bring a non-functioning printer back to full operation.

Depot

Z1AE-ZT2X-3C0	ZT220, ZT230	Zebra OneCare, Essential, 5 Day Turnaround Time EMEA, 3 Years, Comprehensive
Z1AE-ZT2X-300	ZT220, ZT230	Zebra OneCare, Essential, 5 Day Turnaround Time EMEA, 3 Years, Non Comprehensive

On-Site

Z1AE-ZT2X-3C0	ZT220, ZT230	Zebra OneCare, Select, Next Business Day Onsite (select counties only), 3 Years, Comprehensive
Z1AE-ZT2X-300	ZT220, ZT230	Zebra OneCare, Select, Next Business Day Onsite (select counties only), 3 Years, Non Comprehensive







ZT200 Series Supplies

Ribbon

Item number	Description
02300BK11045	2300 Economy Wax, 110mm x 450M
03200BK11045	3200 Premium Wax/Resin, 110mm x 450M
02300BK11030	2300 Economy Wax (300 meters for ZT220), 110mm x 300M

Label

Item number	Description
76180	Z-Perform 1000T - Economy paper Label, 102 x 152mm
76059	Z-Select 2000T - Premium paper Label, 102 x 64mm
76060	Z-Select 2000T - Premium paper Label, 102 x 152mm

Other

Item number	Description
15055	Empty Paper Cores for Ribbon Take Up, 110m x 25.4mm

MORE INDUSTRIAL ZEBRA PRINTERS

