

Classic Cartridge Stoves



GS2100 Trail

Lightweight, compact, stable stove. Powerful burner with precision flame control. Serrated pan supports prevent pot slippage and fold in for storage. Cartridge locking ring secures connection to EN417 gas cartridge. Compact durable carry case incorporating the stove spares kit.



GS2103 Trek 😰

Powerful burner with precision flame control. Additional wind resistance come from the fold-out curved serrated pan supports, these then fold in for storage. Auto-start piezo igniter. Unique folding mechanism allows pan supports to ably stabilise pots of different diameters. Cartridge locking ring secures connection to EN417 gas cartridge. Compact durable carry case incorporating the stove spares kit.



0 Titanium

GS2104 Venture 💿

GS2114 Scion ①

Key to symbols

Piezo Auto-start


Lightweight, compact stove giving precision flame control. Mechanism allows head to neatly fold down minimising storage space, with folding serrated pan supports to prevent pot slippage. Secure connection to EN417 gas cartridge.

windshield

GS2115 Fly 0

The lightest GoSystem stove ever. An ultra light stove made with Titanium weighing only 50g; with precision flame control. Economical gas consumption minimises total carry weight. With folding serrated pan supports prevent pot slippage. Secure connection to EN417 gas cartridge.

f Folding

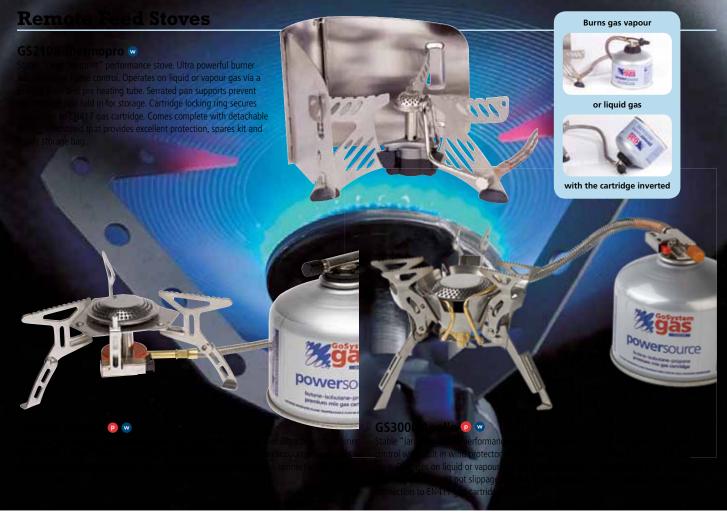

Non Pressured Stove Gas Conversion



GS2000 Adapt

A non pressured stove gas conversion adaptor which fits most mentholated spirit stoves. Operates on liquid or vapour gas via a braided hose and pre heating tube. Adaptor fits neatly into stove for maximum space efficiency – Great performance at an affordable cost.

Multi Fuel Stove With Pump

Operates off the following fuels: Gas canisters (EN417), paraffin, kerosene, white gas, petroleum based fuels.

Accessories and replacement parts available. See page 6

GS2111 Flexifuel incl 1L Fuel bottle

Rugged, reliable, versatile multi-fuel stove. Burns gas and liquid fuels off the same injector. Pre heating tube (generator) is easily maintained by agitating the integral cleaning wire. Turning the fuel bottle over bleeds the fuel line. The pump is fitted with a non-return valve for convenient change over between gas and liquid fuels. This valve also allows the pump (when not in use) to be connected to the fuel bottle without fear of leakage. The flexi fuel comes complete with a boxed maintenance kit, sturdy glass filled nylon pump and stuff sack. It's a simple design that offers trouble free operation and straight forward field repairs.

Dome Cookware

Ultralight and versatile, anodised aluminium pan set with folding handles which stack and pack neatly into any back pack, whilst having the benefit of being able to pack a stove and gas canister inside for maximum space efficiency.



GST200 Single Dome

Cookware

Dome Single (228g) consists of 1litre pot with 0.5 litre pan / lid, durable storage mesh bag & cleaning sponge.

Thermoware

Lightweight hard anodised aluminium pan sets with non-stick Teflon coating and internal volume guides. Grooved bases improve stability when in use as they minimise slippage on the serated pan supports and reduce "spin" when stirring. Cooksets are stackable and packable with the frying pan able to double as a heat saving lid or as a food warmer on top of the 1.2 litre pan. All sets come complete with a frying pan, pot lifter and durable mesh bag.



GST101 Cookset 2 CookSet2 (584g) consists of 1.6/1.2 litre pans with 0.8 litre frying pan, pot lifter and durable mesh bag.

GST100 Cookset 3 CookSet3 (792g) consists of 1.8/1.6/1.2 litre pans with 0.8 litre frying pan, pot lifter and durable mesh bag.



Station 198

GST103 Thermo mug Double walled vacuum insulated stainless steel mug



GSA006 Replacement Universal Pot Lifter Quality coloured anodised aluminium pot lifter




GS2110 Mighty Light
Dightweight robust lantern (up to 50w). Auto-start piezo igniter. Durable pierced stainless steel globe. Easy access twist off lid with carry / hanging chain. Cartridge locking ring secures connection to EN417 gas cartridge.



GS2121 Trail Lite 😰

Lightweight compact lantern (up to 80w). Auto-start piezo igniter. Diffused schott globe. Easy access non-tarnish lid with carry handle. Cartridge locking ring secures connection to EN417 gas cartridge.

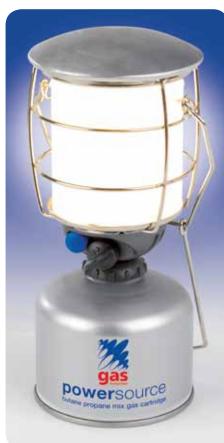

GS2120 Trek Lite 😰

Classically styled, trekking lantern (up to 80w). Auto-start piezo igniter. Diffused Schott globe. Easy access nontarnish lid with carry handle. Cartridge locking ring secures connection to EN417 gas cartridge.



Multi Fuel Stove Accessories

Fuel Bottles





GSA005 Flexifuel Maintenance Kit GSA004 Replacement Flexifuel Pump GSS010 Priming Pads GSS011 Pump Gaskets GSS013 Replacement Injector & seals



GST109 Thermofuel 1.0lt bottle GST108 Thermofuel 0.6lt bottle

Quality one piece extruded aluminium lightweight fuel bottles. Stable interior coating prevents fuel corrosion. Screw style top ensures no leaks.



Replacement Parts



and other leading manufacturers' lanterns. (Weight: 86g, Dimensions: 80mm x 80mm x 80mm)

GSS003 Lite Globe 2 Standard size curved light diffused Schott globe – fits GS2121 Trail Lite and other leading manufacturers' lanterns. (Weight: 40g, Dimensions: 58mm x

65mm x 65mm)

GSS004 Lite Globe 3 Standard size straight glass chimney globe – fits GS2122 Explorer Lite and other leading manufacturers' lanterns. (Weight: 24g, Dimensions: 47mm x 50mm x 50mm)



GSS001 Lite Mantle Pack of 3 quality soot free mantles. (Weight: 10g each, Dimensions: 90mm x 1mm x 170mm each)

		🖨 Boil Time (0.5 Litre)	Boil Time (1 Litre)	Weight (g)	Ignition Type	Consumption (grams used per hour)	Continuous Burn Time (220g can)	Light Output	Appliance Dimensions (width mm x depth mm x height mm)	Power Watts	Power BTUs	Globe Spare
tovor	lantorne/Cac	Litr	Litr	Jht (g	٩Typ	r hou	ı Tim g cat	utpu	n sior n mm	Wati	r BTL	Spar
	Lanterns/Gas	-	e)	g)	ĕ	ĒĒ	n)	t	sri (r	ts	۶L	re
GS2100	Trail	➡ 2 mins	3 mins 30 secs	145	Manual	150	2 hrs 10 mins	n/a	84 x 84 x 105	3750	12805	n/a
GS2100	Trek/P	2 mins 20 secs	3 mins 45 secs	145	Piezo	130	2 hrs 10 mins	n/a	62 x 62 x 84	4260	14525	n/a
GS2104	Venture/P	2 mins 5 secs	3 mins	184	Piezo	156	1 hrs 50 mins	n/a	105 x 105 x 80	2500	10000	n/a
GS2114	Scion/F	2 mins	2 mins 50 secs	82	Manual	130	1 hrs 40 mins	n/a	59 x 35 x 88	3000	10000	n/a
GS2115	Fly/Ti	2 mins 15 secs	3 mins 50 secs	50	Manual	130	2 hrs 15 mins	n/a	59 x 35 x 88	3000	12000	n/a
EMOT												
GS2106	FEED STOVES Sirocco/P/W	2 mins 25 secs	3 mins 45 secs	242	Piezo	144	2 hrs 25 mins	n/a	110 x 85 x 70	3000	10000	n/a
GS2100	Thermopro/W* includes	1 mins 55 secs	3 mins 45 secs	352*	Manual	144	2 hrs 10 mins	n/a	147 x 66 x 128	3690	12614	n/a
	weight of windshield											
GS3000	Apollo/P/W* includes weight of wind protector	2 mins 20 secs	3 mins 50 secs	304*	Piezo	122	1 hr 50 mins	n/a	130 x 130 x 103	3500	12000	n/a
NULTI F	UEL STOVE WITH P	UMP										
GS2111	Flexi-Fuel incl 1L Fuel Bottle	3 mins 30 secs	4 mins 50 secs	464	Manual	112	2 hrs 30 mins	n/a	76 x 76 x 88	2800	9556	n/a
ION PR	ESSURED STOVE G	AS CONVERSI	ON									
GS2000	Adapt	1 mins 50 secs	2mins 35 secs	170	Manual	134	2 hrs 20 mins	n/a	100 x 86 x 73	2500	10000	n/a
ANTER	NS											
GS2110	Mighty Lite/P	n/a	n/a	172	Piezo	27	6 hrs 45 mins	up to 50w	65 x 65 x 126	670	n/a	n/a
GS2122	Explorer Lite/P	n/a	n/a	128	Piezo	20	10 hrs 30 mins	up to 80w	62 x 62 x 105	560	n/a	GSS004 liteglobe
GS2121	Trail Lite/P	n/a	n/a	262	Piezo	27	6 hrs 45 mins	up to 80w	86 x 86 x 136	670	n/a	GSS003
GS2120	Trek Lite/P	n/a	n/a	400	Piezo	32	6 hrs 45 mins	up to 80w	107 x 107 x 155	670	n/a	GSS002 liteglobe
SAS CA	RTRIDGES FOR STO	VES & LANTE	RNS									-
GS500	Powersource 445g	n/a	n/a	590	n/a	n/a	n/a	n/a	103 x 103 x 161	n/a	n/a	n/a
GS250	Threaded Cartridge Powersource 220g Threaded Cartridge	n/a	n/a	338	n/a	n/a	n/a	n/a	103 x 103 x 93	n/a	n/a	n/a
GS125	Powersource 125g Threaded Cartridge	n/a	n/a	226	n/a	n/a	n/a	n/a	90 x 90 x 76	n/a	n/a	n/a
G2190	Pierceable 190g Cartridge	n/a	n/a	264	n/a	n/a	n/a	n/a	90 x 90 x 90	n/a	n/a	n/a
G2109	Converter Travel Pak	n/a	n/a	240	n/a	n/a	n/a	n/a	122 x 122 x 152	n/a	n/a	n/a
	ories / Fuel Bottl		are									
	UEL STOVE WITH P		,	440	,	,	,	,	00 00 440	,	,	,
GSA005 GSS010	Stove Maintenance Kit Priming Pads (3)	n/a n/a	n/a n/a	110 6	n/a n/a	n/a n/a	n/a n/a	n/a n/a	80 x28 x140 85 x 1 x 135	n/a n/a	n/a n/a	n/a n/a
GSS010	Replacement Injector & Seals	n/a	n/a	12	n/a	n/a	n/a	n/a	85 x 1 x 100	n/a	n/a	n/a
GSA004	Replacement Pump	n/a	n/a	128	n/a	n/a	n/a	n/a	85 x 3 x 230	n/a	n/a	n/a
GSS011	Pump Gaskets (2)	n/a	n/a	4	n/a	n/a	n/a	n/a	85 x 1 x 100	n/a	n/a	n/a
UEL BO	OTTLES											
GST108	Fuel Bottle 0.6L	n/a	n/a	102	n/a	n/a	n/a	n/a	73 x 73 215	n/a	n/a	n/a
GST109	Fuel Bottle 1.0L	n/a	n/a	188	n/a	n/a	n/a	n/a	73 x 73 x 270	n/a	n/a	n/a
OOKW												
New	Single Dome	n/a	n/a	228	n/a	n/a	n/a	n/a	126 x 126 x 154	n/a	n/a	n/a
	Cookset 2	n/a	n/a	592	n/a n/a	n/a n/a	n/a n/a	n/a n/a	205 x 90 x 215 205 x 90 x 215	n/a n/a	n/a n/a	n/a n/a
GST101	Cookcot 2					 III/d 	• II/d	• U/d				. n/a
GST101 GST100 GST103	Cookset 3 Thermo Mug	n/a n/a	n/a n/a	972 164	n/a	n/a	n/a	n/a	100 x 101 x 80	n/a	n/a	n/a

of water being heated from 20°C to exactly 100°C in laboratory conditions.
Ignition type – Piezo performance is optimised by depressing the piezo at 1

optimised by depressing the piezo at 1 second intervals allowing the piezo to recharge.

Continuous burn – Based on the appliance being operated at full rate in laboratory conditions from its recommended cartridge (220gm) until all the gas is exhausted. This figure represents the maximum possible life of a cartridge. Burner diameter – The smaller burner concentrates the flame centrally, the larger burner spreads the flame improving heat distribution on larger pans.



0 00000000 000000000000000 -----