

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90~INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 3. KEY DIMENSIONS EQUAL 0.375" x 0.375" x 2.91" (MOTOR SUPPLIED WITH KEY)

UNITS: mm [INCHES]

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

254T TEFC FRAME
F2 ASSEMBLY

MDSLE021-04

TOLERANCES
.X .1
.XX .03
.XXX .005
.XXXX .0005

MAXIMUM
MOTOR WEIGHT

lbs.
kgs.

0	FIRST ISSUE				
NO	REVISION				

Cai Zhengqiang	3/18/17		
DRAWN BY	DATE	CHECK	

Tosh-ECO OWP

DRAWN BY: Cai Zhengqiang
CHECK BY: Lin Qingliu
APPROVED BY: Li Zhuoqing

www.toshiba.com/ind

TOSHIBA
TOSHIBA INTERNATIONAL CORPORATION

TOSHIBA

Issued Date 2017/3/14

Transmit #

Issued By Cai Zhenqiang

Issued Rev 0

TYPICAL MOTOR PERFORMANCE DATA

Model: OW14

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.5	5.5	6	1120	254T	230/460	60	3	20/10.2
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	-	D	H	40

Load	HP	kW	Amperes(460)	Efficiency (%)	Power Factor (%)
Full Load	7.5	5.59	10.15	87.2	79.3
¾ Load	5.63	4.19	8.09	88.5	73.5
½ Load	3.75	2.80	6.43	88.5	61.7
¼ Load	1.88	1.40	5.22	84.2	39.9
No Load			4.86		5.9
Locked Rotor			63		54.3

Torque				Rotor wk ² Inertia (lb-ft ²)
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
35.2	373	354	300	3.17

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
30	14	65	6309 2Z/C3	6305 2Z/C3	278

*Bearings are the only recommended spare part(s).

Motor Options:

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values. The declared locked rotor current has a tolerance of 20%.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MDSLE021-04/0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	2017/3/14



Issued Date	2017/3/14	Transmit #	
Issued By	Cai Zhenqiang	Issued Rev	0


SPEED TORQUE/CURRENT CURVE

Model: OW14

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.5	5.5	6	1120	254T	230/460	60	3	20/10.2
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	-	D	H	40
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						Break Down (%)
		Full Load lb-ft (lb-ft)	Locked Rotor (%)	Pull Up (%)				
63	3.17	35.2	373	354			300	

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor-Squirrel cage rotor

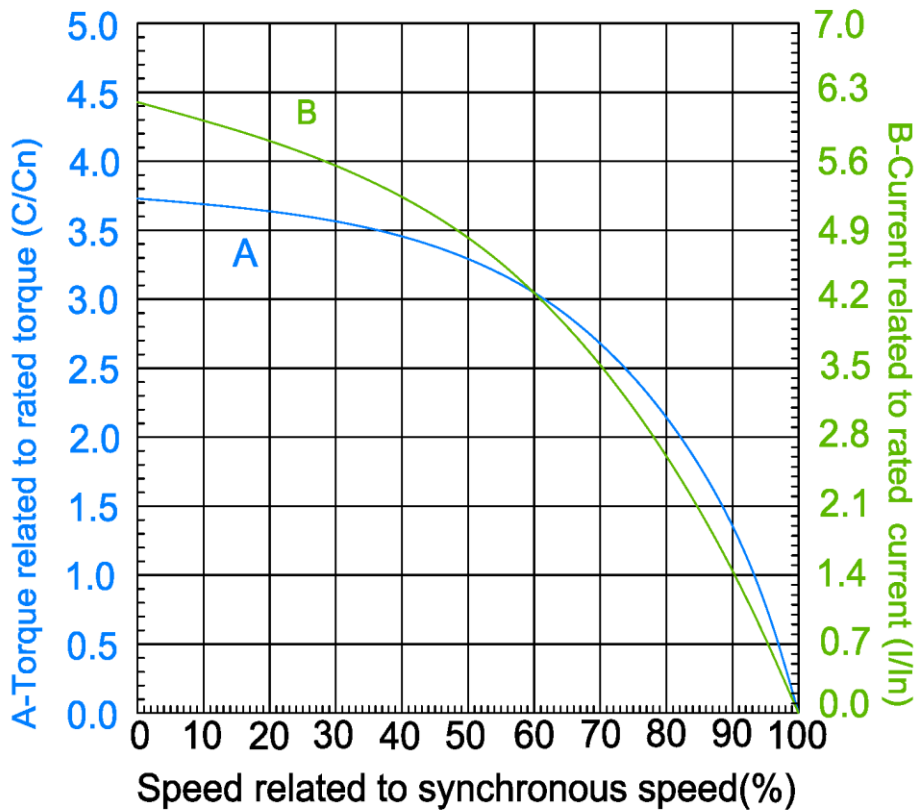

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag: _____

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MDSLE021-04/0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	2017/3/14



Issued Date 2017/3/14

Transmit #

Issued By Cai Zhenqiang

Issued Rev 0

NAMEPLATE DATA

Model: OW14

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.5	5.5	6	1120	254T	230/460	60	3	20/10.2
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	-	D	H	40

Type: _____

Form: _____

Drive End Bearing: 6309 2Z/C3

Non-Drive End Bearing: 6305 2Z/C3

Power Factor: 79.0

Max Safe RPM: 2640

Comments 1: _____

Comments 2: _____

Comments 3: _____

Comments 4: _____

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MDSLE021-04/0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	2017/3/14



Issued Date 2017/3/14

Transmit #

Issued By Cai Zhenqiang

Issued Rev 0

SPARE PARTS LIST*

Model: OW14

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.5	5.5	6	1120	254T	230/460	60	3	20/10.2
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	-	D	H	40

Bearings DE 6309 2Z/C3

Bearings NDE 6305 2Z/C3

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MDSLE021-04/0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	2017/3/14


Motor Connection Diagrams

12 Leads


Dual Voltage

Across-the-Line Starting / Running
Connections

Low Voltage Delta

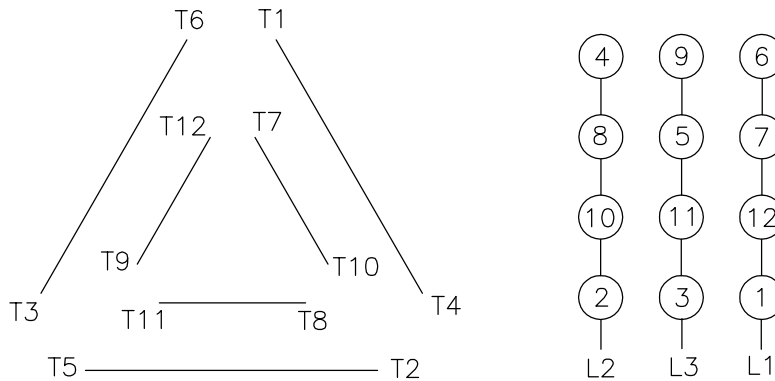

High Voltage Delta

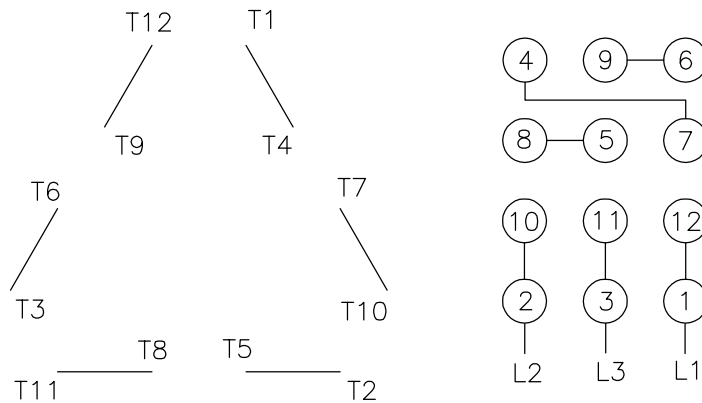

Switch L1 and L2 to reverse rotation