


LANDSCAPE LIGHTING AT-A-GLANCE CATALOG



The Premium
Choice in
Landscape
Lighting



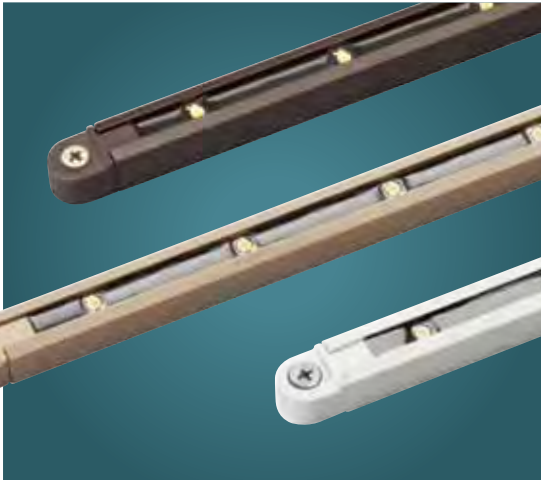

Style to live by™


KICHLER.













A beautiful landscape... starts with your professional landscape designer.

From the latest LED systems to traditional incandescent choices, the complete Kichler® landscape collection helps professional landscape designers deliver exactly what homeowners envision for their home. Leading the way is our Design Pro LED fixtures with Radiax™ optics. These fixtures generate more lumens with less wattage for superior lighting effects, all with the proven performance of Kichler Design Pro LED. They are part of our growing Design Pro LED line featuring fixtures for virtually every outdoor application — including decorative path and spread, low profile hardscape, water features, deck, patio and accent lighting. And, they're just one more way Kichler supports the professional landscape designer, with durable, innovative and time-tested technologies engineered for optimum all-weather performance. *Start with your ideas and let your designer and Kichler bring them to light.*

 Become a fan of Kichler Lighting at:
[facebook.com search Kichler Lighting](https://www.facebook.com/search/Kichler%20Lighting)

 Follow us on
twitter.com/kichlerlight


 Watch us on
[youtube.com/KichlerLighting](https://www.youtube.com/KichlerLighting)

<p>Design Pro LED 12V Path & Spread</p> <p>POWERED BY DESIGN PRO LED TECHNOLOGY</p>	 <p>BBR HIGH-LOW SETTING</p> <p>15807 AZT, BBR LED 4W/5.8 VA, 140Lm HIGH, 3000K</p>	 <p>15801 TZT LED 4W/5.8 VA, 140Lm, 3000K</p>	 <p>TZT</p> <p>15843 CO, NBK, TZT LED 4W/5.8 VA, 187Lm, 3000K</p>	 <p>BBR CAST ALUMINUM OR BRASS</p> <p>15871 BBR, TZT LED 4W/5.8 VA, 187Lm, 3000K</p>
 <p>15857 AZT LED 4W/5.8 VA, 140Lm, 3000K</p>	 <p>CO</p> <p>15839 CO, TZT LED 4W/5.8 VA, 140Lm, 3000K</p>	 <p>15850 CO LED 4W/5.8 VA, 140Lm, 3000K</p>	 <p>15803 AZT LED 4W/5.8 VA, 140Lm, 3000K</p>	 <p>15833 AZT LED 4W/5.9 VA, 140Lm, 3000K</p> <p>LIGHTING for tomorrow</p>
	 <p>15802 TZT LED 4W/5.8 VA, 140Lm, 3000K</p>	 <p>BBR HIGH-LOW SETTING</p> <p>15800 AZT, BBR LED 4W/5.8 VA, 140Lm HIGH, 3000K</p>	 <p>15804 AZT LED 1W/1.7 VA, 140Lm, 3000K</p>	



8" SQUARE TOP

15806 BKT
LED 4W/5.8 VA, 140Lm, 3000K

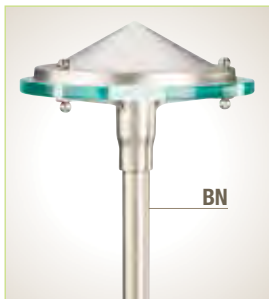

BN

15817 AZT, BN
LED 4W/5.8 VA, 140Lm, 3000K



HIGH-LOW SETTING

15827 BBR
LED 4W/5.8 VA, 140Lm
HIGH, 3000K



AZT

HIGH-LOW SETTING

15815 AZT, BE, BKT
LED 4W/5.8 VA, 140Lm
HIGH, 3000K




BE

15826 AZT, BE, BKT
LED 4W/5.8 VA, 140Lm, 3000K



6" SQUARE TOP

15805 BKT
LED 4W/5.8 VA, 140Lm, 3000K

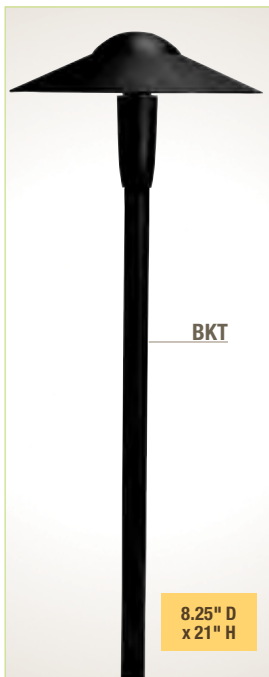

BKT


15810 AZT, BBR, BE, BKT
LED 4W/5.8 VA, 140Lm, 3000K



AZT

8.25" D x 15" H

15811 AZT, BE
LED 4W/5.8 VA, 140Lm, 3000K

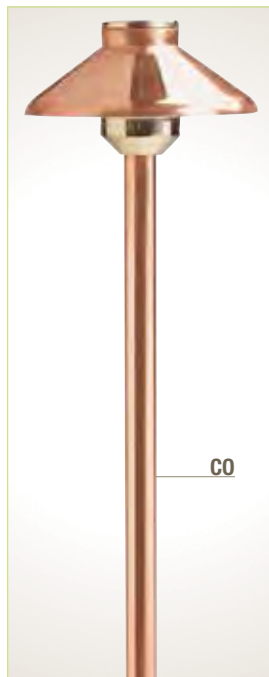

CO

15820 AZT, BBR, CO
LED 4W/5.8 VA, 187Lm, 3000K



BBR

15821 AZT, BBR, CO
LED 4W/5.8 VA, 187Lm, 3000K



BBR

6" D x 21.25" H

15870 AZT, BBR, BE, BKT
LED 4W/5.8 VA, 140Lm, 3000K


Design Pro LED 12V Deck & Patio

POWERED BY
DESIGN PRO LED TECHNOLOGY



15763 TZT

LED 1.9W/2.4 VA, 50Lm, 3000K

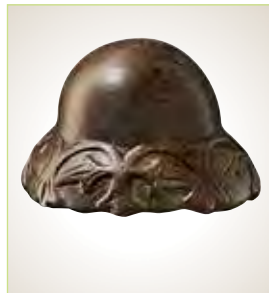

15750 TZT


LED 1.9W/2.4 VA, 50Lm, 3000K



BBR

15765 AZT, BBR, BE, BKT, WHT

LED 1.9W/2.4 VA, 50Lm, 3000K

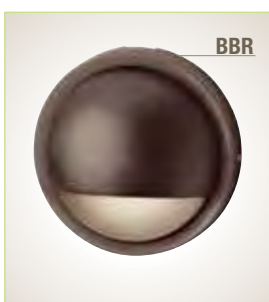

BBR

15764 AZT, BBR, WHT

LED 1.9W/2.4 VA, 50Lm, 3000K




15773 AZT

LED 3.8W/4.8 VA, 100Lm, 3000K



15774 AZT

LED 3.8W/4.8 VA, 100Lm, 3000K



CO

15782 AZT, BBR, BKT, CO, WHT

LED 1.9W/2.4 VA, 50Lm, 3000K



15780 AZT

LED 1.9W/2.4 VA, 50Lm, 3000K

Design Pro LED 12V Hardscape, Deck, Step & Bench



15734 AZT30, BBR30, CO30, GRY30, SD30, WHT30
LED 0.2W/0.3 VA. 8.6Lm, 3000K

15735 AZT30, BBR30, CO30, GRY30, SD30, WHT30
LED .75W/1.3 VA, 44.5Lm, 3000K

15736 AZT30, BBR30, CO30, GRY30, SD30, WHT30
LED 1.4W /2.4 VA, 88Lm, 3000K

15755 AZT30, BBR30, CO30, GRY30, SD30, WHT30
LED 2.2W/3.7 VA, 132Lm, 3000K



15744 AZT, BBR, CO, GRY, SD, WHT LED 0.2W/0.3 VA		
2700K Warm White 8.4Lm	3000K Pure White 8.6Lm	4200K Cool White 11Lm
15744 AZT27	15744 AZT30	15744 AZT42
15744 BBR27	15744 BBR30	15744 BBR42
15744 CO27	15744 CO30	15744 CO42
15744 GRY27	15744 GRY30	15744 GRY42
15744 SD27	15744 SD30	15744 SD42
15744 WHT27	15744 WHT30	15744 WHT42


15745 AZT, BBR, CO, GRY, SD, WHT LED .75W/1.3 VA		
2700K Warm White 34.7Lm	3000K Pure White 44.5Lm	4200K Cool White 51.9Lm
15745 AZT27	15745 AZT30	15745 AZT42
15745 BBR27	15745 BBR30	15745 BBR42
15745 CO27	15745 CO30	15745 CO42
15745 GRY27	15745 GRY30	15745 GRY42
15745 SD27	15745 SD30	15745 SD42
15745 WHT27	15745 WHT30	15745 WHT42



15746 AZT, BBR, CO, GRY, SD, WHT LED 1.4W /2.4 VA		
2700K Warm White 69.5Lm	3000K Pure White 88Lm	4200K Cool White 101.5Lm
15746 AZT27	15746 AZT30	15746 AZT42
15746 BBR27	15746 BBR30	15746 BBR42
15746 CO27	15746 CO30	15746 CO42
15746 GRY27	15746 GRY30	15746 GRY42
15746 SD27	15746 SD30	15746 SD42
15746 WHT27	15746 WHT30	15746 WHT42


15756 AZT, BBR, CO, GRY, SD, WHT LED 2.2W/3.7 VA		
2700K Warm White 104.2Lm	3000K Pure White 132Lm	4200K Cool White 151.8Lm
15756 AZT27	15756 AZT30	15756 AZT42
15756 BBR27	15756 BBR30	15756 BBR42
15756 CO27	15756 CO30	15756 CO42
15756 GRY27	15756 GRY30	15756 GRY42
15756 SD27	15756 SD30	15756 SD42
15756 WHT27	15756 WHT30	15756 WHT42

Design Pro LED Hardscape is now available in 2700K (warm white), 3000K (pure white) & 4200K (cool white)



TaskWork LED 24V DC Outdoor Wet Tape Light

- Low Profile, High Efficiency
- Long Life, Low Energy Usage
- 200 Lumens per foot
- Easy to Install
- Beautiful Color

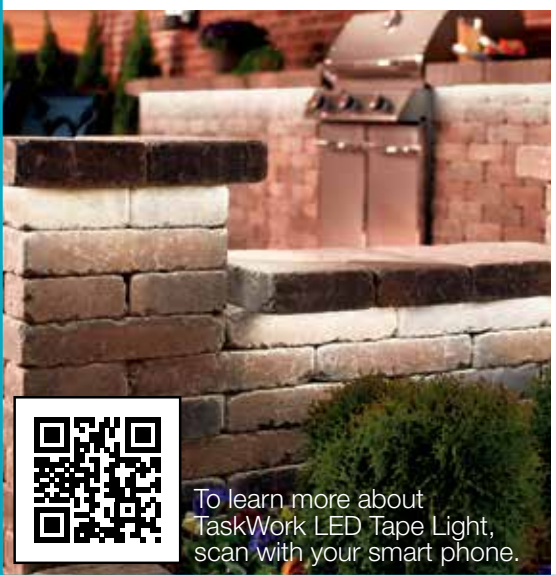

Outdoor Wet Tape is available in 3200K (pure white) & 3600K (cool white)




Also available in Red, Green, Yellow, Blue and Color Changing RGB



To learn more about TaskWork LED Tape Light, scan with your smart phone.

Radiax™ optics come in two forms—side-powered on larger fixtures, and center-powered on smaller ones. Both designs give Kichler® fixtures the greatest lumens per watt over comparable fixtures.



Small Accent Fixture (Shown in AZT) Available in 12V (3W & 4W) Version Only



Medium Accent Fixture (Shown in BBR) Available in 12V (6.5W & 13W) & 120V (12.5W) Versions



Large Accent Fixture (Shown in AZT) Available in 12V (21W) & 120V (19.5W & 29W) Versions

LED 12V Accent & In-Ground, 120V Accent



16000, 16001, 16002 AZT, BBR, BKT, BE, WHT (35° only)
LED 3W/4VA



16003, 16004, 16005 AZT, BBR, BKT, BE, WHT (35° only)
LED 4W/5.5VA

Kelvin/Lumens	2700K Warm White 109Lm	3000K Pure White 116Lm
Compares to Halogen 10W MR16		
Beam Spread 10° Spot	16000 AZT27 16000 BBR27 16000 BKT27 16000 BE27	16000 AZT30 16000 BBR30 16000 BKT30 16000 BE30
Beam Spread 35° Flood	16001 AZT27 16001 BBR27 16001 BKT27 16001 BE27 16001 WHT27	16001 AZT30 16001 BBR30 16001 BKT30 16001 BE30 16001 WHT30
Beam Spread 60° Wide Flood	16002 AZT27 16002 BBR27 16002 BKT27 16002 BE27	16002 AZT30 16002 BBR30 16002 BKT30 16002 BE30

Kelvin/Lumens	2700K Warm White 151Lm	3000K Pure White 180Lm
Compares to Halogen 20W MR16		
Beam Spread 10° Spot	16003 AZT27 16003 BBR27 16003 BKT27 16003 BE27	16003 AZT30 16003 BBR30 16003 BKT30 16003 BE30
Beam Spread 35° Flood	16004 AZT27 16004 BBR27 16004 BKT27 16004 BE27 16004 WHT27	16004 AZT30 16004 BBR30 16004 BKT30 16004 BE30 16004 WHT30
Beam Spread 60° Wide Flood	16005 AZT27 16005 BBR27 16005 BKT27 16005 BE27	16005 AZT30 16005 BBR30 16005 BKT30 16005 BE30

POWERED BY
DESIGN PRO LED TECHNOLOGY
WITH
Radiax
OPTICS

WHT

AZT
BBR
BE
BKT

16006, 16007, 16008 AZT, BBR, BKT, BE, WHT (35° only)
LED 6.5W/10.0VA

POWERED BY
DESIGN PRO LED TECHNOLOGY
WITH
Radiax
OPTICS

BBR

AZT
BE
BKT
WHT

16009, 16010, 16011 AZT, BBR, BKT, BE, WHT (35° only)
LED 13W/18.5VA

Kelvin/Lumens	2700K Warm White 306Lm	3000K Pure White 352Lm
Compares to Halogen 35W MR16		
Beam Spread 10° Spot	16006 AZT27 16006 BBR27 16006 BKT27 16006 BE27	16006 AZT30 16006 BBR30 16006 BKT30 16006 BE30
Beam Spread 35° Flood	16007 AZT27 16007 BBR27 16007 BKT27 16007 BE27 16007 WHT27	16007 AZT30 16007 BBR30 16007 BKT30 16007 BE30 16007 WHT30
Beam Spread 60° Wide Flood	16008 AZT27 16008 BBR27 16008 BKT27 16008 BE27	16008 AZT30 16008 BBR30 16008 BKT30 16008 BE30

Kelvin/Lumens	2700K Warm White 520Lm	3000K Pure White 590Lm
Compares to Halogen 50W MR16		
Beam Spread 10° Spot	16009 AZT27 16009 BBR27 16009 BKT27 16009 BE27	16009 AZT30 16009 BBR30 16009 BKT30 16009 BE30
Beam Spread 35° Flood	16010 AZT27 16010 BBR27 16010 BKT27 16010 BE27 16010 WHT27	16010 AZT30 16010 BBR30 16010 BKT30 16010 BE30 16010 WHT30
Beam Spread 60° Wide Flood	16011 AZT27 16011 BBR27 16011 BKT27 16011 BE27	16011 AZT30 16011 BBR30 16011 BKT30 16011 BE30

POWERED BY
DESIGN PRO LED TECHNOLOGY
WITH
Radiax
OPTICS

BE

AZT
BBR
BKT
WHT

16012, 16013, 16014 AZT, BBR, BKT, BE, WHT (35° only)
LED 21W/27.0VA

Kelvin/Lumens	2700K Warm White 947Lm	3000K Pure White 993Lm
Compares to Halogen 75W MR16		
Beam Spread 10° Spot	16012 AZT27 16012 BBR27 16012 BKT27 16012 BE27	16012 AZT30 16012 BBR30 16012 BKT30 16012 BE30
Beam Spread 35° Flood	16013 AZT27 16013 BBR27 16013 BKT27 16013 BE27 16013 WHT27	16013 AZT30 16013 BBR30 16013 BKT30 16013 BE30 16013 WHT30
Beam Spread 60° Wide Flood	16014 AZT27 16014 BBR27 16014 BKT27 16014 BE27	16014 AZT30 16014 BBR30 16014 BKT30 16014 BE30

**Design Pro LED with Radiax™ Optics
also available in 120V
Accent fixtures – see page 19.**

**Design Pro LED 12V
Accent**

POWERED BY
DESIGN PRO LED
TECHNOLOGY



AZT

15731 (10° spot)
15732 (35° flood)
15733 (60° wide flood)
AZT, BBR, BKT
LED 4.5W/7.5 VA,
150Lm, 3000K



BBR

15741 (10° spot)
15742 (35° flood)
15743 (60° wide flood)
AZT, BBR, BKT
LED 8.5W/12.2 VA,
310Lm, 3000K



BKT

15751 (10° spot)
15752 (35° flood)
15753 (60° wide flood)
AZT, BBR, BKT
LED 12.4W/16.7 VA,
460Lm, 3000K



HIGH-LOW
SETTING

AZT

15861 AZT, BBR, BKT
LED 4W/5.8 VA, 140Lm,
3000K HIGH



BBR

2700K Warm White, 109Lm	3000K Pure White, 140Lm
16070 AZT27	16070 AZT30
16070 BBR27	16070 BBR30
16070 BKT27	16070 BKT30

16070 AZT27, AZT30, BBR27, BBR30, BKT27, BKT30
LED 4W/5.8 VA

LED 12V In-Ground

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax™
OPTICS

**Design Pro LED with Radiax™ Optics
Accessories – see page 16-17.**

**Design Pro LED 12V
In-Ground**

POWERED BY
DESIGN PRO LED
TECHNOLOGY



15767 (10° spot)
15768 (35° flood)
15769 (60° wide flood) BKT
LED 4.5W/7.5 VA,
150Lm, 3000K



16030, 16031, 16032 BBR
LED 4W/5.8VA

Kelvin/Lumens	2700K Warm White 151Lm	3000K Pure White 180Lm
Compares to Halogen 20W MR16		
Beam Spread 10° Spot	16030 BBR27	16030 BBR30
Beam Spread 35° Flood	16031 BBR27	16031 BBR30
Beam Spread 60° Wide Flood	16032 BBR27	16032 BBR30



15728 (10° spot)
15747 (35° flood)
15748 (60° wide flood) BKT
LED 8.5W/12.2 VA,
310Lm, 3000K



15729 (10° spot)
15757 (35° flood)
15758 (60° wide flood) BKT
LED 12.4W/16.7 VA,
460Lm, 3000K



16033, 16034, 16035 BBR
LED 6.5W/9.3VA

Kelvin/Lumens	2700K Warm White 306Lm	3000K Pure White 352Lm
Compares to Halogen 35W MR16		
Beam Spread 10° Spot	16033 BBR27	16033 BBR30
Beam Spread 35° Flood	16034 BBR27	16034 BBR30
Beam Spread 60° Wide Flood	16035 BBR27	16035 BBR30

**Design Pro LED 12V
2-in-1
Water/
Accent Light**

POWERED BY
DESIGN PRO LED
TECHNOLOGY



60° Beam

15711 ss
LED 3.4W/4.9 VA, 150Lm, 3000K



16036, 16037, 16038 BBR
LED 14W/18.5VA

Kelvin/Lumens	2700K Warm White 520Lm	3000K Pure White 590Lm
Compares to Halogen 50W MR16		
Beam Spread 10° Spot	16036 BBR27	16036 BBR30
Beam Spread 35° Flood	16037 BBR27	16037 BBR30
Beam Spread 60° Wide Flood	16038 BBR27	16038 BBR30

**Incandescent/LED 12V
Hybrid Path
& Spread**

Incandescent Lamp
supplied unless
otherwise noted.
For LED Lamp options,
see page 18.



15436 oz
11.6-W(VA) T5 Lamp Supplied



15379 oz
24.4-W(VA) S8 Lamp Supplied



15446 oz
16.25-W(VA) T5 Lamp Supplied



15447 oz
11.6-W(VA) T5 Lamp Supplied




15420 AGZ
11.6-W(VA) T5 Lamp Supplied




15347 VGB
24.4-W(VA) S8 Lamp Supplied




15314 AZT, MST
24.4-W(VA) S8 Lamp Supplied

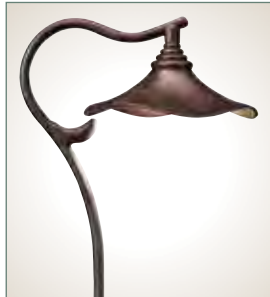

15422 AGZ
11.6-W(VA) T5 Lamp Supplied

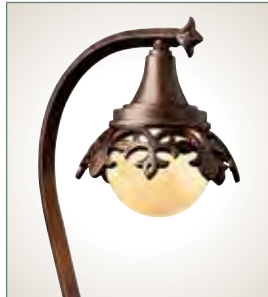

15369 TZT
18.5-W(VA) S8 Lamp Supplied

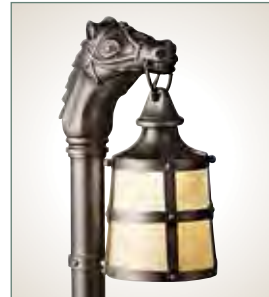


15393 oz
11.6-W(VA) T5 Lamp Supplied




15457 AZT
16.25-W(VA) T5 Lamp Supplied




15426 BKT
11.6-W(VA) T5 Lamp Supplied

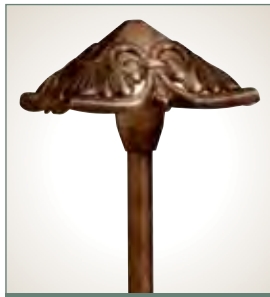

15437 TZT
16.25-W(VA) T5 Lamp Supplied

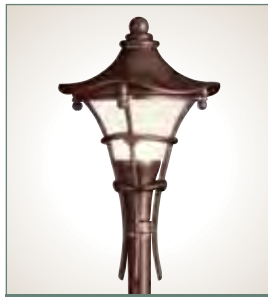

15421 AGZ
11.6-W(VA) T5 Lamp Supplied

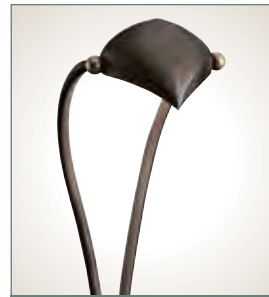

15330 oz
24.4-W(VA) S8 Lamp Supplied



15457 AZT
16.25-W(VA) T5 Lamp Supplied



15449 TZT
11.6-W(VA) T5 Lamp Supplied



15349 MST
18.5-W(VA) S8 Lamp Supplied



15418 AZT
20-W(VA) T3 Lamp Supplied



15401 AZT
20-W(VA) T3 Lamp Supplied




**15443 CO, OB,
OB12, TZT, VG**
24.4-W(VA) S8 Lamp Supplied



15458 oz
11.6-W(VA) (2 required) T5 Lamps Supplied



15471 BBR, TZT
24.4-W(VA) S8 Lamp Supplied

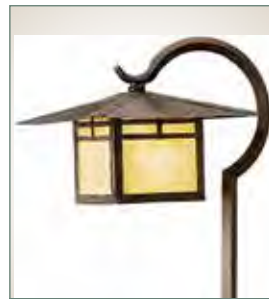

15365 cv
24.4-W(VA) S8 Lamp Supplied



15429 TZT
11.6-W(VA) T5 Lamp Supplied




15351 co
24.4-W(VA) S8 Lamp Supplied



15350 co
24.4-W(VA) S8 Lamp Supplied



15313 TZG
16.25-W(VA) T5 Lamp Supplied

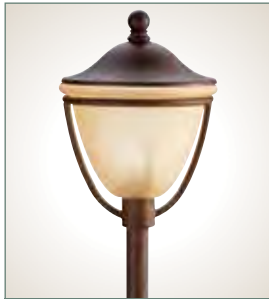

15367 TZT
24.4-W(VA) S8 Lamp Supplied



15438 OB, OZ
18.5-W(VA) S8 Lamp Supplied



15444 oz
11.6-W(VA) T5 Lamp Supplied



15435 PP
24.4-W(VA) S8 Lamp Supplied



15435 AMB



15435 RD



15352 oz
18.5-W(VA) S8 Lamp Supplied



15450 TZT
11.6-W(VA) T5 Lamp Supplied



15322 AGZ
16.25-W(VA) T5 Lamp Supplied



15360 AZT
24.4-W(VA) S8 Lamp Supplied



15392 oz
11.6-W(VA) T5 Lamp Supplied



15391 oz
11.6-W(VA) T5 Lamp Supplied




15319 PZ
18.5-W(VA) S8 Lamp Supplied



15334 OB
6.5-W(VA) T5 Lamp Supplied



15333 TZT
24.4-W(VA) S8 Lamp Supplied

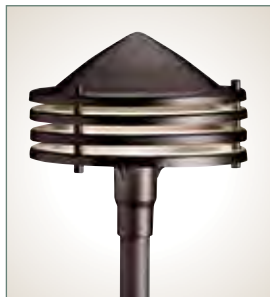

15318 AZT
24.4-W(VA) S8 Lamp Supplied



15317 AZT, BN
24.4-W(VA) S8 Lamp Supplied



15439 CO, OB, OB6, TZT
24.4-W(VA) S8 Lamp Supplied



15005 AZT, BKT
24.4-W(VA) S8 Lamp Supplied

SHOWN WITH
OPTIONAL
STEM SEE
PAGE 20



15328 AZT
24.4-W(VA) S8 Lamp Supplied



15315 AZT, AZT6, BE, BKT
24.4-W(VA) S8 Lamp Supplied



15326 AZT, AZT6, BKT
24.4-W(VA) S8 Lamp Supplied



15011 AZT, BKT
24.4-W(VA) S8 Lamp Supplied

SHOWN WITH
OPTIONAL
STEM SEE
PAGE 20



15336 BKT, TZT
24.4-W(VA) S8 Lamp Supplied



15323 AZT, BKT, TZT
24.4-W(VA) S8 Lamp Supplied



15470 AZT, BBR, BE, BKT
16.25-W(VA) T5 Lamp Supplied

6" D
x 21.25" H



15423 AZT, BKT, TZT
24.4-W(VA) S8 Lamp Supplied



15310 AZT, AZT6, BE, BKT
16.25-W(VA) T5 Lamp Supplied

8.25" D
x 21" H




15410 AZT, BE
16.25-W(VA) T5 Lamp Supplied

8.25" D
x 15" H

**Incandescent/LED 12V
Hybrid
Specialty**

Incandescent Lamp
supplied unless
otherwise noted.
For LED Lamp options,
see page 18.

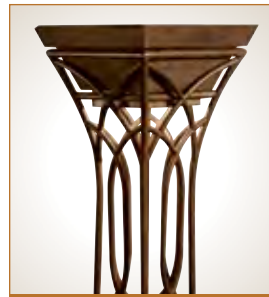

15415 TZT
16.25-W(VA) T5 Lamp Supplied



15123 BK
20-W(VA) MR11 Lamp Supplied



15402 oz
11.6-W(VA) (x9) T5 Lamps Supplied



15409 oz
16.25-W(VA) (x4) T5 Lamps Supplied

**Incandescent/LED 12V
Hybrid Deck
& Patio**

Incandescent Lamp
supplied unless
otherwise noted.
For LED Lamp options,
see page 18.



15474 oz
11.6-W(VA) T5 Lamp Supplied



15110 oz
4-W(VA) T5 Lamp Supplied



15479 TZT
11.6-W(VA) T5 Lamp Supplied




15469 TZT
6.5-W(VA) T5 Lamp Supplied



15071 oz
11.6-W(VA) T5 Lamp Supplied



15047 oz
6.5-W(VA) T5 Lamp Supplied

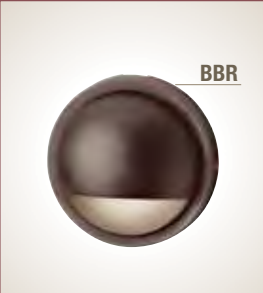

15064 AZT, BBR, BN, WHT
10-W(VA) T3 Lamp Supplied



15065 AZT, BBR, BKT, WHT
6.5-W(VA) T5 Lamp Supplied



15079 AZT
11.6-W(VA) (x2)
T5 Lamp Supplied



15021 VGB
6.5-W(VA) T5 Lamp Supplied



15045 AZT
6.5-W(VA) T5 Lamp Supplied



15461 AZT
6.5-W(VA) T5 Lamp Supplied



15165 AZ
6.5-W(VA) T5 Lamp Supplied



15077 AZT
18.5-W(VA) S8 Lamp Supplied



15066 AZT, WHT
6.5-W(VA) T5 Lamp Supplied




15468 AZT
6.5-W(VA) T5 Lamp Supplied



15123 BK
20-W(VA) MR11 Lamp Supplied




15070 AZT
11.6-W(VA) T5 Lamp Supplied

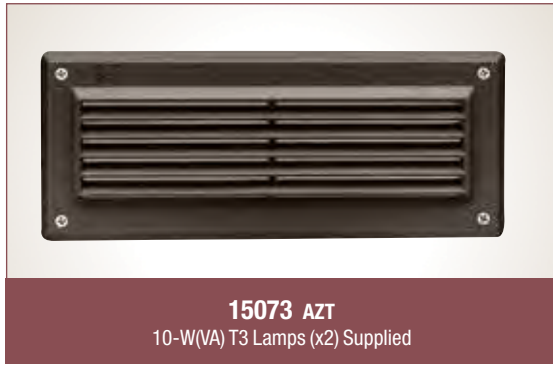

Incandescent/LED 12V Hybrid Accent

Incandescent Lamp not supplied unless otherwise noted.
For LED Lamp options, see page 18.

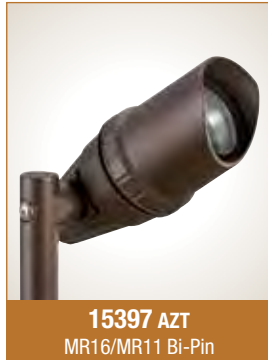



15361 AZT, BKT
S8 Wedge



15363 BBR
S8 Wedge



15087 AZT
MR16/MR11 Bi-Pin



15093 WHT
MR16/MR11 Bi-Pin



15494 AZT
MR16/MR11 Bi-Pin

Incandescent/LED 12V Hybrid In-Ground

Incandescent Lamp not supplied unless otherwise noted.
For LED Lamp options, see page 18.



15488 BK / 15488 BK12
PAR-36 Lamp Supplied



15194 AZ
PAR36 Screw Terminal



15190 BK
MR16/MR11 Bi-Pin



15088 BK 15088 BK12
PAR36 Screw Terminal
15388 BK 35W PAR36 Supplied



15192 BK
MR16/MR11 Bi-Pin



15092 BKT
MR161 Bi-Pin

Incandescent/LED 12V Hybrid Water Feature Lighting

Incandescent Lamp not supplied unless otherwise noted.
For LED Lamp options, see page 18.



15191 BK
MR16/MR11 Bi-Pin



Incandescent / LED 12V Transformers

Power to perform with Incandescent and LED fixtures.

SAFE

- Wire runs feature one common transformer per circuit. ANSI/UL1838 requirements limit each circuit to 300-W and 15V.
- Secondary circuit breakers offer short-circuit protection as a standard feature.
- Magnetic circuit breakers provide a faster response to a fault in the system.
- An in-line primary thermostat protects against thermal over-load. These built-in thermostats are auto-resetting, eliminating the need for replacement or maintenance.
- Because compliance and safety are important long after the installation is complete, all Kichler® Landscape Lighting low voltage transformers are listed or certified by UL, ETL, and/or CSA to the appropriate ANSI/UL 1838 standard for both the United States and Canada.
- Internal wiring is rated for 150°C (302°F), which exceeds safety standard requirements and provides longer life.

POWERFUL

- Various wattage options are available including: 60, 75, 100, 120, 200, 300, 600, 900, and 1200 in many options.
- Available in premium or economy options – convenient for larger, more complicated jobs or where smaller profile, lower-wattage units can be used.
- 75W features 15V tap for LED installations.

DURABLE

- Full enclosure of the housing protects components from weather, sprinkling systems and debris.
- Professional Series housings are made of stainless steel grade 304 designed to run cooler and resist corrosion, and last longer in outdoor environments.
- Multi-tap transformers allow greater flexibility in managing multiple wire runs by moving cables up and down the multi-range. This assures that the correct voltage is applied to a lamp – creating a consistent light output and maximizing lamp life.

WARRANTY

- Limited lifetime warranty offered on Stainless Steel (SS) transformer models.
- A limited 10-Year Warranty on powder-coated Textured Architectural Bronze™ (AZT) transformer models.



K15PR75SS

Wattage (VA)	Model #
75	15PR75 SS
100	15PR100 SS
200	15PR200 SS
300	15PR300 SS
600	15PRD600 SS
600	15PR600 SS
900	15PR900 SS
1200	15PR1200 SS

Professional Series



15M300 AZT

Wattage (VA)	Model #
100	15M100 AZT
200	15M200 AZT
300	15M300 AZT
600	15M600 AZT

Manual Series



K15PL200 AZT

Wattage (VA)	Model #
75	15PL75 AZT
100	15PL100 AZT
200	15PL200 AZT
300	15PL300 AZT
600	15PL600 AZT
900	15PL900 AZT

Plus Series




15E60 BK

Wattage (VA)	Model #
60	15E60 BK
120	15E120 BK

Economy

Incandescent & LED 12V Accessories



1/4-18NPSM thd. Stems 0.5" D. overall	1/2-14NPSM thd. Stems .75" D. overall	1/2-14NPSM thd. Stems .75" D. overall
12" 15651 AZT 15651 BKT 18" 15652 AZT 15652 BKT 24" 15653 AZT 15653 BKT	6" 15645 AZT 15645 BBR 15645 BKT 12" 15656 AZT 15656 BBR 15656 BKT	18" 15657 AZT 15657 BBR 15657 BKT 24" 15658 AZT 15658 BBR 15658 BKT

Reference fixture specifications for proper stem

Fixture Mounting Stems



15570 AZT, BKT
Extends from 18" to 33"


Adjustable Height Stem

4.0625" ID
4.25" OD



18" 15665 AZT, BKT
24" 15666 AZT, BKT
36" 15667 AZT, BKT

Bollard Mounting Kit



Throw-away Debris Lid



16501 BBRP for use with fixtures 4W, 6.5W & 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038

Concrete Installation Kit



15671 ST

Bollard Template Kit

23" H



15578 BK

Bollard Mounting Stake

8" H & 14" H



15575 BK, 8" In-ground Stake
15576 BK, 14" In-ground Stake

Polymeric Support Stakes

1.18" W
2.09" H
1.35" L



BBR

15647 AZT, BBR, BKT

Elbow

1/4-18 NPSM thd
1.5" H



BBR

15649 AZT, BBR, BKT

Stem Coupler

4" D
1/2-14 NPSM thd



BKT

15601 AZT, BKT, BBR, WHT

Surface Mounting Flange

1" x 1/2-14 NPSM thd



15602 AL

Flange Mounting Nipple

1.5" x 2.5" x 1"
1/2-14 NPSM thd



WHT

15607 AZT, BBR, BKT, WHT

Surface Mounting Bracket

3.375" W



15776 BK for use with 15711 SS

Multi-Fixture Weighted Base

3.375" W



15778 BK for use with 15711 SS

Single Fixture Weighted Base

15716 SS
for use with 15734, 15744



15717 SS
for use with 15735, 15745



15718 SS
for use with 15736, 15746



15719 SS
for use with 15755, 15756



1, 3, 6, & 9" LED Flat Mounting Bracket

2.52" W
15777 SS
(shown with 15711SS **Not Included**)

Out of Water Bracket

2.39" W
5.56" H

AZT

15609 AZT, BKT, WHT

Junction Box Mounting Bracket

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax
OPTICS

16064 AMB for use with 3W & 4W fixtures 16000, 16001, 16002, 16003, 16004, 16005
16065 AMB for use with 6.5W & 13W fixtures 16006, 16007, 16008, 16009, 16010, 16011
16066 AMB for use with 21W fixtures 16012, 16013, 16014

15875 AMB for use with fixtures 15731, 15732, 15733, 15741, 15742, 15743, 15767, 15768, 15769, 15728, 15747, 15748
15876 AMB for use with fixtures 15751, 15752, 15753, 15729, 15757, 15758

LED Amber Lens

6" W
14" L

15635 OZ for use with 15435 PP, 15435 RD and 15435 AMB Posies

Three Fixtures, Centerpiece Mounting Kit

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax
OPTICS

16064 GRN for use with 3W & 4W fixtures 16000, 16001, 16002, 16003, 16004, 16005
16065 GRN for use with 6.5W & 13W fixtures 16006, 16007, 16008, 16009, 16010, 16011
16066 GRN for use with 21W fixtures 16012, 16013, 16014

15885 GRN for use with fixtures 15731, 15732, 15733, 15741, 15742, 15743, 15767, 15768, 15769, 15728, 15747, 15748
15886 GRN for use with fixtures 15751, 15752, 15753, 15729, 15757, 15758

LED Green Lens

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax
OPTICS

16064 FRO for use with 3W & 4W fixtures 16000, 16001, 16002, 16003, 16004, 16005
16065 FRO for use with 6.5W & 13W fixtures 16006, 16007, 16008, 16009, 16010, 16011
16066 FRO for use with 21W fixtures 16012, 16013, 16014

15895 FRO for use with fixtures 15731, 15732, 15733, 15741, 15742, 15743, 15767, 15768, 15769, 15728, 15747, 15748
15896 FRO for use with fixtures 15751, 15752, 15753, 15729, 15757, 15758

LED Frosted Lens

15672 FRO for use with fixture 15382
15676 FRO for use with fixtures 15092, 15384, 15484, 15494
15691 FRO for use with fixture 15381
15643 FRO for use with fixture 15374
15633 FRO for use with fixture 15398

Incandescent Frosted Lens

15677 CLR for use with fixture 15327/15827
15695 CLR for use with fixture 15315/15815
15696 CLR for use with fixture 15362

Polycarbonate Lens

15674 LIN for use with fixture 15382
15675 LIN for use with fixtures 15092, 15384, 15484, 15494
15692 LIN for use with fixture 15381
15642 LIN for use with fixture 15374
15632 LIN for use with fixture 15398

Incandescent Linear Lens

15659 AZT for use with fixture 15079
15689 BK for use with fixtures 15088, 15388

Heat Resistant Lens

15673 BL for use with fixture 15382
15686 BL for use with fixtures 15092, 15384, 15484, 15494
15687 BL for use with fixture 15381
15693 BL for use with fixture 15397
15641 BL for use with fixture 15374
15631 BL for use with fixture 15398

Incandescent Blue Filters

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax
OPTICS

BBR

16060 AZT, BBR, BKT, WHT for use with 6.5W & 13W fixtures 16006, 16007, 16008, 16009, 16010, 16011
16062 AZT, BBR, BKT, WHT for use with 21W fixtures 16012, 16013, 16014

5.8"

LED Long Cowl

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax
OPTICS

BBR

16061: 2.5"
16063: 3.3"

16061 AZT, BBR, BKT, WHT for use with 6.5W & 13W fixtures 16006, 16007, 16008, 16009, 16010, 16011
16063 AZT, BBR, BKT, WHT for use with 21W fixtures 16012, 16013, 16014

LED 360° Short Cowl

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax
OPTICS

2.5"

16050 BBRP for use with fixtures 4W, 6.5W & 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038

Cowl – Polycarbonate

POWERED BY
DESIGN PRO LED
TECHNOLOGY



WITH
Radiax
OPTICS

2.5"

16050 BBR for use with fixtures 4W, 6.5W & 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038

Cowl – Cast Brass



2.6"

Short Cowl
15701 AZTP/BKTP for use with fixtures 15731, 15732, 15733, 15741, 15742, 15743
15702 AZTP/BKTP for use with fixtures 15751, 15752, 15753
For BBR fixture finishes, use AZTP

Rotates 360°

Long Cowl
15703 AZTP/BKTP for use with fixtures 15731, 15732, 15733, 15741, 15742, 15743
15704 AZTP/BKTP for use with fixtures 15751, 15752, 15753
For BBR fixture finishes, use AZTP

15703: 5.6"
15704: 6.5"

LED Snap-On Cowls

POWERED BY
DESIGN PRO LED
TECHNOLOGY




WITH
Radiax
OPTICS

16051 BBRP for use with fixtures 4W, 6.5W & 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038

LED Rock Guard – Polycarbonate

POWERED BY
DESIGN PRO LED
TECHNOLOGY



WITH
Radiax
OPTICS

16051 BBR for use with fixtures 4W, 6.5W & 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038

LED Rock Guard – Cast Brass

6.97" D
1.29" H



15694 AZ for use with fixture 15194 or 15268

Incandescent Rock Guard

5.90" D
1.686" H



15787 BK for use with fixtures 15767BKT, 15768BKT, 15769BKT, 15728BKT, 15747BKT, 15748BKT, 15757BKT, 15758BKT


LED Rock Guard

5.90" D
1.686" H



15690 BK for use with fixtures 15088 BK or 15388 BK.

Incandescent Rock Guard



15679 BK for use with fixtures 15092, 15384, 15484, 15494
15680 BK for use with fixture 15381
15683 BK for use with fixture 15397
15644 BK for use with fixture 15374
15634 BK for use with fixture 15398

45° Hexcell Louver




12-gauge
15501 BK 100', 15502 BK 250'
15505 BK 500', 15506 BK 1000'

10-gauge
15504 BK 250'

8-gauge
15503 BK 250'

Low Voltage Cable



15579 BK for use when connecting:
• 8-gauge wire to 10- and 12-gauge
• connecting 10-gauge wire to 12-gauge wire

15589 BK for use when connecting:
• 10-gauge wire
• 12-gauge wire
• 10-gauge wire to 12-gauge wire
• 12-gauge wire to 18-gauge wire

Gel Filled Wire Connector



15509 BK for use with #12-2 or #10-2 low voltage cable only

QUIC DISC® Connector



15529 BL

Pro Series Connector

2.73" W.
3.84" H.
1.89" L




15556 WH

Digital Transformer Timer



15534 BK
10' cord length

Plug-In Transformer Remote Photocell



15565 BK

Plug-In Transformer Photocell



15507 ONG

Kichler Landscape Flag Marker

3" W.
3.09" H.
2.75" L



15557 BK

Mechanical Transformer Timer



15511 BK


Synchronizer Device



15670 BK

Corrosion Preventive Compound

12V LED LAMPS



Base / Lamp Type	Watts	Kelvin / Lumens	Beam Angle			
MR16 Bi-Pin Medium Power 	4W, 5.2VA* Compares up to 20-25W Halogen		15° Spot	25° Wide Spot	40° Flood	60° Wide Flood
		2700K - Warm White 240Lm	18000	18003	18006	18009
		3000K - Pure White 260Lm	18001	18004	18007	18010
		4200K - Cool White 280Lm	18002	18005	18008	18011
MR16 Bi-Pin High Power 	6W, 9VA* Compares up to 35-40W Halogen		22° Spot	38° Flood	60° Wide Flood	
		2700K - Warm White 350Lm	18012	18015	18018	
		3000K - Pure White 380Lm	18013	18016	18019	
		4200K - Cool White 410Lm	18014	18017	18020	
PAR36/AR111 Wet Location 	11W, 14.9VA* Compares up to 50W Halogen		15° Spot	25° Wide Spot	40° Flood	
		2700K - Warm White 540Lm	18021	18024	18027	
		3000K - Pure White 600Lm	18022	18025	18028	
		4200K - Cool White 660Lm	18023	18026	18029	
S8 Wedge 	2W, 2.8VA* Compares up to 18.5W Krypton		300° Omni-directional			
		2700K - Warm White 85Lm	18036			
		3000K - Pure White 100Lm	18037			
		4200K - Cool White 110Lm	18038			
T5 Wedge 	2W, 2.8VA* Compares up to 16W Xenon		300° Omni-directional			
		2700K - Warm White 85Lm	18039			
		3000K - Pure White 100Lm	18040			
		4200K - Cool White 110Lm	18041			
G4/T3 Bi-Pin 	2W, 2.8VA* Compares up to 20W Halogen		300° Omni-directional			
		2700K - Warm White 85Lm	18042			
		3000K - Pure White 100Lm	18043			
		4200K - Cool White 110Lm	18044			

* Multiply fixture VA by the number of fixtures used to determine size of transformer.

Stated lumens are for bare lamp only. Using lamp in enclosed fixtures can result in up to 30-50% loss in lumen output based on test data.

All lamps are listed or certified by UL, ETL, and/or CSA to the appropriate ANSI/standard for both the United States and Canada and have tested for FCC compliance, assuring they won't interfere with other home electronic devices. So, you don't have to worry about inadvertent interference.



LED 120V Accent



16200, 16201, 16206 AZT, BBR, WHT
LED 12.5W/.13A/.85pf



16202, 16203, 16207 AZT, BBR, WHT
LED 19.5W/.18A/.90pf

Kelvin/Lumens	3000K Pure White 590Lm	4250K Cool White 646Lm
Compares to Halogen 50W PAR30		
Beam Spread 10° Spot	16200 AZT30 16200 BBR30 16200 WHT30	16200 AZT42 16200 BBR42 16200 WHT42
Beam Spread 35° Flood	16201 AZT30 16201 BBR30 16201 WHT30	16201 AZT42 16201 BBR42 16201 WHT42
Beam Spread 60° Wide Flood	16206 AZT30 16206 BBR30 16206 WHT30	16206 AZT42 16206 BBR42 16206 WHT42

Kelvin/Lumens	3000K Pure White 947Lm	4250K Cool White 993Lm
Compares to Halogen 75W PAR30		
Beam Spread 10° Spot	16202 AZT30 16202 BBR30 16202 WHT30	16202 AZT42 16202 BBR42 16202 WHT42
Beam Spread 35° Flood	16203 AZT30 16203 BBR30 16203 WHT30	16203 AZT42 16203 BBR42 16203 WHT42
Beam Spread 60° Wide Flood	16207 AZT30 16207 BBR30 16207 WHT30	16207 AZT42 16207 BBR42 16207 WHT42



16204, 16205, 16208 AZT, BBR, WHT
LED 29W/.27A/.90pf

Kelvin/Lumens	3000K Pure White 1131Lm	4250K Cool White 1360Lm
Compares to Halogen 100W PAR38		
Beam Spread 10° Spot	16204 AZT30 16204 BBR30 16204 WHT30	16204 AZT42 16204 BBR42 16204 WHT42
Beam Spread 35° Flood	16205 AZT30 16205 BBR30 16205 WHT30	16205 AZT42 16205 BBR42 16205 WHT42
Beam Spread 60° Wide Flood	16208 AZT30 16208 BBR30 16208 WHT30	16208 AZT42 16208 BBR42 16208 WHT42

Design Pro LED with Radiax™ Optics also available in 12V Accent and In-Ground fixtures – see page 5.

**Incandescent/LED
120V & HID
Hybrid
Accent**

Incandescent Lamp not supplied unless otherwise noted.

For LED Lamp options, see page 23.



15231 AZT, BKT
PAR20 Medium Base



15241 AZT, BKT
PAR30 Medium Base



15251 AZT, BKT
E17 MH/PAR38 Medium Base



15230 AZT
PAR20 Medium Base



15250 AZT
PAR30, PAR30L, PAR38
Medium Base



15255 AZT, BKT
E17 MH/PAR38 Medium Base

**Incandescent/LED
120V & HID
Hybrid
In-Ground**

Incandescent Lamp not supplied unless otherwise noted.

For LED Lamp options, see page 23.



15295 AZ
PAR38 Medium Base



15268 AZ
PAR20/PAR30 Medium Base



15262 AZ
PAR20 Medium Base



15263 AZ
E17 MH/PAR30 Medium Base



15266 AZ
E17 MH/PAR30 Medium Base

**Incandescent
120V & HID
Path &
Spread**

Incandescent Lamp not supplied unless otherwise noted.



15215 AZT, BKT Small Conical
E17 MH Medium Base



15221 AZT, BKT Large Conical
E17 MH Medium Base



15226 AZT, BKT Dome
E17 MH Medium Base



**MUST BE
USED WITH
15215, 15221
AND 15226**

Ballast Assembly

15BLMH50 BK 50W MH
15BLMH70 BK 70W MH
15BLMH100 BK 100W MH



15236 BKT, TZT
A19 Medium Base



15239 OB, OZ
A19 Medium Base



15211 AZT, BKT
A19 Medium Base

SHOWN WITH
OPTIONAL
STEM. SEE
PAGE 21 FOR
MOUNTING
ACCESSORIES



15232 AGZ
A19 Medium Base




15205 AZT, BKT
A19 Medium Base

SHOWN WITH
OPTIONAL
STEM. SEE
PAGE 21 FOR
MOUNTING
ACCESSORIES

MH = Metal Halide

Incandescent HID Ballasts

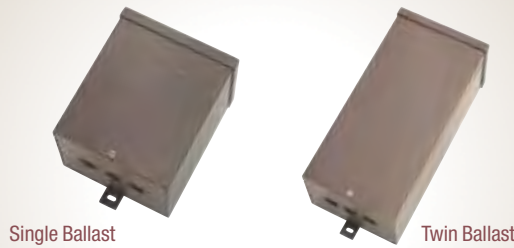

Single Ballast Twin Ballast

15MHS35 AZT, 15MHS70 AZT, 15MHS100 AZT, 15MHS175 AZT, 15MHT35 AZT, 15MHT70 AZT, 15MHT100 AZT, 15MHT175 AZT




15IGMHS35 AZ, 15IGMHS70 AZ, 15IGMHS100 AZ, 15IGMHS175 AZ

LED 120V Outdoor



AZT

11251 AZT, BKT
LED 14.67W, 574Lm, 3000K



BKT

11250 AZT, BKT
LED 11.23W, 374Lm, 3000K



AZT

11077 AZT, BKT
LED 15.42W, 425Lm, 3000K

Incandescent/LED 120V Hybrid Outdoor

Incandescent Lamp not supplied unless otherwise noted.
For LED Lamp options, see page 23.



WH

6051 AZ, WH
PAR30, PAR30L, PAR38
Medium Base



AZ

6052 AZ, WH
PAR30, PAR30L, PAR38
Medium Base


Incandescent & LED 120V & HID Accessories

4.0625" ID
4.25" OD



18"
15665 AZT, BKT for use with fixtures 15005, 15011, 15205, 15211
24"
15666 AZT, BKT for use with fixtures 15005, 15011, 15205, 15211
36"
15667 AZT, BKT for use with fixtures 15005, 15011, 15205, 15211

Bollard Mounting Kit



4"

18" 24" 36"



6"

18" 24" 36"

4" x 18"
15603 AZT, BKT

4" x 24"
15604 AZT, BKT

4" x 36"
15605 AZT, BKT

For use with fixtures 15215, 15221, 15226

6" x 18"
15613 AZT, BKT

6" x 24"
15614 AZT, BKT


6" x 36"
15615 AZT, BKT

For use with fixtures 15215, 15221, 15226

HID Bollard Mounting Kit

6" 15645 AZT, BBR, BKT
12" 15656 AZT, BBR, BKT
18" 15657AZT, BBR, BKT
24" 15658AZT, BBR, BKT

1/2-14 NPSM thd. stems
.75 dia. overall



Fixture Mounting Stems



4.375"

19"

2.25"

15276 BKT for use with fixtures 15205 AZT, 15205 BKT, 15211 AZT, 15211 BKT, 15232 AGZ, 15236 BKT, 15236 TZ, 15239 OB & 15239 OZ

Power Post®

23" H



15578 BK for use with all bollard mounting kits on 12V and 120V fixtures 15005, 15011, 15205, 15211

Bollard Mounting Stake

2.39" W
5.56" H



15609 AZT, BKT, WHT

Junction Box Mounting Bracket

4" D
1/2-14 NPSM thd



15601 AZT, BKT, BBR, WHT

Surface Mounting Flange

1/2-14 NPSM thd.



15602 AL

Flange Mounting Nipple