

SPECIFICATIONS

OUTDOOR

HOUSING

- Sealed die cast housing

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard

OPTICAL SYSTEM

- Available in 4000K and 5000K
- Offered in Low Bay or Parking Garage (wide) distributions

MOUNTING

- Suitable for JBox or Pendant mounting

CODE COMPLIANCE


- cULus Listed for Wet Locations
- Meets DLC Requirements

WARRANTY


- 5 Year
- 10 Year Warranty Available




GL9-LED LED Canopy

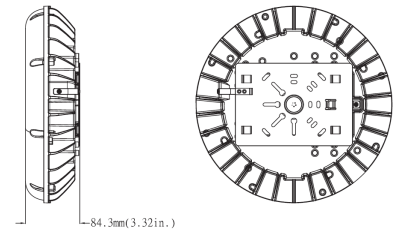

84.3mm (3.32in.)



∅304.75mm (12in.)

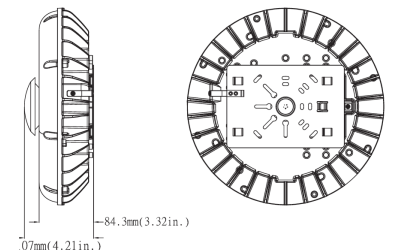

84.3mm (3.32in.)


ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
GL9-30L-QT-50K	30W	3800 Lumens	5000K
GL9-45L-QT-50K	45W	5500 Lumens	5000K
GL9-60L-QT-50K	60W	7600 Lumens	5000K

OPTIONS (Factory Installed)

PG	-	Parking Garage (wide) Distribution <i>Goes after 'GL9' in part number</i>
40K	-	4000K (special order)
EBLED	-	Emergency Ballast
OCS	-	Occupancy Sensor
10YR	-	10 Year Warranty

General

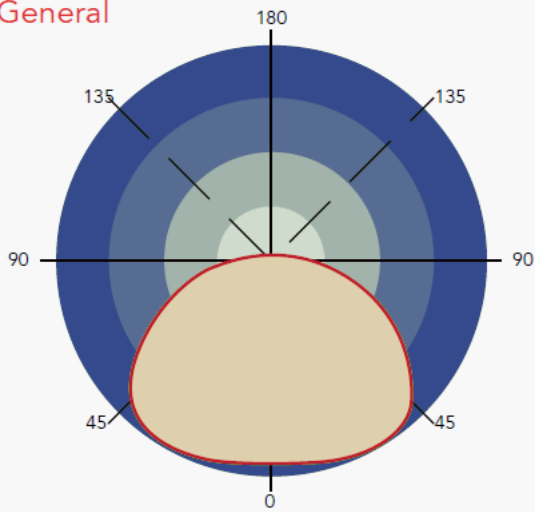

Parking Garage

