SECOND EDITIONS

HOW TO ORDER

All Prices in this Bulletin are NET, and are NOT SUBJECT TO U. S. EXCISE TAX. Send remittances with order in the form of money orders, checks, stamps or cash (the latter by registered mail).

C. O. D. ORDERS


All C. O. D. orders must be accompanied by a 20% deposit remittance. All goods shipped F. O. B. our Warehouse in New York. For shipment by parcel post, include an approximate sum for such charges—any excess will be immediately refunded. In the absence of such instructions, shipment will go forward express collect.

GUARANTEE

We guarantee that all our goods are illustrated and described accurately! Should you be displeased with any of our merchandise, please return same for prompt adjustment!

PROMPT SHIPMENTS

Most of our orders are despatched from within 6 to 24 hours after receipt! Our huge stocks, thoroughly trained Personnel and smooth functioning systems make our unparalleled, speedy shipping service possible!

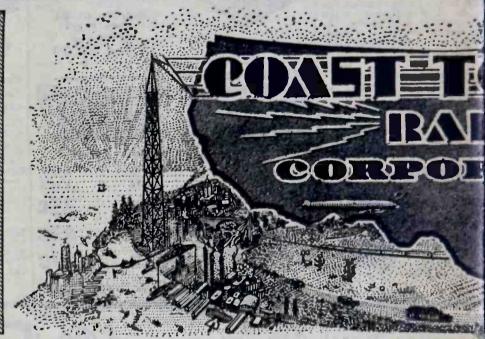

"SUPER-COMPACT" RADIO RECEIVER

Requires These MODERN
TUBES: 1-57, 1-58,
1-247, 1-280
Feature: Galore: Tuned Radio

Features Galore: Tuned Radio Frequency Circuit—2 Gang variable condenser—equipped with a full fledged ELECTRO-DYNAMIC-SPEAKER, which will amaze you with its ability to reproduce surprisingly great volume in a realistic manner. Equipped with an illuminated FULL VISION DIAL, with SPOT TUNING FEATURE. Note simplicity of operating controls—just one tuning knob and a Volume Control (with self-contained on-off switch).



Cat. No. C1287

Complete With
Four RCA
Tubes \$11.95

Tube Triple Grid, Super Control Pentode A. C. Midget Receiver

Requires 2-58 Triple Grid Super Control, 1-57 Screen Grid, 1-247 Pentode and 1-280 Tubes

Featuring satisfactory performance, stability, ease of operation and inconsequential operating cost. Illuminated dial—individually compensated 3 Gang variable condenser. Fully shielded throughout. Tone Control, Volume Control and self-contained A.C. Switch. Attractive Cabinet. True Reproducing Utah Dynamic Speaker. Volume enough to warrant keeping it under control. Selectivity and sensitivity that will delight you... in stort, here is a receiver to warrant your complete approval! For 110 volt 50-60 Cycle A.C.



Caf. No. C1297

\$14.95

COMPLETE WITH FIVE RCA TUBES!

5-Tube Dual Wave 75 to 550 Meter Super-Heterodyne Receiver

Employs These Highly Efficient Tubes:

Telephone

Watkins 9- \ 78

Cable Address: Cotcorad

121-123-125 NEW YO



TWO STAGE 250 SUPER-POWER

TWO STAGE 250 SUPER-POWER AUDITORIUM-SOUND TRUCK and PUBLIC-ADDRESS-AMPLIFIERS



Brand New!

Shipped in Original Cases

This is the identical amplifier that was used in the most expensive VICTOR electric phonographs—models of these used to sell from \$350.00 to \$1,000.001 And now, for the first time, the Radio purchasing public can buy these amplifiers "for a song!"

Designed, Perfected and Manufactured by the Three Most Noted Radio Manufacturers in the World!

R.C.A. . . . WESTINGHOUSE . . . VICTOR—are the sponsors of this remarkable amplifier. Were only any ONE of them credited with its design and manufacture the am-

fully 58 lbs! The power transfisign, and will function practice continuous operating periods, is also practically fool-proof, durated as high as 1500 Volts! Its unique in its design, embracing tion, permitting the use of a high or coupling to any Radio Tuner, cuits of the 1st A.F. tube are bropermitting the use of that stamplifier for any microphone





Our Prices Are LOWEST -Here Is Why!

By an arrangement with the various manufacturers of the Radio receivers and of many of the items herein listed, we have agreed NOT to mention their names in this bulletin because of our quotations which are in most instances EVEN LESS THAN THEIR DISTRIBUTORS and JOBBERS COSTS ... you will of course immediately recognize the manufacturer's name on the merchandisel Were we to mention their names in this Bulletin, their extremely valuable distribution set-up would be impaired. These manufacturers appreciate our HUGE PURCHASING POWER, and accordingly offer us considerably lower prices for a large volume sale—TO FIRMLY RETAIN YOUR GOOD-WILL, WE PASS THESE SAVINGS ON TO YOU!

From present indications, it appears that prices of all commodities are headed for higher levels....BUY NOW, and in AMPLE QUANTITIES, while our present stocks and quotations are existent... and BUY WITH UNRESERVED CONFIDENCE UNDER OUR GUARANTEE OF YOUR COMPLETE SATISFACTIONI

Vest 17th St.

NOTE

For ready reference, we suggest you hang these sheets on your walls—additional copies for this purpose obtainable on your request.




rmer is of heavy-duty delly indefinitely, even over he filter condenser system to some of its units being A.F. Audio system is indeed universal utility of applicaimpedance phono. pick-up The Input and Output Ciright out to a terminal strip, e as a self-contained prephono., etc. An external

Due to the "quick heater" action of the 1st A.F. Tube, and in fact of all its tubes, this amplifier is especially valuable for use in INTER-OFFICE COMMUNICATION SYSTEMS, or wherever it is necessary to operate an amplifier "the moment" it is turned on! These amplifiers are also very ideal for use in multi-channel installations, as each such amplifier is entirely self A.C. operated, and furthermore can furnish D.C. Field Current to its own bank of up

The "Coast-ette" Miniature Universal AC—DC Radio Sets

Remarkably compact: 8½ in. long, 6½ in. tall, 4 in. deep, and completely Self-contained. Total Weight: 5½ lbs. 4 and 5 Tube Models!

Can be plugged into any light socket, 110 Volt D.C., or 110 Volt A.C., 25 to 60 Cycles. New principle employed obviates necessity of power transformer, therefore, break-down possibilities are almost impossible. Employs a remarkably efficient circuit that enables surprising long distance reception. Its reproductive abilities are equally as pleasing—and will assuredly thrill its listeners! Actually operates with its own Self-Contained Antenna System . . . An outside aerial system can be employed if desired. Here are some of the other valuable features of the five-tube model: Equipped with a Volume Control, Screen Grid Power Detector (236), Two Super Control Variable Mu R.F.



Cat. No. C1344

8.95 Complete with Four RCA Tubes: 1-KRI, 1-236, 1-238, 1-239 \$10.95

Cat. No. C1345
Complete with Five RCA Tubes: 1-238, 2-239

Tubes, 3 High Gain T.R.F. Stages, Pentode Power Output Tube, Current Consumption Less Than a 40-Watt Electric Bulb, Distortion-free Resistance Coupled Audio Stage, and Automatic Protection, etc., etc. Its exterior will grace the appearance of any table, desk, mantel, bedroom night table, etc. Its compactness permits its insertion into any traveling bag!

We Are the First to Offer the New

5 TUBE COMPACT SETS EQUIPPED WITH A GENUINE DYNAMIC SPEAKER

DOUBLE VOLUME-TRANSFORMERLESS 43 and 25Z5 TUBE EQUIPPED

Haivered AC-DC







Our Prices Are LOWEST -Here Is Why!

By an arrangement with the various manufacturers of the Radio receivers and of many of the items herein listed, we have agreed NOT to mention their names in this bulletin because of our quotations which are in most instances EVEN LESS THAN THEIR DISTRIBUTORS and JOBBERS COSTS ... you will of course immediately recognize the manufacturer's name on the merchandise! Were we to mention their names in this Bulletin, their extremely valuable distribution set-up would be impaired. These manufacturers appreciate our HUGE PURCHASING POWER, and accordingly offer us considerably lower prices for a large volume sale—TO FIRMLY RETAIN YOUR GOOD-WILL, WE PASS THESE SAVINGS ON TO YOU!

From present indications, it appears that prices of all commodities are headed for higher levels....BUY NOW, and in AMPLE QUANTITIES, while our present stocks and quotations are existent... and BUY WITH UNRESERVED CONFIDENCE UNDER OUR GUARANTEE OF YOUR COMPLETE SATISFACTIONI

Vest 17th St.

impedance phono. pick-up The Input and Output Cir-

ight out to a terminal strip, e as a self-contained pre-

phono., etc. An external

NOTE

For ready reference, we suggest you hang these sheets on your walls—additional copies for this purpose obtainable on your request.



TEMS, or wherever it is necessary to operate an amplifier "the moment" it is turned on! These amplifiers are also

very ideal for use in multi-channel installations, as each such amplifier is entirely self A.C. operated, and furthermore can furnish D.C. Field Current to its own bank of up

Sweeping the Nation Like An Avalanche!
The "Coast-ette" Miniature
Universal AC—DC Radio Sets

Remarkably compact: $8\frac{1}{2}$ in. long, $6\frac{1}{2}$ in. tall, 4 in. deep, and completely Self-contained. Total Weight: $5\frac{1}{2}$ lbs. 4 and 5 Tube Models!

Can be plugged into any light socket, 110 Volt D.C., or 110 Volt A.C., 25 to 60 Cycles. New principle employed obviates necessity of power transformer, therefore, break-down possibilities are almost impossible. Employs a remarkably efficient circuit that enables surprising long distance reception. Its reproductive abilities are equally as pleasing—and will assuredly thrill its listeners! Actually operates with its own Self-Contained Antenna System . . . An outside aerial system can be employed if desired. Here are some of the other valuable features of the five-tube model: Equipped with a Volume Control, Screen Grid Power Detector (236), Two



Cat. No. C1344

8.95 Complete with Four RCA Tubes: 1-KRI, 1-236, 1-238, 1-239 \$10.95

Cat. No. C1345

*13.50 Complete with Five RCA Tubes: 1-KR1, 1-236, 1-238, 2-239

Super Control Variable Mu R.F.
Tubes, 3 High Gain T.R.F. Stages, Pentode Power Output Tube,
Current Consumption Less Than a 40-Watt Electric Bulb, Distortionfree Resistance Coupled Audio Stage, and Automatic Protection,
etc., etc. Its exterior will grace the appearance of any table, desk,
mantel, bedroom night table, etc. Its compactness permits its insertion into any traveling bag!

We Are the First to Offer the New

5 TUBE COMPACT SETS

EQUIPPED WITH A GENUINE

DYNAMIC SPEAKER

DOUBLE VOLUME-TRANSFORMERLESS 43 and 25Z5 TUBE EQUIPPED

Haivareal AC-DC



MEZI IJIP ZI'+ NEM KOKK CI. I amp. 250 volts. I amp. 250 volts. M. long, and extends but, is in behind a panell bress turnings and locking nut, Bakelite houssulated, tinned end leads. Sulated, tinned end leads. Cat. No. C1169

Cat Tubes Secondary Specs, 16 26
No. Matched
No. Matched
1524 2-46, 2-59, 15 ohms tapped
2-79, Etc. at 71% and 33% Watt and Other for 26 Watt Outhuts Available In Two Models-One For 16 1623 UNIVERSAL—

Matches any Equipped with type, single push - taps for 1 to 2 pull or parallel ohm, 3½ ohms, arrangement—and 8 to 12 arrangement and 12 arrangement an 1623 UNIVERSAL— 1622 2-247, 2-59 at 71/2 and 34/2 2.238, 2-233, Etc. ohms 15 ohms tapped 34, at 71% and 34, 1952 2-244, 2-59 Etc. 10 to 15 ohms, \$1.95 22.E\$..... smdo ohms tapped at 71/2 and 33% 1621 2-43, 2-171, Etc. 'ѕшцо 200 87.58..... sm.do 1220 2-23, 2-171, Etc. 15 ohms tapped 34, at 74, and 34, Cat. No. Matched Specs. Cost 1519 2-250, 2-245 Specs. 10 to 15 ohms..51.95 2-43, 2-171, Etc. 10 to 15 ohms..51.95 Will Handle up to IS Watts Outbut For Class "A" Amplifiers quoted. The large core of highest grade slicon steel and perfectly designed collification characters and perfectly designed collings give straight line amplitication characteristics, even at small outputs. The windings are highly insulated and are well impregnated and varnished. Can be used in any climate. The average dimensions are 3% in. nated and varnished. The mounting state output tubes you employ.

State output tubes you employ.

Hotary Sanguet 'On-Off':

Rotary Sanguet as a second sanguet s

doliwe gane 110-no

Volume Control "On-Off"

In Lots of 12, \$1.00

Equipped With Slot-Head

Switch

4000 ohms....\$1.75 \$2.95

CP'S\$ C9'2\$.

26.2\$ 56.1\$

ally offered for

The engineer

to a gless of the constant of th

12110 W 08 01 Producing up

s noitallate

Amplifier In-

Use with P.A.

Excellent For

..... surqo

Attachment

for Cam Atta

Per Dozen, 50e

Short Throw! Noted for Its Unusual

No. C1117 ... 45C

Double Pole - Double

Single Pole — Double

1526 2-46, 2-59, 2-79, Etc.

1625 2-46, 2-59, 2-79, Etc.

Hart & Hegeman Switches

S. P. D. T. and D. P. D. T.

No. C1116 ...

Cat.

Cat. No.



Radio Sockets

"Cinch" 4-5-6-7 Prong Wafer

Per Dozen, \$2.40

Per 100 ft. Roll, \$2.95

The tinest cable obtainable. Consists of
tainable. Consists of
a individually insulated
cables color coded.
Each individual cable
has rubber insulating
and cotton covering.
Woven, flexible tinned copper shield self cotton
covered. Cable tinned copper shield self cotton
both ends. A shielded ground lug is provided
on one end of cable.
On one end of cable.
Fer it. (Cut to any lensity.)

Microphone Cable The tinest c Three Conductor Shielded

Per Dozen, \$1.75

Cat. No. C1503.

ized Taper Grip Bulg olah

Cable and Rubber-

Heavily Insulated Heavy Duty 5 ft. Dual Conductor

Per it. (Cut to any length!) ..

Cat. No. C1502....

Makes and breaks circuit between two dual conductor cables. Colored identification button.



Toylded with knurled nutbose binding posts for convenient connections. Excellent for regular as well as experimental mork, Made of molded phosphor bronze content springs, Knurled nickel binding post terminals and lugs, Knurled nickel binding post terminals and lugs.

Cat. No. C1606. 6 prong—Green Spot, 16C Cat. No. C1406. 6 prong—Green Spot, 16C Cat. No. C1406. 6 prong—Blue Spot, 16C Cat. No. C1406. 6 prong—Blue Spot, 16C Cat. No. C1406. General Purpose

Cat. No. C1406. 6 prong-Blue Spot. JZZ

Universal Panel



Used for below panel connecting and making adapters 1, in diameter, % in high. Holes for mountling socket ean all be drilled with hand at liush against the cop surface of a moter panel or chasses.

Cat. No. C1613. 5 prong—Red Spot.
Cat. No. C1613. 6 prong—Red Spot.
Cat. No. C1614. 6 prong—Red Spot. Bakelite Button Buoid L

\$1.10 | Cat. No. C1616. 6 prong Blue Spot.

Audio Transformers designed on a % in. square core of high square core of high square core of high square core is securely held in an attractively finished strap. Designed in accordance with the latest technique; they can be depended upon to give very satisfactory redepended upon to give very satisfactory in the proportion will indicate the core of high proportions.

Cat. No. C1482, 3 to 1 All Stage 98C

No. C1485. Output Transformer, from 5 or 250 to 8-15 ohm dy-Cat. No. C1483. Input Push- \$1.22
Pull Transformer
Cat. No. C1484. Interstage Push-Pull
Transformer, from single plate to two grids.
For use between push-pull stages \$1.45
—for all types of tubes.

PASS OF 250 to 8-15 ohm dy- \$1.45

Cat. No. C1486. Output Transformer, from 1-247, 233, 59 (etc.), or 238 to 8-15 ohm dynamic speaker

Cat. No. C1488. Pentode Output Push-Pull Transformer, from push-pull 247, 233, 59 (etc.), or 238 tubes to 8—15 contraction of the dynamic speaker voice coll Cat. No. C1487. Output Push-Pull Transformer, from push-pull 246, 250 to 8—15
voice coil

pick-ups pick-up and Microcat, No. C1480. 3000 Ohms Phono. Pick-up
cat, No. C1489. Choice of 200, 400 or 500
Ohm Phono. Pick-up input, for \$1.25
Cat. No. C1489. Choice of 200, 400 or 500
Ohm Phono. Pick-up
input, for high impedance
Cat. No. C1480. 3000 Ohms Phono. Pick-up
Ohm Phono. Pick-up
ohm Cat. No. C1480. 3000 Ohms Phono. Pick-up
ohm Phono. Pick-up
ohm Cat. No. C1480. 3000 Ohms Phono. Pick-up
ohm Phono. Pick-up
ohm Cat. No. C1480. 3000 Ohms Phono. Pick-up
ohm Phono. Pick-u ohm dynamic speaker voice coil, \$1.45

plok-ups

Cat. No. C1491. Single Button Microphone
Cat. No. C1492. Double Button MicroCat. No. C1492. Double Button MicroCat. No. C1492. Double Button MicroCat. No. C1493. Double Button MicroCat. No. C1494. Single Button MicroCat. No. C1495. Double Button Micr 24.13 bjck-ups

Universal 4-5-6 Prong Tube

o setting of the state of the s

one socket. The fllament holes are common to all types; the cathode, plate, grid and suppresson holes are individual for each type. Can be mounted in a 1% in. diameter cut-out socket hole. Can be mounted above or below panell solid bakelite moulded—vari-colored identification feature incorporated. tion feature incor



ment of 9

DIRCE-

Base Forms Bakelite Tube

Overall diameter: 1, in.; lin.; length of bakelite form, length of bakelite form, wound short wave inductances as well as tube and socket plug adapters, ideal for use with above Universal Sockets, length of Prong.

Cat, No. C1496. 5 Prong.

Cat, No. C1496. 5 Prong.

Per Dozen, \$1.00

Made of 14 in. thick steel — extremely rigid. 18 in. long, 10 in. wide. 31, in. tall. Ideal for integral for thick Cadmium Plated Chassis



36L Cat. No. C1193 368 Cat. No. Ciffd. steel — extremely right.

18 in. long, 10 in. wide.

31, in. tall. Ideal for
universal application
Universal abplication
and soldered to.

and soldered to.

Wood Circle Cutter Adjustable Metal, Bakelite or

Guta holes from 1/2 in. to 4 in. In to 4 in. In diameter. Can be used in any hand brace, breast drill or power machine. Drills its own pliot bole. Ideal for Culling Out Sochet

oald just evoda and

OS.18 sonabeda Iduod to elania) en vernal Phono-Pickup.

Tormaol

noispuidmo

256

%E 'ap

100pl-

Сроке

cal-mai

56.43

Contains First Brute Contains First Brute Filter Choke—100 ohms, 15 Henry, 250 Mils.; 200 Ohms, 30 Henry, 130 Mils.; Third Filter Choke—200 Ohms, 30 graeted in a moisture-ase, 34x5%x5% inches, 3,5 x5 inches, Actual

Gauge Steel Casel

Power Pack Chokes

essary Class "B"

Comprises all the Nec-

m P.A. Amplier

oversize bearings;
to run-table R.P.M.
of turn-table R.P.M.
all fittings, such as
pointer and escutcheon
inter and escutcheon
output
ou

silent operation la tomatic heat dissi

tric Motor

h Removable Plug-in

e principi) e mployed tastion of rising and to motor turn-tables, o motor turn-tables, by a cleverly ball.

By a cleverly ball.

By a cleverly ball.

I we forested possibilities, bick-up as fighly dennife musical register.

I we hardly believe to motor to make the motor of a wallable in any pick-up is available in any to 5000 ohms. (Stand-botsted)

y P. A. Amblifter

smoll 70f lashl Killar

ad Cast Studios, The

hono, Pick-up

PLUOL

no. In-

2/I &

Cou-

82 pur

56.78

28.18

56.28

09.88

e wasemply

tehing Trans-

oiba Radio ner Input

ono - Miero-

sives valuable space, site Universal input form one ications from one contect enformer. Correct enering design sasures ering design sasures imm

mum energy trans


22.65

300 ohms ... 200 ohms ... Cat. No. C13 paliossy ul

Per Dozen

Oat, No. C1369 All-Stage Ratio! Mul olbu. Transformer Audio Replacement Universal

WILL Voice Coll



Per Dozen Cat. No. C1096. Colls. All Ratio

Microphone Transformers at, Not C1068, For Single Button walkes, " Single or Double Button P-A SERIES

Per Dozen, 89.00

Output Push-Pull Transformer. With Secondary of 8 to 15 ohms impedance



or 200 obms per button is sugo ool fi Klipade aspald Your Choice

Nationally Advertised A. C. Power uozon dod

84,80 per dozen

Represent The Finest Products of Severals

111W 220 101 Transformers Series Flut Mount "Bell Top" Power Embrace Highest State of Electrical and A

This type seems to enjoy greatest favor with servicemen, due to its clever design and terminal lugitesture. and 280 Rectifier Amp. 21/2 Volt Tubes 0.1 ban 27.1 to sade I

4 Tube Transformer

5 and 6 Tube Transformer

amps., C.T. amps. M.A., D.C.

(g 7 amps., C.T. (g 2 amps. (g 70 M.A., D.C. 6 Tube Transformer

7 and 8 Tube Transformer

for quotations. Note: For IIO Volt, 25 Cycle, 220 or 24 2.5 V. (2.5 V. (2.5 V. (3.5 amps., C.T.)
2.5 V. (2.6 V. (3.6 amps., C.T.)
2.5 V. (3.6 amps., C.T.)
3.5 V. (3.6 amps., C.T.)
3.6 V. (3.6 amps., C.T.)
3.6 V. (3.6 amps., C.T.)
3.7 V. (3.6 amps., C.T.)
3.8 V. (3.6 amps., C.T.)
3.9 V. (3.6 amps., C.T.)
3.9 V. (3.6 amps., C.T.)
3.0 V. (3.6 amps., C.T

Primary: 115 2.5 Volts

For 8-21/2 Furnished wi

Rating: 4% 1

all: yramira 810 V 6.S 810 V 6.S 810 V 0.6 810 V 0.6 815-375 V 01cs

For 7-21/2 VI

Im padsingua

Cat. No. C140

es esdue cort

I Innoitibba

Same as abo

ILI LAbe o

Cat. No. C140

Mounting Hole Height: 3% in Rating: 75 Wu

8310V 8.1 8310V 8.2 8310V 0.6 8310V 0.6 8310V 0.6 9310V 0.6

242-14

Mounting Hol Height: 41% 1 Rating: 85 W

Laminatic

uI .qmA

Senior D

Pons

PARTS **KEBLACEMENT**

Section

MIGG

mounting these condensors in any position makes them truly invaluable. The easing of course, fully insulates the contents.

Our Price

Series Replacements Majestle Audio Transformer

We Can Furnish a Transformer

Every A.C. Sei Made by Majestici

Enclosed in a fully
a hielded sub-panel
style mounting metal
case Equipped with long
flexible lends, each one
struction permits unistruction permit

KORE CHOICE

92-93-100 Series -19-09 3ittelbM

Transfs. Filamen Plate and Combined

For 5-227, 2-1-280 Tubes Cat. No. 01048

Per Dozen, \$3.00 Replacement

I. F. Coll Assembly
Can be easily replaced. Its et.
fletent characteristics permit
ance in any conventional indectmediate trequency R.F. stage.
Equipped with four, identified
leads.
Deads.

Kolster Power Transformer KOLSTER REPLACEMENT COILS AND TRANSFORMERS

Per Dozen...

Cat. No. C1050.

In One Case! Iwo A.F. Transformers Transformer

Kolster Double Audio

No. 01363

Majestie 175 K. C.

The compact size, sturdy construction and linished appearance of these units make them ideal for use in most any receiver of system. Long leads are provided for direct wiring. Case is finished in crackle case, allowed the construction of the cons

Per 100, \$2.95

R.C.A.) Drum Dial Cables

Majestie (and

357

256

36

Cat. No. C1042. For

Cat. No. C1040. For "Super B" Elimi-nators. "Super B" Elimi-"Super B" Elimi-

Containers

Motal Case

ontained in

Sections

Multiple

Coils

Cat. No. C1046

Transformers

Plate

40

Filament

Choice of

Transformers

Power

Majestie

Sour choice of any of the above 300.00

No. C1046. Por 8 P6 No. C1046. Por 8 P6 No. C1046, Por 9 P6

"Special Master B" Eliminators.

Total Cap'r

readst

Six for \$5.00

Majestic Condenser Blocks For

Your Choice Tube Equipped Sets

For All Majestic 171 Power

31, 22..... Cat. No. C CIOIT. FOT.

B-16, B-10, Model K-13, Col. No. C. C1078. For

Cat. No. C1079.

210-250 Condenser Block Dubilier Kolster

160 volts; .5 mfd., 160 volts; .25 mfd., 160 volts For Kolster K-5. 6-H Columbia 500-901 Receiv 21 ov 081 ... H-8 3 mids., 1000 volts; 4 mids., tains following sections: Known as PL-455. Con-Total capacity: 11% mid.



IST TO COAST RADIO CORP, 121

espine, and this undrilled 3 ply walnut tintsh panel. Overall dimensions: 13 in. wide, 24% girlle measures 9% in. tail, by 9 in. wide, and is backed with a rich golden colored grille cloth. Rich and is fall, by 6 in. wide, and is backed with a fich golden colored grille cloth. Rich and is a series of the colored grille cloth.

Highly decorative in appearance cabinet, in which you may decrapt to mount this undiffed 3

Panel

Speaker-Receiver

Sp. IS

258

Cat. No. 01569



ajestic

Majestic Condenser Blocks
Cat. No. C1040. For
"Super B" Elimi-



nators. Cat. No. C1041. For "Master B" Eliminators

"Special Master B" Eliminators.
Your choice of any of the above.... 95C Six for \$5.00


Cat. No. C1043. For 7 P6 (171 Type) Sets. Cat. No. C1044. For 8 P6 (250 Type) Sets. Cat. No. C1045. For 9 P6 (245 Type) Sets.

\$1.80 Your choice of any of the above... Six for \$10.00

Majestic Power Transformers Choice of Filament Plate **Transformers**



For All Majestic 171 Power Tube Equipped Sets Your Choice



Majestic (and R.C.A.) Drum Dial Cables Cat. No. C1050.

Per Dozen ... 45C Per 100, \$2.95

REPLACEMENT PARTS

Majestic Audio Transformer Series Replacements

We Can Furnish a Transformer



Every A.C. Set Made by Majestic!

Enclosed in a fully shielded sub-panel style mounting metal case. Equipped with long flexible leads, each one suitably coded. Ideal for general replacement purpose. Clever construction permits universal mounting.

Cat. No. C1360. Audio

Cat. No. C1360. Audio Cat. No. C1861. Input Push-Pull Cat. No. C1656. Out-put Push-Pull

YOUR CHOICE 85c

Majestic 90-91-92-93-100 Series

Combined Plate and Filament Transfs.

For 5-227, 2-245, 1-280 Tubes Cat. No. C1048





I. F. Coil Assembly Can be easily replaced. Its efficient characteristics permit the usage of this dual inductance in any conventional intermediate frequency R.F. stage. Equipped with four, identified leads.

Cat. No. 01363...... 30C Per Dozen, \$3.00

KOLSTER REPLACEMENT COILS AND TRANSFORMERS Kolster Power Transformer Kolster Double Audio Coils

Cat. No. C1077. For Model K-20. \$1.25

Cat. No. C1078. For Model K-43. 48. B-15, B-16, B-10, \$1.65

Cat. No. C1079. For Model K-24 \$2.50



Transformer Two A.F. Transformers In One Case!

The Cone Case!

The compact size, sturdy construction and finished appearance of these units make them ideal for use in most any receiver of amplifier straight audio system. Long leads are provided for direct wiring. Case is finished in crackie green. Size 2½ x 3½ x 2½ inches. Oat. No. C1364



\$1.45

Dubilier Kolster 210-250 Condenser Block



Total capacity: 11% mfd. Known as PL-455. Contains following sections: 3 mfds., 1000 volts; 4 mfds., 600 volts; 4 mfds., 160 volts; .5 mfd., 160 volts; .25 mfd., 160 volts. For Kolster K-5, 6-H, Columbia 500-901 Receiv-\$1.10



Speaker-Receiver Panel

Highly decorative in appearance—will match most any console cabinet, in which you may desire to mount this undrilled 3 ply walnut finish panel. Overall dimensions: 13 in. wide, 24½ n. tall. The handsomely scrolled grille measures 9½ in. tall, by 9 in. wide, and is backed with a rich golden colored grille cloth. Rich dull finish.

Cat. No. C1569.....\$1.25

Output Push-Pull Transformer. With Voice Coll Secondary of 8 to 16 ohms impedance. 95C

Per Dozen, \$9.00



Universal Audio Replacement Transformer All-Stage Ratio!

Cat. No. 01369 . 45c Our Price \$1.80 per dozen

P-A SERIES Single or Double Button Microphone Transformers at. No. C1068. For Single Button "Mikes."

Cat. No. C1069. For Double Button "Mikes." Your Choice 99C

Please specify if 100 obms or 200 obms per button is desired.



In Asserted Lots FILTER

Cal. No. 01370 ohms Cal. No. C1380 20 200 ohms Cat. No. C1381 30



Cat. No. C1095. Assorte Per Dozen No. C1086. Coils.

Per Dozen Cat. No. C1097.

Per Dozen

Nationally Advertised A.C. Power Tra

Represent The Finest Products of Several of Embrace Highest State of Electrical and Mecha

Flat Mount "Bell Top" Power Transformers Series



For Use With All Types of 1.75 and 1.0 Amp. 21/2 Volt Tubes and 280 Rectifier

This type seems to enjoy greatest favor with serv-icemen, due to its clever design and terminal lug feature.

4 Tube Transformer

Cat. No. C1401.....

5 and 6 Tube Transformer 700 Volts, 60 M.A.

6 Tube Transformer

700 Volts, 70 M.A.
Primary 115 volts, 50/60 cycle
2.5 V.

7 and 8 Tube Transformer

9 and 10 Tube Transformer

Note: For 110 Volt, 25 Cycle, 220 or 240 Vol



1.5 Volts 2.5 Volts 5.0 Volts 5.0 Volts 300-300 Volts A.C. Mounting Holes: 2 Height: 31/2 inches Rating: 75 Watts. Cat. No. C1406 ...

171 Type Pow

Same as above but 11/2 Volt Windings, additional 11/2 Volt 1.05 amps., and is

Cat. No. C1407

245-247 1 Trans

Furnished with Tw

Furnished with Tw

For 7-2½ Volt (b.

Amp. tubes, 2750 Volts
2.5 Volts
5.0 Volts
375-375 Volts A.C.

Mounting Holes: 3½ Height: 4½ inches.

Rating: 85 Watts.

Cat. No. C1061 Cat. No. C1061

> Senior Size Power Th

Furnished with Three For 8-21/2 Volt (h) Amp. Tubes, 2-1

Lamination Stack
800 Volt
Primary: 115 Volts, A
2.5 Volts
2.5 Volts
2.5 Volts
5,0 Volts
400-400 Volts, A.C.
Mounting Holes: 2.5

for quotations.

RADIO CORP. 121-12

Pick-up ide Studios, Theall deal for Home P. Amplifier

p ciple employed of rising and of rising and tor turn-tables, Ba cleverly balenough needle mit, thus considered as a cich possibilities. The self-enclosed iderable advanhardly believe pictip as available allable in any of ohms. (Stand-

\$5.95 \$1.85 h Enovable Plug-in

.... \$7.95

3 3 and 78 eror Contr: Motor



elveteen covered osed oil sprayed nt operation la-tic heat dissitic heat dissi-ersize bearings; rn-table R.P.M. r "record drag," ittings, such as ter speed regu-and escutcheon RANTEED! For

\$8.60

P.A. Amplier ssembly

Cuprises all the Necry Class "B" Pack Chokes bin One Heavy suge Steel Case! Clains First Brute For Choke—100 ohms, 15 Henry, 250 Mils.; Filter Choke Henry, 250 Mils.; and Filter Choke— (Ohms, 30 Henry, Mils.; Third Filter ke—200 Ohms, 30 ted in a moisture-314x578x58 inches, x5 inches.

\$4.95



95c

abination no - Microand Radio er Input thing Transformer

es valuable space.
universal input
tions from one
mer. Correct entg design assures
tim energy trans-

sal Phono-Pickup. (Single or Double nsformer. Secondard edance \$1.50

s Above, But Also

\$2.65

square core of high Silicon steel. The core is securely held in an attractively finished strap. Designed in accordance with the latest technique; they can be depended upon to give very satisfactory results! The coils are scientifically treated to be impervious to all atmospherics—a very valuable and necessary feature. The overall measurements of all the units below are 3% in. long, 2% in. tall, 2½ in. wide. These generous proportions will indicate the HIGH QUALITY of its ENGINEERING DESIGNI

Audio Transformers

Cat. No. C1482. 3 to 1 All Stage 98C Cat. No. C1482. 3 to 1 All Stage 98C
A. F. Transformer
Cat. No. C1483. Input PushPull Transformer
Cat. No. C1484. Interstage Push-Pull
Transformer, from single plate to two grids.
For use between push-pull stages
—for all types of tubes
—for all types of tubes

Cat. No. C1486. Output Transformer, from
1—245 or 250 to 8—15 ohm dynamic speaker voice coil
Cat. No. C1486. Output Transformer, from
1—247, 233, 59 (etc.), or 238 to 8—15 ohm
dynamic speaker
voice coil
Cat. No. C1487. Output Push-Pull Transformer
Cat. No. C1487. Output Push-Pull Transformer

Cat. No. C1487. Output Push-Pull Transformer, from push-pull 245, 250 to 8—15 ohm dynamic speaker \$1.95

Cat. No. C1488. Pentode Output Push-Pull Transformer, from push-pull 247, 233, 59 (etc.), or 238 tubes to 8—15 ohm dynamic speaker voice coil. \$1.45

Phono. Pick-up and Micro-phone Input Transformer Cat. No. C1489. Choice of 200, 400 or 500 Ohm Phono. Pick-up Input, for \$1.25 Cat. No. C1490. 3000 Ohms Phono. Pick-up Input, for high impedance \$1.45 pick-ups

Cat. No. C1491. Single Button Microphone Transformer. (State if for 100 \$1.45

Cat. No. C1492. Double Button Micro-Phone (State if for 100 or 200 ohm Buttons!) Transformer... \$1.75

Universal 4-5-6 Prong Tube Socket





Its place-ment of 9 holes per-mits all types of tubes to be tested or used in this

and 5 Prong Bakelite Tube Base Forms



Overall diameter: 1.6 in.: length of bakelite form, 11/6 in. Brand new—never used. Ideal for home wound short wave inductances as well as tube and socket plug adapters. Ideal for use with above Universal Sockets.

Cat. No. C1494. 4 Prong. Cat. No. C1495. 5 Prong.

Per Dozen, \$1.00

Cadmium Plated Chassis



Made of 10 in thick steel—extremely rigid.
18 in long, 10 in wide.
310 in tall Ideal for universal application!
Can be easily drilled and soldered to.

89c Cat. No. C1114..... Cat. No. C1193 10 x 12 in. long x 3 is in.

Adjustable Metal, Bakelite **Wood Circle Cutter**

Ideal for Cutting Out Socket and Meter Holes, Etc.

Cuts holes from V_2 in. to 4 in. in diameter. Can be used in any hand brace, breast drill or power machine. Drills its own pilot bole.



Per Dozen, \$1.75

Three Conductor Shielded



Microphone Cable

The finest cable obtainable. Consists of 3 individually insulated cables color coded. Each individual cable has rubber insulating and cotton covering.

Woven, flexible tinned copper shield self cotton covered. Cable is finished with spade tips on both ends. A shielded ground lug is provided on one end of cable.

Cat. No. C1163

Per ft. (Cut to any length!)


Per ft. (Cut to any length!) Per 100 ft. Roll, \$2.95

Heavily Insulated Heavy Duty 5 ft. Dual Conductor Cable and Rubberized Taper Grip Male Ping



Cat. No. C1503..... Per Dozen, \$2.40

"Cinch" 4-5-6-7 Prong Wafer Radio Sockets



Phosphor Bronze Contacts-Bakelite Insulation!

Available for ALL FOUR to SEVEN PRONG TYPE TUBES, including the new 59 SEVEN PRONG SERIES, 25Z5, 48, 43, 79, Etc.

ALL ONE PRICE

Cat. No. C1192 EACH Per Asst'd Lot of 100, \$4.25

New Types 56-57-58

Three Piece Ventilated **Aluminum Tube** Shields

Cat. No. C1200. 12C Per Dozen, \$1.25



5c

"NA-ALD"—ALDEN BAKELITE SOCKETS **General Purpose**

Sockets



Provided with knurled nut binding posts for convenient connections. Excellent for regular as well as experimental work. Made of molded Bakelite throughout with phosphor bronze contact phosphor bronze contact springs. Knurled nickel bind-

ing post terminals Cat. No. C1504. 4 p and lugs Cat. No. C1504. 4 prong—Red Spot. **16C**Cat. No. C1508. 5 prong—Green Spot. Cat. No. C1406. 6 prong—Blue Spot. 22C Cat. No. C1507. 7 prong—Orange Spot.

Universal Panel **Mount Sockets**

Genuine molded Bakelite
with phosphor bronze spring
contacts. For mounting
either above or below subpanel. Equipped with insulated mounting flanges and holes. Convenient
solder lug terminals. Mounting holes 1 stain.centers, panel hole 1 stain diameter.
Cat. No. C1508. 4 prong.
Cat. No. C1509. 5 prong.
Cat. No. C1510. 6 prong.
Cat. No. C1510. 6 prong.
Cat. No. C1511. 7 prong.

29C

29c

Bakelite Button

Used for below panel connecting and making adapters 1.2 in. diameter, % in. high. Holes for mounting socket can all be drilled with hand drill. Hole in center for No. 6 screw. Socket itself mounts flush against the top surface of a meter panel or chassis.

Cat. No. C1512. 4 prong—Red Spot.

Cat. No. C1513. 5 prong—Green Spot.

Cat. No. C1514. 6 prong—Blue Spot.

Use with P.A. Amplifier Installations Producing up to 30 Watts! The engineering design of these transformers is on a par with a par with similar instru-

similar instruments generally offered for many times the modest cost here with a quoted. The large core of highest grade silicon steel and perfectly designed coils give straight line amplification characteristics, even at small outputs. The windings are highly insulated and are well impregnated and varnished. Can be used in any climate. The average dimensions are 3% in. long, 2 in. wide, 2% in. tall—the mounting holes are 2 in. x 2% in. Please definitely state output tubes you employ.

For Class "A" Amplifiers Will Handle up to 15 Watts Output

Tubes
Cat. No. Matched
1519 2-250, 2-245
2-43, 2-171, Etc. Secondary Specs. 10 to 15 ohms..\$1.95

15 ohms tapped at 7½ and 3¾ ohms\$2.75 500 ohms, 15 1521 2-250, 2-245 2-43, 2-171, Etc.

ohms tapped at 7½ and 3¾ ohms\$3.25 1522 2-247, 2-59 2-238, 2-233, Etc. 10 to 15 ohms.\$1.95

1522 2-247, 2-59 at 7½ and 3¾ 2-238, 2-233, Etc. ohms\$2.50

500 ohm and 2000 ohm lines and 1523 UNIVERSAL-Matches any Equipped with type, single push-taps for 1 to 2 pull or parallel ohm, 3½ ohms, arrangement—and 8 to 12 CLASS A OR B! ohm voice coil secondary windings\$4.95

For Class **GB** Amplifiers

Available In Two Models—One For 16 Watt and Other for 26 Watt Outputs

Cat Tubes Secondary Specs. 16 26
No. Matched Watt Watt

No. Matched
1524 2-46, 2-59, 2-79, Etc. at 7½ and 3¾ ohms\$1.95 \$2.95
1525 2-46, 2-59, 500 ohms, 15 2-79, Etc. ohms tapped at 7½ and 3¾ ohms\$2.65 \$3.45

1526 2-46, 2-59, 2-79, Etc. 4000 ohms....\$1.75 \$2.95

S. P. D. T. and D. P. D. T. Hart & Hegeman Switches

Single Pole — Double Cat.

No. C1116... 21c Double Pole — Double Throw

No. C1117 ... 45C

Volume Control "On-Off" Switch



Equipped With Slot-Head for Cam Attachment Cat. No. C1254 12c In Lots of 12, \$1.00


On-Off Snap Switch

Noted for Its Unusual Short Throw!

Cat. No. C1253 ... Per Dozen, 50c



Ultra-Compact "On-Off" Rotary Snap Switch
Rated 3 amps., 125 volts;
1 amp., 250 volts. Only



Source itself mounts flush against the top surface of a meter panel or chassis.


Cat. No. C1512. 4 prong—Red Spot.
Cat. No. C1513. 5 prong—Green Spot.
Cat. No. C1514. 6 prong—Blue Spot.
Cat. No. C1515. 7 prong—Orange Spot.
Cat. No. C1515. 7 prong—Orange Spot.
Cat. No. C1515. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.

Cat. No. C1516. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.



ajestic

Majestic Condenser Blocks
Cat. No. C1040. For
"Super B" Elimi-



nators. Cat. No. C1041. For "Master B" Elimi-

nators.
Cat. No. C1042. For "Special Master B" Eliminators. Your choice of any of the above..... 95C

Six for \$5.00


Cat. No. C1043. For 7 P6 (171 Type) Sets. Cat. No. C1044. For 8 P6 (250 Type) Sets. Cat. No. C1045. For 9 P6 (245 Type) Sets.

Six for \$10.00 Your choice of any of the above

Majestic Power Transformers Choice of Filament or Plate



Transformers For All Majestic 171 Power Tube Equipped Sets Your Choice




Majestic (and R.C.A.) Drum Dial Cables Cat. No. C1050.

Per Dozen ... 45C Per 100, \$2.95

REPLACEMENT PARTS

Majestic Audio Transformer Series Replacements

We Can Furnish a Transformer Every A.C. Set Made by Majestic! Enclosed in a fully shielded sub-panel



shielded sub-panel style mounting metal case. Equipped with long flexible leads, each one suitably coded. Ideal for general replacement purpose. Clever con-struction permits uni-versal mounting.

Cat. No. C1360. Audio Cat. No. C1361. Input Push-Pull Cat. No. C1656. Out-put Push-Pull

YOUR CHOICE

90-91-Majestic 92-93-100 Series

Combined Plate and Filament Transfs.

For 5-227, 2-245, 1-280 Tubes Cat. No. C1048





er Dozen, \$3.00

KOLSTER REPLACEMENT COILS AND TRANSFORMERS Kolster Power Transformer Kolster Double Audio Coils Transformer

C1077. Cat. No. C1077. For Model K-20. \$1.25 For

Cat. No. C1078. For Model K-43, 48, B-15, B-16, B-10, \$1.65

Cat. No. C1079. For Model K-24 Model K-24 Sets \$2.50

Cat. No. C1365....



Two A.F. Transformers

Two A.F. Transformers
In One Case!
The compact size, sturdy construction and finished appearance of these units make them ideal for use in most any receiver or amplifier straight audio system. Long leads are provided for direct wiring. Case is finished in crackle green. Size 2 ½ x 31½ x 2½ inches. Cat. No. C1364



Dubilier Kolster 210-250 Condenser Block



Total capacity: 11% mfd. Known as PL-455. Contains following sections: 3 mfds., 1000 volts; 4 mfds., 600 volts; 4 mfds., 160 volts; .5 mfd., 160 volts; .25 mfd., 160 volts. For Kolster K-5. 6-H, Columbia 500-901 Receiv-

S1.10



Speaker-Receiver Panel

Highly decorative in appearance—will match most any console cabinet, in which you may desire to mount this undrilled 3 ply walnut finish panel. Overall dimensions: 13 in. wide, 24½ n. tall. The handsomely scrolled grille measures 9½ in. tall. by 9 in. wide, and is backed with a rich golden colored grille cloth. Rich dull finish.

Output Push Pull Transformer. With Voice Coll Secondary of 8 to 15 ohms impedance. 95C Per Dozen, \$9.00



Universal Audio Replacement Transformer All-Stage Ratio!

Cat. No. 01368 45c our Price 84.80 per dozen

P-A SERIES Single or Double Button Microphone Transformers
at. No. C1088. For Single
Button "Mikes."

Cat. No. C1069. For Double Button "Mikes."

Please specify if 100 ohms or 200 ohms per button is desired.



FILTE Cat. No. 01379 3 200 ohma Qat, No. 01380 20 opme Cat. No. C1351 30

In Assorted Lots

Audio. Input



Cat. No. C1095. Assor Coils. All Ratios. S Per Dozen . S Coils. Per Dozen No. C1097. Per Dozen

Nationally Advertised A.C. Power Tr Represent The Finest Products of Several of

Embrace Highest State of Electrical and Mech

Flat Mount "Bell Top" Power Transformers Series



For Use With All Types of 1.75 and 1.0 Amp. 21/2 Volt Tubes and 280 Rectifier

This type seems to enjoy greatest favor with servicemen, due to its clever design and terminal lug feature.

4 Tube Transformer

Cat. No. C1401.....

5 and 6 Tube Transformer

6 Tube Transformer

7 and 8 Tube Transformer

Note: For 110 Volt, 25 Cycle, 220 or 240 Vo for quotations.

300-300 Volts A.C. Mounting Holes: 2 Height: 3½ inches Rating: 75 Watts. Cat. No. C1408....

171 Type Por

Same as above bu 1½ Volt Windings additional 1½ Vo 1.05 amps., and is

Cat. No. C1407 ...

245-247 "H" 20 W

Furnished with For 7-2½ Volt (Amp. tubes, 2 750 Vo

Amp. tubes, 2
750 Vo
Primary: 115 Volts,
2.5 Volts
2.5 Volts
5.0 Volts
375-375 Volts A.C.
Mounting Holes: 34
Height: 4½ inches.
Rating: 85 Watts.
Cat. No. C1061 Cat. No. C1061

> Senior Size Power

Furnished with The For 8-21/2 Volt Amp. Tubes, 200

Lamination Stac Primary: 115 Volts, 2.5 Volts 2.5 Volts

Mounting Holes: 2 Height: 3 % inches. Rating: 100 Watts.

T TO COAST RADIO CORP

hop. Pick-up adat Studios, Theally deal for Home P. . Amplifier

y P. . Amplifier

iciple employed of rising and of rising and of rising and of rising and of the consideration of

\$5.95 for ... \$1.85

h Inovable Plug-in \$7.95

3 3 and 78 erpr Con-Motor



elveteen covered losed oil sprayed nt operation la-tic heat dissitic heat dissi-ersize bearings; rn-table R.P.M. r "record drag," ittings, such as ter speed regu-and escutcheon RANTEED! For

\$8.60

P.A. Amplier ssembly

prises all the Necry Class "B" Pack Chokes bin One Heavy auge Steel Case! ins First Brute Choke—100 ohms, lenry, 250 Mils.; Henry, 250 Mind Filter Choke Ohms, 30 Henry, Mils.; Third Filter ke — 200 Ohms, 30 ted in a moisture-3\(\frac{1}{2}\)\(\frac{

\$4.95 11-125





former es valuable space.
universal input
tions from one
mer. Correct enig design assures
im energy trans-

ning Trans-

sal Phono-Pickup. v (Single or Double nsformer. Secondance \$1.50

is Above, But Also

\$2.65

designed on a % in.

square core of high
Silicon steel. The
core is securely held
in an attractively
finished strap. Designed in accordance
with the latest technique; they can be
depended upon to give very satisfactory results! The coils are scientifically treated
to be impervious to all atmospherics—a
very valuable and necessary feature. The
overall measurements of all the units below
are 3% in. long, 2% in. tall, 2½ in. wide.
These generous proportions will indicate
the HIGH QUALITY of its ENGINEERING
DESIGN!

Audio Transformers

Cat. No. C1482. 3 to 1 All Stage 98C Cat. No. C1482. 3 to 1 All Stage 98C

A. F. Transformer

Cat. No. C1483. Input PushPull Transformer

Cat. No. C1484. Interstage Push Pull
Transformer, from single plate to two grids.

For use between push-pull stages

—for all types of tubes.

Cotton: Cransformer, from Cat. No. C1485. Output Transformer, from 1—245 or 250 to 8—15 ohm dynamic speaker voice coil..... \$1.45

Cat. No. C1488. Pentode Output Push-Pull Transformer, from push-pull 247, 233, 59 (etc.), or 238 tubes to 8—15 ohm dynamic speaker voice coil. \$1.45 Phono. Pick-up and Micro-

phone Input Transformer
Cat. No. C1489. Choice of 200, 400 or 500
Ohm Phono. Pick-up Input, for
low impedance pick-ups...... \$1.25 Cat. No. C1490. 3000 Ohms Phono. Pick-up input, for high impedance \$1.45

pick-ups Cat. No. C1491. Single Button Microphone Transformer. (State if for 100 \$1.45

Button Micro-Cat. No. C1492. Double Button Micro-Phone (State if for 100 or 200 ohm Buttons!) Transformer... \$1.75

Universal 4-5-6 Prong Tube Socket





ment of 9 holes permits all types of tubes to be tested or used in this

one socket. The filament holes are common to all types; the cathode, plate, grid and suppressor holes are individual for each type. Can be mounted in a 1½ in. diameter cut-out socket hole. Can be mounted above or below panel! Solid bakelite moulded—vari-colored identification feature incorporated.

and 5 Prong Bakelite Tube Base Forms



Overall diameter: 1% in.; length of bakelite form, 1% in. Brand new—never used. Ideal for home wound short wave inductances as well as tube and socket plug adapters. Ideal for use with above Universal Sockets.

Cat. No. C1494. 4 Prong. Cat. No. C1495. 5 Prong. CACH

Per Dozen, \$1.00

Cadmium **Plated Chassis**



Made of 10 in thick steel — extremely rigid.
18 in long, 10 in wide,
310 in tall. Ideal for universal application!
Can be easily drilled and soldered to.

89c Cat. No. C1114..... Cat. No. C1193 10 x 12 in. long x 3 % in.

Adjustable Metal, Bakelite **Wood Circle Cutter**

Ideal for Cutting Out Socket

and Meter Holes, Etc.

Cuts holes from ½ in. to 4 in. in diameter. Can be used in any hand brace, breast drill or power machine. Drills its own pilot hole. Cat. No. C1156



Makes and breaks citwo dual conductor caidentification button.

Cat. No. C1502..... breaks circuit between nductor cables. Colored cables. Per Dozen, \$1.75

> Three Conductor Shielded Microphone Cable



The finest cable obtainable. Consists of 3 individually insulated cables color coded. Each individual cable

Woven, flexible tinned copper shield self cotton covering.

Woven, Cable is finished with spade tips on both ends. A shielded ground lug is provided on one end of cable.

Cat. No. C1163

Per ft. (Cut to any top the individual cable is finished with spade tips on both ends. A shielded ground lug is provided on one end of cable.

Per 100 ft. Roll, \$2.95

Heavily Insulated Heavy Duty 5 ft. Dual Conductor Cable and Rubberized Taper Grip Male Plug



Cat. No. C1503..... Per Dozen, \$2.40

4-5-6-7 Prong "Cinch" Wafer Radio Sockets



Phosphor Bronze Contacts-Bakelite Insulation!

Available for ALL FOUR to SEVEN PRONG TYPE TUBES, including the new 59 SEVEN PRONG SERIES, 25Z5, 48, 43, 79, Etc.

ALL ONE PRICE

5C EACH Per Asst'd Lot of 100, \$4.25

New Types 56-57-58

Three Piece Ventilated **Aluminum Tube** Shields

Cat. No. C1200. 12C Per Dozen, \$1.25



"NA-ALD" —ALDEN BAKELITE SOCKETS

General Purpose Sockets



Provided with knurled nut binding posts for convenient connections. Excellent for regular as well as experimental work. Made of molded Bakelite throughout with phosphor bronze contact phosphor bronze contact springs. Knurled nickel bind-

ing post terminals and lugs.
Cat. No. C1504. 4 prong—Red Spot.
Cat. No. C1505. 5 prong—Green Spot.

16C Cat. No. C1406. 6 prong—Blue Spot. 22C

Universal Panel



29c

Bakelite Button

Used for below panel connecting and making adapters 1. in. diameter, % in. high. Holes for mounting socket can all be drilled with hand drill. Hole in center for No. 6 screw. Socket itself mounts flush against the top surface of a meter panel or chassis.

Cat. No. C1512. 4 prong—Red Spot.

Cat. No. C1513. 5 prong—Green Spot.

Cat. No. C1514. 6 prong—Blue Spot.

Use with P.A. Amplifier Installations Producing up to 30 Watts! The engineering design of these transformers is on a par with

formers is on a par with similar instruments generally offered for many times the modest cost here with highest grades give straight line amplification characteristics, even at small outputs. The windings are highly insulated and are well impregnated and varnished. Can be used in any climate. The average dimensions are 3% in. long, 2 in. wide, 2% in. tall—the mounting holes are 2 in. x 2% in. Please definitely state output tubes you employ.

For Class "A?" Amplifiers

For Class "A" Amplifiers
Will Handle up to 15 Watts Output

Tubes
No. Matched
9 2-250, 2-245
2-43, 2-171, Etc. Secondary Specs. 10 to 15 ohms..\$1.95

15 ohms tapped at 7½ and 3¾ ohms\$2.75 1520 2-250, 2-245 2-43, 2-171, Etc. 500 ohms,

1521 2-250, 2-245 2-43, 2-171, Etc. ohms tapped at 7½ and 3¾ ohms\$3.25 1522 2-247, 2-59 2-238, 2-233, Etc. 10 to 15 ohms.\$1.95

1522 2-247, 2-59 at 7½ and 3¾ 2-238, 2-233, Etc. ohms\$2.50

1523 UNIVERSAL—

Matches any Equipped with type, single push-taps for 1 to 2 pull or parallel ohm, 3½ ohms, arrangement—and 8 to 12 CLASS A OR B! ohm voice coil secondary windings ... \$4.95

For Class **B'* Amplifiers

Available In Two Models—One For 16

Available In Two Models-One For 16 Watt and Other for 26 Watt Outputs

Cat Tubes Secondary Spees. 16 26
No. Matched Watt Watt

No. Matched
1524 2-46, 2-59, 2-79, Etc. at 7½ and 3¾ ohms tapped at 7½ and 3½ ohms\$1.95 \$2.95 \$00 ohms, 15 ohms tapped at 7½ and 3¾ ohms\$2.65 \$3.45

1526 2-46, 2-59, 2-79, Etc. 4000 ohms....\$1.75 \$2.95

S. P. D. T. and D. P. D. T Hart & Hegeman Switches

Single Pole — Double Throw Cat.

No. C1116... 21º Double Pole — Double Throw

No. C1117 ... 45C



Volume Control "On-Off" Switch



Equipped With Slot-Head for Cam Attachment Cat. No. C1254 12º In Lots of 12, \$1.00

On-Off Snap Switch


Noted for Its Unusual Short Throw!

Cat. No. C1253 ...

Per Dozen, 50c



Ultra-Compact "On-Off" Rotary Snap Switch
Rated 3 amps., 128
1 amp., 250 volts.



S1.10 Surface of a meter panel or chassis.

Cat. No. C1513. 5 prong—Green Spot.
Cat. No. C1514. 6 prong—Blue Spot.
Cat. No. C1515. 7 prong—Orange Spot.
Cat. No. C1515. 7 prong—Orange Spot.
Cat. No. C1516. 7 prong—Orange Spot.

ing
on Times
titles
it. No.
ozen
O As
For
ing Teing P e per 00 ap 8 I 1A20

On-C

oggle

pulse pulse d Circ IONO CORPLA **Turnished**

Condenser

al e str n s in. a e strip, 6il in.
n. a in. wide. Exemi useful—always
ave. few on hand!

... 35c 65



lining Posts ds. No selection titles allowed. No. C1609.

EEN .. 50C Assorted or \$1.50

g Tension incag Posts



per 25, ap Switch



12.1.20 an On-Off" ggle Switch

ular the world r. Anchored (8 hes long), flex-iuty—rated at 3 10 Volt! 1 inch ded ink.

.50 los Circuit Jack



Cat. No. C1816.
Total Resistance 10,000 ohms...... 70C EQUIPPED WITH 4 VARIABLE TAPS
Cat. No. C1317.
Total Resistance 15,000 ohms YOUR
Cat. No. C1318
Total Resistance 20,000 ohms.
Cat. No. C1319.
Total Resistance 25,000 ohms.

13,000 ohm Tapped Voltage Divider



5 in. long, % in. dia-meter. Tapped as follows: 2,000 - 3,000 - 3,000 - 2,000 -3,000 ohms. Cat. No. C1620... 49C

Cat. No. C1621. Electrad 245-247 Loftin- 39C White Circuit Tapped Resistor.....

R.C.A. Voltage Divider
For Radiolas 18, 33 and
51. 4½ inches long.
Consists of two separate resistors, one being
1,600 ohms, and the other is 2,340 ohms, tapped at 1,900 ohms.
Cat. No. C1622. Each

Per Dozen, \$2.75 25c

Peerless Courier Voltage Divider Contains two separate sections of 100,000 and 2,500 phms. Also following sections in series: 3,000—15,000 HIT CE TERO 100,000—500,000 ohms. 29C

Kolster Wire Wound Resistances

Cat. No. C1624.....

For KOLSTER SET No. K-24. (Part No. 3938). Total: 7,835 ohms. tapped at 3,400; 3,800; 55, 80, 40, 360 ohms.

"Surplus - Low - Priced" Carbon Pigtail Resistor Kits



These kits are well apportioned from huge barrels into which have been placed resistors ranging in value from 100 ohms clear up to 10 megohms, in every possible resistance value between.

Cat. No. C1625 Cat. No. C1828
Asst'd Kit of 100 Resistors...... \$4.45

Brunswick Output Push-Pull Transformer

Equipped with Secondary which matches Impedance of Standard Dynamic Speaker Voice Coils. Enclosed in a 2% inch diameter round can, 3 inches tall. Note the conveniently shaped mounting base.

Cat. No. C1209...... 49C In Lots of Six, \$2.50



Heat-Proof Cambric



Ideal for use in hot pitch filled trans-

Hook-Up Wire Spaghetti
36 Inch Long. Black.
Cat. No. C1634. Per Dozen Lengths... 35C Kit

Asst'd. Wire Contains Every Conceivable Type

of Wire Needed on a Service Job Cat. No. C1249 Per Packet 49C

Per Dozen Cartons, \$5.25

Listeners Official Radio Log Book



Contains complete listings of World Short-Wave Stations and regular broadcasting stations— 15 to 550 meters. Cross tabulated by Call, Frequency, Location, and TIME of SHORT-WAVE BROADCAST. Also, World and American time - and - location maps—and other special features. Cat. No. C1264...... 19C


'Radio News' Books

"Radio News Short Wave Manual"
"Radio Trouble Finder"
"Radio Amateur Handibook"
"Radio News 1001 Radio Questions and Answers"
YOUR 45c

All 4 for \$1.50



RCA-VICTOR R.F. **COIL ASSORTMENT**



Embracing highly efficient antenna and r. f. coils designed for screen grid, 227 and 226 types of R. F. Tubes. Many are equipped with high impedance loading coil primaries mounted within the coil forms. All Forms Are Genuine Bakelite and vary in lengths from 2½ in. to 3% in. Conceded to be one of the most perfectly designed coils ever manufactured!

Cat. No. C1660.

PER ASSORTMENT \$1.00

SPADE TERMINALS

Cat. No. C1131. Per Pair, with
TIP TERMINALS Per Dozen, \$5.00

Handy Radio Nut Wrench Set

High grade steel with case hardened, re-movable "chuck type" sockets. Hollow handle

Heavy Duty Two Tip Electric Solder Irons

69c Cat. No. C1648
Rating: 75 Watts..... \$1.15 Cat. No. C1649



Rosin Core Solder Cat. No. C1169. Per Generous Portion 15C Can.....

Per Dozen Cans, As Illustrated \$1.18

Cat. No. C1170. ONE 37c SPOOL.....

Aluminum Solder
Cat. No. C1660. Per Stick, 17 in. long,
in diameter. Weight, 2 ozs........... 25C
In Lots of 12, \$1.95

Serviceman's Tool and Repair Parts Kit

14 in. x 6½ in. x 6 in. Key and lock included. Removable tray feature. Cat. No. Cat. No. **79C**



COMPLETE ANTENNA KITS Aerial Kit



A big leader! Ideal for any average installation. Cat. No. C1240 ... 35C

Per Dozen, \$3.60

contains: 100 ft. 7/22 stranded copper aerial; 50 l8 ground wire; 1 approved lightning arrester; 1 copper ground clamp; 1 lead-in strip; 2 porcelain insulators; 2 Nailit knobs Cat. No. C1651. PER KIT

Advertised Brand!

FEG! UNCONDITIONALLY GUARANTEED FOR SIX complete SATISFACTION is assured! You will be

F	manufacturer's name	on each	tube c	arton	
H	Your Cost	TYPE		X	our Cos
	\$1.12				
					_
	2.48		• • • • • • •		
			• • • • • • • • • • • • • • • • • • •		
		89			8:
ш					
II.	duct A SPECIAL IND	HICKMEN	UT 50%	DISC	OUNT



AERIAL ELIMINATOR

Actually duplicates the performance of 150 ft. long antenna systems! Almost entirely eliminates static and other 'man ande" or atmospheric distribution. Greatly sharpens the tuning selectivity of any receiver! Can be placed within or behind any make or type Radio Receivermeasures only 4 in. tail, 2 in. diameter. Entirely dispenses with ever-present lightning storm diameter. Entirely dispenses with ever-present lightning storm hazards.
Cat. No. C6921
EXTRA SPECIAL 25C

EXTRA SPECIAL 25C
In Lots of 12, \$2.75

Ward-Leonard 100 Watt-17.5 Ohm Vitreous **Enameled Resistor**



Ideal For Reducing "110 Volt"

Per Dozen, \$2.50

ection

ILL-NEVER-BE-AS-LOW





Best! Her-time resisting that assures Conservatively

800 Volt \$.75 \$1.10 \$1.30 \$1.75

MURE RS

unt. Aluminum embedded brass te with highly and miniature Extends only 1% -1% in. diameter.

g Value! 9 Plates 13 Plates

.... 59C Each

ERTISED densers



...\$1.65 .00014 \$1.25

e Models h OSCILLATOR

S1.95 \$2.25

fd. Variable Condenser

Equipped with compensators.
Ruggedly constructed. 65c 1600

odyne Selector etector or Coils

6-



PILOT LIGHTS For Radio Drum Dials. 2½ and 5 volt types. Cat. No. C1242. Package of 10. 19c 5 VOLT Cat. No. C1243. Package of 10. 23/2 VOLT 19C

In Lots of 100, \$1.80 In Lots of 500, \$7.95

"Slow Speed High Frequency" and "Fast Speed Low Fre-quency" Full Vision Illuminated Vernier Dial

The varying speed permits a better and more uniform separation of the graduations at the high frequency end of the scale. The pointer is operated through a link motion which is positive and in exact unison with the condenser rotor. No slippage can occur. The attractively embossed escutcheon plate is can occur. The attractively embossed escutcheon plate is $5\frac{1}{2}$ inches long.

Cat. No. C1616.......49C





Spring Action Drive, Illuminated "Fan Type" Vernier Dial

When illuminated, it makes a very pleasing appearance.
The Condenser shaft hub accommodates both % in. and % in. shafts. The operating shaft is % in. in diameter.

Cat. No. C1663..... 59C

Eddy Drum Dial

A drum type dial complete with ceiluloid tuning scale with 100 divisions and dial light brackets. For ¼ inch shafts. Die cast construction with phosphor bronze cable and automatic stop adjustment. Screw take-up for tension adjustment. Overall size, 5½ x 2 x 5¼ inches.

Cat. No. C1617..... 49C

Knob Assortment



Consists of All-Bakelite, Wooden, Celluloid Top, Metal Faced, Em-bossed, and odd

shaped knobs, in all sizes. All are equipped with standard 1/4 inch diameter shaft holes, and set screws. Cat. No. C1618. 12 Asst'd. Knobs..... 59C 24 Asst'd. Knobs.......\$1.05 C1619

NATIONALLY ADVERTISED R.M.A. Color Coded "Pig-Tail" Resistors



Available in values ranging from 100 ohms to 2 megohms. If definite value re-mention them. (Note:

sistors are desired, please mention them. (Note: Our kits contain a well apportioned assortment excellent for GENERAL REPLACEMENT work.)

ONE WATT 8C Each Cat. No. C1184. Asst'd Kit of 24, \$1.75 TWO WATT

15C Each Cat. No. C1185. 19C Each


Asst'd. Kit of 24, FREE OFFER! With each Kit order, we will include FREE a R.M.A. Color Code Chart!

Variable Voltage Dividers





Victor RE-32, 45, 57, 75 TWO STAGE PUSH-PULL JR. "Mike"-Phono-Radio P. A. Amplifier Available In A Variety of 1933 Improved Models



Cat. No. C1652

TUBES REQUIRED 1-56 (or 227), 2-245, 1-280

Less Speaker and Tubes

MATCHED DYNAMIC SPEAKER \$3.95

A Late Model Design RCA Power Transformer Furnished Enables Use of Latest Series of Tubes!

Use of Latest Series of Tubes!

Every component part in these amplifiers was designed to carry a substantial over-load, to avoid break-down. Its generous construction can be gleaned by its dimensions of 13½ in. long, 10¼ in. wide, 6¼ in. tall. Mounted upon a sturdy chassis, fitted with all conveniences, such as speaker field provision plug, voice coil outlet plug, tuner voltage outlets, etc., etc. These amplifiers can furnish D.C. Field Current to a 2500 ohm, 110 volt D.C. Dynamic Speaker. (If you desire to use any other type speaker, we will include a special 2500 ohm choke to supplant the speaker field . . 90c additional.) An Output Push-Pull Transformer, with a 7-15 ohm Voice Coil Matching Impedance is also furnished—a diagram included shows how to match same to the impedance of 1 to 8 Dynamic Speakers. A Phono-Input Tap is also provided. Highest grade parts make up this very easily assembled kit—such manufacturers as Westinghouse, Victor, General Electric, Etc., Etc. The utterly simple wiring that remains to be done can be accomplished by anybody with only a slight knowledge of Radio! For 110 Volts, 50-60 Cycles A.C.

71/2 WATT UNDISTORTED OUTPUT MODEL

TUBES REQUIRED: 1-57 (or 224-A), 2-247
(or 59) 1-280 (or 83).

Cat. \$5.95

Cat. \$5.95

Cincle with Four RCA and Tubes (your choice) Wright De Coster Dynamic Speaker\$13.95

Cat. \$5.95 No. C1653 Speaker and Tubes

Multi-Steel Core Copper Stranded Drum Dial Cable



Cat. No. C1627 \$1.00 100 ft. .

Cat. No. C1628 500 ft.

Assorted Bakelite and Fibre Coil Tubing, Forms, Étc.

Ideal for the experimenter or laboratory that has occasion to wind their own coils. In each assortment there will be found many various sizes, in both diameters and lengths. Some are ready drilled for insertion of inductance ends. Cat. No. C1629

Per Dozen Asst'd Colls.... 75C

Fibre Tubing



Cat. No. C1244. 16 inch O. D. 16 inch Inside diameter. 24 inches long...... 20C

Cat. No. C1245. A inch diameter. 20
In Lots of 12 Lengths, \$1.95 **20c**


Triple Relay

A 2-Volt circuit actuates a single pole double throw and a single pole single throw set of contact arms. Provided also with single pole double throw fine relay. 31/8 x 33/8 x 21/4 inches.

Cat. No. C1630.... 95C



4 Relay Remote Control Unit



Two of the relays operate a double pole double throw set of contact arms. The other two relays control a set of double pole—single throw contact arms. Equipped with 7 wire, 45 in. cable and terminal block. Size of bakelite mounting plate: 3% in x 7% in. Cat. No. Cat. No. 01631 \$1.95

Wireless Key



Transformer Compound and Condenser Wax

Can be melted very easily in an ordinary kitchen pot or can over a gas stove. A Ser-

TRANSFORMER COMPOUND

Cat. No. C1642. 5 lb. Container..... 60C Cat. No. C1643. 10 lb. Container

CONDENSER WAX

Cat. No. C1644. 5 lb. Container ...

85c \$1.25 Cat. No. C1645. 10 lb. Container ...

All-Purpose Neutralizing Tool
Complete with socket
wrenches, screw driver
and vest pocket clip.
Cat. No.
200 C1101 ...


.... 29c Per Dozen, \$3.00



Improved Model

(5-In-1 Design.) Endorsed by professionals and all laboratories.

Complete with additional Regulation Size screwdriver chuck and protective Cat. No. sheath feature.



Heavily insulated prods.
Cables are 50 in. long.
Cat. No. C1108. Spade Type, Per Pair
Cat. No. C1109. Tip Type, Per Pair...
Per Dozen, \$2.00 19c

Heavy Duty—Laboratory Model Test Leads



Not to be confused with commonly offered test leads.

Extreme satisfaction warranted.

Choice of Removable



ajestic

Majestic Condenser Blocks



Cat. No. C1040. For "Super B" Eliminators.
Cat. No. C1041. For "Master B" Eliminators. nators

"Special Master B" Eliminators. Your choice of any of the above 95C Six for \$5.00

Cat. No. C1043. For 7 P6 (171 Type) Sets. Cat. No. C1044. For 8 P6 (250 Type) Sets. Cat. No. C1045. For 9 P6 (245 Type) Sets.

Six for \$10.00

Majestic Power Transformers Choice of **Filament** or Plate **Transformers**



For All Majestic 171 Power Tube Equipped Sets Your Choice

Cat. No. C1046...... 95C



Majestic (and R.C.A.) Drum Dial Cables Cat. No. C1050.

Per Dozen 45C Per 100, \$2.95

REPLACEMENT PARTS

Majestic Audio Transformer Series Replacements

We Can Furnish a Transformer



Tevery A.C. Set Made by Majestic!

Enclosed in a fully shielded sub-panel style mounting metal case Equipped with long flexible leads, each one suitably coded. Ideal for general replacement purpose. Clever construction permits universal mounting. Cat. No. C1360. Audio Cat. No. C1361. Input Push-Pull Cat. No. C1656. Output Push-Pull

Majestic 90-91-92-93-100 Series

Combined Plate and Filament Transfs.

For 5-227, 2-245, 1-280 Tubes Cat. No. C1048





Majestic 175 K. C. Replacement

I. F. Coil Assembly
Can be easily replaced. Its efficient characteristics permit the usage of this dual inductance in any conventional intermediate frequency R.F. stage, Equipped with four, identified leads.

Per Dozen, \$3.00

KOLSTER REPLACEMENT COILS AND TRANSFORMERS Kolster Power Transformer Kolster Double Audio Coils Transformer Two A.F. Transformers

Cat. No. C1078. For Model K-43, 48, B-15, B-16, B-10. \$1.65

Cat. No. C1079. For Model K-24 \$2.50



In One Case! The compact size, sturdy construction and finished appearance of these units make them ideal for use in most any receiver or amplifier straight audio system. Long leads are provided for direct wiring. Case is finished in crackle green. Size 2,½ x 3½ x 2,½ inches. Cat. No. C1364

green. Size 21 x 318 x 218 L Cat. No. C1364.....



\$1.45

Dubilier Kolster 210-250 Condenser Block



Total capacity: 113/4 mfd. Known as PL-455. tains following sections: 3 mfds., 1000 volts; 4 mfds., 600 volts; 4 mfds., 160 volts; .5 mfd., 160 volts; .25 mfd., 160 volts. For Kolster K-5, 6-H, Columbia 500-901 Receiv-



Speaker-Receiver Panel

Highly decorative in appearance—will match most any console cabinet, in which you may desire to mount this undrilled 3 ply walnut finish panel. Overall dimensions: 13 in. wide, 24½ n. tall. The handsomely scrolled grille measures 9½ in. tall, by 9 in. wide, and is backed with a rich golden colored grille cloth. Rich dull finish.

Cat. No. C1869.....\$1.25

Output Push-Pull Transformer. With Voice Coll Secondary of 8 to 15 ohms impedance. 95C

Per Dozen, \$9.00



Universal Audio Replacement Transformer

All-Stage Ratio! Cat. No. C1369 Our Price 45c \$1.80 per dozen

P-A SERIES Single or Double Button Microphone Transformers Cat. No. C1068. For Single Button "Mikel."

Cat. No. C1069. For Double Button "Mikes."
Your Choice 99C

Please specify if 100 obms or 200 ohms per button is desired.



In Assorted L Cat. No. 0137 200 ohms Ost. Ng. C138C 200 ohms Cat. No. C1381

200 ohma Audio. Inpe



Cat. No. C1095. As Coils. All Ratios. Per Dozen

Cat. No. C1098. Per Dozen Cat. No. C1097

5.0 Volts 5.0 Volts 300-300 Volts A.C.

Mounting Holes: : Height: 31/2 inches Rating: 75 Watts.

171 Type Po

Same as above 11/2 Volt Windin

additional 11/2 V

1.05 amps., and Cat. No. C1407 ..

Furnished with

For 7-21/2 Volt Amp. tubes,

Primary: 115 Volts
2.5 Volts
2.5 Volts
5.0 Volts
375-375 Volts A.C.
Mounting Holes:
Height: 41/6 inche:
Rating: 85 Watts.

Cat. No. C1061.

245-247

Tra

Cat. No. C1406 ...

Per Dozen

Nationally Advertised A.C. Power 1

Represent The Finest Products of Several o Embrace Highest State of Electrical and Me

Flat Mount "Bell Top" Power Transformers Series



For Use With All Types of 1.75 and 1.0 Amp. 21/2 Volt Tubes and 280 Rectifier

This type seems to enjoy greatest favor with servicemen, due to its clever design and terminal lug feature.

4 Tube Transformer

5 and 6 Tube Transformer

6 Tube Transformer

7 and 8 Tube Transformer

Note: For 110 Volt, 25 Cycle, 220 or 240 Ve

Senior Siz Power Furnished with T

For 8-21/2 Volt Amp. Tubes,

Lamination Sta

for quotations.

T TO COAST DIO CORP. 121.1 hono. Pick-up padcast Studios, Thesally Ideal for Home y P. A. Amplifier

e principle employed asaton of rising and to motor turn-tables, By a cleverly balm, just enough needle rmitted, thus considle scratch possibilities, ivity and all frequency pick-up as highly dentire musical register, up! The self-enclosed s considerable advanti We hardly believe pick-up is available! Available in any to 5000 ohms. (Stand-

ndard ... \$5.95 no. In-former... \$1.85

h Removable Plug-in \$7.95

3 1/3 and 78 ernor Contric Motor



enclosed oil spraysilent operation la-matic heat dissi-size bearings; comatic heat dissi-g oversize bearings; f turn-table R.P.M. ns or "record drag," all fittings, such as cointer speed regu-nter and escutcheon UARANTEED! For

Dete... \$8.60

P.A. Amplier Assembly comprises all the Nec-

ower Pack Chokes Vithin One Heavy Gauge Steel Case! ontains First Brute liter Choke—100 ohms, 5 Henry, 250 Mils.; econd Filter Choke—00 Ohms, 30 Henry, 30 Mils.; Third Filter hoke—200 Ohms, 30 nated in a moisture-6, 3\%x5\%x5\%x5\% inches. Actual

..... \$4.95 m-125

hoke




nbination no - Microe and Radio Input hing Transformer

ves valuable space, universal input tions from one rmer. Correct en-ng design assures im energy trans-

sal Phono-Pickup.
as, as well as 3000
(Bingle or Double as a secondard \$1.50

s Above, But Also al Audio Trans-



Audio Transformers

Cat. No. C1482. 3 to 1 All Stage 98C

Cat. No. C1483. Input Push- \$1.22
Pull Transformer
Cat. No. C1484. Interstage Push - Pull
Transformer, from single plate to two grids.
For use between push-pull stages
—for all types of tubes. \$1.45

\$1.25

voice coil

Cat. No. C1487. Output Push-Pull Transformer, from push-pull 245, 250 to 8-15 ohm dynamic speaker

voice coil

S1.95

Cat. No. C1488. Pentode Output Push-Pull Transformer, from push-pull 247, 233, 59 (etc.), or 238 tubes to 8—15 ohm dynamic speaker voice coil. \$1.45

Phono. Pick-up and Microphone Input Transformer
Cat. No. C1489. Choice of 200, 400 or 500
Ohm Phono. Pick-up Input, for \$1.25

Cat. No. C1490. 3000 Ohms Phono. Pick-up Input, for high impedance

\$1.45 pick-ups Cat. No. C1491. Single Button Microphone Transformer. (State if for 100 \$1.45

Cat. No. C1492. Double Button Micro-Phone (State if for 100 or 200 \$1.75 ohm Buttons!) Transformer... \$1.75

Universal 4-5-6 Prong Tube Socket





Its place-ment of s holes per-mits all types of tubes to be used in this

The filament holes are common

and 5 Prong Bakelite Tube Base Forms



Overall diameter: 1.6 in.:
length of bakelite form,
1% in. Brand new—never used. Ideal for home wound short wave inductances as well as tube and socket plug adapters. Ideal for use with above Universal Sockets.

Cat. No. C1494. 4 Prong.

Cat. No. C1494. 4 Prong. } Cat. No. C1495. 5 Prong. }

10C EACH Per Dozen, \$1.00

Cadmium Plated Chassis



Made of 15 in thick steel — extremely rigid. 18 in long, 10 in wide. 315 in tall. Ideal for universal application! Can be easily drilled and soldered to.

Cat. No. C1114..... 89c Cat. No. C1193 10 x 12 in, long x 3₁ in 79c

Adjustable Metal, Bakelite or **Wood Circle Cutter**

Ideal for Cutting Out Socket

and Meter Holes, Etc.

Cuts holes from ½ in. to 4 in. in diameter. Can be used in any hand brace, breast drill or power machine. Drills its own pilot hole.

Cat. No. C1156.



Per Dozen, \$1.75

Three Conductor Shielded Microphone Cable
The finest crainable. Cor
3 individually




Heavily Insulated Heavy Duty 5 ft. Dual Conductor Cable and Rubber- & ized Taper Grip Male Plug



Cat. No. C1503... .. 25c Per Dozen, \$2.40

"Cinch" 4-5-6-7 Prong Wafer Radio Sockets



Phosphor Bronze Contacts-Bakelite Insulation!

Available for ALL FOUR to SEVEN PRONG TYPE TUBES, including the new 59 SEVEN PRONG SERIES, 25Z5, 48, 43, 79, Etc. ALL ONE PRICE

Cat. No. C1192

Per Asst'd Lot of 100, \$4.25

New Types 56-57-58 Three Piece Ventilated **Aluminum Tube** Shields

Cat. No. C1200 12C Per Dozen, \$1.25



-ALDEN BAKELITE "NA-ALD"-SOCKETS

General Purpose Sockets



Provided with knurled nut binding posts for convenient connections. Excellent for regular as well as experimental work. Made of molded Bakelite throughout with phosphor bronze contact springs. Knurled nickel binding post terminals and lugs.

Cat. No. C1504. 4 prong—Red Spot. 16C

Cat. No. C1605. 5 prong—Green Spot. 16C

Cat. No. C1406. 6 prong—Blue Spot.

Cat. No. C1408. 6 prong—Blue Spot. Cat. No. C1507. 7 prong—Orange Spot. 22C

Universal Panel

Mount Sockets

Genuine molded Bakelite with phosphor bronze spring contacts. For mounting either above or below subpanel. Equipped with insulated mounting flanges and holes. Convenient solder lug terminals. Mounting holes 1 stain.centers, panel hole 1 stain diameter.

Cat. No. C1508. 4 prong.

Cat. No. C1509. 5 prong.

Cat. No. C1510. 6 prong.

Cat. No. C1511. 7 prong.

Cat. No. C1511. 7 prong.

Bakelite Button



Used for below panel connecting and making adapters 1.% in. diameter, % in. high. Holes for mounting socket can all be drilled with hand drill. Hole in center for No. 6 top surface of a meter panel of chassis.

Cat. No. C1512. 4 prong—Red Spot. 16C

\$1.10 Cat. No. C1514. 6 prong—Blue Spot. Cat. No. C1515. 7 prong—Orange Spot. 22C

Use with P.A. Amplifier Installations Producing up to 30 Watts! The engineer-ing design of these trans-formers is on a par with ments generally offered for many times the modest cost

Excellent For

quoted. The large core of highest grade give straight line amplification characteristics, even at small outputs. The windings are highly insulated and are well impregnated and varnished. Can be used in any climate. The average dimensions are 3% in long, 2 in. wide, 2% in. tall—the mounting holes are 2 in. x 2% in. Please definitely state output tubes you employ.

For Class 66A?

For Class "A" Amplifiers Will Handle up to 15 Watts Output Secondary

Tubes S. Cat. No. Matched 1519 2-250, 2-245 2-43, 2-171, Etc. 1520 2-250, 2-245 2-43, 2-171, Etc.

1521 2-250, 2-245 2-43, 2-171, Etc.

1522 2-247, 2-59 2-238, 2-233, Etc. 10 to 15 ohms.\$1.95

1522 2-247, 2-59 15 ohms tapped at 7½ and 3¾ 2-238, 2-233, Etc. ohms\$2.50

2-238, 2-233, Etc. ohms\$2.50

1523 UNIVERSAL—

Matches any Equipped with taps for 1 to 2 pull or parallel ohm, 3½ ohms, arrangement—
CLASS A OR B! ohm voice coil sec on dary windings\$4.95

For Class **B** Amplifiers

Available In Two Models—One For 16

Watt and Other for 26 Watt Outputs

10 to 15 ohms..\$1.95

15 ohms tapped at 7½ and 3¾ ohms\$2.75

7½ and 3¾ ohms\$3.25

500 ohms, ohms tapped

Watt and Other for 26 Watt Outputs

Cat Tubes Secondary Specs. 16 26
No. Matched
1524 2-46, 2-59, 15 ohms tapped Watt Watt No. Matched
1524 2-46, 2-59, 2-79, Etc.
15 ohms tapped at 7½ and 3¾ ohms\$1.95 \$2.95 ohms tapped at 7½ and 3¾ ohms\$1.95 \$2.95 ohms tapped at 7½ and 3¾ ohms\$2.65 \$3.45

1526 2-46, 2-59, 2-79. Etc. 4000 ohms....\$1.75 \$2.95

S. P. D. T. and D. P. D. T. Hart & Hegeman Switches

Single Pole — Double Throw

No. C1116... 219 Double Pole — Double Throw

No. C1117 ... 45C

Volume Control "On-Off" Switch



Equipped With Slot-Head for Cam Attachment Cat. No. C1254 12c In Lots of 12, \$1.00

On-Off Snap Switch

Noted for Its Unusual Short Throw!

Cat. No. C1253 Per Dozen, 50c



Ultra-Compact "On-Off"

Rotary Snap Switch

Rated 3 amps., 125 volts;

1 amp., 250 volts. Only

34 in. long. and extends
but 16 in. behind a panel;

brass turnings and locking nut. Bakelite houssulated, tinned end leads.

Cat. No. C1159

In Lots of 12, \$1.00

EST 17th ST.+ NE

HESE • PRICES • A



RCA-Victor Genuine



65c Per Dozen,

\$6.95

Victor 600 Volt 103/4 Mfd. Condenser Block

Ideal for Any Make Pentode or 245, Set!

Arrangement of terminals: 5 mfds.; 3 mfds.; 2.5 mfds.; Common; 5 mfds. Total 10¾ mfds. Size: 5¾ in. long, 5 in. high, and 4 in. wide.

RCA-Victor 4,325 Ohm Tapped Voltage Divider For Victor RE 32-45-75 Sets

50 Watts-Vitreous Enameled



Tapped as follows: 1975, 1350, 200, 800 ohms. The overall length is 6½ in., 78 in. diameter. Adaptable to most any voltage divider system,

25 for \$5.00

RCA-Victor 245-250 Power Pack Choke

Rating: 200 Obms, 125 Mil., 30 Henries



Cat. No. C1008


Excellently adapted for use as the first filter choke, to be followed by a high resistance (approximately 2500 ohms) dynamic Speaker field. This choke has an unusually low D.C. resistance of only 200 ohms, causing a low voltage drop across it, thereby permitting a high and well filtered plate voltage to be fed directly to the plates of the 250 tube. This voltage is obtained right after the first choke (this one!) and before the second choke (or dynamic speaker field). 3½x3¼x2½ ins.

RCA-Photophone Dynamic Speaker,

Complete Cone Replacement

Complete With VOICE COIL

A guaranteed replacement for ALL PHOTOPHONE Speakers (both A.C. and D.C. models) \$1.95



Victor Input and Output Push- Victor Audio Pull Audio Transformer Phone Assembly

Dynamic Speaker Field Coils

R-32, RE-45, RE-52, RE-75
Series.
(1500 ohms)
Cat. No. C1071. RCA Photophone Series.
(1000 ohms)
95C
Cat. No. C1072. RCA Photophone 6 Volt Coll. (Can be easily inserted into any Photophone Speaker by removing present 1000 ohm coll. Draws 1.375
amps. at 6 volts.
Cat. No. C1073. Radiola 104 and
105 Speakers

\$1.25



Cat. No. C1001

Cat. No. C1070. For Victor R-32, RE-45, RE-52, RE-75

Electrostatically

Shielded Amplifica-tion On All Fre-quencies. Impregnated against lamination vibration
Output matches voice
coil of standard dynamic speakers. Can
be used with 171A,
245, 247, 250 tubes.
Both Input and Output transformers
mounted in one case!
51/4 in. long, 31/8 in.
wide, 31/8 in. high. nation vibration

Our Price

R.C.A. Cond Outn

Required In Radi RCA Part No. 83.4 two 1 mfd. filtern and one ½ mfd. on ser and choke coi protection. 450 m 3% x 2% x 3% inch Cat. No. C1366...

Socket and Voltage Divider Assortments



Every Service of an analysis Builder Should at Al Times Have These Valuably Useful Assortments On Hand!



4 to 7 Prong Wafer Socket Assortment

Included in this well apportioned assortment are sockets manufactured by such houses as RCA, Cinch, Eby, Alden, etc. Your satisfaction is warranted.

Cat. No. C1354

PER ASST. OF 95C

500 Assorted for \$4.25 1000 Assorted for \$7.50

All-Purpose Variable Tapped Voltage Divider Assortments

Included in this assortment, you may find various types, sizes and styles of single and multi-tapped 10 to 100 watt voltage dividers for some of the following receivers: RCA-Kolster, Stromberg-Carlson, Victor, Zenith, Peerless, Majestic, Philco, Silver-Marshall, Edison, Freed, Freshman, etc., etc. All guaranteed perfect—sizes range from 10 to 250,000

ohms. PER ASST OF \$1.00
Cat. No. C1355 12 RESISTORS \$1.00



Crosley Audio Transformers

Completely shielded—re-markably compact. Excel-lent for all general replace-ment applications.

Per Dozen, \$3.75

Crosley Combination 1st A.F. Audio and Push-Pull Input Audio Transformer Unit

For Models 41-A, 42, 704, 706
Similar to Part No. 5315. Note
threaded mounting pillars. Can
be universally employed. Highly
efficient and serves a valued need! 2½x1%x4¾
inches.

Cat. No. C1371



Transformer Corp. of America Audio Input and Output Push-Pull

Nationally Advertised 500 Volt Peak Dry Electrolytic Condensers

Will actually function under sudden surges of 600 volts...should any harm result from such excessive voltage, the nature of the contents is such that a Self-Healing Action follows! Can be mounted in any position. Can be used in any temperature, or in any climate—they are not subject to any ill effects due to varying extremes of natural heat and humidity conditions. In the multiple units, which are metal cased,



Mounts Upright-Connected At Top, Mounted by Ring Clamp

Cat.	Cap'y Mfd.		Your					
No.	at Anodes	Cap'y	Cost					
C1132	8	8	\$.47					
C1133	8-8	16	.99					
C1134	8-8-8	24	1.35					
C1135	8-8-8-8	32	1.75					
C1136	9-9-18	36	1.95					
C1137	8-8-18-18	52	2.85					
C1138	9-9-18-18	54	2.95					
120								

densers Encased in Cardboard ontainers and Equipped

Tubular Dry Electroly-tic Pig-Tail Con-



the common connection (which goes to negative) is brought out separately. Unlike most electrolytic condensers, the outside casing is not electrically a part of the condenser itself—the valuable advantages this offers will be immediately apparent—makes them ideal for mounting on metal chassis! Inasmuch as they can be mounted in any angle, their value is further enhanced.

Inverted Type Mounting

Equipped with Appropriate Insulating Lock Washers and Bolts

Cat.	Ca	p'y M	fd. T	otal	Your
No.	at	Anod	les C	ap'y	Cost
C1139				8	470
C1140	.4-8	(with	leads	12	73c
C1141	.6-8	44	66	14	84c
C1142	.8-8	- **	44	16	940
			- 100 mm		



Cardboard Container Dry Electrolytic Filter Condensers

Equipped with two vari-colored flexible leads. Extreme com-



Series A.F. Transformers Preferred by professional set builders and manufacturers of America's finest commercial receivers, and super-power Public Address Amplifiers. Can be universally mounted—note long flexible leads.

Cat. No. C1062. Audjo Transformer.

Cat. No. C1063. Input Push-Pull Transformer.

Your Choice

Per Dozen, \$5.95

Cat. No. C1367. Output Push-Pull Transformer. Equipped with 7 to 15 ohm impedance voice coll secondary.

Silver-Marshall Audio, Input and Push-Pull **Transformers**

Cat. No. C1035. 3 to 1 Audio. Cat. No. C1036. Input
Push-Pull.

CHOICE.

S1.00





Has 3 I.F. stages! 7½ in. tall. This tu-their renowned Radiol-ceiver! Can be used w 200 to 550 meters. Cat. No. C1100

Polymet Aw Output Push Input Series formers



are scientifically tritto all atmospheriesippinecessary feature. at. No. C1372. 3 ner Audio Transformei No

Cat. No. C1373. 105 Input Push-Pull 18 Cat. No. C1374. In Push-Pull

Cat. No. C1375. Ol Al Voice Coil winding pedance. State Pused!) Cat. No. C1376. Sabove, but for use Output Tubes

Cat No. C1377. Phigh or low impedup is employed.)..

Cat. No. C1378. Ch

IN/AMPLE/QUANTITIES

RTISED n Carbon

Sound Truck All-Purpose lic Address plifier Use!

iblifier Usel

libute to AmerEngineers — a
quality twoon microphone
liber for the
time at this
lingly imposlow price! Rence: 200 ohms
button. Frecy range: 1000
00 cycles. Scidically damped.
a very low hiss.
Duralumin
breakable diagm. Huskilyructed — meag 2½ in. diamby 1 in. thick.
GOLD CONTS! Note four
ling rings!

pose" Input



liary equip-the imped-y input grid houses the ell voltage for several illy replaced. in call sys-ion and all an be set up uny novice an be set up
ny novice—
minals. Its
s its placeurch pulpit,
'/ in. wide.
described,
valiable for
itton Microor 200 ohm

\$4.95 Illustrated. ellogg Hand \$5.95 eration

(Tapped ims) D.C. Speaker ssis

many midget rers! Quality to a Price! a voice coil to a Price!
a voice coil
tching trans-

\$1.95 x, \$10.50







Miniature Coat Lapel Microphone

Permits unhindered speech pickup, even while orator is pacing up and down the floor or pulpit. Can be slipped into any lapel in a second!

Cat. No. C1466......98C

SENIOR MODEL Single

and Double Button Coat
Lapel Microphones
Not a toy—a real, serviceable instrument that fills a long felt need. Handsomely and durably constructed. Fully warranted throughout. Resistance 200 ohms per button—amazing frequency range response.
Cat. No. C1467. Single Button

Cat. No. C1467. Single Button Cat. No. C1468. Double Button Model \$3.95

Cat. No. C1469. Single or Double Button Microphone Input Transformer... 95C



UTAH 1000 ohm 8-Inch Diam. 110 Volt D.C. Dynam-

Volt D.C. Dynamic Speaker

Famed for its ability to withstand enormous surges of output voltages flowing through its cleverly constructed voice coil. The field coil is of ample electrical capacity to assure maximum electro magnetic transfer function, and attendant crisp, full frequency range response reproduction. Furnished complete with a high safety factor Output Transformer, for single or push-pull output tube application. Please state what tubes are employed.

Cat. No. C1470. \$2.95



UTAH-JENSEN-ROLA D.C. Dynamic Speaker Field Coils

DIMENSIONS
OverDiam. all

Cat.			Hole	Diam.	Depth	Your
No.	Mfgr.	Ohms	Ins.	Ins.	Ins.	Cost
C1471	Utah	1000	1,3	27/2	11/2	\$1.25
C1472	Jensen				- / •	4 11 10 1
	-9, 1550, 7					
26	I-A Series	1000	1,10	23/8	15/8	1.45
C1473	"	1250	1 1	23/8	15/8	1.75
C1474	11	1900	110	23/8	15/8	1.75
C1475	**	2500	1,10	2 1/8	15/8	1.45
C1476	" (6 Vo		1.4	23/8	15/6	1.65
C1477	Rola-K	,			- /6	
	(8 in.)	1000	1	21/4	2	1.49
C1478	(1)	2500	i	21/4	2	1.49
C1479	Rola-F			- /-	250	
	(6 in.)	1000	1	21/4	11/2	1.49
C1480	16	1800	ī	21/4	11/2	1.49
	(7	Capped	1	- /-	- /-	
	9	t 300)				
C1481	**	2500	1	21/4	11/2	1.49
			_	- /-	- /4	

Other Types and Makes Available-Write For Quotations.

Skinderviken "Mike"



Smallest microphone made, measuring only % inch in diameter. It can be used as a detectograph (dictophone) to listen-in secretly on conversations. Very good sensitivity. With a Skinderviken button you can make a powerful Hand-microphone.

Cat. No. C1208.... 39C

UNIVERSAL MOUNT-TERMINAL BOARD EQUIPPED — AUDIO TRANSFORMERS, Etc.

Solder Lug Fea-ture Permits Universal Connection Facilities
These transformers
and chokes are all



"Jr.-Public Address" Single Button Carbon Hand Microphone



Cat. No. C1496 98c

SPECIAL "MIKE" INPUT MATCHING TRANSFORMER

95c


A High Grade Instru-ment—Not To Be Con-fused With Similar Low Priced Devices!

Produces perfectly clear, even and crisp response, with a faithfulness of reproduction that is highly commendable. Provided with a conveniently located "On-Off" button switch, which disengages the "mike" proper from the grid circuit of any amplifier or Radio Receiver, to which it may be connected. It also disconnects the microphone current dry cell. Equipped with a correctly formed wooden handle, and 25 ft. of high grade flexible insulated wire, and necessary connection adapters. The metal shell of the microphone casing is highly nickel plated and beautifully buffed. The sensitive diaphragm is protected by a gilt plated mesh screen.



Cat. No. C1168. 6 Volt Field \$7.35

ALLEN HOUGH SYNCHRO-NOUS PHONO. MOTOR



Only 1% in. thick. Revolves exact speed of 78 R.P.M. despite any voltage variation in 110 volt, 60 cycle A.C. line. 10-inch turn-table included.

Cat. No. C1265

Bakelite 4-5-6-7 Prong

Cable Plugs
Fit any tube socket. Equipped with detachable plug feature.
Overall length, 31/4 in., and diameter 11/6 in.





One Piece Speaker Plugs. Same plug as contained on above complete inustrated plug.

Cat. No. C1497. 4 Prong Cat. No. C1498. 6 Prong Cat. No. C1498. 6 Prong Cat. No. C1499. 6 Prong Cat. No. C1501. 7 Prong 90c Per Dozen

4-5-6-7 Prong Bakelite Speaker, Etc. Plugs
Fit Any Standard Tube Socket
Cat. No. C1194
State Number of



Prongs Desired 14C

\$1.50 Per Dozen

C-H Feed-Thru Switch With Two Female Recentecias





I.C.A. DE LUXE CARBON MICROPHONE

A genuine, amazingly efficient, single button microphone, equipped with an ON-OFF button switch. Solidly constructed, white cast metal, neatly gilt finished.

An adapter and a 12 ft. cord furnished permit ready installation to ANY Receiver or Power Amplifier. This is a really fine and decidedly efficient piece of apparatus—do not attempt to judge its superior quality by its seemingly rediculously too low price!

Jensen "Concert" 11½ Inch 110 Volt A.C. Dynamic **Speakers**

Equipped With Tym-Flex Diaphragm Uses Either a 280 or Full Wave82Type Mercury Rectifier Tube!

Cone Diameter: 11½
in. Burtex Cloth Diaphragm. Equipped
with your optional
choice of any output
tube matching
transformer — state
what type output
tubes you employ.



, , , , , , , , , , , , , , , , Highly Improved-**Extremely Sensitive**



Brandes 2000 Ohm Phones

Known the world over, and rightly so. Pay a few cents more for the extreme satisfaction you will derive from these amazingly sensitive headphones!

Cat. No. C1517.....

\$1.35

Featherweight **Head-Phones**

2000 Ohms. Excellent for Short Wave Fans. 99C





Genuine Nathaniel Baldwin Phones

Sponge Rubber
Phone Cushions
Can be slipped over any make
or size phones. Adds pleasing
comfort. Highly endorsed by
ship operators.
Cat. No. C1314
PER PAIR




Universal Application **OUTPUT TRANSFORMERS**

HESE • PRICES • ACTU



RCA-Victor Genuine



Our Price 65c Per Dozen,

\$6.95

Victor 600 Volt 103/4 Mfd. Condenser Block

Ideal for Any Make Pentode or 245, Set!

Arrangement of terminals: 5 mfds.; 3 mfds.; 2.5 mfds.; Common; 5 mfds. Total 10% mfds. Size: 5% in. long, 5 in. high, and 4 in. wide.

RCA-Victor 4,325 Ohm Tapped Voltage Divider

For Victor RE 32-45-75 Sets

50 Watts-Vitreous Enameled



Tapped as follows: 1975, 1350, 200, 800 ohms. The overall length is 6½ in., 7, in. diameter. Adaptable to most any voltage divider system, in any receiver. Cat. No. C1654. Our Price...... 25C

25 for \$5.00

RCA-Victor 245-250 Power Pack Choke

Rating: 200 Obms, 125 Mil., 30 Henries



Cat. No. C1003

Excellently adapted for use as the first filter choke, to be followed by a high resistance (approximately 2500 ohms) dynamic Speaker field. This choke has an unusually low D.C. resistance of only 200 ohms, causing a low voltage drop across it, thereby permitting a high and well filtered plate voltage to be fed directly to the plates of the 250 tube. This voltage is obtained right after the first choke (this one!) and before the second choke (or dynamic speaker field). 3½x3¼x2½ ins.

RCA-Photophone Dynamic Speaker,

Complete Cone Replacement

Complete With VOICE COIL

A guaranteed replacement for ALL PHOTOPHONE Speakers (both A.C. and D.C. models) \$1.95



Victor Input and Output Push- Victor Audio Pull Audio Transformer Phone Assembly

Dynamic Speaker Field Coils Cat. No. C1070. For Victor R-32, RE-45, RE-52, RE-75 Series.



Cat. No. C1001

\$1.45

Phone Electrostatically Shielded Amplifica-tion On All Fre-

nation vibration



Our Price

R.C.A. Cond Outp

Required In Radi RCA Part No. 83 two 1 mfd. filtes and one ½ mfd. ot ser and choke col protection. 450 3¾ x 2½ x 3¼ inch Cat. No. C1366...

SIGNING

Socket and Voltage Divider Assortments



Every Service and n., Dealer and Set Builder Should at A!
Times Have These Valuated by Useful Assortments
On Hand!

Nationally Advertised

500 Volt Peak Dry Electrolytic Condensers



4 to 7 Prong Wafer Socket Assortment

Included in this well apportioned assortment are sockets manufactured by such houses as RCA, Cinch, Eby, Alden, etc. Your satisfaction is warranted. PER ASST. OF 25C Cat. No. C1354

500 Assorted for \$4.25 1000 Assorted for \$7.50

Will actually function under sudden surges of 600 volts . . should any harm result from such excessive voltage, the nature of the contents is such that a Self-Healing Action follows! Can be mounted in any position. Can be used in any temperature, or in any climate—they are not subject to any ill effects due to varying extremes of natural heat and humidity conditions. In the multiple units, which are metal cased,

Mounts Upright-Connected At Top,

Ring Clamp
Cat. Cap'y Mfd. Total
No. at Anodes Cap'y
C1132 8 8
C1133 8-8 16
C1134 8-8-8 24
C1135 8-8-8-8 32

Mounted by

8 8-8 16 8-8-8 24 8-8-8-8 32 9-9-18 36 8-8-18-18 52 9-9-18-18 54

All-Purpose Variable Tapped Voltage Divider Assortments

Included in this assortment, you may find various types, sizes and styles of single and multi-tapped 10 to 100 watt voltage dividers for some of the following receivers: RCA-Kolster, Stromberg-Carlson, Victor, Zenith, Peerless, Majestic, Philco, Silver-Marshall, Edison, Freed, Freshman, etc., etc. All guaranteed perfect—sizes range from 10 to 250,000

ohms.
Cat. No. C1355

PER ASST OF \$1.00

the common connection (which goes to negative) is brought out separately. Unlike most electrolytic condensers, the outside casing is not electrically a part of the condenser itself—the valuable advantages this offers will be immediately apparent—makes them ideal for mounting on metal chassis! Inasmuch as they can be mounted in any angle, their value is further enhanced.

Inverted Type

Mounting

Equipped with Appropriate In-

sulating Lock Washers and

Bolts

tophone Series. (1000 ohms)

Per Dozen, \$3.75

Push-Pull Input

For Models 41-A, 42, 704, 706
Similar to Part No. 5315. Note
threaded mounting pillars. Can
be universally employed. Highly
efficient and serves a valued need! 2½x1%x4¾

Cat. No. C1371



Has 3 I.F. stages! 71/s in. tall. This tu their renowned Radiol ceiver! Can be used w 200 to 550 meters. Cat. No. C1100



59c

Per Dozen, \$5.95

Cat. No. C1036. Input Push-Pull. YOUR

and Push-Pull Transformers

Polymet Au Output Push Input Series formers



are scientifically to to all atmospherics necessary feature. Cat. No. C1372. 3 46

Audio Transformer Cat. No. C1373. Input Push-Pull

Cat No. C1377. P. high or low impedup is employed.)...

Cat. No. C1072. RCA Photophone 6 Volt Coil. (Can be easily inserted into any Photophone Speaker by removing present 1000 ohm coil. Draws 1.375 amps. at 6 volts. \$3.95 Cat. No. C1073. Radiola 104 and 105 Speakers Crosley Audio
Transformers
Completely shielded—remarkably compact. Excellent for all general replacement applications. Radiol Super-Requires 8 an AUTOM Two R.F.

Crosley Combination 1st A.F. Audio and Audio Transformer Unit

No. C1371 \$1.95 In Lots of Three, \$5.25

Transformer Corp. of America Audio Input and Output Push-Pull Series A.F. Transformers



Preferred by professional set builders and manufacturers of America's finest commercial receivers, and super-power Public Address Amplifiers. Can be universally mounted—note long flexible leads.

Cat. No. C1063. Input Push-Pull Transformer.

Cat. No. C1367. Output Push-Pull Transformer. Equipped with 7 to 15 ohm impedance voice coil secondary.

Silver-Marshall Audio, Input

Cat. No. C1035. 3 to 1 Audio.

YOUR CHOICE.... \$1.00

Cat. No. C1374. In Push-Pull Cat. No. C1375. On Voice Coil windin pedance. State Poused!) Cat. No. C1376. 8 above, but for use Output Tubes

Cat. No. C1378. Ch Button Microphon

Encased in Cardboard Containers and Equipped

Tubular Dry Electroly-tic Pig-Tail Condensers



Your Cost \$.47 .99 1.35 1.76

Cat. Cap'y Mfd. Total Your No. at Anodes Cap'y Cost C1139...8 8 47c C1140...4-8 (with leads) 12 73c C1141...6-8 " 14 84c C1142...8-8 " 16 94c

Cardboard Container Dry Electrolytic Filter Condensers

Equipped with two vari-colored flexible leads. Extreme compactness and facility offered of

IN/AMPLE/OUANTITIE

DRISED marbon

10 or Sind Truck Il-Purpose bh Address Amther Use!

tribe to Amergineers — a lality twogh tality twottor microphone
aila; for the
st ne at this
emi(ly imposole l price! Retton. Freenc tange: 1000
400!yeles. Scitiffely damped.
as a ry low hiss
vel. Duralumin
n-bitkable diarag. Huskily ble dia-Huskily nstrted — mea-ring ½ in. diam-re b1 in. thick. re OLD CON-CT Note four rings!

rrse" livut.



put grid uses the ny put grid
o uses the
ce voltage
t c several
sil replaced.
e call systid and all
cale set up
at novice—
mals. Its ar novice—
mals. Its
ts:s place—
hub pulpit,
in. wide.
s escribed
av able for
hub Micro200 ohm

4.95 s ustrated. Kegg Hand 5.95 Opertion

m Tapped bhs) D.C. Dhis) e beaker ass

ny midget tur i Quality a Price! th voice coil mating trans-1-2 tube.

\$1.95 Sia \$10.50



JATION



Miniature Coat Lapel Microphone

Permits unhindered speech pick-up, even while orator is pacing up and down the floor or pulpit. Can be slipped into any lapel in a second! Cat. No. C1486..... 98C

SENIOR MODEL Single and Double Button Coat

Lapel Microphones

Not a toy—a real, serviceable instrument that fills a long felt need. Handsomely and durably constructed. Fully warranted throughout. Resistance 200 ohms per button—amazing frequency range response.

Cat. No. C1467. Single Button \$2.75 Model . Cat. No. C1468. Double Button \$3.95 Model

Cat. No. C1469. Single or Double Button Microphone Input Transformer... 95C



UTAH 1000 ohm 8-Inch Diam. 110 Volt D.C. Dynam-

Volt D.C. Dynamic Speaker

Famed for its ability to withstand enormous surges of output voltages flowing through its cleverly constructed voice coil. The field coil is of ample electrical capacity to assure maximum electro magnetic transfer function, and attendant crisp, full frequency range response reproduction. Furnished complete with a high safety factor Output Transformer, for single or push-pull output tube application. Please state what tubes are employed. ployed. Cat. No. C1470......\$2.95



UTAH-JENSEN-ROLA D.C. Dynamic Speaker Field Coils

DIMENSIONS Over-

Cat.			Diam. Hole		Depth	Your
No.	Mfgr.	Ohms	Ins.	Ins.	Ins.	Cost
C1471	Utah	1000	1,3	27/8	11/2	\$1.25
C1472	Jensen		75.7		Ti iii	
\ D	-9. 1550.	7				
7 261	-A Series	1000	1,10	23/8	15/8	1.45
C1473	11	1250	1,10	23/8	15/8	1.75
C1474	44	1900	1,10	23/8	15/8	1.75
C1475	44	2500	1 10	23/8	1 %	1.45
C1476	" (6 V	olt) 8	1,10	23/8	15/8	1.65
C1477	Rola-K		101		1.74	400
	(8 in.)	1000	1	21/4	2	1.49
C1478	11	2500	1	21/4	2	1.49
C1479	Rola-F					
	(6 in.)	1000	1	21/4	11/2	1.49
C1480	***	1800	1	21/4	11/2	1.49
1 1 1 1 1 1 1		(Tappe	d		17.7	1100
		at 300)				
C1481	44	2500	1	21/4	11/2	1.49

Other Types and Makes Available-Write For Quotations.

Skinderviken "Mike"

Rutton

Smallest microphone made, measuring only ¾ inch in diameter. It can be used as a detectograph (dictophone) to listen-in secretly on conversations. Very good sensitivity, With a Skinderviken button you can make a powerful Hand-microphone.

Cat. No. C1208..... 39C

UNIVERSAL MOUNT-TERMI-NAL BOARD EQUIPPED -AUDIO TRANSFORMERS, Etc.

Solder Lug Fea-ture Permits Universal Connection Facilities These transformers and chokes are all



"Jr.-Public Address" Single Button Carbon Hand Microphone




SPECIAL "MIKE" INPUT MATCHING TRANSFORMER

98c

A High Grade Instrument-Not To Be Con-fused With Similar Low Priced Devices!

Produces perfectly clear, even and crisp response, with a faithfulness of reproduction that is highly commendable. Provided with a conveniently located "On-Off" button switch, which disengages the "mike" proper from the grid circuit of any amplifier or Radio Receiver, to which it may be connected. It also disconnects the microphone current dry cell. Equipped with a correctly formed wooden handle, and 25 ft. of high grade flexible insulated wire, and necessary connection adapters. The metal shell of the microphone casing is highly nickel plated and beautifully buffed. The sensitive diaphragm is protected by a gilt plated mesh screen.



ALLEN HOUGH SYNCHRO-NOUS PHONO. MOTOR



Only 1% in. thick. Revolves exact speed of 78 R.P.M. despite any voltage variation in 110 volt, 60 cycle A.C. line. 10-inch turn-table included.

Cat. No. C1265

Bakelite 4-5-6-7 Prong

Cable Plugs
Fit any tube socket. Equipped with detachable plug feature.
Overall length, 31/4 in., and diameter 11% in.

Cat.	No.	C1210			25c
Cat.	No.	C1211.	- 15	Prong	200
Cat.	No.	C1212.	6	Prong	290
Cat.	No.	C1213.	7	Prong	490



One Piece Speaker Plugs. Same plug as contained on above complete inustrated plug.

lat.	No.	C1497.	4	Prong			
lat.	No.	C1498.	5	Prong			C EACH
at.	No.	C1499.	6	Prong	00	-	Dozen
jat.	No.	C1501.	7	Prong	JUC	Per	Dozen

4-5-6-7 Prong Bakelite Speaker, Etc. Plugs Fit Any Standard Tube Socket Cat. No. C1194



State Number of Prongs Desired 14C

\$1.50 Per Dozen

C-H Feed-Thru Switch With Two Female Recenteries





70c

MATCHED
"MIKE"
INPUT
TRANSF.

95c

CARBON MICROPHONE

A genuine, amazingly efficient, single button microphone, equipped with an ON-OFF button switch. Solidly constructed, white cast metal, neatly gilt finished, an adapter and a 12 ft. cord furnished permit ready installation to ANY Receiver or Power Amplifier. This is a really fine and decidedly efficient piece of apparatus—do not attempt to judge its superior quality by its seemingly rediculously too low price!

I.C.A. DE LUXE

Jensen "Concert" 111/2 Inch 110 Volt A.C. Dynamic **Speakers**

Equipped With Tym-Flex Diapbragm Uses Either a 280 or Full Wave82Type Mercury Rectifier Tube!

Cone Diameter: 11½ in. Burtex Cloth Diaphragm. Equipped with your optional choice of any output tube matching transformer—state what type output tubes you employ.

what type output
tubes you employ. Capable of handling huge
volume, free of blasting or distortion. Excellent
for P.A. Multi-Speaker installations—each
speaker can easily dissipate up to 8 watts audio
energy. Plug into any 110 volt 50-60 cycle A.C.
socket.

socket. Cat. No. C1217......\$8.75

Highly Improved-**Extremely Sensitive**



Brandes 2000 Ohm Phones

Known the world over, and rightly so. Pay a few cents more for the extreme satisfaction you will derive from these amazingly sentitive headshopper. headphonest sitive

Cat. No. C1517.....

\$1.35

Featherweight **Head-Phones**

2000 Ohms. Excellent for Short Wave Fans. 99C





Genuine Nathaniel Baldwin Phones

Balanced armature principle. The most sensitive and efficient on the market. Used extensively by the United States Signal Corps and the Navy. Preto the ordinary head set.

Cat. No. C1518...

Sponge Rubber

Phone Cushions
Can be slipped over any make or size phones. Adds pleasing comfort. Highly endorsed by ship operators.
Cat. No. C1314
PER PAIR




Universal Application **OUTPUT TRANSFORMERS**



HESE • PRICES • ACTU



RCA-Victor Genuine



Cat. No. C1000 Our Price 65c Per Dozen,

86.95

Victor 600 Volt 103/4 Mfd. Condenser Block

Ideal for Any Make Pentode or 245, Set!

Arrangement of terminals: 5 mfds.; 3 mfds.; 2.5 mfds.; Common: .5 mfds. Total 10% mfds. Size: 5% in. long, 5 in. high, and 4 in. wide.

RCA-Victor 4,325 Ohm Tapped Voltage Divider

For Victor RE 32-45-75 Sets

50 Watts-Vitreous Enameled



Tapped as follows: 1975, 1350, 200, 800 ohms. The overall length is 6½ in., % in. diameter. Adaptable to most any voltage divider system, any receiver.

25 for \$5.00

RCA-Victor 245-250 Power Pack Choke

Rating: 200 Obms, 125 Mil., 30 Henries



Cat. No. C1008

Excellently adapted for use as the first filter choke, to be followed by a high resistance (approximately 2500 ohms) dynamic Speaker field. This choke has an unusually low D.C. resistance of only 200 ohms, causing a low an unusually low D.C. resistance of only 200 ohms, causing a low voltage drop across it, thereby permitting a high and well filtered plate voltage to be fed directly to the plates of the 250 tube. This voltage is obtained right after the first choke (this one!) and before the second choke (or dynamic speaker field). 3½x3½x2½ ins.

RCA-Photophone Dynamic Speaker.

Complete Cone Replacement

Complete With VOICE COIL

A guaranteed replacement for ALL PHOTOPHONE Speakers (both A.C. and D.C. models) D.C. models) \$1.95 Cat. No. C1676



Victor Input and Output Push- Victor Audio Pull Audio Transformer Phone Assembly

Cat. No. C1072. RCA Photophone 6 Volt Coil. (Can be easily inserted into any Photophone Speaker by removing present 1000 ohm coil. Draws 1.375 amps. at 6 volts. \$3.95 Cat. No. C1073. Radiola 104 and 105 Speakers



Cat. No. C1001

\$1.45

Electrostatically Shielded Amplifica-tion On All Fre-

quencies. Impregnated against lamination vibration nation vibration
Output matches voice
coil of standard dynamic speakers. Can
be used with 171A.
245, 247, 250 tubes.
Both Input and Output transformers
mounted in one case!
5 % in. long, 3 % in.
wide, 3 % in. high.



Our Price

R.C.A. Cond Outp

Required In Rad RCA Part No. 83 two 1 mfd. filter and one ½ mfd. or ser and choke coi protection. 450 3% x 2% x 3% inch Cat. No. C1366...

Radiol

Super-I Requires 8 an AUTOM Two R.F.

Socket and Voltage Divider Assortments



Every Servit c e m a n ,
Dealer and
Set Builder
Should at Al
Times Have
These Valu
ably Useful
Assortments
On Hand 1



4 to 7 Prong Wafer Socket Assortment

Included in this well apportioned assortment are sockets manufactured by such houses as RCA, Cinch, Eby, Alden, etc. Your satisfaction is warranted. PER ASST. OF PER ASST. OF 95C Cat. No. C1354

500 Assorted for \$4.25 1000 Assorted for \$7.50

All-Purpose Variable Tapped Voltage Divider Assortments

Included in this assortment, you may find various types, sizes and styles of single and multi-tapped 10 to 100 watt voltage dividers for some of the following receivers: RCA-Kolster, Stromberg-Carlson, Victor, Zenith, Peerless, Majestic, Philco, Silver-Marshall, Edison, Freed, Freshman, etc., etc. All guaranteed perfect—sizes range from 10 to 250,000

ohms.
Cat. No. C1355
PER ASST OF \$1.00

Crosley Audio
Transformers
Completely shielded—remarkably compact. Excellent for all general replacement applications.

Per Dozen, \$3.75

Crosley Combination 1st A.F. Audio and Push-Pull Input Audio Transformer Unit

For Models 41-A, 42, 704, 706
Similar to Part No. 5315. Note
threaded mounting pillars. Can
be universally employed. Highly
efficient and serves a valued need! 2½x1%x4¾



Has 3 I.F. stages! 71/6 in. tall. This tutheir renowned Radiol ceiver! Can be used w 200 to 550 meters. Cat. No. C1100

Transformer Corp. of America Audio Input and Output Push-Pull Series A.F. Transformers



Preferred by professional set builders and manufacturers of America's finest commercial receivers, and super public Address Amplifiers. Can be universally mounted—note long flexible leads.

Cat. No. C1063. Input Push-Pull Transformer.

... 59c Per Dozen, \$5.95

Cat. No. C1367. Output Push-Pull Transformer. Equipped with 7 to 15 ohm impedance voice coil secondary.

Silver-Marshall Audio, Input and Push-Pull

Transformers

Cat. No. C1035. 3 to 1 Audio. Cat. No. C1036. Input Push-Pull. YOUR CHOICE.... \$1.00

Polymet Au Output Push Input Series formers



are scientifically tre to all atmospherics necessary feature. Cat. No. C1372. 3 Re. Audio Transformer

Cat. No. C1373. 106 Input Push-Pull Cat. No. C1374. In Push-Pull

Push-Pull
Cat. No. C1375. Of A
Voice Coil windin
pedance. State Pr
used!)
Cat. No. C1376. Sill
above, but for use
Output Tubes

Cat No. C1377. Pahigh or low impediup is employed.)...

Cat. No. C1378. Che Button Microphon Transf. 200 ohms

Nationally Advertised 500 Volt Peak Dry Electrolytic Condensers the common connection (which goes to negative) is brought out separately. Unlike most electrolytic condensers, the outside casing is not electrically a part of the condenser itself—the valuable advantages this offers will be immediately apparent—makes them ideal for mounting on metal chassis! Inasmuch as they can be mounted in any angle, their value is further enhanced.

Will actually function under sudden surges of 600 volts. . should any harm result from such excessive voltage, the nature of the contents is such that a Self-Healing Action follows! Can be mounted in any position. Can be used in any temperature, or in any climate—they are not subject to any ill effects due to varying extremes of natural heat and humidity conditions. In the multiple units, which are metal cased,



Mounts Upright-Connected At Top, Mounted by Ring Clamp

	Cap'y Mfd.	Total	Your
No.	at Anodes	Cap'y	Cost
C1132	8	8	\$.47
C1133	8-8	16	.99
C1134	8-8-8	24	1.35
C1135	8-8-8-8	32	1.75
C1136	9-9-18	36	1.95
C1137	8-8-18-18	52	2.85
C1138	9-9-18-18	54	2.95

Tubular Dry Electroly-tic Pig-Tail Condensers

Encased in Cardboard Containers and Equipped



Cardboard Container Dry Electrolytic Filter Condensers

Inverted Typé

Mounting

Equipped with Appropriate In-

sulating Lock Wasbers and

Bolts

Cat. Cap'y Mfd. Total Your No. at Anodes Cap'y Cost C1139...8 8 470 C1140...4-8 (with leads) 12 73c C1141...6-8 " 14 84c C1142...8-8 " 16 94c

Equipped with two vari-colored flexible leads. Extreme compactness and facility offered of

IN/AMPLE/QUANTITIE

ERISED m:arbon

r S nd Truck Il-Purpose bli Address mpfer Use!

tribe to Amerm gineers—a
th ality twotton microphone
alial for the
semi-ly imposde le price! Retand 200 ohms
bon. Freencyange: 1000
400(ycles. Scitificay damped.
sary low hiss
lel. Juralumin
n-brkable diarag. Huskily
nstrited—meagineers nstried — mearing 2 in. diamr b i in. thick.
re bLD CONNote four
rings!

In) ut

rpse"

xiliy equipimped-put grid luses the luses the voltage several replaced. call system and all reset up annovice— mals. Its hun pulpit, 3½n. wide. as escribed, aviable for But a Micro-m 0200 ohm

4.95 as listrated. Kelgg Hand 5.95 ope tion

m Tapped Dus) D.C. e Seaker ass

y my midget turn! Quality a Price! on voice coil mating trans-1-24 ube.

\$1.95 Sia \$10.50






Miniature Coat Lapel Microphone

Permits unhindered speech pick-up, even while orator is pacing up and down the floor or pulpit. Can be slipped into any lapel in second! Cat. No. C1466..... **98c**

SENIOR MODEL Single and Double Button Coat

Lapel Microphones

Not a toy—a real, serviceable instrument that fills a long felt need. Handsomely and durably constructed. Fully warranted throughout. Resistance 200 ohms per button—amazing frequency range response.



Cat. No. C1469. Single or Double Button Microphone Input Transformer... 95C



UTAH 1000 ohm 8-Inch Diam. 110 Volt D.C. Dynam-

Volt D.C. Dynamic Speaker

Famed for its ability to withstand enormous surges of output voltages flowing through its cleverly constructed voice coil. The field coil is of ample electrical capacity to assure maximum electromagnetic transfer function, and attendant crisp, full frequency range response reproduction. Furnished complete with a high safety factor Output Transformer, for single or push-pull output tube application. Please state what tubes are employed. ployed. **\$2.95**



UTAH-JENSEN-ROLA D.C. Dynamic Speaker Field Coils

DIMENSIONS
OverDiam. all
Hole Diam. Depth Your
Ins. Ins. Ins. Cost
1% 2% 1½ \$1.25

D	-9, 1550.			100		
	-A Serie		1,10	23/8	15/8	1.45
C1473	**	1250	1,10	23/8	15/8	1.75
C1474	"	1900	110	23/8	15/8	1.75
C1475	44	2500	114	2 %	15/8	1.45
C1476		Volt) 8	1,10	23/8	15/8	1.65
C1477	Rola-K	100			- 2360	
100000000000000000000000000000000000000	(8 in.)	1000	1	21/4	2 2	1.49
C1478	- "	2500	1	21/4	2	1.49
C1479	Rola-F			1000		
Andrew Comment	(6 in.)	1000	1	21/4	11/2	1.49
C1480	"	1800	1	21/4	11/2	1.49
1000		(Tapped				
	5 D	at 300)	100			7
C1481	The state of	2500	1	21/4	11/2	1.49

Other Types and Makes Available-Write For Quotations.

Skinderviken "Mike"

Rutton

Smallest microphone made, measuring only ¾ inch in diameter. It can be used as a detectograph (dictophone) to listen-in secretly on conversations. Very good sensitivity, With a Skinderviken button you can make a powerfui Hand-microphone.

Cat. No. C1208..... 39C

UNIVERSAL MOUNT-TERMI-NAL BOARD EQUIPPED -AUDIO TRANSFORMERS, Etc.

Solder Lug Fea-ture Permits Universal Connection Facilities These transformers and chokes are all



'Jr.-Public Address' Single Button Carbon Hand Microphone



Cat. No. C1496

SPECIAL "MIKE" INPUT MATCHING TRANSFORMER

98c

A High Grade Instru-ment—Not To Be Con-fused With Similar Low Priced Devices!

Produces perfectly clear, even and crisp response, with a faithfulness of reproduction that is highly commendable. Provided with a conveniently located "On-Off" button switch, which disengages the "mike" proper from the grid circuit of any amplifier or Radio Receiver, to which it may be connected. It also disconnects the microphone current dry cell. Equipped with a correctly formed wooden handle, and 25 ft. of high grade flexible insulated wire, and necessary connection adapters. The metal shell of the microphone casing is highly nickel plated and beautifully buffed. The sensitive diaphragm is protected by a gilt plated mesh screen.



ALLEN HOUGH SYNCHRO-NOUS PHONO. MOTOR



Only 1¼ in. thick. Revolves exact speed of 78 R.P.M. despite any voltage variation in 110 volt, 60 cycle A.C. line. 10-inch turn-table included.

Cat. No. C1285

Bakelite 4-5-6-7 Prong Cable Plugs

Fit any tube socket. Equipped with detachable plug feature. Overall length, 31/4 in., and diameter 11% in.





One Piece Speaker Plugs. Same plug as contained on above complete inustrated plug.

Cat. No. C1497. Cat. No. C1498. Cat. No. C1499. Cat. No. C1501. 4 Prong 5 Prong 8C EACH 6 Prong 90c Per Dozen

4-5-6-7 Prong Bakelite Speaker, Etc. Plugs Fit Any Standard Tube Socket Cat. No. C1194



Prongs Desired 14c \$1.50 Per Dozen

State Number of

C-H Feed-Thru Switch With Two Female Recentacion





MICROPHONE

Cat. No. C1285

70C MATCHED "MIKE" INPUT TRANSF. 95c

A genuine, amazingly effi-cient, single button micro-phone, equipped with an ON-OFF button switch. Sol-idly constructed, white cast ON-OFF button switch. Solidly constructed, white cast metal, neatly gilt finished. An adapter and a 12 ft. cord furnished permit ready installation to ANY Receiver or Power Amplifier. This is a really fine and decidedly efficient piece of apparatus—do not attempt to judge its superior quality by its seemingly rediculously too low price!

I.C.A. DE LUXE

CARBON

Jensen "Concert" 111/2 Inch 110 Volt A.C. Dynamic **Speakers**

Equipped With Tym-Flex Diaphragm Uses Either a 280 or Full Wave82Type Mercury Rectifier Tube!

Cone Diameter: 111/2 cone Diameter: 11½
in. Burtex Cloth Diaphragm. Equipped
with your optional
choice of any output
tube matching
transformer—state
what type output

what type output tubes you employ. Capable of handling huge volume, free of blasting or distortion. Excellent for P.A. Multi-Speaker installations—each speaker can easily dissipate up to 8 watts audio energy. Plug into any 110 volt 50-60 cycle A.C. Socket.

socket. Cat. No. C1217......\$8.75

Highly Improved-**Extremely Sensitive**



Brandes 2000 Ohm Phones

Known the world over, and rightly so. Pay a few cents more for the extreme satisfaction you will derive from these amazingly sensitive headphones! headphonest

Cat. No. C1517.....

\$1.35

Featherweight **Head-Phones**

2000 Ohms. Excellent for Short Wave Fans. 99C





Genuine Nathaniel Baldwin Phones

Balanced armature principle. The most sensitive and efficient on the market. Used extensively by the United States Signal Corps and the Navy. Preto the ordinary head set.

Cat. No. C1518.....

Sponge Rubber Phone Cushions

Can be slipped over any make or size phones. Adds pleasing comfort. Highly endorsed by ship operators. Cat. No. C1314 PER PAIR



Universal Application **OUTPUT TRANSFORMERS**







ajestic



"Special Master B" Eliminators. Your choice of any of the above.... 95c Six for \$5.00

Cat. No. C1048. For 7 P6 (171 Type) Sets. Cat. No. C1044. For 8 P6 (250 Type) Sets. Cat. No. C1045. For 9 P6 (245 Type) Sets.

Your choice of any of the above... Six for \$10.00 Majestic Power Transformers Choice of Filament or Plate



Transformers For All Majestic 171 Power Tube Equipped Sets Your Choice

Cat. No. C1046...... 95C



Majestic (and R.C.A.) Drum
Dial Cables
Cat. No. C1050.

Per Dozen ... 45C Per 100, \$2.95

REPLACEMENT PARTS

Majestic Audio Transformer Series Replacements

We Can Furnish a Transformer




Every A.C. Set Made by Majestic!
Enclosed in a fully shielded sub-panel style mounting metal case. Equipped with long flexible leads, each one suitably coded. Ideal for general replacement purpose. Clever construction permits universal mounting.
Cat. No. C1360. Audio Cat. No. C1361. Input Push-Pull
Cat. No. C1658. Output Push-Pull

.....85c YOUR CHOICE

Majestic 90-91-92-93-100 Series

Combined Plate and Filament Transfs.








Majestic 175 K. C. Replacement

Per Dozen, \$3.00

KOLSTER REPLACEMENT COILS AND TRANSFORMERS Kolster Power Transformer Kolster Double Audio Coils Transformer

Cat. No. C1077. For Model K-20. \$1.25

Cat. No. C1078. For Model K-43, 48, B-15, B-16, B-10, S1.65 For





Two A.F. Transformers In One Case!

In One Case!

The compact size, sturdy construction and finished appearance of these units make them ideal for use in most any receiver or amplifier straight audio system. Long leads are provided for direct wiring.

Case is finished in crackle green. Size 2,4 x 312 x 214 inches.

Cat. No. C1364.

\$1.45 Cat. No. C1364

Dubilier Kolster 210-250 Condenser Block



Total capacity: 113/4 mfd, Known as PL-455. Contains following sections: 3 mfds., 1000 volts; 4 mfds., 600 volts; 4 mfds., 160 volts; .5 mfd., 160 volts; .25 mfd., 160 volts. For Kolster K-5. 6-H, Columbia 500-901 Receiv-

\$1.10



Speaker-Receiver Panel

Highly decorative in appearance—will match most any console cabinet, in which you may desire to mount this undrilled 3 ply walnut finish panel. Overall dimensions: 13 in. wide, 24½ n. tall. The handsomely scrolled grille measures 9½ in. tall, by 9 in. wide, and is backed with a rich golden colored grille cloth. Rich dull finish.

Output Push-Pull Transformer. With Voice Coil Secondary of 8 to 15 ohms impedance. 95C

Per Dozen, \$9.00



Universal Audio Replacement Transformer

All-Stage Ratio!

Cat. No. C1369 Our Price \$1,80 per dozen

P-A SERIES Single or Double Button Microphone Transformers Cat. No. C1068, For Single Button "Mikes."

Cat. No. C1069. For Double Button "Mikes." Your Choice 99C

Please specify if 100 ohms or 200 obms per button is desired.



In Assorted La FILTI Cat. No. 01379 200 ohma Cat. No. C1380 200 ohma Cat. No. C1381 200 oluns

Audio. Input



Cat. No. C1095, Asso Coils. All Ratios. Per Dozen Cat. No. C1096. Per Dozen ... Cat. No. C1097.

Per Dozen

Nationally Advertised A.C. Power Tr

Represent The Finest Products of Several of Embrace Highest State of Electrical and Mec

Flat Mount "Bell Top" Power Transformers Series



Types of 1.75 and 1.0
Amp. 2½ Volt Tubes
and 280 Rectifier
This type seems

This type seems to enjoy greatest favor with servicemen, due to its clever design and terminal lug feature.

4 Tube Transformer
660 Volts, 40 M.A.
115 volts, 50/60 cycle
3.75 amps. C.T. Primary 115 2.5 V. 5 V.

5 and 6 Tube Transformer

6 Tube Transformer

7 and 8 Tube Transformer

9 and 10 Tube Transformer

Note: For 110 Volt, 25 Cycle, 220 or 240 Va for quotations.

300-300 Volts A.C. Mounting Holes: 2 Height: 31/2 Inches Rating: 75 Watts. Cat. No. C1406

171 Type Po

Same as above by 11/2 Volt Windings additional 11/2 Vo 1.05 amps., and is

Cat. No. C1407 ...

245-247 Tran

Furnished with T

Furnished with T
For 7-2½ Volt
Amp. tubes,
750 Vo
Primary: 115 Volts,
2.5 Volts
5.0 Volts
375-375 Volts A.C.
Mounting Holes: 3½
Height: 4½ inches.
Rating: 85 Watts.
Cat. No. C1061 Cat. No. C1061

Senior Size Power

Furnished with Th For 8-21/x Volt Amp. Tubes, 2

Lamination Star 800 Vo

TO COAST RADIO CORP. 121.1

o. Pick-up st Studios, The-Ideal for Home A. Amplifier

A. Amplifier
inciple employed
in of rising and
iotor turn-tables,
r a cleverly balist enough needle
ed, thus considatch possibilities,
and all frequency
i-up as highly demusical register,
The self-enclosed
isiderable advanre hardly believe
-up is available!
vailable in any
00 ohms. (Stand-00 ohms. (Stand-

\$5.95 n-er... \$1.85

emovable Plug-in \$7.95

3/3 and 78 enor Cone Motor



leiveteen covered losed oil sprayed ent operation la-atic heat dissiversize bearings; urn-table R.P.M. or "record drag," fittings, such as or "record drag,"
fittings, such as
iter speed regur and escutcheon
RANTEED! For

\$8.60

P.A. Amplier Assembly

sprises all the Nec iry Class per Pack Chokes hin One Heavy auge Steel Case! tains First Brute er Choke—100 ohms, Henry, 250 Mils.; and Filter Choke— Ohms, 30 Henry Mils.; Third Filter ke — 200 Ohms, 30 ted in a moisture 31/4x57/6x55/6 inches

..... \$4.95



95c

cambric

Obination o - Microand Radio er Input ing Trans-


ormer
s valuable space.
universal input lons from one filmer. Correct endesign assures tom energy trans-

yal Phono-Pickup. hs, as well as 3000 n (Single or Double Tisformer. Seconndance \$1.50

A Above, But Also

\$2.65

square core of high Silicon steel. The core is securely held



Audio Transformers

Cat. No. C1482. 3 to 1 All Stage 98C A. F. Transformer..... Cat. No. C1484. Input Push- \$1.22

Cat. No. C1484. Interstage Push - Pull Transformer, from single plate to two grids. For use between push-pull stages \$1.45

Cat. No. C1487. Output Push-Pull Transformer, from push-pull 245, 250 to 8—15 ohm dynamic speaker
voice coil \$1.95
Cat. No. C1488. Pentode Output Push-Pull Transformer, from push-pull 247, 233, 59 (etc.), or 238 tubes to 8—15

(etc.), or 238 tubes to 8—15 ohm dynamic speaker voice coil. \$1.45

Phono. Pick-up and Microphone Input Transformer Cat. No. C1489. Choice of 200, 400 or 500 Ohm Phono. Pick-up Input, for low impedance pick-ups..... \$1.25 Cat. No. C1490. 3000 Ohms Phono. Pick-up Input. for high impedance pick-ups \$1.45
Cat. No. C1491. Single Button Microphone

Cat. No. C1491. Single Button Microphone Transformer. (State if for 100 \$1.45 or 200 ohm Buttons!)......

Cat. No. C1492. Double Button Micro-Phone (State if for 100 or 200 ohm Buttons!) Transformer... \$1.75

Universal 4-5-6 Prong Tube Socket





Its place-ment of 9 holes per-mits all types of tubes to be tested or used in this e common to

one socket. The filament holes are common to all types; the cathode, plate, grid and suppressor holes are individual for each type. Can be mounted in a 1½ in. diameter cut-out socket hole. Can be mounted above or below panel! Solid bakelite moulded—vari-colored identification feature incorporated.

4 and 5 Prong **Bakelite Tube** Base Forms



Overall diameter: 1,5 in.; length of bakelite form, 1½ in. Brand new—never used. Ideal for home wound short wave inductances as well as tube and socket plug adapters. Ideal for use with above Universal Sockets.

Cat. No. C1494. 4 Prong. Cat. No. C1495. 5 Prong.

10C EACH Per Dozen, \$1.00

Cadmium Plated Chassis



Made of 15 in. thick steel — extremely rigid. 18 in. long, 10 in. wide, 3.5 in. tall. Ideal for universal application! Can be easily drilled and soldered to.

89c Cat. No. C1114..... Cat. No. C1193 10 x 12 in. long x 3 to in. 79c

Adjustable Metal, Bakelite **Wood Circle Cutter**

Ideal for Cutting Out Socket and Meter Holes, Etc.

Cuts holes from ½ in. to 4 in. in diameter. Can be used in any hand brace, breast drill or power machine. Drills its own pilot hole.

Cat. No. C1156



Per Dozen, \$1.75

Three Conductor Shielded



Microphone Cable

The finest cable obtainable. Consists of 3 individually insulated cables color coded. Each individual cable

Woven, flexible tinned copper shield self cotton covering.
Covered. Cable is finished with spade tips on both ends. A shielded ground lug is provided on one end of cable.
Cat. No. C1163
Per ft. (Cut to are: Per ft. (Cut to any length!)

Per 100 ft. Roll, \$2.95

Heavily Insulated Heavy Duty 5 ft. Dual Conductor Cable and Rubberized Taper Grip Male Plug



Per Dozen, \$2.40 "Cinch" 4-5-6-7 Prong

Radio Sockets



Phosphor Bronze Contacts-Bakelite Insulation!

Insulation!

Available for ALL FOUR to SEVEN PRONG
TYPE TUBES, including the new 59 SEVEN
PRONG SERIES, 25Z5, 48, 43, 79, Etc.


ALL ONE PRICE

Cat. No. C1192 EACH Per Asst'd Lot of 100, \$4.25

New Types 56-57-58 Three Piece Ventilated

Aluminum Tube Shields

Cat. No. C1200 12C Per Dozen, \$1.25



"NA-ALD"—ALDEN BAKELITE SOCKETS General Purpose

Provided with knurled nut binding posts for convenient connections. Excellent for regular as well as experimental work. Made of molded Bakelite throughout with phosphor bronze contact springs. Knurled nickel bindand lugs. springs.

ing post terminals and lugs.
Cat. No. C1504. 4 prong—Red Spot.
Cat. No. C1508. 5 prong—Green Spot. Cat. No. C1408. 6 prong—Blue Spot. 22C

Universal Panel

Mount Sockets

Genuine molded Bakelite with phosphor bronze spring contacts. For mounting either above or below subpanel. Equipped with insulated mounting flanges and holes. Convenient solder iug terminals. Mounting holes 1 stain.centers, panel hole 1 stain diameter.

Cat. No. C1508. 4 prong.

Cat. No. C1509. 5 prong.

Cat. No. C1510. 6 prong.

Cat. No. C1511. 7 prong.

Cat. No. C1511. 7 prong. Convenient

Bakelite Button

Used for below panel connecting and making adapters 1th in. diameter, the ing socket can all be drilled with hand drill. Hole in center for No. 6 screw. Socket itself mounts flush against the top surface of a meter panel or chassis.

Cat. No. C1512. 4 prong—Red Spot. 16C \$1.10 Cat. No. C1514. 6 prong—Blue Spot. Cat. No. C1515. 7 prong—Orange Spot. 22C

stallations Producing up to 30 Watts! The engineering design of these transformers is on ta par with similar instruments generally offered for many times the modest cost

P.XCOLLONE POT

Use with P.A.

Amplifier In-

quoted. The large core of highest grade silicon steel and perfectly designed coils give straight line amplification characteristics, even at small outputs. The windings are highly insulated and are well impregnated and varnished. Can be used in any climate. The average dimensions are 3% in. long, 2 in. wide, 2% in. tall—the mounting holes are 2 in. x 2% in. Please definitely state output tubes you employ.

For Class "A" Amplifiers Will Handle up to 15 Watts Output

Tubes S Cat. No. Matched 1519 2-250, 2-245 2-43, 2-171, Etc.

15 ohms tapped at 7½ and 3¾ ohms\$2.75 1520 2-250, 2-245 2-43, 2-171, Etc. 500 ohms, ohms tapped 7½ and 3 1521 2-250, 2-245 2-43, 2-171, Etc.

1522 2-247, 2-59 2-238, 2-233, Etc. 10 to 15 ohms.\$1.95

15 ohms tapped at 7½ and 3¾ 2-238, 2-233, Etc. ohms\$2.50

1523 UNIVERSAL

523 UNIVERSAL—

Matches any Equipped with type, single push-pull or parallel arrangement—

CLASS A OR B! ohm voice coil secondary windings;

For Class 'B'? Amplifier \$4.95

10 to 15 ohms..\$1.95

7½ and 3¾ ohms\$3.25

Amplifiers Available In Two Models-One For 16 Watt and Other for 26 Watt Outputs

Cat Tubes Secondary Specs. 16 26
No. Matched
1524 2-46, 2-59, 2-79, Etc. 2-79

1526 2-46, 2-59, 2-79, Etc. 4000 ohms... . . \$1.75 \$2.95

S. P. D. T. and D. P. D. T. Hart & Hegeman Switches

Single Pole — Double Throw

No. C1116... 21º Double Pole. — Double Throw

No. C1117 ... 45C





Equipped With Slot-Head for Cam Attachment Cat. No. C1254 In Lots of 12, \$1.00

On-Off Snap Switch Noted for Its Unusual

Short Throw! Cat. No. C1253

Per Dozen, 50c



Rotary Snap Switch

Rated 3 amps., 125 volts:
1 amp., 250 volts. Only
4 in. long. and extends
but in behind a panel!
Kandsomely lacquered
ing. Equipped with two 6½ inch heavily insulated, tinned end leads.
Cat. No. C1159

In Lots of 12, \$1.00



ajestic

Majestic Condenser Blocks



Cat. No. C1040. For "Super B" Eliminators. Cat. No. C1041. For "Master B" Elimi-

"Special Master B" Eliminators.
Your choice of any of the above.... 95C Six for \$5.00


Cat. No. C1043. For 7 P6 (171 Type) Sets. Cat. No. C1044. For 8 P6 (250 Type) Sets. Cat. No. C1045. For 9 P6 (245 Type) Sets.

Your choice of any of the above... Six for \$10.00

Majestic Power Transformers Choice of Filament Or Plate Transformers



For All Majestic 171 Power Tube Equipped Sets Your Choice



Majestic (and R.C.A.) Drum Dial Cables Cat. No. C1050

Per Dozen ... 45C Per 100, \$2.95

REPLACEMENT PARTS

Majestic Audio Transformer Series Replacements

We Can Furnish a Transformer



Every A.C. Set Made by Majestic!

Enclosed in a fully shielded sub-panel style mounting metal case. Equipped with long flexible leads, each one suitably coded. Ideal for general replacement purpose. Clever construction permits universal mounting.

Cat. No. C1360. Audio Cat. No. C1361. Input Push-Puil

Cat. No. C1658. Output Push-Puil

YOUR CHOICE 85c

Majestic 90-91-92-93-100 Series

Combined Plate and Filament Transfs.

For 5-227, 2-245, 1-280 Tubes Cat. No. C1048





Majestic 175 K. C. Replacement

Can be easily replaced. Its efficient characteristics permit the usage of this dual inductance in any conventional intermediate frequency R.F. stage. Equipped with four, identified leads.

Cat. No. C1363...... 30C Per Dozen, \$3.00

KOLSTER REPLACEMENT COILS AND TRANSFORMERS Kolster Power Transformer Kolster Double Audio Coils Transformer

C1077. For Cat. No. C1077. For Model K-20. \$1.25

Cat. No. C1078. For Model K-43, 48, B-15, B-16, B-10, \$1.65

Cat. No. C1079. For Model K-24 Model K-24 Sets \$2.50



Two A.F. Transformers

Dubilier Kolster 210-250 Condenser Block



Total capacity: 11% mfd. Known as PL-455. Contains following sections: 3 mfds., 1000 volts; 4 mfds., 600 volts; 4 mfds.. 160 volts; .5 mfd., 160 volts; .25 mfd., 160 volts. For Kolster K-5, 6-H, Columbia 500-901 Receiv-



Speaker-Receiver Panel

Highly decorative in appearance—will match most any console cabinet, in which you may desire to mount this undrilled 3 ply walnut finish panel. Overall dimensions: 13 in. wide, 24½ n. tall. The handsomely scrolled grille measures 9½ in. tall, by 9 in. wide, and is backed with a rich golden colored grille cloth. Rich dull finish.

Cat. No. C1569.....\$1.25 Cat. No. C1569 \$1.25

Output Push-Pail Transformer. With Voice Coil Secondary of 8 to 15 ohms impedance. 95C

Per Dozen, 89.00



Universal Audio Replacement Transformer

All-Stage Ratio!

Oat. No. C1369 Our Price \$1.80 per dozen

P-A SERIES Single or Double Button Microphone Transformers Cat. No. C1068. For Single Button "Mikes."

Cat. No. C1069. For Double Button "Mikes." Your Choice 99C

Please specify if 100 ohms or 200 ohms per button is desired.



In Assorted Los Cat. No. C1379 200 ohma Cat, No. C1380 200 ohms Cat. No. 01381 200 ohms

Audio. Input



Cat. No. C1095. Asso Coils. All Ratios. Per Dozen Cat. No. C1098. Per Dozen

Cat. No. C1097. Per Dozen

Nationally Advertised A.C. Power Tr

Represent The Finest Products of Several of Embrace Highest State of Electrical and Mec

Flat Mount "Bell Top" Power Transformers Series



Types of 1.75 and 1.0
Amp. 2½ Volt Tubes
and 280 Rectifier
This type seem

This type seems to enjoy greatest favor with servicemen, due to its clever design and terminal lug feature.

4 Tube Transformer 660 Volts, 40 M.A.

5 and 6 Tube Transformer

6 Tube Transformer

7 and 8 Tube Transformer

Note: For 110 Volt, 25 Cycle, 220 or 240 Vo for quotations.



300-300 Volts A.C. Mounting Holes: 2 Height: 31/s inches Rating: 75 Watts. Cat. No. C1408

171 Type Por

Same as above b: 1½ Volt Windings additional 11/2 Vo 1.05 amps., and is

Cat. No. C1407 ...

245-247 Tran

Furnished with T For 7-21/2 Volt 1 7-272 Amp. tubes, 2 750 Vo

Amp. tubes, 2
750 Vo
Primary: 115 Volts,
2.5 Volts
5.0 Volts
375-375 Volts A.C.
Mounting Holes: 37
Height: 4½ inches.
Rating: 85 Watts.
Cat. No. C1061...

Senior Size Power 1

Furnished with Th For 8-2½ Volt (Amp. Tubes, 2

T TO COAST RADIO CORP. 121-1:

60. Pick-up ad st Studios, Theall Ideal for Home A. Amplifier

nciple employed n of rising and otor turn-tables, a cleverly balst enough needle d, thus considatch possibilities. and all frequency up as highly demusical register. The self-enclosed siderable advansiderable advan-e hardly believe up is available! vailable in any vailable in any 0 ohms. (Stand-

\$5.95 a- \$1.85

movable Plug-in \$7.95

/3 and 78 or Contic Motor



elveteen covered losed oil sprayed nt operation la-atic heat dissi-versize bearings; table R.P.M. ittings, such as iter speed regu-and escutcheon RANTEED1 For

\$8.60

P.A. Amplier ssembly

sprises all the Nec-Class er Pack Chokes bin One Heavy auge Steel Casel Choke—10 250 100 Ohms, 30 Henry, Mils.; Third Filter ke — 200 Ohms, 30 ted in a moisture-31/4x57/8x55/8 inches, x5 inches

.... \$4.95 h-125



95c

bination o - Microand Radio er Input tuing Trans-

ormer bes valuable space.
I universal input
clons from one
fmer. Correct enrg design assures
im energy trans-

al Phono-Pickup. on Single or Double Insformer. Secon-

nidance \$1.50
es Above, But Also
hal Audio Trans-

\$2.65

square core of high Silicon steel. The core is securely held in an attractively finished strap. Designed in accordance with the latest technique; they can be depended upon to give very satisfactory results! The coils are scientifically treated to be impervious to all atmospherics—a very valuable and necessary feature. The overall measurements of all the units below are 3% in. long, 2% in. tall, 2% in. wide. These generous proportions will indicate the HIGH QUALITY of its ENGINEERING DESIGNI

Audio Transformers

Cat. No. C1482. 3 to 1 All Stage 98C A. F. Transformer

Cat. No. C1483. Input PushPull Transformer

Cat. No. C1484. Interstage Push-Pull
Transformer, from single plate to two grids.
For use between push-pull stages

—for all types of tubes. \$1.45

Cat. No. C1485. Output Transformer, from
1—245 or 250 to 8—15 ohm dynamic speaker voice coil. \$1.45

Cat. No. C1487. Output Push-Pull Transformer, from push-pull 245, 250 to 8—15 ohm dynamic speaker voice coil \$1.95

Cat. No. C1488. Pentode Output Push-Pull Transformer, from push-pull 247, 233, 59 (etc.), or 238 tubes to 8—15 ohm dynamic speaker voice coil \$1.45 ohm dynamic speaker voice coil. \$1.45

Phono. Pick-up and Microphone Input Transformer
Cat. No. C1489. Choice of 200, 400 or 500
Ohm Phono. Pick-up Input, for low impedance pick-ups...... \$1.25 Cat. No. C1490. 3000 Ohm: Input, for high impedance 3000 Ohms Phono. Pick-up ... \$1.45 pick-ups .

Cat. No. C1491. Single Button Microphone Transformer. (State if for 100 \$1.45 Cat. No. C1492. Double Button Microphone (State if for 100 or 200 ohm Buttons!) Transformer... \$1.75

Universal 4-5-6 Prong Tube Socket





used in this

one socket. The filament holes are common to one socket. The illament holes are common to all types; the cathode, plate, grid and suppressor holes are individual for each type. Can be mounted in a 1½ in. diameter cut-out socket hole. Can be mounted above or below panel! Solid bakelite moulded—vari-colored identification feature incorporated.

4 and 5 Prong **Bakelite Tube** Base Forms



Overall diameter: 1.% in.; length of bakelite form, 1% in. Brand new—never used. Ideal for home wound short wave inductances as well as tube and socket plug adapters. Ideal for use with above Universal Sockets.

Cat. No. C1494. 4 Prong.

Cat. No. C1494. 4 Prong. Cat. No. C1495. 5 Prong. 10C EACH Per Dozen, \$1.00

Cadmium Plated Chassis

Made of 16 in, thick steel — extremely rigid.
18 in, long, 10 in, wide,
3 in in, tall. Ideal for steel — extremely 18 in. long, 10 in. 31 in. tall. Ide universal applic 3% in tall Ideal for universal application! Can be easily drilled and soldered to.

89c Cat. No. C1114..... Cat. No. C1193 10 x 12 in, long x 3 to in.

Adjustable Metal, Bakelite **Wood Circle Cutter**

Ideal for Cutting Out Socket and Meter Holes, Etc.
Cuts holes from ½ in. to 4 in.
in diameter. Can be used in any
hand brace, breast drill or power
machine. Drills its own pilot hole.
Cat. No. C1156.





Per Dozen, \$1.75

Three Conductor Shielded



The finest cable obtainable. Consists of 3 individually insulated cables color coded. Each individual cable has rubber insulating and cotton covering. Woven, flexible tinned copper shield self cotton covered. Cable is finished with spade tips on both ends. A shielded ground lug is provided on one end of cable.

Cat. No. C1163

Per ft. (Cut to appri

Per 100 ft. Roll, \$2.95

Heavily Insulated Heavy Duty 5 ft. Dual Conductor Cable and Rubberized Taper Grip Male Plug



Cat. No. C1503..... Per Dozen, \$2.40

"Cinch" 4-5-6-7 Prong Wafer Radio Sockets



Phosphor Bronze Contacts—Bakelite

Insulation!

Available for ALL FOUR to SEVEN PRONG
TYPE TUBES, including the new 59 SEVEN
PRONG SERIES, 2525, 48, 43, 79, Etc.


ALL ONE PRICE

Cat. No. C1192 Per Asst'd Lot of 100, \$4.25

New Types 56-57-58 Three Piece Ventilated

Aluminum Tube Shields

Cat. No. C1200 12C Per Dozen, \$1.25



5c

"NA-ALD"--ALDEN BAKELITE SOCKETS

General Purpose



Sockets

Provided with knurled nut binding posts for convenient connections. Excellent for regular as well as experimental work. Made of molded Bakelite throughout with phosphor broaden

Bakelite throughout with phosphor bronze contact springs. Knurled nickel binding post terminals and lugs.
Cat. No. C1504. 4 prong—Red Spot.
Cat. No. C1505. 5 prong—Green Spot.

16C Cat. No. C1408. 6 prong-Blue Cat. No. C1406. 6 prong—Blue Spot. 22C

Universal Panel

Mount Sockets

Genuine molded Bakelite with phosphor bronze spring contacts. For mounting either above or below subpanel. Equipped with insulated mounting flanges and holes. Convenient solder lug terminals. Mounting holes 1st in.centers, panel hole 1st in diameter.

Cat. No. C1508. 4 prong.

Cat. No. C1509. 5 prong.


Cat. No. C1510. 6 prong.

Cat. No. C1511. 7 prong.

29C

Bakelite Button

Used for below panel connecting and making adapters 1% in. diameter, % in. high. Holes for mounting socket can all be drilled with hand drill. Hole in center for No. 6 screw. Socket itself mounts flush against the top surface of a meter panel or chassis. Cat. No. C1512. 4 prong—Red Spot. 16C \$1.10 Cat. No. C1514. 6 prong—Blue Spot. Cat. No. C1515. 7 prong—Orange Spot. 22C



Use with P.A. Amblifier Installations Producing up to 30 Watts! The engineering design of these transformers is on a par with similar instruments generally offered for many times the modern cost

many times the modest cost here with here with here with here with here silicon steel and perfectly designed coils give straight line amplification characteristics, even at small outputs. The windings are highly insulated and are well impregnated and varnished. Can be used in any climate. The average dimensions are 3% in long, 2 in. wide, 2% in. tall—the mounting holes are 2 in. x 2% in. Please definitely state output tubes you employ.

For Class "A" Amplifiers Will Handle up to 15 Watts Output

Tubes Son Cat. No. Matched 1519 2-250, 2-245 2-43, 2-171, Etc. Secondary

1520 2-250, 2-245 2-43, 2-171, Etc.

1521 2-250, 2-245 2-43, 2-171, Etc. 1522 2-247, 2-59 2-238, 2-233, Etc. 10 to 15 ohms.\$1.95

1522 2-247, 2-59 at 7½ and 3¾ 2-238, 2-233, Etc. ohms\$2.50

1523 UNIVERSAL

UNIVERSAL—
Matches any Equipped with taps for 1 to 2 pull or parallel ohm, 3½ ohms, arrangement—
arrangement—
arrangement—
and 8 to 12
CLASS A OR B! ohm voice coil n voice con condary For Class "B" Amplifiers

15 ohms tapped

10 to 15 ohms..\$1.95

ohms tapped at 7½ and 3¾ ohms\$3.25

15 ohms tapped at 7½ and 3¾ ohms

ohms

500

Available In Two Models-One For 16 Watt and Other for 26 Watt Outputs Cat Tubes Secondary Specs. 16 26
No. Matched

1524 2-46, 2-59, 2-79, Etc.

Watt Watt
15 ohms tapped
at 7½ and 3¾
ohms\$1.95 \$2.95
500 ohms, 15
ohms tapped at
7½ and 3¾
ohms\$2.65 \$3.45 1525 2-46, 2-59, 2-79, Etc.

1526 2-46, 2-59, 2-79. Etc. 4000 ohms....\$1.75 \$2.95

S. P. D. T. and D. P. D. T. Hart & Hegeman Switches

Single Pole — Double

No. C1116... 219 Double Pole — Double Throw

No. C1117 ... 45C

Volume Control "On-Off"

12c





Noted for Its Unusual

Short Throw! Cat. No. C1253 ...

Per Dozen, 50c



On-Off Snap Switch

amp. 250 volts. can, in. long, and extends in. behind a panel! l amp. 250 volts. Only in long, and extends but in behind a panel Handsomely lacquered brass turnings and locking nut. Bakelite housing. Equipped with two 6½ inch heavily insulated, tinned end leads.

Cat. No. C1159

In Lots of 12, \$1.00

7th ST. NEV

DERINAMPLEADUAUTITIES!

CVEBON I.C.A. DE LUXE

MICHOPHONE

Speakers Jensen "Concert" II 1/2 Inch I 10 Volt A.C. Dynamic



Isqu I Mercury Rectifier Wave82Tybe 11nA 70 082 pbragm Uses Either Tym-Flex Dia-Equipped With

Cone Diameter: 11% in Burtex Cloth Disameter: 11% phragm. Equipped with your optional with your optional choice of any output tube you employ. Capable of handling huge volume, free of blasting or distortion. Excellent volume, free of blasting or distortion. Excellent tubes you employ. Capable up to 8 watts audio of P.A. Multi-Speaker installations—each speaker can easily dissipate up to 8 watts audio energy. Flug into any 110 voit 50-80 cycle A.C. energy.

Extremely Sensitive Highly Improved-

Ohm Phones Brandes 2000

Known the world over, and rightly so. Pay a few cents more for the express as satisfaction you will derive from these amazingly sensitive headphonesistive headphonesis



Cat. No. C1617

Head-Phones Featherweight

Short Wave Fans. 99C 2000 Ohms. Excellent for

Baldwin Phones Genuine Vathaniel

Balanced armature principle. The most sensitive
and efficient on the marthe United States Signal
for the ordinary head set.
Cothe ordinary head set.

356

Sponge Rubber

comfort, Highl ahlp operators, Cat. No. C1314 PER PAIR Phone Cushions
Can be slipped over any make
or size phones. Adds pleasing
comfort. Highly endorsed by
ship operators.

> ment-Not To Be Con-A High Grade Instruton Carbon Hand Microphone -tub olgais "sesarbbA oildu F.-T."

Produces perfectly clear, even and crisp response, with a faithfulness of reproduction that is highly commendable. Provided with a conveniently located Priced Devices! wod With Similar Low

tr also disconnects the mi-crophone current dry cell, Equipped with a correctly formed wooden handle, and 25 ft, of high grade flexible insulated wire, and necessary connection adap-ters. The metal shell of the microphone casing is highly nickel plated and beautifuly butted. The sensitive diaphragm is pro-tected by a gilt plated mesh screen. which disengages the which disengages the which disengages the grid circuit of any amplitude of the may be connected, it may be connected it also disconnects the mills and mills also disconnects the mills also disconnects the mills and with a conveniently located "On-Oil" button,

286 Cat. No. C1496

386

TRANSFORMER SPECIAL WATCHING

256

JENSEN D-9 D.C.


DYNAMIC SPEAKERS

11% in. diameter—Burtex Cone. 8 ohms voice
coll impedance. Rurfish any single or



highest price receivers utilize this series Dy-namic Speakers, Ideal for P. A. Multi-Speaker installations. tex Cone, 8 onms voice oil impedance, Fur-nished with any single or push-pull output trans-former—state tubes em-ployed. Note convenient mounting stand. Con-servative wattage capac-fity rating—8 wattai The highest price receivers

NOUS PHONO. MOTOR ALLEN HOUGH SYNCHRO-





Equipped feature. Cable Plugs Bakelite 4-5-6-7 Prong

32c CRL. No. C1210 Fit any tube socket. Equipped with detachable plug feature. Overall length, 3% in., and diameter 1, in.

One Piece Speaker Plugs. Same plug as contained on above com-6 Prong. . . 280 6 Prong. . . 290 7 Prong. 490

Cat. No. C1499. 6 Prong SC EACH Cat. No. C1499. 6 Prong 30c Per Dozen Cat. No. C1469. 7 Prong 30c Per Dozen

State Number of Speaker, Etc. Plugs Fit Any Standard Tube Socket 4-5-6-7 Prong Bakelite



Cat. No. C1208 365

Solder Ling Bea-ture Permits Uni-AUDIOTRANSPORMERS, Etc. NAL BOARD EQUIPPED —

> byous 10 Ohm Carbon ADVERTISED

mals For Sound Truck

192U TofildmA Public Address All-Purbose

suring 2% in diameter by 1 in thick.

Pure GOLD CONPure By 1 in thick.

phragm

available for the first time at this seemingly impossistence: 500 ohms sible low price! Resistence: 500 ohms per button. Frequency range: 1000 to 4000 cycles. Scilentifically damped. Has a very low hiss level. Duralumin mon-breakable diaphragm. Huskily constructed — mea-Lapel Microphones and Double Button Coat A tribute to Ameral and a single and a singl SENIOR MODEL Single microphone

mea-

Model 29.58 Cat. No. C1468, Double Button .. IsboM **SZ.75** Cat. No. C1467. Single Button Not a toy—a real, serviceable instrument that fills a long felt need, Handsomely and durably constructed. Fully warranted throughout. Resistance 200 ohms per button—amaxing frequency range response.

Cat. No. C1466.

Microphone

Cout Lapel

Permits unhindered speech up, even while orator is prup and down the floor or p Can be slipped into any lap a second!

Cat. No. C1469. Bingle or Double But-

ic Speaker states ability Volt D.C. Dynam-UTAH 1000 ohm 8-Inch Diam. 110

Famed for its ability of withstand enormons of withstages

to with stand enormous surges of output voltages surges of output voltages surges of output voltages ellowing through its clevely constructed volce coil is of ample electrical capacity to assure maximum electinn ample electrical capacity in ample the surget of the surget of the surget of the surget response reproduction. Furnished comners, for single or push-pull output Transformer, for single or push-pull output tube application. Please state which application.

Cat. No. C1470

D.C. Dynamic Speaker UTAH-JENSEN-ROLA

DIMENSIONS Field Coils

Over-Diam. all Hole Diam. Ins. Ins. Los 27,

(Tapped at 300) 2500 1000 84. P C1480 ('ui 9) Jensen -9, 1550, -A Series Oppma 1000

For Quotations. Other Types and Makes Available-Write

Skinderviken "Mike"

Bmallest microphone made, measuring only % inch in diemeter. It can be used as a detectograph (dictophone) to listen-in secretly on conversations. Very good sensition you can make a powerful mand-microphone. Ratton

%1



C1481

Lacilities Versal Connection



UNA ELICATION

05.018 ,xi2 10

red by many midget anutactureral Quality Down to a Pricel bed with a voice coil ance matching trans-r for 1-247 tube.

00 Ohms) D.C. namic Speaker Chassis

O Ohm (Tapped

Holle Operation

Se.28 Sitivity Kellogg Hand

warrants its place-unter, currents its place-unter, church pulpit, n. tall, 3 % in. wide. Models available for Models Button Micro-loopie Button M

matches the imped-matches the imped-one to any input grid if also houses the dry-cell voltage will last for several an be easily replaced. It for use in call sys-nmunication and all tions. Can be set up ited by any novice— intes by any novice— intes by any novice— intes by any novice— intes by any novice—

phone lier, Input

II-Purpose"

56.ps

26.18



OUTPUT TRANSFORMERS Universal Application

> 81.50 Per Dozen Prongs Desired

With Two Female C-H Feed-Thru Switch

E • beice? •

RCA-Victor Genuine

Vitreous

-5110 M 05

Per Dozen,

259

Our Price Cat. No. 01000

W. T.

Output matches voice coll of standard dynamic speakers. Can be used with 171A, 245, 247, 250 tubes. Both input and Output transformers mounted in one case! 5% in. long, 3% in. wide, 31% in. high. Our Pric Shielded Amplifica-tion On All Fre-quencies, Impreg-nation against lami-nation vibration

22.18



St.Is

Pull Audio Transformer

Victor Input and Output Push- Victor Ad

Dynamic Speaker Field Coils
Cat. No. C1070. For Victor Series.
(1600 ohms) 75C
Cat. No. C1077. RCA Photophone Series.
(1000 ohms) 99C
Cat. No. C1072. RCA Photophone Series into any Photophone Speaker by resent 1000 ohm coil. Draws 1.375
Easily inserted into any Photophone Speaker of the Series into any Photophone Speaker of the Speake

Excellently adapted for use as the first filter choke, to be followed by a high resistance (approximately 2500 ohms) dynamic speaker field. This choke has an unusually low D.C. resistance of only 200 ohms, causing a low voltage drop across it, thereby woltage drop across it, thereby to the plates of the 250 directly to the plates of the 250 directly to the plates of the 250 choke (this steed plate voltage is obtained right after the first choke (this one) and before the second one!) and before the second one!

Rating: 200 Obms, 125 Mil., 30 Henries

Ромег Раск Споке

HCA-Victor 245-250

ouei)

Cat. No.

Complete Cone Speaker, RCA-Photophone Dynamic




Cat. No. C1676\$1.95 A guaranteed replacement for ALL PHOTOPHONE Speakers (both A.C. and D.C. models). MITP AOICE COIL

Complete

Replacement

Socket and Voltage Divider Assortments



heqqeT sldringV sequuq-llA

Voltage Divider Assortments

OPIES. No. C1356 12 RESISTORS \$1.00 Included in this assortment, you may that various types, sizes and styles of single and multi-tapped 10 to 100 watt voltage dividers for some of the following receivers: Renth. Releter, Stromberg-Carlson, Victor, Zenith, Peerliess, Majestic, Philco, Silver-Marshall, Edison, Freed, Freshman, etc., etc., All guaranteed perfect—sizes range from 10 to 250,000 anteed perfect p

Assortment 4 to 7 Prong Wafer Socket

Included in this well apportioned assortment glon is warranted.

RCA, Cinch, Eby, Alden, etc. Your satisfaction is warranted.

RCA, Cinch, Eby, Alden, etc. Your satisfaction is warranted.

25 for \$5.00

Tapped as follows: 1975, 1350, 200, 800 ohms. The overall length is 61% in., % in. diameter. Adaptable to most any voltage divider system, in any receiver.

Cat. No. O1654. Our Price.

For Victor RE 32-45-75 Sets

Voltage Divider

RCA-Victor 4,325 Ohm Tapped

2.5 mfds.; Common; .5 mfds. Total 10% mfds. Size: 5% in. long, 5 in. high, and 4 in. wide.

Arrangement of termi-nals: 5 mids.; 3 mids.;

Pentode or 245, Set1

Ideal for Any Make BIOCK Condenser

PJW 1/201

Victor 600 Volt

03.7\$ not betrossA 0001 500 Assorted for \$4.25

Will actually function under sudden surges of 600 volts. . . should any harm result from such excessive voltage, the nature of thom such excessive voltage, the nature of he contents is such that a Self-Healing healtion. Can be used in any temperature, or in any climate—they are not subject to natural heat and humidity conditions. In natural heat and humidity conditions. In the multiple units, which are metal cased, 200 Volt Peak Dry Electrolytic Condensers Nationally Advertised

the common connection (which goes to nega-tive) is brought out separately. Unlike most electrolytic condensers, the outside casing is not electrically a part of the condenser itself mounting on metal chassis! Inasmuch as mounting on metal chassis! inasmuch as mounting on metal chassis! inasmuch as walue is further enhanced.

Mounting Inverted Type



Equipped with Appropriate In-sulating Lock Washers and Bolts pup

ON 109.08
C7140...48 (with leads) 12
C7140...6-8 ... 14
C71442...8-8 ... 16 Cap'y Mfd. Total Your at Anodes Cap'y Cost




100X 120D 74, \$ 89.


densers the Pig-Tail Con-Tubular Dry Electroly.

Encased in Cardboard

Cat. No. C1036. Input YOUR Cat. No. C1035. 3 to 1



ter Condensers Dry Electrolytic Fil-Cardboard Container



















Hing Clamp Cat. Cap'y Mid. Total No. at Anodes Cap'y No. at Anodes

Mounts Upright, Connected At Top, Mounted by



.... 00778

Transformers and Push-Pull Silver-Marshall Audio, Input

CIS. Cat. No. Cat. No. Cat.

Cat. No. C18

Cat. No. C18

Cat. No. C18 Input Pusi

to all atmos necessary feat Cat. No. C12 Audio Tran

are scientific to all atmos

TOFM s andur

andano Polymet

Has 3 I.F. sta 7% in. tall. 7 their renowned ceiver! Can be cat. No. C4100

(B)

HCA Part 1
two 1 mid. III
and one '\(\psi \) to
protection. 53% x 2% x 3! m
Cat. No. C1!

Required In

R.C.A.

Cat No. C1??... high or lor m up is empled Cat. No. Cr.
above, but Tul (ipasn pedance.

Your Cholce Per Dozen, \$5.95

Preferred by professional set builders and manufacturers of America's finese commercial receivabler, and super-power public Address Amplifiers, Can be universally mounted—note long flexible leads,
Transformer,

Audio Input and Output Push-Pull Series A.F. Transformers

Transformer Corp. of America

Cat, No. Clays

Cat, No. Clays

In Lots of Three, \$5.25

Per Dozen, \$3.75 35C

Transformers
Completely shielded—remarkably compact. Excellent for all general replacement applications.

Crosley Audio

For Models 41-A, 42, 704, 706
Similar to Part No. 5315. Note
threaded mounting pillars. Can
be universally employed. Highly
efficient and serves a valued need!
inches.

JinU


Crosley Combination let A.F. Audio and Push-Pull Input Audio Transformer



-Here Is Why! Our Prices Are LOWEST


IUOY OT NO POWER, and accordingly offer us considerably lower prices for a large volume sale—TO FIRMLY RETAIN YOUR GOOD-WILL, WE PASS THESE SAVINGS would be impaired. These manufacturers appreciate our HUGE PURCHASING to mention their names in this Bulletin, their extremely valuable distribution set-up THAN THEIR DISTRIBUTORS and JOBBERS COSTS... you will of course immediately recognize the manufacturer's name on the merchandise! Were we 223 NAVA seanstani teom ni ese daidw anoitetoup and to esusaed nitellud sidt ni many of the items herein listed, we have agreed NOT to mention their names By an arrangement with the various manufacturers of the Radio receivers and of

stocks and quotations are existent ... and BUY WITH UNRESERVED CON-FIDENCE UNDER OUR GUARANTEE OF YOUR COMPLETE SATISFACTION! From present indications, it appears that prices of all commodities are headed for higher levels, while our present for higher levels, while our present

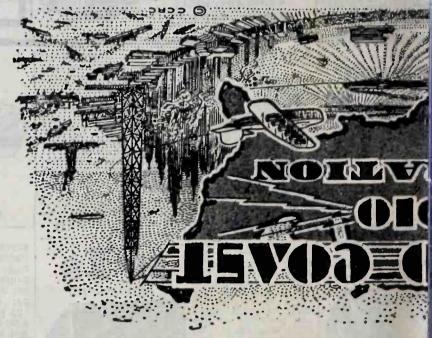

Universal AC—DC Radio Sets The "Coast-ette" Miniature Sweeping the Nation Like An Avalanchel

Can be plugged into any light socket, 110 Volt D.C., 05 to 60 Cycles. New principle employed obvi-Remarkably compact: 8½ in. long, 6½ in. tall, 4 in. deep, and completely Self-contained. Total Weight: 5½ lbs. 4 and 5 Tube Models!



C91. No. C1344

\$8.95 Complete with Four RCA Tubes: 1-KRI, 1-239, 1-239, 1-239

1-738' 7-736 SI3.50 Complete with 1-236, C9+ No. C1345

etc., etc. Its exterior will grace the appearance or any recipilating mantal, bedroom night table, etc. Its compactness permits its in-Its exterior will grace the appearance of any table, desk, Tubes, 3 High Gain T.R.F. Stages, Pentode Power Output Tube, Current Consumption Less Than a 40-Watt Electric Bulb, Distortion-free Resistance Coupled Audio Stage, and Automatic Protection, a Volume Control, Screen Grid Power Detector (236), Two Super Control Variable Mu R.F.

|Bi186

lead pnilevent yne otni noitnes

five-tube model: Equipped with

other valuable features of the fo emos ere erel. besis ti beyoldme ed nes metsys

prising long distance reception. ble. Employs a remarkably ef-ficient circuit that enables sur-

ates necessity of power trens-former, therefore, break-down possibilities are almost impossi-

ebistuo nA . . . met -2y2 sanataA benistno J-11e2 Actually operates with its own ero zeitilide evitouborger etl Iliw bno—pnizselg ze ylleupe Izrenetzil eti Ilindt ylberuzze

DYNAMIC SPEAKER EGUIPPED WITH A GENUINE S TUBE COMPACT SETS

We Are the First to Offer the New

DOORTE AOTHME-LEVAREOUMERTERS

NOLE

For ready reference, we suggest you hand these spects on your walls—additional copies for this purpose obtainable on your request.


K CILL lest 17th St.



The MOST SENSATIONAL SCOOP of these


very ideal for use in multi-channel installations, as each such emplifier is entittely self A.C. operated, and furthermore can furnish D.C. Finld Current to its own bank of up osle ere sreifildme esed! Ino benrut zi ti "tnemom edt" TEMS, or wherever it is necessary to operate an amplifier

onog etc. An external qista lenimset e ot tuo the of Input and Output Cir pedence phono. pick-up Audio system is indeed solide of applice. pnied stinu eti to emos o netsys resnebnos reflit







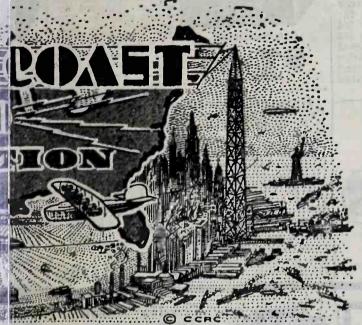

Our Prices Are LOWEST -Here Is Why!

By an arrangement with the various manufacturers of the Radio receivers and of many of the items herein listed, we have agreed NOT to mention their names in this bulletin because of our quotations which are in most instances EVEN LESS THAN THEIR DISTRIBUTORS and JOBBERS COSTS... you will of course immediately recognize the manufacturer's name on the merchandise! Were we to mention their names in this Bulletin, their extremely valuable distribution set-up would be impaired. These manufacturers appreciate our HUGE PURCHASING POWER, and accordingly offer us considerably lower prices for a large volume sale—TO FIRMLY RETAIN YOUR GOOD-WILL, WE PASS THESE SAVINGS ON TO YOU!

From present indications, it appears that prices of all commodities are headed for higher levels....BUY NOW, and in AMPLE QUANTITIES, while our present stocks and quotations are existent.... and BUY WITH UNRESERVED CONFIDENCE UNDER OUR GUARANTEE OF YOUR COMPLETE SATISFACTION!

s: 17th St.

ance hono. pick-up ut at Output Cirto terminal strip,

self-intained pre-

NOTE

For ready reference, we suggest you hang these sheets on your walls—additional copies for this purpose obtainable on your request.




TEMS, or wherever it is necessary to operate an amplifier "the moment" it is turned on! These amplifiers are also very ideal for use in multi-channel installations, as each such amplifier is entirely self A.C. operated, and furthermore can furnish D.C. Field Current to its own bank of up

Sweeping the Nation Like An Avalanche!
The "Coast-ette" Miniature
Universal AC—DC Radio Sets

Remarkably compact: 8½ in. long, 6½ in. tall, 4 in. deep, and completely Self-contained. Total Weight: 5½ lbs. 4 and 5 Tube Models!

Can be plugged into any light socket, 110 Volt D.C., or 110 Volt A.C., 25 to 60 Cycles. New principle employed obviates necessity of power transformer, therefore, break-down possibilities are almost impossible. Employs a remarkably efficient circuit that enables surprising long distance reception. Its reproductive abilities are equally as pleasing—and will assuredly thrill its listeners! Actually operates with its own Self-Contained Antenna System . . . An outside aerial system can be employed if desired. Here are some of the other valuable features of the five-tube model: Equipped with a Volume Control, Screen Grid Power Detector (236), Two Super Control Variable Mu R.F.



Cat. No. C1344

Complete with Four RCA Tubes: 1-KR1, 1-236, 1-238, 1-239 \$10.95

Cat. No. C1345
Complete with Five RCA Tubes: 1-KR1, 1-236, 1-238, 2-239

Tubes, 3 High Gain T.R.F. Stages, Pentode Power Output Tube, Current Consumption Less Than a 40-Watt Electric Bulb, Distortion-free Resistance Coupled Audio Stage, and Automatic Protection, etc., etc. Its exterior will grace the appearance of any table, desk, mantel, bedroom night table, etc. Its compactness permits its Insertion into any traveling bag!

We Are the First to Offer the New

5 TUBE COMPACT SETS

EQUIPPED WITH A GENUINE


DYNAMIC SPEAKER

DOUBLE VOLUME-TRANSFORMERLESS 43 and 25Z5 TUBE EQUIPPED

Universal AC.DC





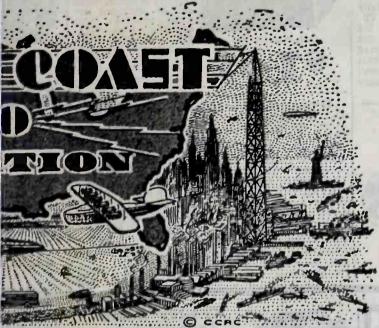

Our Prices Are LOWEST -Here Is Why!

By an arrangement with the various manufacturers of the Radio receivers and of many of the items herein listed, we have agreed NOT to mention their names in this bulletin because of our quotations which are in most instances EVEN LESS THAN THEIR DISTRIBUTORS and JOBBERS COSTS you will of course immediately recognize the manufacturer's name on the merchandise! Were we to mention their names in this Bulletin, their extremely valuable distribution set-up would be impaired. These manufacturers appreciate our HUGE PURCHASING POWER, and accordingly offer us considerably lower prices for a large volume sale—TO FIRMLY RETAIN YOUR GOOD-WILL, WE PASS THESE SAVINGS ON TO YOU!

From present indications, it appears that prices of all commodities are headed for higher levels....BUY NOW, and in AMPLE QUANTITIES, while our present stocks and quotations are existent.... and BUY WITH UNRESERVED CONFIDENCE UNDER OUR GUARANTEE OF YOUR COMPLETE SATISFACTIONI

st 17th St.

nce phono. pick-up ut and Output Cir-

to a terminal strip.

etc. An external

NOTE

For ready reference, we suggest you hang these sheets on your walls—additional copies for this purpose obtainable on your request.




TEMS, or wherever it is necessary to operate an amplifier "the moment" it is turned onl. These amplifiers are also

very ideal for use in multi-channel installations, as each

such amplifier is entirely self A.C. operated, and furthermore can furnish D.C. Field Current to its own bank of up Sweeping the Nation Like An Avalanche!
The "Coast-ette" Miniature
Universal AC—DC Radio Sets

Remarkably compact: $8\frac{1}{2}$ in. long, $6\frac{1}{2}$ in. tall, 4 in. deep, and completely Self-contained. Total Weight: $5\frac{1}{2}$ lbs. 4 and 5 Tube Models?

Can be plugged into any light socket, 110 Volt D.C., or 110 Volt A.C., 25 to 60 Cycles. New principle employed obviates necessity of power transformer, therefore, break-down possibilities are almost impossible. Employs a remarkably efficient circuit that enables surprising long distance reception. Its reproductive abilities are equally as pleasing—and will assuredly thrill its listeners! Actually operates with its own Self-Contained Antenna System . . . An outside aerial system can be employed if desired. Here are some of the other valuable features of the five-tube model: Equipped with a Volume Control, Screen Grid Power Detector (236), Two Super Control Variable Mu R.F.



Cat. No. C1344

\$8.95 Complete with Four RCA Tubes: 1-KR1, 1-236, 1-238, 1-239 \$10.95

Cat. No. C1345
Complete with Five RCA Tubes: 1-KRI, 1-236,

Tubes, 3 High Gain T.R.F. Stages, Pentode Power Output Tube, Current Consumption Less Than a 40-Watt Electric Bulb, Distortion-free Resistance Coupled Audio Stage, and Automatic Protection, etc., etc. Its exterior will grace the appearance of any table, desk, mantel, bedroom night table, etc. Its compactness permits its insertion into any traveling bag!

We Are the First to Offer the New

5 TUBE COMPACT SETS

EQUIPPED WITH A GENUINE

DYNAMIC SPEAKER

DOUBLE VOLUME-TRANSFORMERLESS
43 and 25Z5 TUBE EQUIPPED

Universal AC-DC

COND

TO ORDER

All Prices in this Bulletin are NET, and are NOT SUBJECT TO U. S. EXCISE TAX. Send remittances with order in the form of money orders, checks, stamps or cash (the latter by registered mail).

C. O. D. ORDERS


All C. O. D. orders must be accompanied by a 20% deposit remittance. All goods shipped F. O. B. our Warehouse in New York. For shipment by parcel post, include an approximate sum for such charges—any excess will be immediately refunded. In the absence of such instructions, shipment will go forward express

GUARANTEE

We guarantee that all our goods are illustrated and described accurately! Should you be displeased with any of our merchandise, please return same for prompt adjustment!

PROMPT SHIPMENTS

Most of our orders are despatched from within 6 to 24 hours after receipt! Our huge stocks, thoroughly trained Personnel and smooth functioning systems make our unparalleled, speedy shipping service possible!

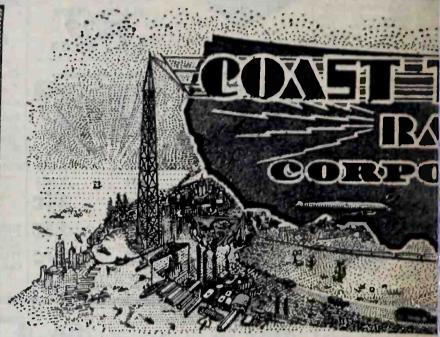

"SUPER-COMPACT" RADIO RECEIVER

Requires These MODERN TUBES: 1-57, 1-58, 1-247, 1-280

Features Galore: Tuned Radio Frequency Circuit-2 Gang variable condenser—equipped with a full fledged ELECTRO-DYNAMIC-SPEAKER, which will amaze you with its ability to reproduce sur-prisingly great volume in a realistic manner. Equipped with an illuminated FULL VISION DIAL, with SPOT TUNING FEATURE. Note simplicity of operating controls—just one tuning knob and a Volume Control (with self-contained on-off switch).



Cat. No. C1287 .95 Complete With Four RCA Tubes \$11.95

Tube Triple Grid, Super Control Pentode A. C. Midget Receiver

Requires 2-58 Triple Grid Super Control, 1-57 Screen Grid, 1-247 Pen-Screen Grid, 1-247 Per tode and 1-280 Tubes

Featuring satisfactory perform ance, stability, ease of operation and inconsequential operating cost. luminated dial-individually compensated 3 Gang variable condenser. Fully shielded throughout. Tone Control, Volume Control and selfcontained A.C. Switch. Attractive Cabinet. True Reproducing Utah Cabinet. True Reproducing Utah Dynamic Speaker. Volume enough to warrant keeping it under control. Selectivity and sensitivity that will delight you . . . in short, here is a receiver to warrant your complete approval! Fo: 110 volt 50-60 Cycle



Cat. No. C1297

FIVE RCA TUBES!

5-Tube Dual Wave 75 to 550 Meter Super-Heterodyne Receiver

Employs These Highly Efficient Tubes:

Telephone

7861 7862 Watkins 9-7863 Cable Address: Cotcorad 121-123-125 NEW Y



RADIO CORPORATION - Westinghouse -

TWO STAGE 250 SUPER-PO M-SOUND TRUC DDRESS-AM



Brand New!

Shipped in Original Cas


This is the identical amplifier that was used in the most fully 58 lbs! expensive VICTOR electric phonographs-models of these sign, and will function projection used to sell from \$350.00 to \$1,000.00! And now, for the first time, the Radio purchasing public can buy these amplifiers "for a song!"

Designed, Perfected and Manufactured by the Three Most Noted Radio Manufacturers in the World!

R.C.A. . . . WESTINGHOUSE . . . VICTOR—are the sponsors of this remarkable amplifier. Were only any ONE

radited with its design and manufacture the am-

continuous operating period is also practically fool-proof rated as high as 1500 Volts! unique in its design, embra tion, permitting the use of a or coupling to any Radio Tur cuits of the 1st A.F. tube are permitting the use of that amplifier for any microphe





HOW TO ORDER

All Prices in this Bulletin are NET, and are NOT SUBJECT TO U. S. EXCISE TAX. Send remittances with order in the form of money orders, checks, stamps or cash (the latter by registered mail).

C. O. D. ORDERS


All C. O. D. orders must be accompanied by a 20% deposit remittance. All goods shipped F. O. B. our Warehouse in New York. For shipment by parcel post, include an approximate sum for such charges—any excess will be immediately refunded. In the absence of such instructions, shipment will go forward express collect.

GUARANTEE

We guarantee that all our goods are illustrated and described accurately! Should you be displeased with any of our merchandise, please return same for prompt adjustment!

PROMPT SHIPMENTS

Most of our orders are despatched from within 6 to 24 hours after receipt! Our huge stocks, thoroughly trained Personnel and smooth functioning systems make our unparalleled, speedy shipping service possible!

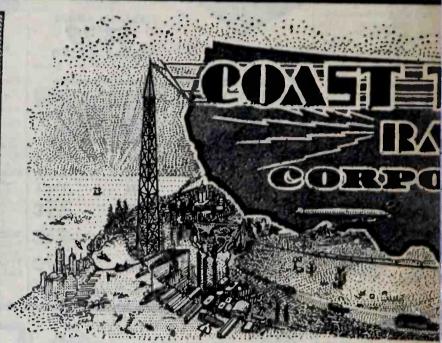

"SUPER-COMPACT" RADIO RECEIVER

Requires These MODERN TUBES: 1-57, 1-58, 1-247, 1-280





Cat. No. C1287

Complete With
Four RCA
Tubes \$11.95

5 Tube Triple Grid, Super Control Pentode A. C. Midget Receiver

Requires 2-58 Triple Grid Super Control, 1-57 Screen Grid, 1-247 Pentode and 1-280 Tubes

Featuring satisfactory performance, stability, ease of operation and inconsequential operating cost. Illuminated dial—individually compensated 3 Gang variable condenser. Fully shielded throughout. Tone Control, Volume Control and self-contained A.C. Switch. Attractive Cabinet. True Reproducing Utah Dynamic Speaker. Volume enough to warrant keeping it under control. Selectivity and sensitivity that will delight you . . in short, here is a receiver to warrant your complete approval! For 110 volt 50-60 Cycle



Cat. No. C1297

\$14.95

COMPLETE WITH FIVE RCA TUBES!

5-Tube Dual Wave 75 to 550 Meter Super-Heterodyne Receiver Employs These Highly Efficient Tubes:

Telephone


Watkins 9-

Cable Address: Cotcorad

121-123-125 NEW Y



TWO STAGE 250 SUPER-POWE AUDITORIUM-SOUND TRUCK and



Brand New!

Shipped in Original Cas


This is the identical amplifier that was used in the most expensive VICTOR electric phonographs—models of these used to sell from \$350.00 to \$1,000.001 And now, for the first time, the Radio purchasing public can buy these amplifiers "for a song!"

fully 58 lbs! The power to sign, and will function precontinuous operating period is also practically fool-proof fiers "for a song!"

Designed, Perfected and Manufactured by the Three Most Noted Radio Manufacturers in the World!

R.C.A. . . . WESTINGHOUSE . . . VICTOR—are the sponsors of this remarkable amplifier. Were only any ONE of them credited with its design and manufacture the am-

sign, and will function practically fool-proof rated as high as 1500 Volts unique in its design, embraction, permitting the use of a por coupling to any Radio Turcuits of the 1st A.F. tube are permitting the use of that amplifier for any micropho





HOW TO ORDER

All Prices in this Bulletin are NET, and are NOT SUBJECT TO U. S. EXCISE TAX. Send remittances with order in the form of money orders, checks, stamps or cash (the latter by registered mail).

C. O. D. ORDERS

All C. O. D. orders must be accompanied by a 20% deposit remittance. All goods shipped F. O. B. our Warehouse in New York. For shipment by parcel post, include an approximate sum for such charges—any excess will be immediately refunded. In the absence of such instructions, shipment will go forward express collect.

GUARANTEE

We guarantee that all our goods are illustrated and described accurately! Should you be displeased with any of our merchandise, please return same for prompt adjustment!

PROMPT SHIPMENTS

Most of our orders are despatched from within 6 to 24 hours after receipt! Our huge stocks, thoroughly trained Personnel and smooth functioning systems make our unparalleled, speedy shipping service possible!



SUPER-COMPACT" RADIO RECEIVER TUBES: 1-57, 1-58,

Cat. No. C1287 .95 Complete With Four RCA Tubes \$11.95

Requires These MODERN 1-247, 1-280

Features Galore: Tuned Radio Frequency Circuit-2 Gang variable condenser—equipped with a full fledged ELECTRO-DYNAMIC-SPEAKER, which will amaze you with its ability to reproduce surprisingly great volume in a realistic manner. Equipped with an illuminated FULL VISION DIAL, with SPOT TUNING FEATURE. Note simplicity of operating controls—just one tuning knob and a Volume Control (with self-contained on-off switch),

5 Tube Triple Grid, Super Control Pentode A. C. Midget Receiver

Requires 2-58 Triple Grid Super Control, 1-57 Screen Grid, 1-247 Pen-tode and 1-280 Tubes

Featuring satisfactory performance, stability, ease of operation and inconsequential operating cost. Illuminated dial-individually compensated 3 Gang variable condenser. Fully shielded throughout. Tone Control, Volume Control and selfcontained A.C. Switch. Attractive Cabinet. True Reproducing Utah Dynamic Speaker. Volume enough to warrant keeping it under control. Selectivity and sensitivity that will delight you . . . in short, here is a receiver to warrant your complete approvall Fc. 110 volt 50-60 Cycle



Cat. No. C1297

COMPLETE WITH FIVE RCA TUBES!

5-Tube Dual Wave 75 to 550 Meter Super-Heterodyne Receiver **Employs These Highly Efficient Tubes:**

Telephone


7861 Watkins 9-

Cable Address: Cotcorad

121-123-125

The House of "Coast-to-Coast is Justifiably Proud . A flattering Jestimonia! an

RADIO CORPORATION-Westinghouse-



Brand New!

This is the identical amplifier that was used in the most, fully 58 lbsl. The power tra

Shipped in Original Case

expensive VICTOR electric phonographs—models of these sign, and will function practused to sell from \$350.00 to \$1,000.00! And now, for the continuous operating period first time, the Radio purchasing public can buy these ampli- is also practically fool-proof. fiers "for a song!"

Designed, Perfected and Manufactured by the Three Most Noted Radio Manufacturers in the World!

R.C.A. . . . WESTINGHOUSE . . . VICTOR—are the sponsors of this remarkable amplifier. Were only any ONE f them credited with its design and manufacture the am-

rated as high as 1500 Volts! unique in its design, embraces tion, permitting the use of a or coupling to any Radio Tur-cuits of the 1st A.F. tube are permitting the use of that a amplifier for any microphol