

K003-662-A-111/XX

9.52mm Pitch - 02 to 03 poles

Electrical  ^{us}

Current: 30A

Voltage: 600V

AWG: 10-30

Screw: M3, Galvanized steel

Torque: 7.2 in. lbs

PCB Hole Diameter: 1.3mm


Clamp: Nickered copper alloy

Terminal: tin-plated copper alloy

Moulding: PA UL94V-0


Working Temperature: -40 °C to 125°C

Colour: Green

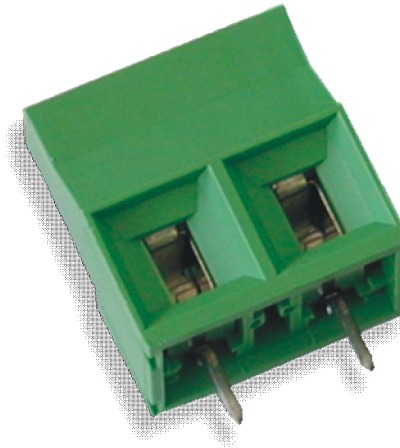

Konvar Interconnect
19,900 Clark Graham
Baie D'Urfe, QC H9X 3R8
Canada

Tel: (514) 457-4639 Fax: (514) 457-7704
www.konvar.com

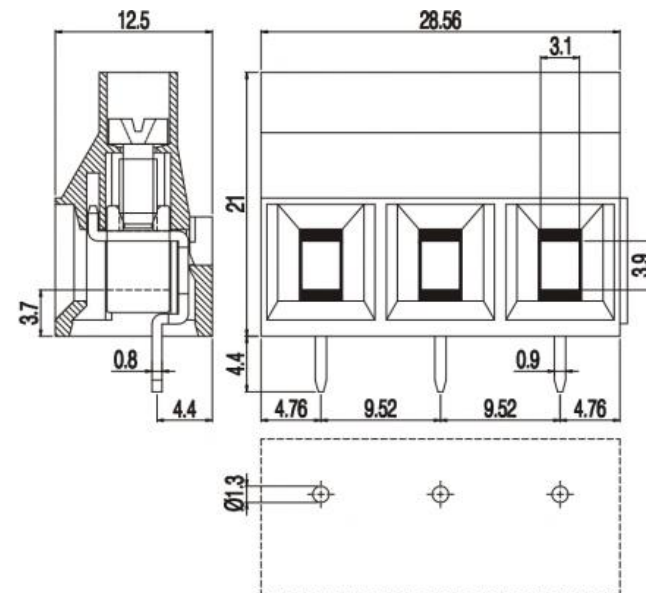

Morsettiere a 4 o più vie sono ottenibili componendo le versioni modulari.

Terminal blocks of 4 or more poles are obtainable composing modular version.