

PHONES (044) 360-7-130 (050) 336-0-130 (063) 788-0-130 (067) 233-0-130 (068) 282-0-130

## 130 Internet store of autogoods



294-0-130 597-0-130

> SKYPE km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |


CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |

GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Carr TV tuners • Cameras • Videomodules
• Transcoders • Carr TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronics • Combined parktronics • Rear-view mirrors
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant





In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

http://130.com.ua




## \$5551, 65221, 155221, 155202, 155502








1252cfp, 6125cfl ,15524, i5524, is5524, i5522d 

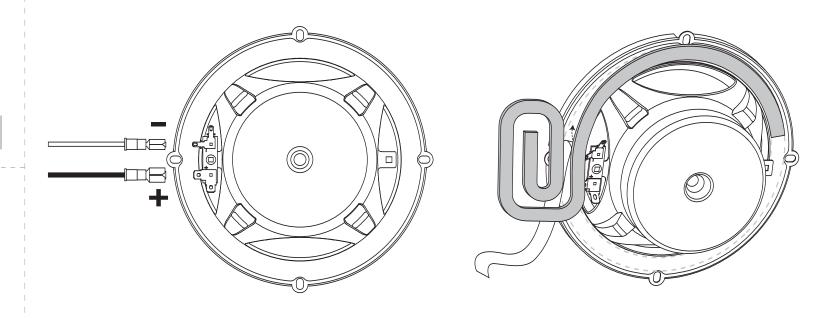



155564, d155544, 155544, 155508, iE508, iE54P , i 554P, i 8552d, i 5552d, i 8550d, i 550d, i 5502, i 550P

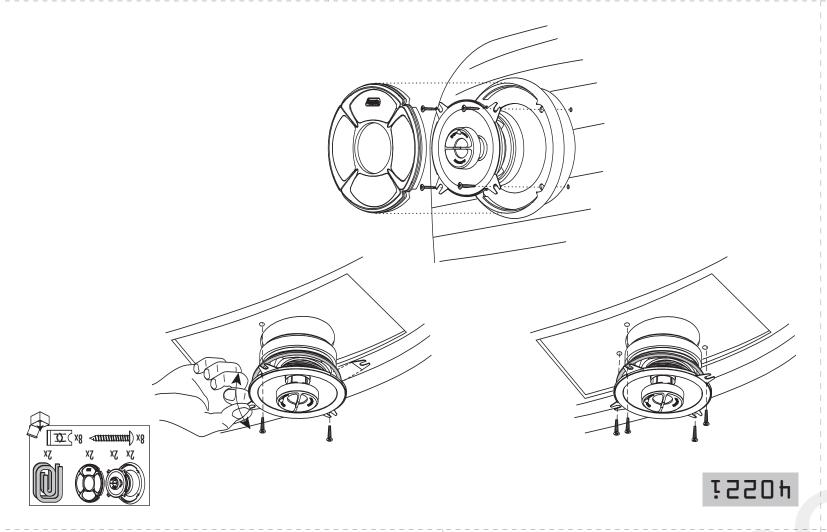


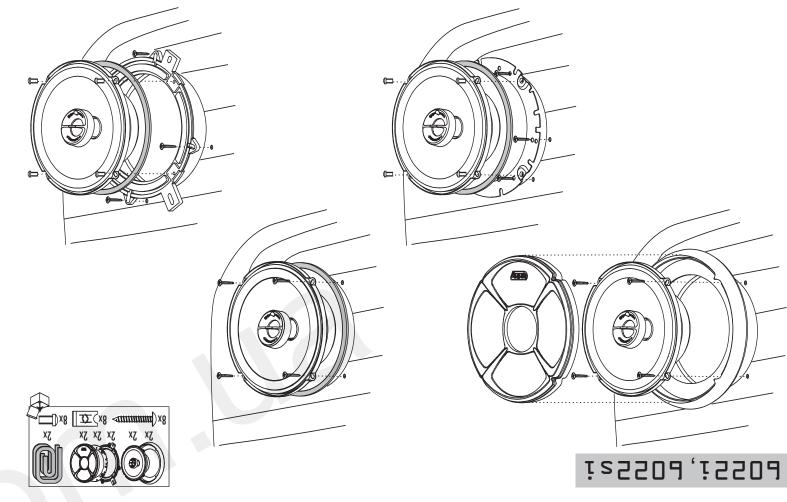

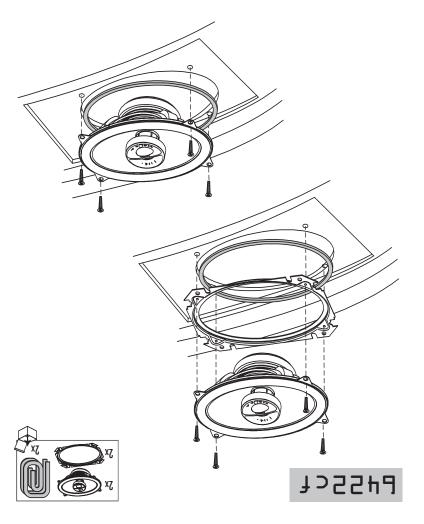

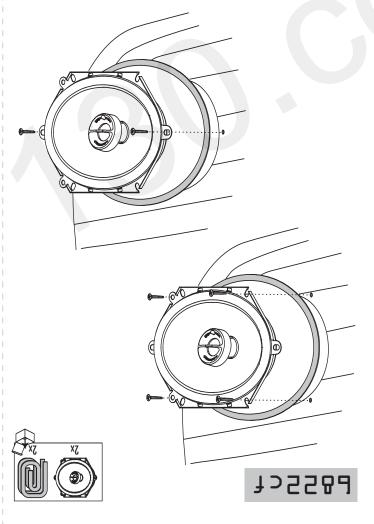

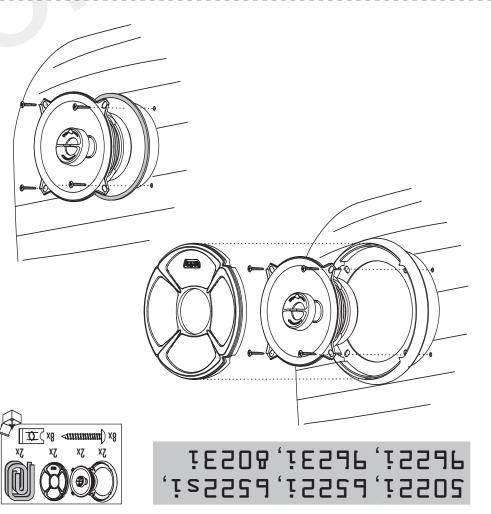

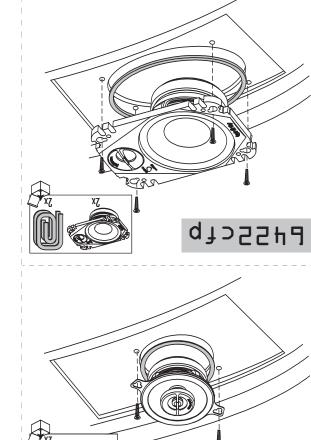

1550E

4022i, 5022i, 6022i, 6022si, 6522i, 6522si, 9622i, 9623i, 8023i, 3022cf, 6422cf, 6422cfp, 6822cf



Declaration of Conformity  $\epsilon$ We, Harman Consumer Group Internationa 2, route de Tours 72500 Château du Loir 1-4115 Klaus Lebherz man Consumer Group Internatio Château du Loir, France 10/06

A valid serial number is required for warranty coverage.
Features, specifications and appearance are subject to change without notice.
This product is designed for mobile applications and is not intended for connection to the mains.
Infinity Systems • 2 route de Tours, 72500 Château du Loir, France • www.infinitysystems.com
© 2006 Harman International Industries, Incorporated. All rights reserved. Part No. REFMEOM10/06

**WInfinity** 

Performance - Design H A Harman International Company

reference series

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car sudio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. Gensitivity (2.83V, 1m): 72Hz – 21KHz 120W 79Hz – 21KHz 225W 49Hz – 21KHz 72Hz - 21KHz 85Hz - 21KHz 46Hz - 21KHz tehz – 21kHz requency n Power Handling, Peak: 132M M9Z 300M M008 W081 VVUG MGt 40M **M97** MG/ ۸۸۵۵۱ WOOT Nominal Impedance: Power Handling, RMS: Fit motsuD vsW-S smdO 63.5 woa Custom Fit Plate 2.65 Ohms ti∃ motsuO smdO 38.S 2.65 Ohms 2.65 Ohms 2.65 Ohms smdO 39.5 fit motsuD 6422cfp 4" x 6" 2-Way 8" 3-Way **9622i** 6" x 9" 2-Way ιλbe: "7 x "6/"8 x "8 4" x 6" 2-Way 3-1/2" 2-Way 6" x 9" 3-Way \$22cf Sensitivity (2.83V, 1m): 839B 92dB 33qB **339**R 93qB 92dB Power Handling, Peak: Frequency Response: 28Hz - 21KHz 28Hz - 21KHz 23Hz - 21KHz 23Hz - 21KHz 67Hz - 21kHz 82Hz - 21KHz W081 120M 120M W081 132M M901 WOO M09 WOO M09 M9t MGE ower Handling, KIVIS: -wollad2" S\f\2. \psi \range \text{should} \range \range \text{should} \range \range \text{should} \range 2.65 Ohms 2.65 Ohms 2.65 Ohms smdO 38.5 2.65 chms Nominal Impedance: 165mm Shallow-Mount 2-Way 6022i 6-1/2" 2-Way 5-1/4" 2-Way 5-1/4" 2-Way 165տm 2-Way **4022i** 4" 2-Way SPECIFICATIONS ISZZGG **ISZZ09** WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. 934B 49Hz – 21KHz 844B 46Hz – 21KHz 819B 72Hz – 21KHz 844B Sensitivity (2.83V, 1m): 85Hz – 21KHz 75W 49Hz – 21KHz 225W 46Hz – 21KHz 300W Power Handling, Peak: Frequency Response: 72Hz - 21kHz W081 M351 120W 300M Nominal Impedance: Power Handling, RMS: M09 M97 75W W00 tiH motsuD ysW-S 2.65 Chms 6/0/04 sm4O **6**8.2 smdO **6**8.5 2.65 Ohms 2.65 Ohms 2.65 Ohms smdO **6**8.5 Custom Fit Plate Ji-I motsuJ ti-l motsu 6422cfp 4" x 6" 2-Way **9622i** 78 V='Way "7 x "8/"8 x "8 4" x 6" 2-Way 7-1/2" 2-Way 8" 3-Way γsW-5 "8 x "8 f52286 6422cf 8023! 9623! 3022cf 8398 28Hz – 21KHz 8345 - 21KHz 934z – 21KHz 82Hz - 21KHz apse 92dB Sensitivity (2.83V, 1m): Power Handling, Peak: Frequency Response: 28Hz - 21KHz 67Hz - 21KHz M091 W081 M091 W081 132M MGOL smdO 66.2 W07 smdO 88.2 W08 Nominal Impedance: Power Handling, RMS: 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms 165mm Shallow-Mount 2-Way 6-1/2" Shallow-Mount 2-Way 165ოm 2-Way 5-1/4" 2-Way 4" 2-Way 6-1/2" 2-Way is2223 9255! 12209 2025! 4022! SPECIFICATIONS car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity GENEBBY CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. 82Hz - 21KHz 844B 46Hz – 21KHz 91dB 72Hz – 21KHz Sensitivity (2.83V, 1m): 839B 46Hz - 21KHz /2Hz - 21KHz 49Hz - 21KHz 46Hz - 21KHz -reduency Response: W081 132M 42M 120W 225W 75W 300W 300W Power Handling, Peak: M9Z 6" x 8"/5" x 7" 2-Way Custom Fit 2.65 Ohms smdO 33.5 2.65 Uhms smdO 66.5 2.65 Ohms smdO 66.5 2.65 Ohms Nominal Impedance: 4" x 6" 2-Way
Custom Fit Plate fil motsu 4" x 6" 2-Way 3-1/2" 2-Way 8" 3-Way γsW-5 "8 x "8 γεW-2 "8 x "8 \$222cf 6422cfp 6422cf 3022cf 8023! 9623! 12296 8398 28HZ - 51KHZ 8345 - 21KHz 92dB 67Hz – 21KHz 82Hz - 21KHz Frequency Response: Sensitivity (2.83V, 1m): 8398 28Hz - 21KHz 8398 23Hz - 51KHz Nominal Impedance: Power Handling, RMS: Power Handling, Peak: 120M 20M 102M 32M W081 120M W081 132W smdO **6**8.2 smdO <u>2</u>8.2 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms 165mm Shallow-Mount 2-Way 6-1/2" Shallow-Mount 2-Way 165mm 2-Way 6-1/2" 2-Way 5-1/4" 2-Way 4" 2-Way 9022! 4022! SPECIFICATIONS 182228 is2208 5022 car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. Sensitivity (2.83V, 1m): 844B 91dB 8pt6 8tqB **339**B 91dB 49Hz – 21KHz 180W 72Hz – 21KHz 120W 49Hz – 21KHz 225W 46Hz – 21KHz 300W 46Hz – 21KHz 300W 72Hz – 21KHz SPHZ - ZIKHZ Frequency Response: Power Handling, RMS: Power Handling, Peak: 132M 75W 25W W08 M9t W04 M9Z M001 W001 6" x 8"/5" x 7" 2-Way Custom Fit 2.65 Ohms 4" x 6" 2-Way Custom Fit Plate 265 Ohms 4" x 6" 2-Way Fit motsuD 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms Nominal Impedance: 8" 3-Way 6" x 9" 3-Way γεW-2 "8 x "8 3-1/2" 2-Way 6422cfp 6422cf 8023! !8296 12296 Sensitivity (2.83V, 1m): 33qB 8986 92dB **339B** 92dB 28Hz – 21KHz 160W 28Hz - 21KHz 23Hz - 21KHz 23Hz - 21KHz **67Hz - 21KHz** 82HZ - 21KHZ Frequency Response: Power Handling, Peak: Fower Handling, Peak: M09 M09 M09 M09 M9t M98 wollsd2 "2\f-6 -Wount 2-Way 2.65 Ohms 2.65 Ohms smdO **6**8.5 2.65 Ohms 2.65 Ohms 2.65 Ohms Nominal Impedance: 165mm 2-Way 46V-2 "2/1-8 5-1/4" 2-Way 4" 2-Way SPECIFICATIONS **6522si** 9275! 6022si 5022 4022! WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. GENEBAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. Sensitivity (2.83V, 1m): 82Hz – 21KHz 75W 49Hz – 21KHz 225W Power Handling, Peak: Frequency Response: 49Hz - 21KHz 72Hz - 21kHz 46Hz - 21KHz 46Hz - 21KHz 72Hz - 21KHz W081 132M 120W 300M 300M VVUC Mgt 4004 M97 MG/ VV001 WOOT Nominal Impedance: Power Handling, RMS: 2.65 Ohms 2.65 Ohms smdO 33.5 2.65 Ohms smdO **6**8.2 2.65 Ohms 2.65 Ohms Custom Fit Plate fil motsu fil motsu **6422cfp** 4" x 6" 2-Way **9623i** 6" x 9" 3-Way **9622i** 6" x 9" 2-Way 8" 3-Way ιλbe: "7 x "3/"8 x "8 4" x 6" 2-Way 3-1/2" 2-Way 6422cf 3022cf 8023! 93dB 28Hz – 21KHz 92dB 85Hz – 21KHz Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m): 934z – 21KHz 934z – 21KHz **339R** 85qB 28Hz - 21KHz 67Hz - 21KHz M091 W081 M091 W081 102W 132M VVUC ۸۸09 Nominal Impedance: Power Handling, RMS: smdO <u>6</u>8.5 smdO 36.2 smdO <u>2</u>8.2 2.65 Ohms 2.65 Ohms smdO <u>6</u>8.5 165տm 2-Way 46-1/2" 2-Way 5-1/4" 2-Way -wollediz mmeði 6522si 9255! is2208 9022! 2025! 4022! SPECIFICATIONS WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. GENEBAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. 934B 49Hz – 21KHz 91dB 72Hz – 21kHz 91dB 72Hz - 21kHz 814B 85Hz – 21KHz 944B 49Hz – 21KHz 844B 46Hz – 21KHz 844B 46Hz – 21KHz Nominal Impedance: Power Handling, RMS: Frequency Response: Frequency Response: 132M 42M 120W 225W 75W 2.65 Ohms W001 W005 W081 75W 25W 300M 6" x 8"/5" x 7" 6" x 8"/5" x 7" 2-Way Custom Fit 2.65 Ohms 2.65 Ohms 2.65 Ohms smdO **6**8.2 smdO **6**8.5 smdO **6**8.5 6422cfp 4" x 6" 2-Way Custom Fit Plate **8023i** 8" 3-Way **9622i** 6" x 9" 2-Way 4" x 6" 2-Way 7-1/2" 2-Way γsW-5 "8 x "8 6822cf 6422cf 18296 3022cf 1626281 1630w-1650w-160w-160w 160w 160w 160w 160w 160w-1 939B 28Hz – 21KHz 180M 90M 834z - 21KHz 834z – 21KHz 92dB 67Hz – 21KHz Sensitivity (2.83V, 1m): Power Handling, Peak: Frequency Response: 82HZ - 21KHZ 102W 120M 20M W081 132M smdO 66.2 W08 Nominal Impedance: Power Handling, RMS: -wollsd2" S\f\2) Nount S-MoM 265 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms 5022i 5-1√4" 2-Way 6-1/2" 2-Way 4" 2-Way 165mm 2-Way 4022! SPECIFICATIONS Ot 1WSPL (dB) SPL 2.83V 2.69 2.18 2.63 2.18 2.18 2.18 3.18 3.18 5.18 5.18 85.28 82.2 82.2 82.2 82.2 82.2 84.2 86.7 5269 6.20 6.20 6.15 5.25a 5.25a 7.25b 7.25c is2508 is208 73.6 61.2 63.51 63.51 74.8 74.8 70.1 68.7 7.8 7.8 7.8 07.0 178 6.29 96.0 6.88 9.26 236.94 442 34.69 41.6 78.0 42.6 77.0 5.34 7.0 2.83 2.74 3.75 3.23 3.30 3.47 3.23 5.48 5.48 5.48 01.1 0.88 isSS28 8.52 81.21 81.21 7.281 01.2 8.99 8.91 1.1 BL (T-m)
DCR (ohms)
Sd (sq cm)
Cms (µm/N)
Vas (I)
Fs (Hz)
Ces
Odes
Oms 2.20 72.2 22.01 72.01 123 68.7 128 87.0 9.69 5.27 2.18 6.13 63.6 206 1.05 1.05 1.05 1.05 4.30 2.30 21.70 աալցլ աաϛϛլ աաϛϛլ ..9l/S-9 ..8/L-9 ..8/L-9 աարի DO O 1-3/4" mm<sup>†</sup> աագլլ ..Z/L-9 7-7/8" 3-5/8" "8/I4 and the second is5524 15522 155544 145mm 142mm ..9l/6<sup>-</sup>S ..9l/6<sup>-</sup>S ..9L/LL-S 142mm աալ/ ..9l/6-E ..9L/E-E ..8/S-2 7-13/19.. .8/I-Z 7-3\8 ..9l/\$l-l ww/ mm59 ..9L/s <sup>-</sup> ..9L/LL-E 18/5 ..91/*L* 218mm "4\&-I ..9l/6-8 1-3/4" ]-3<u>/</u>4...` սա65 լ 110mm աա65 լ ..8/1-2 mm0[] 4-3/8" ..t/L-9 43/8" 3-7/8"

183mm

..9L/E-L

mm001

.9l/Sl-E

16508

..9l/6-E

тзэшш

..91/51

15504

..91/1-7


177mm

..5

..9l/6-E

ECIFICATIONS							
	<b>4022i</b> 4" 2-Way	<b>5022i</b> 5-1/4" 2-Way	<b>6022i</b> 6-1/2" 2-Way	is <b>SS08</b> 6-1/2" Shallow- way TinuoM	<b>6522i</b> 165mm 2-Way	is <b>S228</b> 165mm Shallow- 160un <u>t</u> 2-Way	
minal Impedance: wer Handling, PMS: quency Response:	2.65 Ohms 36W 105W W301 – 214Hz	2.65 Ohms 45W 135W 57Hz – 21KHz	2.65 Ohms 60W 180W 53Hz – 21KHz	2.65 Ohms 50W 150W 150W 53Hz – 21kHz	2.65 Ohms 180W 18Hz – 21kHz	2.65 Ohms 150W 160W 58Hz – 21kHz	
raitivity (2.83V, 1m):	92dB <b>9622i</b> 6" x 9" 2-Way	92dB <b>9623i</b> 6" × 9" 3-Way	934B 83-Way	3 <b>052cf</b> 3 <b>052cf</b> 3-1\2" 2-Way	93dB <b>6422cf</b> 4" x 6" 2-Way	93dB <b>6422cfp</b> 4" x 6" 2-Way	<b>6822cf</b> 6" x 8"/5" x 7"
minal Impedance: wer Handling, RMS:	2.65 Ohms 100V	2.65 Ohms W001	smdO 33.2 W37	Sef Ohms 2.65 Ohms 26W	ifi motsuD 2.65 Ohms 40W	Custom Fit Plate 2.65 Ohms 45W	otsuO ysW-S 2.5 Ohms W09
wer Handling, Peak: quency Response: rsitivity (2.83V, 1m):	944B 46Hz – 21KHz 300W	949B 46Hz – 51KHz 300M	944B 49Hz – 21KHz 226W	814B 85Hz – 21KHz 75W	914B 72Hz – 21KHz 120W	819B ∆5Hz – 51KHz 132M	839B 48H <sup>z</sup> – SJKH <sup>z</sup> 180M
RRANTY: Reference Se	ries speakers are warr	s cleaned with a damp clo anted against defects. Thi gth of your warranty. To	ne duration of the speak	er's warranty depends or	the laws in the count	ones. ry in which it was purchase	ed. Your local Inf
ECIFICATIONS 96:	4 <b>022i</b> 4" 2-Way	<b>5022i</b> 5-1/4" 2-Way	<b>iS208</b> ysW-2 "2\f-8	is <b>2209</b> -wojigdS "2\r <sub>-</sub> 9	<b>6522i</b> YeW-S mm <b>2</b> 31	<b>6522si</b> -wollagi Smm <sup>2</sup> ji	
minal Impedance: wer Handling, RMS:	36.5 SmdO 36.2	. 82.5 8.65 Ohms W34	smdO	Mount 2-Way 2.65 Ohms W03	smdO	ysW-S fnuoM 2.65 who 50.7	
wer Handling, Peak: quency Response: rsitivity (2.83V, 1m):	924B 85Hz – 21KHz 105W	924B 67Hz – 21KHz 135W	839B 23Hz – 51KHz 180M	839В 23Н∑ – 51КН∑ 120М	839B 28Hz – 51KHz 180M	939В 28Н <sup>∑</sup> − 51КН <sup>∑</sup> 120М	
:90	9 <b>5228</b> %" 2 "2 × "8	9623i 6" x 9" 3-Way	8" 3-Way	<b>3022cf</b> 3-1\2" 2-Way Custom Fit	<b>6422cf</b> 4" x 6" 2-Way Custom Fit	<b>6422cfp</b> 4" x 6" 2-Way Custom Fit Plate	<b>6822cf</b> 6" x 8"/5" x 7 2-Way Custo
minal Impedance: wer Handling, RMS: wer Handling, Peak:	sm4O 33.2 W001 W005	sm4O 33.2 W001 W005	smdO	sm40	2.65 Ohms 40W 120W	2.65 Ams 45W 135W	smdÖ 33.2 W03 W081
quency Response: nsitivity (2.83V, 1m):	46Hz – 21kHz 94dB 716esker grilles may be	: cleaned with a damp clo 94dB 71KHz	49Hz – 21KHz 94dB loth. Do not use any clea	85Hz – 21kHz 91dB 85Hz – 21kHz	đujiles or the speaker o 91dB 72Hz – 21KHz	oues: 319B 75Hz – S1KHz	839B ⊄8H <sup>z</sup> – 51KH
RRANTY: Reference Se	ries speakers are warr		ne duration of the speak	er's warranty depends or	the laws in the count	ry in which it was purchased γ	ed. Your local In
ECIFICATIONS  96:	<b>4022i</b> 4" 2-Way	<b>5022i</b> 5-1\4" 2-Way	<b>6022i</b> 6-1/5" 2-Way	-wollad 2"2/1-8	<b>6522i</b> 165mm 2-Way	is <b>S228a</b> -wollsd2 mm53f wount 2-Way	
minal Impedance: wer Handling, RMS:	smdO	smdO	smdO <b>7</b> 8.5 W08	ysW-2 InuoM 26.5 SmhO 30.2 W031	smdO	2.65 Ohms 50W	
wer Handling, Peak: quency Response: rsitivity (2.83V, 1m):	92dB 82Hz – 21KHz 102W	959B 92Hz – 51KHz 139M	839B 23Hz – 51KHz 180M	839В 23Н∑ – 51КН∑ 120М	839B 28Hz – 51KHz 180M	939B 28Hz – 51KHz 120M	
:06:	<b>9622;</b> 6" × 9" 2-Way	<b>9623i</b> 6" x 9" 3-Way	83-Way	3022cf 3-1/2" 2-Way Custom Fit	<b>6422cf</b> 4" x 6" 2-Way 5ti motsuD	6422cfp 4" x 6" 2-Way 4" x 6" 2-way 5 Talq motsuD	<b>6</b> " x 8"/5" x 7 6" x 8"/5" x 7 2-Way Custo
minal Impedance: wer Handling, RMS: wer Handling, Peak:	8m4O 88.S 100W 300W 500W	8m40 88.2 W001 W008	8.2 smhO 88.2 W87 W822	2.65 Ohms 26.W 75W	2.65 40W W01	2.65 Ohms 45W 135W	smdO 33.2 W03 W081
duency Response: nsitivity (2.83V, 1m): NERAL CARE: The loud	46Hz – 21kHz 94dB Speaker grilles may be	t cleaned with a damp clo 7498 1497 - 21kHz	49Hz – 21KHz 94dB loth. Do not use any cles	85Hz – 21KHz 91dB 85Hz on the	Brilles or the speaker o 91dB 72Hz – 21kHz	oues: 819B YSHZ – SIKHZ	839B 48H <sup>S</sup> - SJKH
RRANTY: Reference Se	ries speakers are warr		ne duration of the speak	er's warranty depends or	the laws in the count	ry in which it was purchase	ed. Your local In
e:	<b>4022i</b> 4" 2-Way	<b>5-21</b> /4" 2-Way	<b>6022i</b> 6-1/2" 2-Way	isSS08 -wollsd2 "S\f-8 ysW-S tanoM	<b>6522i</b> 165mm 2-Way	is <b>SS28</b> -wollsd2 mm381 ysW-S truoM	
minal Impedance: wer Handling, RMS: wer Handling, Peak:	sm4O	2.59 454 Wat 1368	smdO	Mount 2-Way 2.65 Ohms 50W 150W	smdO	ysW-S InuoM 26.S W03 W021	
quency Response: sitivity (2.83V, 1m):	82Hz – 21KHz	859B 97Hz – 21KHz	839B 23Hz – 51KHz	839B 23Hz – 51KHz	839B 28Hz - 21KHz	9348 284z – 21kHz	. 2300
:90	<b>9622i</b> 6" x 9" 2-Way	yeW-5" 8 × "8	8" 3-Way	<b>3022cf</b> 3-1\2" 2-Way Custom Fit	6422cf 4" x 6" 2-Way Custom Fit	<b>6422cfp</b> 4" x 6" 2-Way Custom Fit Plate Castom Fit Plate	6" x 8"/5" x 7 2-Way Custo
minal Impedance: wer Handling, Peak:	8m4O 88.5 W001 W006 FUME FUEL	2.65 Ohms 1000 300W 2.4100	sm4O	sm4O дд. 2 Wд. Wд. -H410 - 1430	2.65 Ohms 40W 120W	80.5 Ships 45.65 W 135W 1310 - 1405	8.65 china 6.63 w 8.63 w 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8
quency Response: nsitivity (2.83V, 1m): <b>NERAL CARE:</b> The louc	46Hz – SJKHz 949B Sbeaker grilles may be	: cleaned with a damp clo 46Hz – 21KHz	49Hz – 21KHz 94dB loth. Do not use any clea	Buers or solvents on the 85Hz – 21KHz	årilles or the speaker o 91dB 72Hz – 21KHz	oues: 1918 1918 – SIKHZ	839B 48H <sup>S</sup> - SJKH
RRANTY: Reference Se	ries speakers are warr		ne duration of the speak	er's warranty depends or	the laws in the count	ry in which it was purchase	ed. Your local In
ECIFICATIONS	<b>4022i</b> 4" 2-Way	<b>5022i</b> 5-1/4" 2-Way	<b>6022i</b> 6-1/2" 2-Way	-wollsh2".2\r-8	<b>6522i</b> 165mm 2-Way	6522si 165mm Shallow-	
minal Impedance: wer Handling, RMS:	sm4O	2.59 454 Wat 1368	smdO	Mount 2-Way 2.65 Ohms 50W 150W	smdO	ysW-S InuoM 2a.S W03 W021	
wer Handling, Peak: quency Response: nsitivity (2.83V, 1m):	8245 – 21KHz	859B 97Hz – 21KHz	839B 23Hz – 51KHz	839B 23Hz – 51KHz	839B 28Hz – SJKHz	9348 284z – 21kHz	
; · · · ·	<b>9622i</b> 6" x 9" 2-Way	yeW-5 "8 x "8	8" 3-Way	<b>3022cf</b> 3-1/2" 2-Way Custom Fit	<b>6422cf</b> 4" x 6" 2-Way Custom Fit	<b>6422cfp</b> 4" x 6" 2-Way Custom Fit Plate	<b>6</b> " X 8"/5" X 7 6" X 8"/5" X 7 6" X 2"/5" X 7
minal Impedance: wer Handling, Peak: wer Handling, Peak:	8m/O 88.2 1000 300W 5000 5000	2.65 Ohms W001 W008	sm4O	8.65 SmhO 66.2 W2S W7 W3T	2.65 Ohms 40W 120W	80.5 Ships 45.65 Wath 135.0 Ships 136.0 Ships	8m4O 88.5 W08 W081
duency Response: nsitivity (2.83V, 1m): NERAL CARE: The loud	46Hz – 21KHz 94dB Speaker grilles may be	: cleaned with a damp clo 46Hz – 21KHz	49Hz – 21KHz 94dB loth. Do not use any cles	85Hz – 21KHz 91dB 85Hz – 21KHz	Brilles or the speaker o 91dB 72Hz – 21kHz	:oues: 819B 75Hz – S1KHz	839В 48Н2 – 51КН:
		anted against defects. Thi gth of your warranty. To				ry in which it was purchase	ed. Your local Inf
e: Ecifications	<b>4022i</b> 4" 2-Way	6-1/4" 2-Way 5022i	<b>6022i</b> 6-1/2" 2-Way	6 <b>.222si</b> 6-1\Z" Shallow- Mount 2-Way	<b>6522i</b> 165mm 2-Way	isSS28 -wollsd2 mm381 ysW-2 JnuoM	
minal Impedance: wer Handling, RMS: wer Handling, Peak:	26.5 SmdO 36.W 105.W	2.55 W54 W51	smdO	26.5 smdO 36.2 20W 350W	emdO	smdO	
quency Response: rsitivity (2.83V, 1m):	82Hz – 21KHz	854B 67Hz – 21KHz	839B 23Hz – 51KHz	839B 23Hz – 51KHz	934B 28Hz – 21KHz	93qB 28Hz – 21kHz	P-0003
:e:	9622i 6" x 9" 2-Way	9 <b>623i</b> 6" × 9" 3-Way	8" 3-Way	<b>3022cf</b> 3-1\2" 2-Way Custom Fit	4" X 6" 2-Way 4" X 6" 2-Way Custom Fit	<b>6422cfp</b> 4" x 6" 2-Way Custom Fit Plate Custom Fit Plate	6" x 8"/5" x 7 2-Way Custo
dneuck Kesbouse: wer Handling, Peak: Mar Handling, RMS: Mer Handling, RMS:	2.65 Ohms 100W 300W 46Hz – 21KHz	2.65 Ohms 300W 46Hz – 21kHz	2.65 Ohms 75W 225W 49Hz – 21KHz	2.65 Ohms 2.65 Y 7.5W 7.5W A. – 21kHz	2.65 Ohms 120W 72Hz – 21kHz	75Hz – 51kHz 136W 7.65 Оршs	2.65 Ohms 60W 49Hz – 21kH
:(mf ,V88.S) ytivitisr	8pt6	94dB cleaned with a damp clo	8Pt6	ap16	Bp16	ap16	892B
		anted against defects. The 19th of your warranty. To				ry in which it was purchase	ed. Your local Inf
e: Ecifications	<b>4022i</b> 4" 2-Way	<b>2022i</b> 2-1∖4" 2-Way	<b>6022i</b> 6-1\2" 2-Way	6-222si 6-1\2" Shallow- Mount 2-Way	<b>6522i</b> 165mm 2-Way	is <b>SS23</b> 8 -wollsd2 mm&31 ysW-S InnoM	
minal Impedance: wer Handling, RMS: wer Handling, Peak:	26.5 smdO 36.2 35.0 30.0 30.0 30.0 30.0 30.0 30.0 30.0	8m4O 68.2 Wapa 135W	smAO 65.2 W08 180W	2.65 Ohms 5.0W 150W	2.65 SmhO 36.2 W09 180W	2.65 Ohms 50W 150W	
quency Response: rsitivity (2.83V, 1m):	<b>8955!</b> 859B 82HS – SJKHS	<b>9623!</b> 959B 92Hz – SJKHz	<b>8053!</b> 639B 23Hz – SJKHz	<b>3055¢</b> 8398 23Hz – 51KHz	<b>e455¢!</b> 839B 28Hz – SJKHz	<b>e<del>4</del>55c<u>t</u>b</b> 839B 28Hz – SJKHz	fo2288
e: minal Impedance:	ysW-S "8 x "8 smdO 33.S	ysW-5 "8 x "8 smdQ	γsW-S "8 emdO 39.Σ	3-1/2" 2-Way Gustom Fit 2.65 Ohms	4" x 6" 2-Way Fit motsuD 2.65 Ohms	4" x 6" 2-Way Custom Fit Plate 2.65 Ohms	6" x 8"/5" x 7 2-Way Custo 2.65 Ohms
ver Handling, RMS:	300W	300W 300W	556W 76W	M9Z M9Z	40W 120W	132M 42M	W09

car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

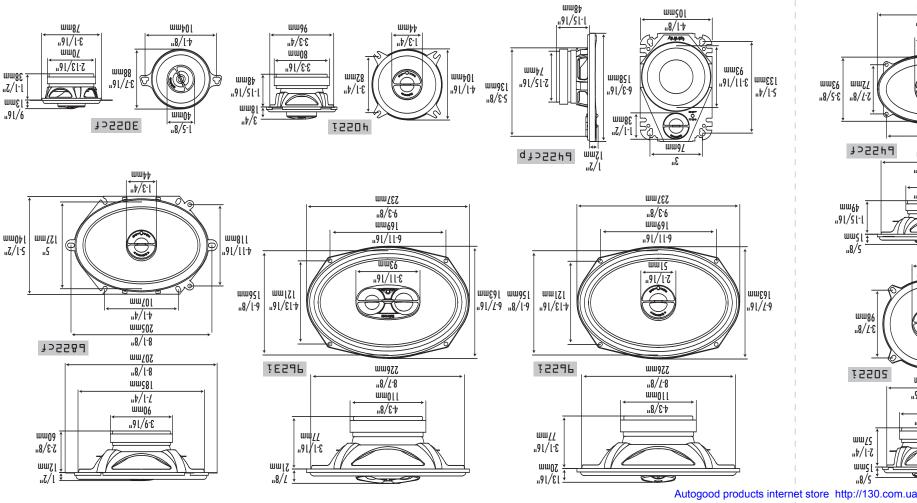

15502

J-1/4"

120mm

..9l/ll<del>1</del>

..9L/E-E

i2550d

шш67

..9l/Sl<sup>-</sup>l

177mm

ıς

mm08

..9L/E-E