

ViewSonic® VP201s/VP201b LCD Display

20.1" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



VP201b shown.
Also available in silver (VP201s)

Immerse yourself in the panorama of this big-picture LCD. Turn your ideas into breathtaking reality with the 20" VP201s and VP201b **LARGE-SCREEN THINEDGE ULTRA-SLIM BEZEL LCD** displays. With astounding 176° ultra-wide viewing angles, UXGA 1.92 megapixel resolution, ClearMotiv™ broadcast-quality video technology and native HDTV high-scan 720p compatibility, these displays boost professional productivity and heighten user enjoyment for video editors, financial traders, CAD/CAM engineers and power gamers. Ideal for multiple-panel configurations with height/pivot* adjustments, digital/analog inputs and USB 2.0 high-speed connectivity, the VP201s and VP201b are the infinitely versatile professional desktop displays of choice.



ThinEdge design is ideal for multi-panel setups. Four unit panel-module-only (without base) multi-packs available.

Uncompromised features and versatility to have you seeing 20/20.

❖ThinEdge maximizes your productivity

The ultra-slim 0.67" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

❖ClearMotiv technology

Ultra-fast 16ms video response enables digital HD broadcast-quality full-motion video at 62.5 fps.

❖Ideal for multiple-monitor setups

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

❖Pivot, height and wall-mount versatility

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot*, height, tilt and swivel adjustments.

❖**OPTISYNC** analog/digital inputs and integrated USB hub expand your connectivity

Includes one DVI-I (analog or digital capable) and one analog input. Integrated USB 2.0 high-speed hub enables unlimited connectivity options.

❖Full 20.1" viewable screen

❖1600x1200 native resolution

❖High brightness and contrast

250-nit brightness (typ) and 400:1 contrast ratio (typ) for rich images.

❖HDTV-720p ready

❖Image clarity from all directions

XtremeView® performance features ultra-wide 176° viewing angles horizontally and vertically.

❖Integrated power supply with hard power switch

❖TCO'03 and ENERGY STAR®

TCO'03 for silver and TCO'99 for black models.



ThinEdge

*Pivot function not supported by ViewSonic on Apple computers.

ViewSonic® 
the choice of professionals

ViewSonic® VP201s/VP201b LCD Display


20.1" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



Pivot feature saves time
Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



Wide-travel height adjustment
With over 4¼ inches of travel, this LCD fits just right.

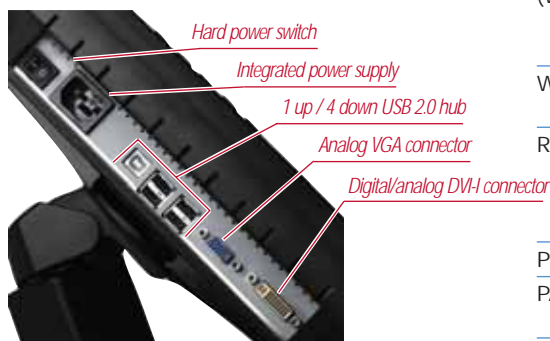

LCD PANEL	Type	20.1" color TFT active matrix UXGA LCD
	Display Area	16.1" (horizontal) x 12.1" (vertical); 20.1" diagonal
	Optimum Resolution	1600x1200
	Contrast Ratio	400:1 (typ)
	Viewing Angles	176° horizontal, 176° vertical @ contrast ratio > 10
	Response Time	16ms (typ)
VIDEO INPUT	Brightness	250 cd/m2 (typ)
	Glass Surface	Anti-glare
	Analog	RGB Analog (75 ohms, 0.7/1.0 Vp-p)
	Digital	DVI-D (TMDS, 100 ohms, or analog capable)
COMPATIBILITY	Frequency	F _H : 30~92kHz, F _V : 50~85Hz
	Sync	H/V separated, composite, sync-on-green (TTL)
	PC	VGA up to 1600x1200 non-interlaced
CONNECTOR	Mac®***	Power Mac™ G3/G4/G5 up to 1600x1200. Pivot function not supported by ViewSonic.
	HDTV	480p, 720p
POWER	Analog	15-pin mini D-sub
	Digital	Digital DVI-I
	USB	V 2.0 Up stream (B type) x1; Down stream (A type) x4
	Power	3-pin plug (CEE22)
CONTROLS	Voltage	AC 100~240V (universal), 50~60Hz
	Consumption	70W (typ)
OPERATING CONDITION	Basic	Power, 1, down, up, 2
	OnView®	Auto image adjust, contrast, brightness, input select (D-sub, DVI-A, DVI-D), color adjust (9300K, 6500K, 5400K, 5000K, user color), information (H/V frequency, resolution, model number, serial number, web site), manual image adjust (H. size, H/V position, fine tune, sharpness, scaling), setup menu (language, resolution notice, input priority, OSD position, OSD time-out, OSD background, OSD pivot), memory recall
DIMENSIONS (W x H X D)	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
WEIGHT	Physical	448mm x 480mm x 267mm (with stand) 17.6" x 18.9" x 10.5" (with stand) 448mm x 346mm x 71mm (without stand) 17.6" x 13.6" x 2.8" (without stand)
	Net	18.7 lb. (8.5 kg) with stand; 11.5 lb. (5.2 kg) without stand
	Gross	24.7 lb. (11.2 kg) with stand; 15.9 lb. (7.2 kg) without stand
	REGULATIONS	UL, cUL, FCC-B, CB, CE, ENERGY STAR®, NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II) TCO'03 (VP201s), TCO'99 (VP201b), NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, hygienic, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S
POWER MANAGEMENT	Meets TCO and ENERGY STAR® standards	
PACKAGE CONTENTS	LCD display, video cables (VGA and DVI-D), power cable, USB cable, ViewSonic Wizard CD, Portrait/Pivot CD software	
WARRANTY	Three-year limited warranty on parts, labor and backlight	



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

ViewSonic® 

the choice of professionals

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

**Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2005 ViewSonic Corporation. All rights reserved. [12419-00B-04/05] VP201s-1/VP201b-1

For more product information, visit us on the web at ViewSonic.com

specifications