

SIEVERT®

Heating tools for professionals



Product Catalogue

Swedish design and quality since 1882

In your hand you hold Sievert's whole product range. But behind all the product pictures and article numbers there is a lot more.

This unseen Sievert represents more than hundredthirty years of technical progress - decades of technical support and discussions with users - years of providing thoughtful service - days of unceasing effort to find new possibilities.

Our stated goal is both simple and straightforward: to develop, manufacture and supply innovative and high-quality tools and tool systems for all types of soldering and heating applications.

This statement is not just a definition of our product range – it is also a promise. A promise that we will always be one step ahead and that we will always listen to you – our customer – and involve ourselves in your business. A promise that we will be close to hand wherever in the world you may be. A promise that we will be the working partner that you need, helping you achieve the greatest possible success in your business when you use our products and services. Whatever the jobs you may have on today. Whatever the jobs you may have in the future.

We have been in business for more than 130 years, and today our products lead the world. But it still seems that our work has only just begun. Welcome to Sievert.



The concept is over a hundred years old but the flame still burns as brightly today

Because Carl Richard Nyberg was a specialist in soldering, he knew all too well that the soldering technology available in the 1880's left a lot to be desired.

But C.R. Nyberg was a stubborn man determined to find a heating source that would make the work more efficient. After much experimentation at home in his little flat he succeeded in finding a solution and in 1882 he had the first prototype of his soldering blowtorch ready for use, for which he also obtained a patent.

In the same year, the future industrialist Max Sievert opened the doors of the machinery business in Stockholm that was to form the foundation of a major company. When the paths of Nyberg and Sievert later crossed, the partnership they created was uncommonly fruitful. Nyberg manufactured blowlamps and Sievert sold them throughout the world. A successful business was launched.

SIEVERT®

Our products represent today's most advanced technology.
But our ambition extends far beyond this.

Wherever you are

Sievert has its origin and head office in Sweden, but with sales in more than 60 countries in five continents, it should be viewed as a truly global business. Few other companies in our industry can boast such geographical coverage.

Our geographical spread also has major benefits for our customers. One is our accessibility and the availability of high standards of service. Another is the experience that we gain of different countries and different industries, which is of immense benefit in our ongoing development work.



Whatever you need

Our goal is to be able to offer professional products at the top end of the quality scale for any possible type of soldering or heating task that needs to be done. Whether the job is large or small and whether you are a demanding professional user or a demanding Do-It-Yourselfer.

It is you that controls our work

These days it is not enough to do a good job. You must do the job better, more efficiently and if possible cheaper than anyone else. That is what counts today.


Accordingly, it is vital that we at Sievert understand how you and all our other customers operate – what your daily work involves. In this way we can become a better supplier, providing the products that will best meet the precise requirements of your individual business. In many cases we have modified products to match specific requests and these have then become part of our standard range of products. This is how you can – and should – control our work, because at the end of the day it is your work that really matters.



Quality means more than what you see

The piezoelectric igniter is guaranteed for 30,000 operations, and works faultlessly even if the handle is exposed to moisture. Every smallest detail is contrived and machined to function perfectly. We use the very best steel and the most advanced production technology.

Even so, Sievert quality means much more than reliable operation and a long working life. It means knowledge of the user's daily work and long experience of the industry. It means a worldwide organisation. It means the products and range of accessories that make up the whole Sievert System. All this comes as standard under what we mean by Quality.

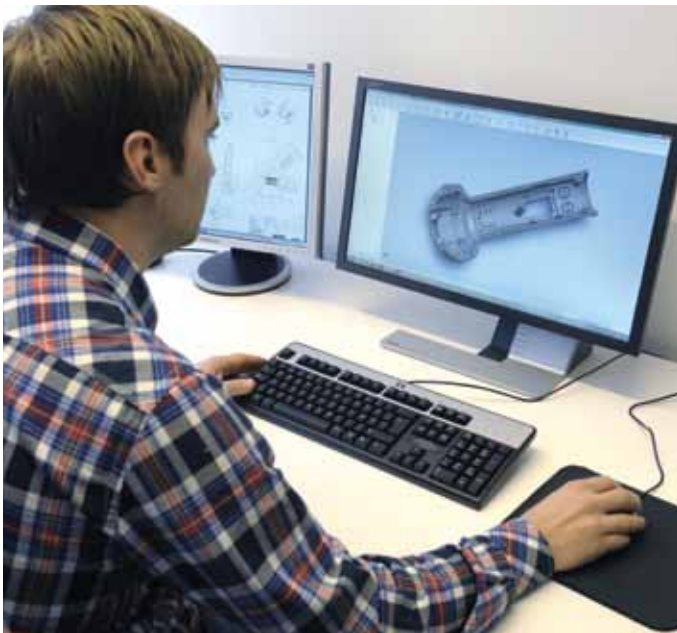

World leaders - but we are never satisfied

"Anything good can be made even better" summarises the spirit of our day-to-day work. This doesn't mean that our current products are not as good as we can make them – rather, that we constantly improve our products to match the changing world outside. Being innovative requires more than undertaking technical development for its own sake; it means foreseeing future changes. A good example is our new electronic product range, which complements our established range to make us a complete supplier.

Table of contents



Promatic torch system

Page 10



Pro 86 classic torch system

Page 18



Pro 88 heavy-duty torch system

Page 24



Soldering irons

Page 32



Propane hoses & accessories

Page 38



Regulators and HFVs

Page 40



Refillable cylinders

Page 42



Disposable cartridges

Page 44

Hand held torches



Powerjet

Page 46



Turbojet

Page 52



Handyjet

Page 54



Butajet

Page 56



Grinding wheel dressers

Page 58



Gardner

Page 59

LP gas information

Page 68

Combination chart

Page 70

Search index

Page 72

Point-of-sales material

Page 74



Roofing

Hot-air welding machines

DW 2000 hot-air tool

Page 62

TW 5000 hot-air welding

Page 64

B2 hot-air welding

Page 66

New product releases



New Sievert Powerjet and Handyjet with new ergonomic design and outstanding performance

New Powerjet:
Read more on page 46

New Handyjet:
Read more on page 54



Selection guide

for LP gas heating tools

The System code

Shows which products that fit together.



Promatic



Pro 86/88



Pro 95



Metaljet



Powerjet




Turbojet



The Product code

Shows the features and benefits of the product.



Piezo ignition



Trigger on/off



Bayonet fitting



Anti-flare



Changeable burners



Cyclone flame



Precise flame adjustment valve



360° swivel burner



Swivel hose nipple



Precise main flame adjustment valve



Precise pilot flame adjustment valve



Trigger for shifting between pilot and main flame



Precise main flame adjustment valve



Anti-flare



Light-weight

The Application code

Shows the applications for the product.



Precision



Soldering/
Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping



Sheet metal



Cyclone flames. The rotating flames wrap around the pipes giving an even heat distribution. Ideal for brazing, soft soldering, plumbing etc.




Pin-point flames. Fine pointed flames with a distinct core. Ideal for fine work on gold, silver, lead etc.




Standard flames. Strong, powerful flames for general soldering and heating.



Power flames. Large powerful, windproof flames for efficient outdoor use. Ideal for roofing, road-working and large scale heating.



Hot-air flames. Powerful windproof hot-air streams. Ideal for paint stripping, heat shrinking, heating of PVC, roofing etc.



Soft flames. Sweeping, powerful flames with visible yellow tip. Ideal for cable work and heat shrinking.



Flat flames. Powerful and windproof wide flame. Ideal for paint stripping, ski waxing etc.

Promatic

The universal torch system



SAFE

USER FRIENDLY


ERGONOMIC

Promatic is the most complete and advanced system in our range. The patented piezoelectric ignition, universal handle, range of accessories, advanced design and ergonomic appearance make Promatic a world-beating system for all possible heating tasks where efficiency and professional workmanship are the most important requirements.

Promatic - Sievert's top of the line torch system operates with propane and butane gases.



Precision




Soldering/
Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping

- Plastic composite handle reinforced with 30% glass fibres for maximum durability
- Double moulded soft grip for highest comfort and usability
- Piezo igniton with instant trigger on/off function
- Bayonet fitting for burners
- Swivelling hose connection to avoid hose drag
- Combined suspension hook and footstand
- Valve for precise flame setting
- Delivered without hose nipple



Technical data	
Working pressure, bar	1,5-4
Weight, g	290
Length, mm	180
Height, mm	80

Hose connections	
BSP 3/8"LH	336611
M 14x1	336628
UNF 9/16"LH	336617

Sievert Promatic handle 3366



Load relieving trigger system with automatic Piezo ignition.

Trigger on/off function



Swivel hose nipple.

Precise flame adjustment valve



No gas emission unless burner fitted. Bayonet fitted burners.

Ergonomic softgrip handle



Soft flame burners for cable shrinking



System



- Soft flame design ideal for cable work and other heat shrinking applications
- Soft flame burners with sweeping, powerful yellow and blue soot-free windproof flames
- Fresh air sucks in and keeps the burner head cold to minimize the risk of burning the shrink material
- To heat the sleeves efficiently but still soft enough not to overheat the shrink material
- Working pressure 2 bar

Soft flame burner no.	334791	334191	334891
Burner diameter Ø, mm	28	38	50
Gas Consumption, g/h at 2 bar	460	900	2 000
Effect, kW	5,9	11,5	26
For thick walled sleeves max, mm Also for thin walled sleeves	50	150	150



Burners for soft soldering, brazing and heating

Pin-point burners



System



- Pin-point burner with the finest flame for precision work such as gold and silver forging
- Silver soldering about 615°C
- Working pressure 2 bar

Pin-point burner no.	333301
Burner diameter Ø, mm	14
Gas Consumption, g/h at 2 bar	55
Effect, kW	0,7
Soft Soldering about 400°C max. pipe diameter Ø, mm	12

Standard burners



System



- Standard burners with brush-type flames for all kinds of soft soldering/small heating applications
- Silver soldering about 615°C
- Working pressure 2 bar

Standard burner no.	334301	334401
Burner diameter Ø, mm	19	25
Gas Consumption, g/h at 2 bar	250	580
Effect, kW	3,2	7,4
Soft Soldering about 400°C max. pipe diameter Ø, mm	32	70

Cyclone burners



System




Promatic



- Cyclone flame burners are the most efficient burners for brazing and soft soldering
- The rotating flame gives an even and all-round heat transfer to the pipe
- Working pressure 2 bar

Cyclone burner no.	334001	333501	333601
Burner diameter Ø, mm	14	19	25
Gas Consumption, g/h at 2 bar	170	250	580
Effect, kW	2,1	3,2	7,4
Soft Soldering about 400°C max. pipe diameter Ø, mm	28	32	70
Brazing up to 720°C max. pipe diameter Ø, mm	15	18	32

Hot-air burners



System



- Hot-air burners with powerful windproof hot-air streams for heat shrinking
- 3349 ideal for shrinking in confined spaces and fibre optic closures
- Working pressure 2 bar

Hot-air burner no.	333401	334990
Burner diameter Ø, mm	38	32x15
Gas Consumption, g/h at 2 bar	125	55
Effect, kW	1,6	0,7

Special burners for PVC and TPO




System



- Hot-air burners with powerful windproof hot-air streams for heating PVC or other rubber membranes where an open flame not is suitable
- Working pressure 2 bar

Hot-air burner no.	335890
Burner diameter Ø, mm	32x15
Gas Consumption, g/h at 2 bar	55
Effect, kW	0,7

Special burners for electronics

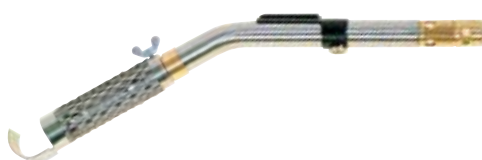

System



- Extra small hot-air burner incorporating a heat reflector, ideal for signal systems, traffic lights, alarm systems, marine applications, automobiles and other vehicle repairs
- Working pressure 2 bar

Hot-air burner no.	335990
Burner diameter Ø, mm	25
Gas Consumption, g/h at 2 bar	28
Effect, kW	0,36

Power burners for waterproofing and other heat demanding works


Power burners



System



- High capacity power burners with extremely strong and windproof flames for roofing works and for large-scale heating applications
- Long burners for field torching
- Recommended working pressure 4 bar

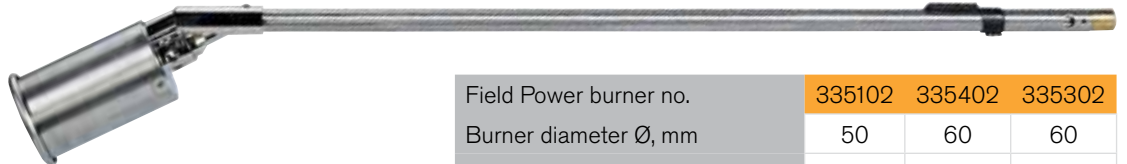


Field Power burner no.	335102	335402	335302
Burner diameter Ø, mm	50	60	60
Gas Consumption, g/h at 4 bar	6 700	8 000	8 000
Effect, kW	86	102	102
Burner length, mm	600	500	600

Power burners, titanium



- High capacity power burners with weight reduced by 60% compared to traditional roofing burners on the market.
- Saves your body

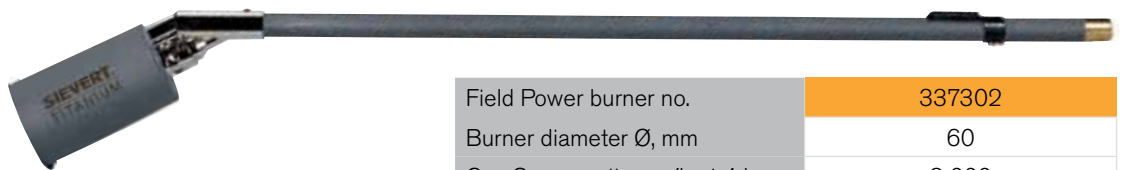


Field Power burner no.	337302
Burner diameter Ø, mm	60
Gas Consumption, g/h at 4 bar	8 000
Effect, kW	102
Burner length, mm	600

Detail power burners



- Short burners for detail work on roofs and other heating applications such as preheating before welding and shrinking on pipelines
- Recommended working pressure 4 bar

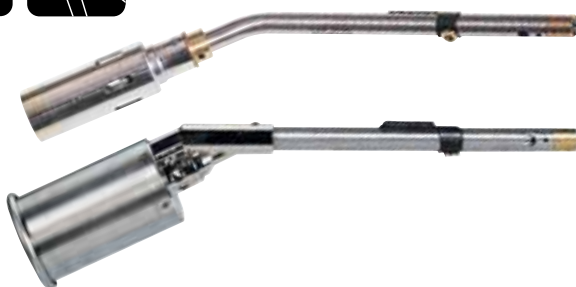

Detail Power Burner no.	335002	335602
Burner diameter Ø, mm	40	60
Gas Consumption, g/h at 4 bar	3 350	8 000
Effect, kW	43,5	102
Burner length, mm	250	250



Soldering burners for electronics

Promatic

B



System

B



- Burner with encased and windproof flame for soft soldering.
- Ideal for signal systems, traffic lights, alarm systems, marine applications, automobiles and other vehicle repairs
- Working pressure 2 bar

Soldering burner no.	335991
Soldering tip diameter Ø, mm	10
Gas Consumption, g/h at 2 bar	28
Effect, kW	0,36

Burners for paint stripping



System

B



- Flat flame burner with powerful wide flame for efficient use outdoors for paint stripping and ski-waxing
- Working pressure 2 bar

Flat flame burner no.	334501
Burner diameter, mm	40x8
Gas Consumption, g/h at 2 bar	215
Effect, kW	2,7



Soldering iron burner head



System

B



- Titanium burner head to turn your Promatic handle into a high performance Soldering Iron
- Incorporates an effective windshield that makes the flame totally encased and windproof
- Working pressure 2 bar

Soldering iron no.	700301
Gas Consumption, g/h at 2 bar	140
Effect, kW	1,8
Weight, g	542



Complete Soldering Iron assortment, see page 32



Promatic Accessories

Copper bit



Made of copper with one pointed and one flat end. For pin-point burner 3333.

Copper bit no.	884301
----------------	--------

Flat nozzle



Flame shaper for hot-air burner 3334.

Flat nozzle no.	716941
-----------------	--------

Heat reflector



Protects the wall and speeds up the work when brazing. For use with all soldering burners.

Heat reflector no.	717281
--------------------	--------

Neck tube support



Neck tube support / Footstand for burners with long neck tubes.

Neck tube support no.	717241
-----------------------	--------

Tool box



Made of sturdy metal-reinforced plywood. With large handle and locking clasp. 720106: Space for up to 5 burners, 4 m hose, handle, regulator and two disposable cartridges.

Tool box no.	720106
Dimensions:	260x160x350 mm

Soldering mat



For wall and floor protection when soldering. Saves heat and time. For temperatures up to 760°C.

Solder mat no.	415061
Dimensions:	25x25 cm











































For wall and floor protection when soldering. Saves heat and time. Formable solder mat. For temperatures up to 700°C.

Aluminium Solder mat no.	415062
Dimensions:	33x50cm

Tool bags

For more information, see page 74

















Soldering/ Brazing	Heating	Precision	Shrinking	Waterproofing/ Welding	Sheet metal	Paint stripping
						
Cyclone burners for soft soldering and brazing	Burners for soft soldering	Pin-point burner	Soft flame burners	Power burners	Soldering Irons	Flat flame burner
 334001 Ø14mm	 333301 Ø14mm	 333301 Ø14mm	 334891 Ø28mm	 335002 Ø40mm	 700301	 334501 40x8mm
 333501 Ø19mm	 334301 Ø19mm	 Cyclone burner	 334191 Ø38mm	 335602 Ø60mm	 700350 350g	 Hot-air burners
 333601 Ø25mm	 334401 Ø25mm	 334001 Ø14mm	 Hot-air burners	 335102 Ø50mm	 700500 500g	 334990 32x15mm
			 335990 Ø25mm	 337302 Ø60mm	 700400 400g	 333401 Ø38mm
			 334990 32x15mm	 Hot-air burners	 700800 800g	
			 333401 Ø38mm	 335890 32x15mm	 700353 Longlife 350g	
				 700550 Longlife 500g	 700550 Longlife 500g	

Complete your torch kit

Articles you also need for a complete torch system



 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m hose 8mm 5m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m
 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, 1-4bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV



Hoses

For more information, see page 38



Regulators

For more information, see page 40

Pro 86

The classic torch system

STABLE FLAME

RELIABLE



The Pro 86 series meets high criteria for carrying out professional heating tasks. Whether soldering, paint stripping, shrinking or performing gold/silversmith's work, the high quality combined with convenience and a comprehensive range of accessories makes the Pro series a versatile tool for the demanding craftsman.



Precision



Soldering/
Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping

- Single valved handle mainly for smaller burners
- The spindle and valve are designed to give a very exact and quick flame setting
- The springloaded metal knob gives a precise and stable setting for the finest of flames
- All metal parts made of high quality brass
- Ergonomically designed plastic composite handle
- Double moulded soft grip for highest comfort and useability
- Delivered without hose nipple



Technical data	
Working pressure, bar	1,5-8
Weight, g	245
Length, mm	180
Height, mm	70

Hose connections	Art no.
BSP 3/8"LH	348641
M14x1	348642
UNF 9/16"LH	348647

Sievert Pro 86 handle 3486



Exact flame setting

Works in all weather conditions



Wide range of burners for all applications

Two component handle



Sievert Pro 86 torch kit

- A professional and powerful torch kit, ideal for soft soldering, brazing, melting, metalworks, paintstripping and other heating jobs
- Includes handle 3486, necktube 3511, burner 2941 and 2 m fixed hose
- Available with or with out valve 700001



System



Technical data	
Burner diameter Ø, mm	28
Gas Consumption, g/h at 2 bar	600
Effect, kW	7,7
Soft soldering about 400°C max. pipe diameter Ø, mm	60

Hose connections	Art no.
BSP 3/8"LH Fixed hose	219741
BSP 3/8"LH no valve	219742

Pro 86

Burners and neck tubes

Sievert Pro neck tubes

System



- Neck tubes made of high quality brass
- Shorter neck tubes are recommended for smaller heating applications like gold and silver forging

Neck tube no.	Length, mm
350902 with hook	180
350501	100
351102 with hook	70
350101 only for burner 8842	78

Soft flame burners

System



- Soft flame design ideal for cable work and other heat shrinking applications
- Soft flame burners with sweeping, powerful yellow and blue soot-free windproof flames
- Fresh air sucks in and keeps the burner head cold to minimize the risk of burning the shrink material
- To heat the sleeves efficiently but still soft enough not to overheat the shrink material
- For direct connection to Sievert Pro handles
- Working pressure 2 bar

Soft flame burner no.	352890	352990
Burner diameter Ø, mm	28	38
Gas Consumption, g/h at 2 bar	900	1 200
Effect, kW	11,3	15

Burners for soft soldering and brazing

Pin-point burners

System




- Pin-point burners with the finest flames for precision work such as gold and silver forging
- Silver soldering about 615°C
- For connection to Sievert Pro necktubes, 8842 only for necktube 3501
- Recommended working pressure 2 bar

Pin-point burner no.	884204	393802	393902
Burner diameter Ø, mm	8	17	17
Gas Consumption, g/h at 2 bar	20	20	70
Effect, kW	0,25	0,25	0,9
Soft Soldering about 400°C max. pipe diameter Ø, mm	8	10	12



Standard burners



System




Pro 86



- Standard burners with brush-type flames for all kinds of soft soldering/small heating applications
- Silver soldering about 615°C
- For connection to Sievert Pro necktubes
- Recommended working pressure 2 bar

Standard burner no.	394002	394102	294102
Burner diameter Ø, mm	17	22	28
Gas Consumption, g/h at 2 bar	90	240	600
Effect, kW	1,2	3,1	7,7
Soft Soldering about 400°C max. pipe diameter Ø, mm	12	40	60

Cyclone burners



System




- Cyclone flame burners are the most efficient burners for brazing and soft soldering
- The rotating flame gives an even and all-round heat transfer to the pipe
- For direct connection to Sievert Pro handles
- Working pressure 2 bar

Cyclone burner no.	352403	352503
Burner diameter Ø, mm	19	25
Gas Consumption, g/h at 2 bar	240	800
Effect, kW	3,1	10,3
Soft Soldering about 400°C max. pipe diameter Ø, mm	50	70
Brazing up to 720°C max. pipe diameter Ø, mm	18	32

Special burners

Burners for paint stripping




System



- Flat, wide, extremely windproof and powerful flame for paint stripping
- For direct connection to Sievert Pro handles
- Recommended working pressure 2 bar

Flat flame burner no.	351703
Burner diameter, mm	35x5
Gas Consumption, g/h at 2 bar	210
Effect, kW	2,7

Soldering iron burner head



System



- Burner head to turn your Pro 86 handle into a high performance Soldering Iron for sheet metal work
- Windshield and burner designed to give excellent wind protection
- Working pressure 2 bar

Soldering burner no.	295501
Gas Consumption, g/h at 2 bar	260
Effect, kW	3,3
Wind shield no.	708121

Pro 86

Light Line System



- Value for money burner assortment for Pro 86

Neck tube



- Neck tube to connect light line burner to the Pro 86 handle

Neck tube no.	Length, mm
350101	78

Pin-point burners



- Pin-point burners with the finest flames for precision work such as gold and silver forging
- Silver soldering about 615°C
- Recommended working pressure 2 bar

Pin-point burner no.	884204	872001
Gas consumption g/h at 2 bar	20	60
Max pipe diameter Ø, mm	8	10
Effect in kW	0,25	0,75

Standard burner



- Standard burners with brush-type flames for all kinds of soft soldering/small heating applications
- Silver soldering about 615°C
- Recommended working pressure 2 bar

Standard burner no.	871901
Gas consumption g/h at 2 bar	160
Soft soldering 400°C, Max pipe diameter Ø, mm	22
Brazing up to 720°C, Max pipe diameter Ø, mm	12
Effect in kW	2

Power burner



- Heavy duty light weight power burners with extremely strong and windproof flames to withstand the severest weather conditions
- Ideal for several different heat demanding applications
- Recommended working pressure 2 bar

Standard burner no.	872501
Gas consumption g/h at 2 bar	550
Soft soldering 400°C, Max pipe diameter Ø, mm	40
Brazing up to 720°C, Max pipe diameter Ø, mm	18
Effect in kW	7








Burners for paint stripping



- Flat, wide, extremely windproof and powerful flame for paint stripping
- Recommended working pressure 2 bar

Flat burner no.	872304
Gas consumption g/h at 2 bar	230
Effect in kW	3



Soldering/ Brazing	Heating	Precision	Shrinking	Waterproofing/ Welding	Sheet metal	Paint stripping
 <p>Cyclone burners for soft soldering and brazing</p> <ul style="list-style-type: none"> 352403 Ø19mm 352503 Ø25mm 350101 871901 Ø17mm 872501 Ø25mm 	 <p>Burners for soft soldering</p> <ul style="list-style-type: none"> 351102 350902 393802 Ø17mm 393902 Ø17mm 394002 Ø17mm 394102 Ø22mm 	 <p>Pin-point burner</p> <ul style="list-style-type: none"> 350101 884204 Ø8mm 872001 Ø12mm  <p>Burners for soft soldering</p> <ul style="list-style-type: none"> 351102 393802 Ø17mm 393902 Ø17mm 394002 Ø17mm 	 <p>Soft flame burners</p> <ul style="list-style-type: none"> 352890 Ø28mm 352990 Ø38mm 	 <p>Soldering Irons</p> <ul style="list-style-type: none"> 349241 701633 Longlife 701725 Longlife 701800 256200 701630 707120 702070 	 <p>Flat flame burner</p> <ul style="list-style-type: none"> 351703 35x5mm 350101 884204 	













Complete your torch kit

Articles you also need for a complete torch system



348641
BSP 3/8"LH
348642
M14X1



 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>
 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>



Hoses

For more information, see page 38



Regulators

For more information, see page 40

Pro 88

Heavy-duty torch system



HEATING POWER

PERFORMANCE

The Pro 88 series is used all over the world by professional roofers and waterproofing specialists. With a complete power burner programme, including Titanium torches, the Pro 88 is the ultimate torch system for heavy-duty works.

The Pro 88 series operates with propane and butane gases.



Precision



Soldering/
Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping

- Double valved handle mainly for larger burners
- Incorporates one main valve and one economizer valve enabling a gas saving pilot flame
- Trigger for instant shifting between pilot and main flame and for pulsing the main flame
- All metal parts made of high quality brass
- Ergonomically designed plastic composite handle
- Double moulded soft grip for highest comfort and useability
- Delivered without hose nipple



Technical data	
Working pressure, bar	1,5-8
Weight, g	385
Length, mm	205
Height, mm	90

Hose connections	Art no.
BSP 3/8"LH	348841
BSP 3/8"LH <i>preset pilot flame</i>	348875
M14x1	348842
UNF 9/16"LH	348847

Sievert Pro 88 handle 3488



Trigger for shifting between pilot and main flame and for pulsing the main flame



Precise flame adjustment of pilot and main flame

Pilot flame for gas saving

Double valved handle mainly for larger burners




Wide range of burners for power applications

Works in all weather conditions



Sievert has a wide range of titanium burners and necktubes

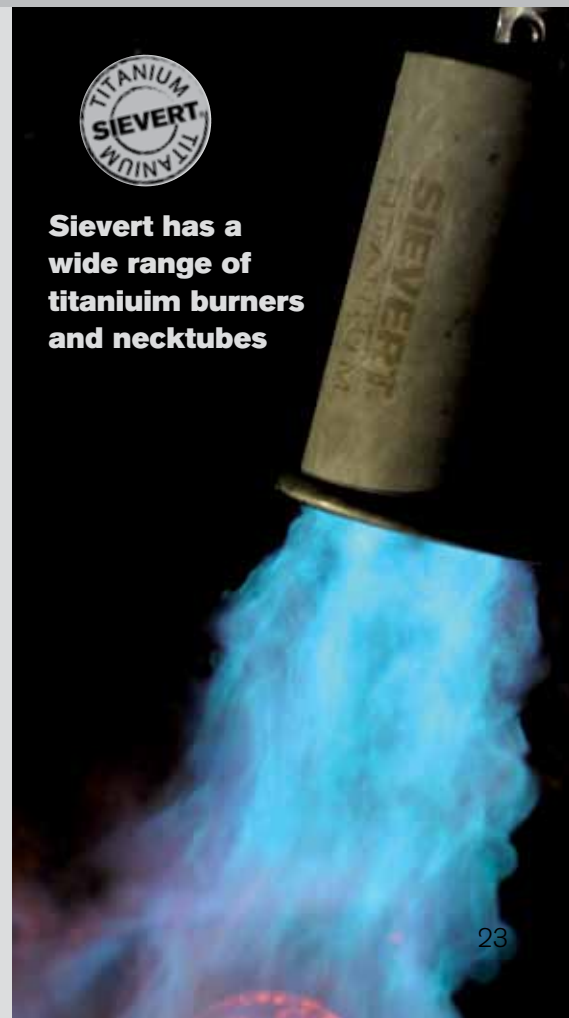


Pro 88

Burners and neck tubes

Sievert Pro neck tubes

System

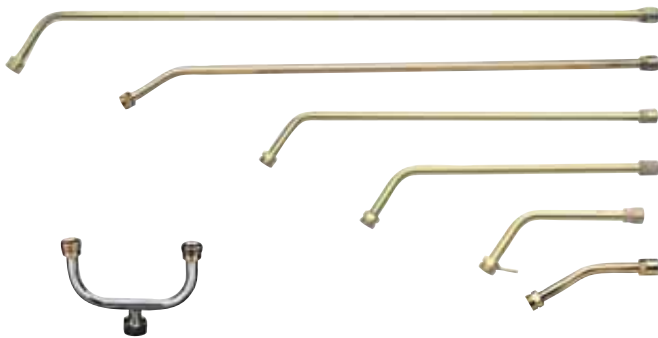

▪ Wide range of neck tubes made of high quality brass ▪ Double neck tube 770044, made of stainless steel, makes it possible to connect two burners to one neck tube ▪ Shorter neck tubes like 3505 and 3509 are recommended for smaller heating applications like gold and silver forging ▪ Longer neck tubes like 3506, 3507, 3508, 3510 are recommended for larger jobs like roofing and road-work

Neck tube no.	Length, mm
350601	750
350801	600
350701	500
351001	350
350902 with hook	180
350501	100
770044 double neck tube	

Power burners for waterproofing and other heat demanding works

System



▪ Heavy-duty light weight power burners with extremely strong and windproof flames to withstand the severest weather conditions ▪ Ideal for drying, bitumen laying, detail and field torching, preheating before welding, melting snow/ice and other heat demanding applications ▪ For connection to Sievert Pro necktubes ▪ Recommended working pressure 4 bar

Power burner no.	294202	294302	294402
Burner diameter Ø, mm	32	35	50
Gas Consumption, g/h at 4 bar	2 000	3 350	6 700
Effect, kW	26	43,5	86

Made of high quality brass



Power burner no.	293401	296001
Burner diameter Ø, mm	34	60
Gas Consumption, g/h at 4 bar	2 000	8 250
Effect, kW	26	114

Made of high quality stainless steel



Power burner torch kits

Pro 88



System



Burner kit no.	345000
Burner diameter Ø, mm	50
Gas Consumption, g/h at 4 bar	6 700
Effect, kW	86

Swivel hose nipple for 5 to 8 mm hose



Technical data	
Burner diameter Ø, mm	50
Gas Consumption, g/h at 4 bar	6 700
Effect, kW	86
Neck tube length, mm	180

Hose connections	Art no.
BSP 3/8"LH	344441
M14x1	344442
UNF 9/16"LH	344447



Technical data	
Burner diameter Ø, mm	60
Gas Consumption, g/h at 4 bar	8 250
Effect, kW	114
Neck tube length, mm	500


Hose connections	Art no.
BSP 3/8"LH	346041
M14x1	346042
UNF 9/16"LH	346047

Special heavy-duty torch 6250



Torch no.	625010	625020
Burner diameter Ø, mm	56	51
Gas Consumption, g/h at 4 bar	4 800	4 800
Effect, kW	57	57
Neck tube length, mm	400	1460

Hose connection BSP 3/8"LH




Pro 88

Titanium range

Save Your body

Working long days in tough conditions requires tools that are easy to handle and that prevent state of exhaustion. Sievert Titanium torches are the most ergonomic roofing burners ever created. With weight reduced by 60% compared to traditional burners, they will dramatically reduce the load on your body when working continuously for hours, days and months.

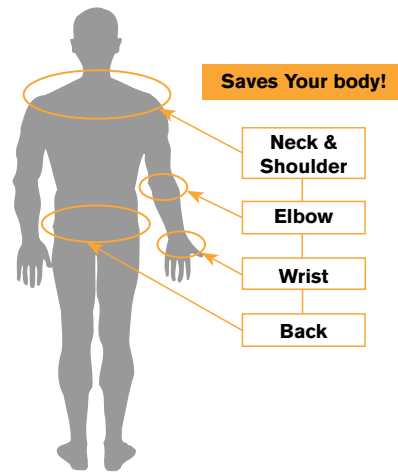

Titanium power burners and kits

Power burners



System



- Heavy-duty light weight power burners with extremely strong and windproof flames to withstand the severest weather conditions
- Ideal for drying, bitumen laying, detail and field torching, preheating before welding, melting snow/ice and other heat demanding applications
- For connection to Sievert Pro neck-tubes
- Recommended working pressure 4 bar



Power burner no.	295101	295001	295301	295401	295402
Burner diameter Ø, mm	34	50	60	70	70
Gas Consumption, g/h at 4 bar	2 000	6 700	8 250	12500	12500
Effect, kW	26	86	114	155	155

Made of high quality titanium

Neck tubes, titanium

System



- Range of neck tubes made of high quality titanium to connect power burners




Titanium neck tube no.	355501	355001	355701	355601
Neck tube length, mm	100	350	500	750

Power burner kits

System

Pro 88

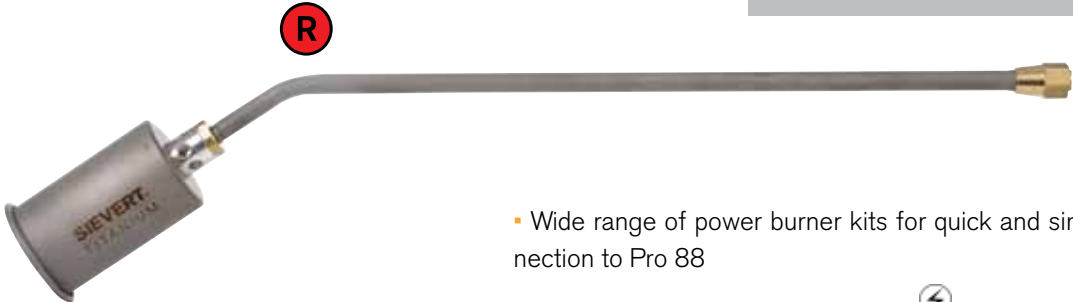

- Wide range of power burner kits for quick and simple connection to Pro 88



Titanium kit no.	356301	356401	356101	356701	356501	356001	357001	357002	356601	356201
Neck tube length, mm	100	100	350	350	500	500	500	500	600	750
Burner width, mm	34	50	50	60	50	60	70	70	50	50
Gas consumption, g/h at 4 bar	2 000	6 700	6 700	8 250	6 700	8 250	12 500	12 500	6 700	6 700
Effect, kW	26	86	86	114	86	114	155	155	86	86

Power burner torch kits

System

- Complete torch kits with fixed power burners and footstand




Power burner no.	346051	346052	347051	347052
Burner diameter Ø, mm	60	50	70	70
Gas Consumption, g/h at 4 bar	8250	6700	12500	12500
Effect, kW	114	86	155	155
Neck tube length, mm	500	500	500	500



Pro 88

Hot-air burners

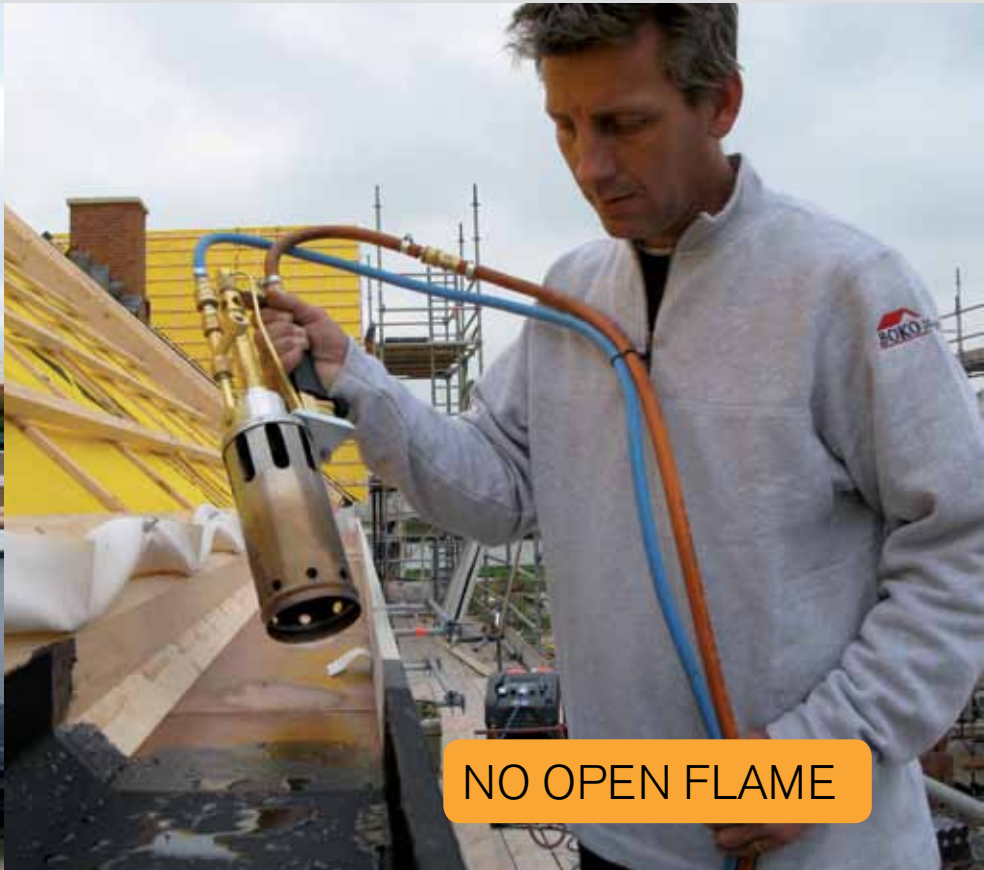

Hot-air burners for roofing work



System



- Powerful hot-air roofing burners with totally encased flames for efficient bitumen laying when open flames are not permitted
- Powerful enough to achieve the same speed of roof laying compared to open flames - and the gas consumption is much lower
- The use of heat is very efficient due to the narrow and directed hot-air stream and due to the fact that one can work even closer to the material
- All burners can use compressed air to increase power for welding and for quick and efficient drying
- Working pressure 2 and 4 bar

With lifting device. Hot-air directed obliquely under overlap. Supplied with 3488 handle.

Delivered fully prepared for compressed air.



Technical data	2981	2982	2986
Burner width, cm	8	22	16
Gas Consumption, kg/h at 2 bar	1,1	2,2	1,1
4 bar with compressed air	1,8	3,6	1,8
Effect at 2 bar, kW	15	30	15
Effect at 4 bar, kW	25	50	25



Turboset no. **717271**

Allows the use of compressed air to increase the power of hot-air burners 2981 and 2986.






Hose connections **Art no.**

BSP 3/8"LH	298101
UNF 9/16"LH	298147
BSP 3/8"LH	298601
UNF 9/16"LH	298647
Hose nipple	298201

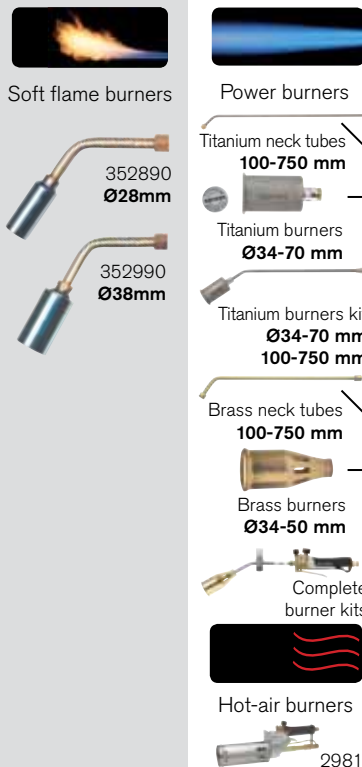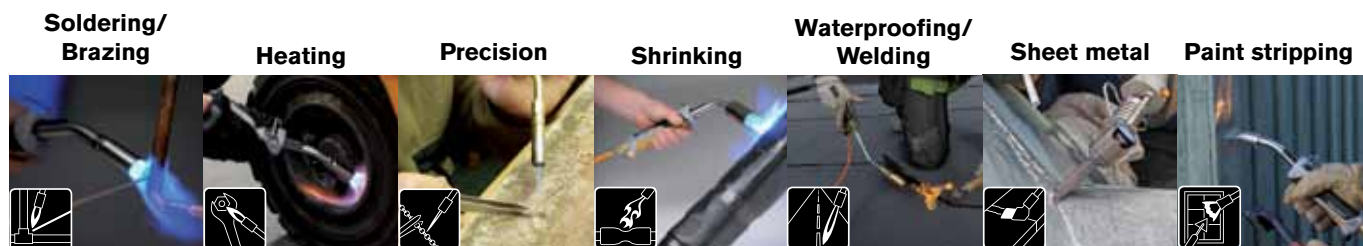

Complete your torch kit

Articles you also need for a complete torch system

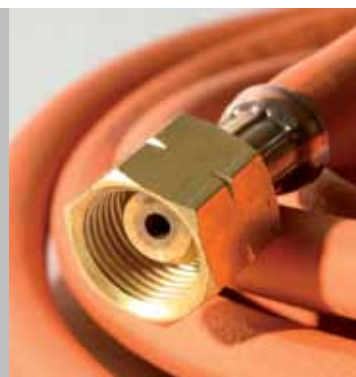

Hoses

For more information, see page 38



Regulators

For more information, see page 40

Soldering Irons

Wide range of unique solutions



FLEXIBLE

INNOVATIVE

WIDE RANGE



Sheet metal

PSI 3380

System



Pro 95

System



Pro 3492

System



Promatic

System





System



Works 60 to 90 minutes with one 60g cartridge!

- Portable soldering iron for sheet metal work made of high quality Titanium and aluminium
- Ergonomically designed handle for even greater comfort
- Automatic piezo ignition
- The burner incorporates an effective windshield that makes the flame totally encased and windproof
- No risk of burning sensitive material
- The precise valve in the handle makes it easy to obtain the right heat for the copper bit
- Copper bit included

PSI	338030
Gas Consumption, g/h at 2 bar	75
Effect, kW	0,9
Length, mm	230
Weight, g	810
Copper bit weight, g	250

Portable soldering iron kit	338093
-----------------------------	--------

Delivered in a box with ▪ 1 PSI 338030 ▪ 2 cartridges Ultragas 220283 ▪ 1 Copper bit 700250 (250g) ▪ 2 jet orifices.

PSI (Portable Soldering Iron)



Ergonomically designed handle

Simple one-hand operation



Light-weight design

Made of high quality titanium and aluminium



Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	700245	700250
Weight, g	245	250

Replacement cartridges

- Ultragas 220283 is a special gas mixture comprising Propane, Butane, Acetone and Propene. It achieves a flame temperature of more than 2100°C!

Technical data	220283
Connection	EU 7/16"
Content, ml	210

Anti-flare!



Soldering Irons

Wide range of unique solutions

Promatic soldering iron 3370



System



- Soldering iron burner for sheet metal work made of high quality Titanium
- Ergonomically designed handle for even greater comfort
- Automatic piezo ignition
- The burner incorporates an effective windshield that makes the flame totally encased and windproof
- No risk of burning sensitive material
- Equipped with locking device to keep the flame burning
- The precise valve in the handle makes it easy to obtain the right heat for the copper bit
- Working pressure 2 bar

Technical data	
Gas Consumption, g/h at 2 bar	140
Effect, kW	1,8
Length, mm	290
Weight, g	832

Delivered without copper bit

Hose connections	Art No
BSP 3/8"LH	337030
UNF 9/16"LH	337037



Totally encased and windproof burner

Wide range of copper bits



Swivel hose nipple.

Precise flame adjustment valve

Complete soldering iron kit



Promatic soldering kit	337093
------------------------	--------

Portable soldering kit with 2 disposable Propane cartridges (6 working hours).

Contains:

- Promatic Soldering Iron with 350 g copper bit
- 2 cartridges of quality propane 430 g, 220883
- Adjustable regulator 265012
- 2 m hose Ø 5 mm, 717321
- Hook for Belt 884105
- Bottle for soldering flux, 757208
- Small brush for soldering flux 757200
- Stone ammoniacal 757206
- Black wooden box 720106

Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	700350	700400	700500	700800
Weight, g	350	370	500	800

Long life copper bits

- Long Life Copper bits solder at least 1500 metres and provide maximal heating transfer. Low gas consumption, no salmiak stone needed for cleaning

1500 metres of soldering, No hammering, No filing!



Copper bit no.	700353	700550
Weight, g	350	500

Soldering iron Pro 95 Titanium

Soldering Irons

K



System

K



- Extra light-weight soldering iron combining classic design, maximum comfort with modern burner technology
- Large selection of copper bits for all kinds of sheet metal work including roofing & gutter soldering
- The Pro 95 burner guarantees wind stability without using a windshield
- The handle has sliding air control to enable hard or soft setting
- It is also equipped with a swivel hose connection to avoid hose twist.

Technical data	
Gas Consumption, g/h at 2 bar	120
Effect, kW	150
Length, mm	250
Weight, g	299

Hose connections	Art no.
BSP 3/8"LH	770360
M14x1	770361



Extrem light-weight design

Made of high quality titanium



Sliding air control to enable hard or soft setting

Accessories



Footstand no.	770303
---------------	--------

Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	701630	701720	702070	256200	701800
Weight, g	300	500	380	800	800

Long life copper bits

- Long Life Copper bits solder at least 1500 metres and provide maximal heating transfer. Low gas consumption, no salmiak stone needed for cleaning

**1500 metres of soldering,
No hammering,
No filing!**



Copper bit no.	701633	701725
Weight, g	300	500

Soldering Irons

Wide range of unique solutions

Soldering iron Pro 3492




System



- Traditional soldering iron burner for sheet metal work
- Practical and sturdy design
- Supplied with windshield and burner designed to give excellent wind protection
- Working pressure 2 bar
- Delivered without copper bit

Technical data	
Gas Consumption, g/h at 2 bar	260
Effect, kW	3,3

Hose connections	
BSP 3/8"LH	Art no. 349241
M14x1	349242



Practical and sturdy design

Precise flame adjustment



Accessories



Soldering burner no.	295501
Gas Consumption, g/h at 2 bar	260
Effect, kW	3,3



Wind shield no.	708121
-----------------	--------

Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	701630	701720	702070	256200	701800
Weight, g	300	500	380	800	800

Long life copper bits

- Long Life Copper bits solder at least 1500 metres and provide maximal heating transfer. Low gas consumption, no salmiak stone needed for cleaning

1500 metres of soldering, No hammering, No filing!



Copper bit no.	701633	701725
Weight, g	300	500


Soldering Irons

Sheet metal

Sheet metal

Sheet metal


Sheet metal



Soldering Irons




Soldering Irons

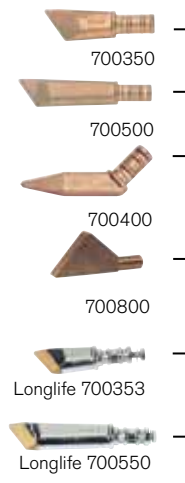

Soldering Irons



Soldering Irons

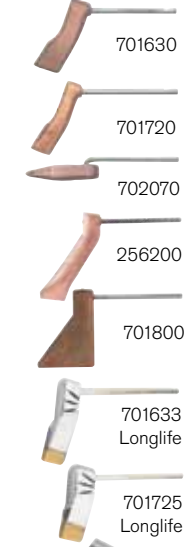

Complete your soldering iron kit

Articles you also need for a complete torch system



Replacement gas cartridge Ultragas 2202



Propane hose 5mm
2m, 4m and 10m



Propane hose 5mm
2m, 4m and 10m



Propane hose 5mm
2m, 4m and 10m



Regulator with adjustable pressure For gas cartridge



Regulator, fixed, 2bar, HFV



Regulator with adjustable pressure For gas cartridge



Regulator, fixed, 2bar, HFV



Regulator with adjustable pressure For gas cartridge



Regulator, fixed, 2bar, HFV

Soldering iron kit solutions



Propane hoses and accessories

Wide range of hoses



3 LAYERS FOR SAFETY

Sievert high pressure hoses conform to the EN 559/ISO 3821 standards. Sievert hoses are also extra frost resistant and can be used in temperatures down to -30°C. The Sievert hose is designed with an inner layer of black gas resistant rubber, a middle layer of reinforcing weave to withstand high pressure and an outer orange coloured layer to protect against external damage, sunlight and ozone.

Sievert hoses are available with inside diameters of 5 mm, 6,3mm and 8 mm in 50 meter rolls or as factory fitted and leak tested hose kits.

Propane hoses

Diameter 5 mm
EN 559 / ISO 3821

Propane hose no.	Connection type	Connections	Length, m
853090		-	50 metre roll
717321	Fixed	BSP 3/8"LH / BSP 3/8"LH	2
717341	Fixed	BSP 3/8"LH / BSP 3/8"LH	4
717431	Fixed	BSP 3/8"LH / BSP 3/8"LH	10
701501	Fixed	BSP 3/8"LH / M14x1	2
701291	Fixed	BSP 3/8"LH / M14x1	4
701261	Fixed	BSP 3/8"LH / M14x1	10
717320	Fixed / Swivel	BSP 3/8"LH / BSP 3/8"LH	2
701294	Fixed / Swivel	BSP 3/8"LH / BSP 3/8"LH	4
701505	Fixed / Swivel	BSP 3/8"LH / M14x1	2
701290	Fixed / Swivel	BSP 3/8"LH / M14x1	4

Propane hoses for large burners

Extra resistant
Diameter 6,3 mm
EN 559 / ISO 3821

Propane hose no.	Connection type	Connections	Length, m
770037	Fixed	BSP 3/8"LH / BSP 3/8"LH	5
770039	Fixed	BSP 3/8"LH / BSP 3/8"LH	8
770038	Fixed	BSP 3/8"LH / BSP 3/8"LH	10
770015	Fixed	BSP 3/8"LH / BSP 3/8"LH	20

Flexible
Diameter 8 mm
EN 559 / ISO 3821

Propane hose no.	Connection type	Connections	Length, m
836990		-	50 metre roll
701295	Fixed	BSP 3/8"LH / BSP 3/8"LH	5
711511	Fixed	BSP 3/8"LH / BSP 3/8"LH	10
701510	Fixed / Swivel	BSP 3/8"LH / BSP 3/8"LH	10
711510	Fixed / Swivel	BSP 3/8"LH / M14x1	10

Quick connections



Gas quick connection according to EN 561, ISO 7289

- Double O-ring sealing
- Gas cut-off

Threads:

In accordance with EN 560, ISO 3253 or country specific connections: 3/8"LH

Art no.	Description	Connection	Weight, g	Dimension, mm
754213	Quick connection OT	G3/8" LH OT	77,3	53x21
754214	Coupling pin IT	G3/8" LH IT	41,8	47x21
754215	Quick connection IT	G3/8" LH IT	86,4	52x21
754216	Coupling pin OT	G3/8" LH OT	29,3	47,5x15

OT=Outside thread IT=Inside thread



Hose nipples Fixed

Hose nipple no.	709621	709180	708971	717000	717020
Thread	BSP 3/8"LH	BSP 3/8"LH	M14x1	Shell	POL
Inside hose Ø, mm	5	5 and 8	5 and 8	5 and 8	5 and 8



Hose nipples Swivel

Hose nipple no.	722001	717331	715161	Hose clip no.	901359	900477
Thread	BSP 3/8"LH	BSP 3/8"LH	M14x1	Inside hose Ø, mm	5	8 adjustable
Inside hose Ø, mm	5	5 and 8	5 and 8			



Connections



Connections no.	Description
754206	Quick Connection female, BSP 3/8"LH for hose
754210	Nipple for Quick Connection male, BSP 3/8"LH for handle
770512	Double nipple, BSP 3/8"LH x BSP 3/8"LH for hose
770067	Connection for connecting two hoses, DIN Kombi
770082	Hose for 770067, length 40 cm, DIN Kombi

Valve



Valve no.	Description
700001	Valve adaptor M14-1,5 / BSP 3/8"LH. Horizontal outlet, convenient swivel connection.

Regulators

Hose failure valves



Sievert regulators are manufactured in brass to ensure the highest quality and long service life. The valves have a very high capacity and precise outlet pressure.

Why use a regulator?


Certain Pro 86/88 burners, such as cyclone burners and most Promatic burners, require a steady pressure of 2 bar in order to perform well. Other burners can also operate under higher pressures but it is still an advantage to reduce the pressure from the propane cylinder. The advantage is that the pressure can be stabilized to obtain the same pressure on a warm summer's day as on a cold winter's day. The diagram shows how the pressure in an LP-gas cylinder varies with temperature. If the gas output is high, the gas cylinder will be cooled down and the pressure will drop.

Why use a hose failure valve?

A hose failure valve improves safety by **cutting off the gas flow in case of a hose rupture or some other major gas leak**. The use of hose failure valves is especially recommended on long hoses. The hose connection rotate freely on the valve housing, which reduces the risk of the hose becoming entangled. Sievert hose failure valves are supplied separately (3054) or integrated in regulators (3063, 3083, 3092 and 3093).

Why use LTS?

The Leak Test System improves safety even further. The **LTS valve is designed to detect minor leaks**. Before starting work, the operator can check for leaks in the system with the LTS valve. Their use is especially **recommended in poorly ventilated premises and when working below ground**. A regulator with LTS is always combined with a hose failure valve, to take care of the risk from major leaks.

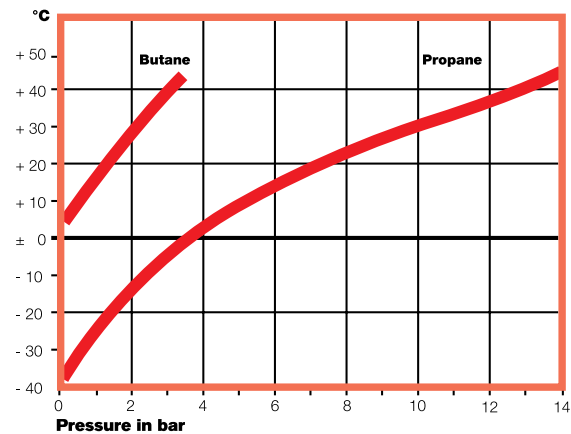

Connections Guide

Commercial name	POL	BSP	Italian	DIN-Kombi	Shell
Thread	0.88"-14NGO	3/8"LH	W20.0-14LH	W21.8-14LH	W21.8-14LH
Standard	G.9	G.25	G.1	G.5	-
Country	CZ, DE, NO, PL, PT, SE	DE	AT, GR, IT	AT, DE, PL	FR
					

Regulators & hose failure valves

Regulators

Regulators with fixed pressure



Regulator no.	Connection	Pressure	Max. Capacity
309121	POL	2 bar	6 kg/h
309122	BSP 3/8"LH	2 bar	6 kg/h
309124	Italian	2 bar	6 kg/h
309129	Shell	2 bar	6 kg/h
309175	DIN Kombi	2 bar	6 kg/h

Regulators with fixed pressure and hose failure valve



With hose failure valve	Connection	Pressure	Max. Capacity
309221	POL	2 bar	4 kg/h
309222	BSP 3/8"LH	2 bar	4 kg/h
309225	DIN Kombi	2 bar	4 kg/h
309345	DIN Kombi	4 bar	12 kg/h
309229	Shell	2 bar	4 kg/h
309399	Shell	4 bar	12 kg/h

Regulators with adjustable pressure



Regulator no.	Connection	Pressure	Max. Capacity
306111	POL	1-4 bar	5-20 kg/h
306112	BSP 3/8"LH	1-4 bar	5-20 kg/h
306115	DIN Kombi	1-4 bar	5-20 kg/h
306119	Shell	1-4 bar	5-20 kg/h
With manometer	Connection	Pressure	Max. Capacity
308111	POL	1-4 bar	5-20 kg/h
308115	DIN Kombi	1-4 bar	5-20 kg/h

Regulators with adjustable pressure and hose failure valve



With hose failure valve	Connection	Pressure	Max. Capacity
306311	POL	1-4 bar	5-12 kg/h
306312	BSP 3/8"LH	1-4 bar	5-12 kg/h
306314	Italian	1-4 bar	5-12 kg/h
306315	DIN Kombi	1-4 bar	5-12 kg/h
306319	Shell	1-4 bar	5-12 kg/h
With manometer	Connection	Pressure	Max. Capacity
308311	POL	1-4 bar	5-12 kg/h
308315	DIN Kombi	1-4 bar	5-12 kg/h

Regulators with adjustable pressure, HFV and LTS

With leak test system	Connection	Pressure	Max. Capacity
306961	POL	1-4 bar	1-2,3 kg/h
306962	BSP 3/8"LH	1-4 bar	1-2,3 kg/h

Regulators with adjustable pressure for cartridges



Regulator no.	Connection	Pressure	Max. Capacity
265012	EU 7/16" cartridge	0-2 bar	-
265033	US 1" cylinder	0-2 bar	-

Hose failure valves

With convenient swivelling angled connection.



HFV no.	Connection	Pressure	Max. Capacity
305401	POL	High 1,5-4 bar	10-14 kg/h
305406	BSP 3/8"LH	Low 1,5-4 bar	3,8-5,7 kg/h
305402	BSP 3/8"LH	High 1,5-4 bar	10-14 kg/h
305404	Italian	High 1,5-4 bar	10-14 kg/h
305405	DIN Kombi	High 1,5-4 bar	10-14 kg/h
305409	Shell	High 1,5-4 bar	10-14 kg/h
645000	POL, hose nipple 5-8 mm	Ca. 7 bar	14 kg/h

Manometer



Manometer	Pressure
720730	For 3061, 3063, 3081 and 3083

Refillable cylinders

ECONOMICAL

ENVIRONMENTALLY FRIENDLY

Refillable LP Gas cylinders

- Manufactured of high quality steel, treated with corrosion protection and durable varnish on the outside
- Fitted with self closing connecting valves and integrated safety valve



Article no.	200041	201251	200060	201260	200426
Connection	M14 x1,5	M14 x1,5	M14 x1,5	M14 x1,5	BSP 3/8 LH
Total weight (kg)	1,2	5,7	1,2	5,7	1,72
Contents (kg)	0,34	2,0	0,34	2,0	0,42
Height (cm)	28	22	28	22	30
Safety valve	External	External	In valve	In valve	In valve

Accessories



Hose holder no.

717031

Hose holder for cylinder 2012. A neat and practical solution for carrying and storing a torch kit and hose.



Suspension and carrying hook no.

884104/884105

884104: For use with the 2000, 2004 cylinder.
884105: For use with regulator 265012/265033.

Light line



Full range of burners, see page 21

Valve no. **871601**

Combined valve and neck tube assembly. For use with the refillable cylinder 2000.



Valve no. **881647**

Complete torch with US connection. For use with disposable cylinder 2209 and 2211

Refillable cylinders



Refill connections and accessories for refillable LP gas cylinders



Refill connection no. **203902**

Thread: POL / M14x1,5 for cylinder 2000 and 2012



Refill connection no. **204402/204403**

204402 Thread: Shell / M14x1,5 for cylinder 2000 and 2012
204403 Thread: DIN Kombi / M14x1,5 for cylinder 2000 and 2012



Refill connection no. **702621**

Thread: POL / BSP 3/8"LH for cylinder 2004 and 3960



Refill connection no. **702871**

Thread: Shell / BSP 3/8"LH for cylinder 2004 and 3960



Refill connection no. **757007**

Thread: DIN Kombi / BSP 3/8"LH for cylinder 2004 and 3960



Refill connection no. **770327**

Thread: DIN Household / BSP 3/8"LH for cylinder 2004 and 3960



Art no **720740** Art no **700001** Art no **769200**

Adaptor no. **720740/700001//769200**

720740: Adaptor for connecting POL regulator to valve - 700001. Threads - POL / BSP 3/8"LH. - 769200: Adaptor POL / DIN Kombi and Shell.



Cylinder valve no. **770326**

BSP 3/8"LH for cylinder 2004.



Cylinder trolley no. **730470**

With rubber wheels. Including nylon strap.

Gases

Disposable cartridges



PREMIUM QUALITY

SAFETY

Butane gas - 1925°C

- Piercable cartridges 221093 without valve
- Cartridge 220183 with adaptors for refilling butajet lighters etc.
- Contains 100% butane



Ultragas - 2100°C

- Built-in Anti-Flare function
- Gas mixture of propane, butane, propylene



Powergas - 1925°C

- Disposable cartridges with self closing valve
- Contains a gas mixture of 35% propane and 65% butane



System

EN 417:2012

Article no.	221083	220183	220283	220583	220383	220483
Connection	Piercable	Filling tube	EU (7/16")	EU (7/16")	EU (7/16")	EU (7/16")
Weight (g)	280	256	110	337	257	450
Contents (g)	190	168	60	210	175	336
Contents (ml)	350	330	210	380	300	600
Gas mixture	Butane	Butane	Propane / Propylene / Butane	Propane / Propylene / Butane	Propane / Butane	Propane / Butane
ADR	UN 2037	UN 2037	UN 2037	UN 2037	UN 1950	UN 1950



Safety

Disposable gas

Our filling of gas cartridges is controlled with the greatest of care. An automated weight control on the production line weighs each individual cartridge. The cartridge is then tested for leaks by immersing it in a 55°C water bath for three minutes. If the cartridge weighs too little or too much or if gas leaks out during the water test, it is automatically removed from the production line and discarded.

“The various safety steps in the process guarantee that each cartridge is of the highest quality and that it is completely safe for our customers to use,” “We know that we have unique safety solutions in our new factory and that we therefore always deliver the best products to our customers.”

MAPP® and Ultramapp gas - 2400°C For soldering, brazing and heating applications

- Safer, faster, cheaper and easier to work with than Acetylene
- Not sensitive to shocks
- Environmentally friendly and non toxic gas mixture



Premium quality Propane - 1925°C

- Adapted to most soldering and brazing applications




System

Article no.	220685	221183	220885	220983
Connection	EU (7/16")	US (1")	EU (7/16")	US (1")
Weight (g)	536	1200	536	1200
Contents (g)	405	400	405	400
Contents (ml)	750	788	750	788
Gas mixture	Propylene/Butane	Propylene	Propane/Butane	Propane
ADR	UN 2037	UN 1077	UN 2037	UN 1978
Standard	EN 417	EN 12205	EN 417	EN 12205

Powerjet

The professional torch system

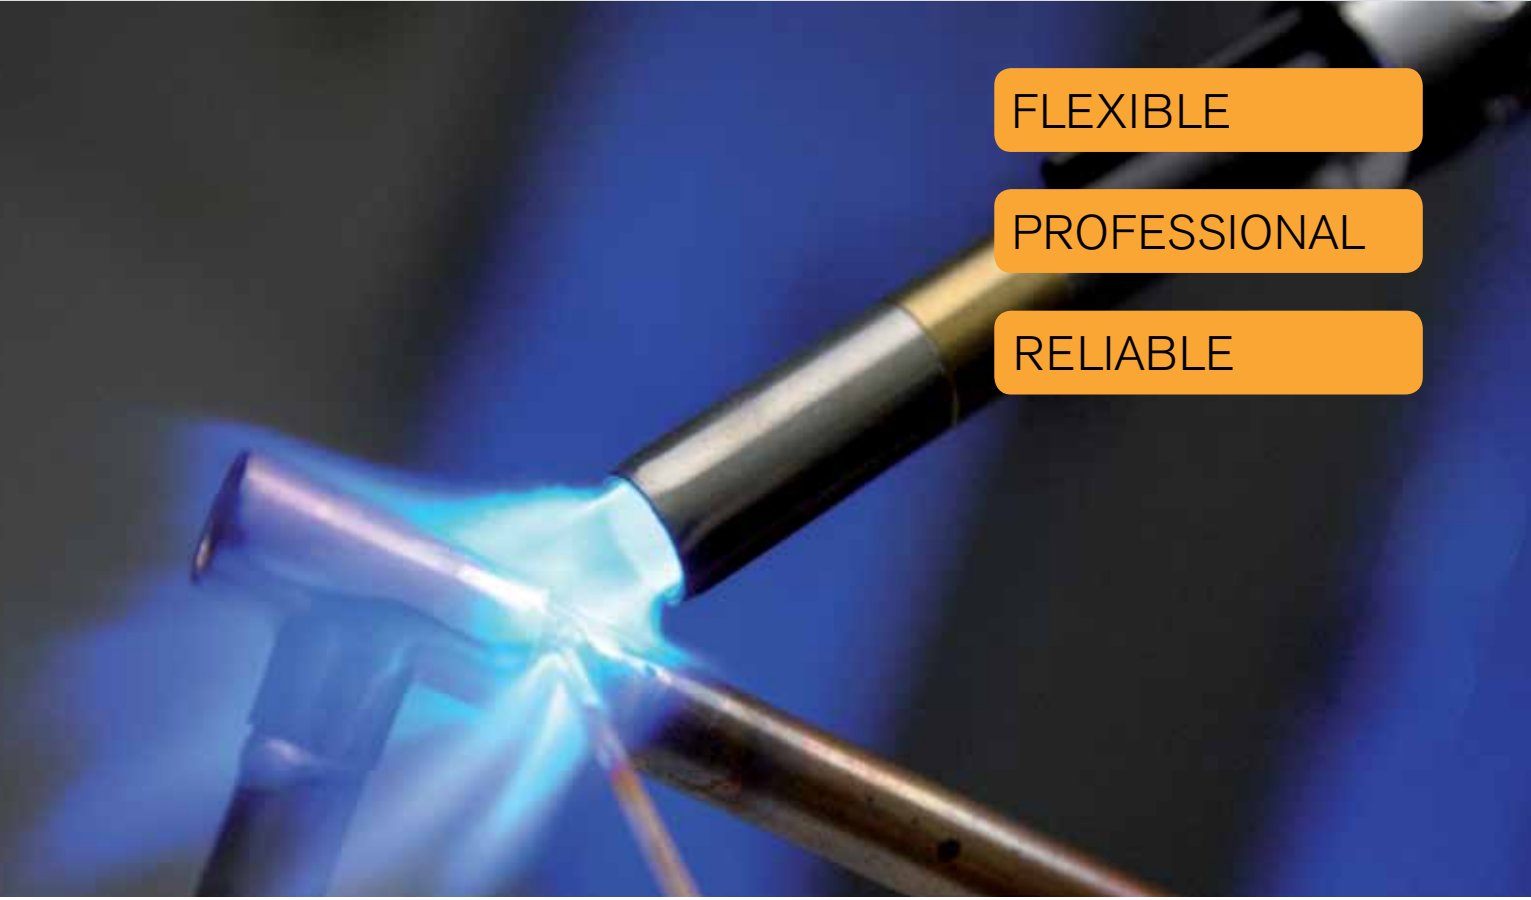



FLEXIBLE

PROFESSIONAL

RELIABLE

Flexibility is the key word to describe the Sievert hand held torch system. These blowtorches provide everything the craftsman or discerning home handyman requires. With many unique features, these are the most advanced blowtorches for brazing or soft soldering, heat-shrinking, heating and dismantling work.

This Sievert Torch System operates on a number of fuels from propane, butane, Propane/Butane mix, Sievert Ultragas (a highly efficient anti-flare mixture) and our MAPP® and Ultramapp for extreme high heat levels.



Soldering/
Brazing



Heating



Precision



Shrinking




Waterproofing/
Welding



Paint stripping

- The most powerful and efficient torch system in the market
- The ergonomic handle is both long lasting and reliable
- Reliable Automatic Piezo ignition (up to 30000 ignitions)
- Trigger on/off function helps preventing LPG wastage
- Anti-Flare enables the torch to operate in all positions (360°)
- Full range of 6 easily interchangeable burners
- Easy exchange of nozzles
- Designed for use with MAPP® but also suitable for use with Propane, Ultramapp and Ultragas



Technical data	
Working pressure, bar	2
Weight, g	290
Length, mm	180
Height, mm	80

Connections	Art no.
Sievert M14x1,5	253501
EU 7/16"	253511
US 1"	253547

Powerjet 2535



New ergonomic comfort grip

Trigger on/off function helps preventing LPG wastage

No gas emission unless burner fitted



New trigger lock, provides continuous flame for hands-free use

New drop protection for highest safety.



New precise flame adjustment valve, turns only 270°


New (orange) Piezo ignition chock protection cover




Powerjet

The professional torch system

Powerjet 2535



Connections:



Sievert
M14x1,5

EU
7/16"


US
1"

System



Powerjet	253501	253511	253547
Burner diameter Ø, mm	14	14	16
Gas Consumption, g/h at 2 bar	170	170	230
Effect, kW	2,2	2,2	2,9
Cyclone burner	8706	8706	8707
Connection	Sievert	EU	US

Metaljet 2155



System



- Metaljet is the heavy duty torch
- Reliable Automatic Piezo ignition (up to 30000 ignitions)
- Trigger on/off function helps preventing LPG wastage
- Anti-Flare enables the torch to operate in all positions (360°)
- Full range of 6 easily interchangeable burners
- Easy exchange of nozzles
- Designed for use with Ultramapp but also suitable for use with Propane

Metaljet	215512	215513
Burner diameter Ø, mm	16	16
Gas Consumption, g/h at 2 bar	230	230
Effect, kW	2,9	2,9
Cyclone burner	8707	8707
Connection	EU	US

Metaljet kits





Metaljet kit	215563	215565	215583	215585
Connection	EU	US	EU	EU
Metaljet	215512	215513	215512	215512
Burner	870701	870701	870701	870801
Burner	870201	870201	-	871001
Gas	220685	221183	220885	220885

Professional Service Case made of sturdy plastics.
One cylinder foot is included in all kits

Powerjet 2135, 2335 and 2435

Powerjet




System



Reliable Automatic Piezo ignition (up to 30000 ignitions) • Trigger on/off function helps preventing LPG wastage • Anti-Flare enables the torch to operate in all positions (360°) • Full range of 5 easily interchangeable burners • Easy exchange of nozzles



Connections:



Sievert M14x1,5 EU 7/16" US 1"

Powerjet	213551	233512	243553
Burner diameter Ø, mm	14	14	16
Gas Consumption, g/h at 2 bar	170	170	230
Effect, kW	2,2	2,2	2,9
Cyclone burner	8706	8706	8707
Connection	Sievert	EU	US

Powerjet kits



Powerjet hose kit **219301**

This kit contains: Powerjet 2135 handle with 8706 cyclone burner. 2 m hose and 700001 connection valve. Plastic cover. For refillable cylinder 2000 or 2012



Service case MAPP® **243517**

Professional Service Case made of sturdy plastics including one Powerjet 2435 torch, one cyclone burner 870701, 2 MAPP® disposable cylinders 221183 and one cylinder support.


Powerjet 2235

Easyjet 2295



• Light-weight composite handle • Developed for DIY applications like soft soldering, loosening bolts, paint stripping, fire lightning • Delivered with 8704 standard burner and 2204 gas cartridge

System



EU 7/16"

Powerjet **223511**

Kit with 2204 gas

Powerjet **223512**

Handle only



• Simplified hand-held torch with piezo • Fixed standard flame burner • Delivered with Sievert Powergas • Developed for basic DIY applications like soft soldering, loosening of bolts, paint stripping, fire lightning and cooking

for Anti-Flair effect use Ultragas



EU 7/16"































Powerjet **229501**

Kit with 2204 gas



Powerjet

Interchangeable burners

	Pin-point burner 870201	Standard burner 870401	Cyclone burner 870601	Cyclone burner 870701	Hot-air burner 870801	Soft flame burner 871001
	 	 	 	 	 	 
Precision	<ul style="list-style-type: none"> For small soft soldering jobs Gives a precise and stable flame 	<ul style="list-style-type: none"> For soft soldering and other small heating jobs 	<ul style="list-style-type: none"> For brazing and soft soldering Intensive and effective short flame that reaches around the pipe 	<ul style="list-style-type: none"> For brazing and soft soldering Highly efficient cyclone burner with increased tip diameter 	<ul style="list-style-type: none"> For shrinking and paint stripping Powerful and wind stable hot-air stream 	<ul style="list-style-type: none"> For shrinking and heating jobs Powerful and wind stable soft flame
						
Soft soldering						
						
Heating						
						
Brazing						
						
Paint stripping						
						
Shrinking						
						
System						

Burner no.	870201	870401	870601	870701	870801	871001
Burner diameter Ø, mm	15	16	14	16	38	24
Gas Consumption, g/h at 2 bar	40	90	170	230	130	230
Effect, kW at 2 bar	0,5	1,2	2,2	2,9	1,7	3,5
Soldering max pipe Ø, mm	10	18	40	50	-	22
Brazing max pipe Ø, mm	-	-	18	20	-	-


Powerjet

Soldering/ Brazing	Heating	Precision	Shrinking	Waterproofing/ Welding	Sheet metal	Paint stripping
Cyclone burners for soft soldering and brazing	Burners for soft soldering	Pin-point burner	Soft flame burners	Soft flame burners	Soldering Irons	Hot-air burners
870601 Ø14mm	870401 Ø16mm	870201 Ø16mm	871001 Ø24mm	871001 Ø24mm		870801 Ø24mm
870701 Ø16mm	871001 Ø24mm		Hot-air burners	Hot-air burners		
	Cyclone burner		870801 Ø24mm	870801 Ø24mm		
	870601 Ø14mm					
	870701 Ø16mm					

Complete your hand torch kit
Gas cartridge or cylinder that fits your handle



Connections:



Sievert
M14x1,5

EU
7/16"

US
1"



Hoses

For more information, see page 38



Gas

For more information, see page 45

Turbojet


Easy-to-use torch with swivel burner for hands-free work

NO FLARE-UP

360° SWIVEL



For all kinds of brazing, soft soldering and heating applications.
Available in EU or US connection, with and without piezo ignition.



360° swivel burner for hard-to-reach places

Built-in regulator 0-3,5 bar



Compact and stable cyclone flame

Strong metal piezo cover for long lasting durability

Turbojet swivel torches

Turbojet




Twin swivel torches

System



Connections:



EU
7/16"

US
1"



- For Brazing of tubes up to \varnothing 25 mm

Technical data	
Working pressure, bar	0-3,5
Burner diameter \varnothing , mm	14x2
Gas consumption, g/h	590
Effect, kW	7,6
Soft soldering max \varnothing , mm	60
Brazing max \varnothing , mm	25


Valve connections	Art no.
EU 7/16" with piezo	264112
US 1" with piezo	264133

Single swivel torches

System



Connections:



EU
7/16"

US
1"



- For all kinds of brazing, soft soldering and heating applications

Technical data	
Working pressure, bar	0-3,5
Burner diameter \varnothing , mm	14
Gas consumption, g/h	295
Effect, kW	3,8
Soft soldering max \varnothing , mm	40
Brazing max \varnothing , mm	18

Valve connections	Art no.
EU 7/16" with piezo	261012
US 1" without piezo	262033
US 1" with piezo	261033

Hot-air burner




- For shrinking and paint stripping

Hot-air burner no.	263201
Burner \varnothing , mm	38
Gas consumption, g/h	180
Effect, kW	2,3



Soldering mat

For wall and floor protection when soldering. Saves heat and time. For temperatures up to 760°C.



Solder mat no.	415061
Dimensions:	25x25 cm

For wall and floor protection when soldering. Saves heat and time. Formable solder mat. For temperatures up to 700°C.



Aluminium Solder mat no.	415062
Dimensions:	33x50 cm

Handyjet

The new multi-purpose torch



PIEZO IGNITION


ANTI-FLARE



Soldering/
Brazing



Heating



Paint stripping

Multi-purpose is the keyword for our new Handyjet line. Examples of applications are soldering, paint stripping, de-icing, cooking, barbeque and many other heating applications.

New unique burner

Our new Handyjet has a new powerful, efficient and windstable multi-purpose burner. The new unique burner is designed with a preheating tube, that heats up the gas before combustion. This means that our new Handyjet can be used upside down without any flare-ups.



NEW



Sievert Handyjet 2281, 2282 and 2283



Drop protection for maximum safety and durability



Piezo ignition and new superior flame adjustment valve



Ergonomic comfort grip

Models



Article number	228101	228201	228301
Burner diameter Ø, mm	20	20	20
Gas consumption, g/h	140	140	80
Effect, kW	1,8	1,8	1,0
Piezo ignition	No	Yes ⚡	Yes ⚡
Gas cartridge connection	EU (7/16")	EU (7/16")	Pierceable

Gases

Recommended disposable gas cartridges



Product name	Butane gas	Powergas
Art. no.	221083	220383
Connection	Pierceable	EU (7/16")
Contents (ml)	350	300
Gas mix	Butane	Propane / Butane

Butajet

Refillable torch system

HANDY

REFILLABLE



Turbo Lite torch 420001



- Gives an exact and wind stable pin-point flame ideal for de-icing of bicycle- and car locks, camping or as a cigarette lighter
- Automatic ignition
- Complete portability
- Flame lock child resistant
- Flame temperature 1300°C
- Burning time per fill 30 min

Microjet torch 423000




- Gives a precise and wind stable pin-point flame Ideal for melting/de-icing of snow and ice, lighting barbeques, candles and small heating works
- Automatic ignition
- Complete portability
- Fueled by butane lighter or included fuel cell
- Flame temperature 1300°C
- Burning time per fill 20 min

Pro torch 430000




- Gives a precise and adjustable flame ideal for cooking, lighting barbeques and candles also small soldering jobs
- Automatic ignition
- Complete portability
- Hi-tech polymer construction - light weight yet sturdy
- Flame temperature 1300°C
- Burning time per fill 60 min

Pro torch with rubber grip 432000



- Gives a stable and adjustable flame ideal for cooking, lighting barbeques and candles also small soldering and shrinking jobs
- Automatic ignition
- Complete portability
- Ergonomic handle with rubber grip
- Removable safety stand included
- Flame temperature 1300°C
- Burning time per fill 220 min

Pro torch heavy duty 435000




- Gives a powerful and adjustable flame ideal for cooking, lighting, melting/de-icing, soldering and shrinking jobs
- Automatic ignition
- Complete portability
- Highest output flame of any butane torch
- Separate Controls for Fuel and Air
- Flame temperature 1350°C
- Burning time per fill 200 min

Electric ignition soldering kit 410001

Premium soldering kit 412001

- For applications such as automotive and truck repairs, TV- and radio repairs, jewelry repairs, electronics, air condition, shrinking and other heating jobs
- Automatic piezo ignition
- Portable multi function heat tool
- Flame temperature 1300°C



- Power range 30-100 Watt
- Burning time per fill 120 min



- Power range 30-125 Watt
- Visible fuel level
- Burning time per fill 210 min



Refilling cartridge

- Disposable cartridge with self closing valve
- Contains 100% butane
- For refilling of the Butajet line



Technical data	220183
Connection	Filling tube
Weight, g	256
Content, g	168
Content, ml	330
Cartridge	Disposable

Grinding wheel dressers

RESTORE



Reconditioning grinding wheels

A worn or clogged grinding wheel seriously reduces its grinding ability. With a Sievert Grinding Wheel Dresser, the grinding wheel can be restored to almost new condition and large amount of money will be saved.

The sturdy and comfortable hardwood handle provides a stable but soft grip. The roller comprises complete discs of punched Swedish special steel with U-shaped teeth. Through a special method of hardening, the teeth have been given the correct hardness and toughness. Supporting heels on the dresser cover enable it to be placed precisely against the grinding wheel. The cover also provides protection for the face and hands against sparks and flying particles.

The choice of Sievert Grinding Wheel Dresser depends on the grain size, hardness and speed of the grinding wheel.



GWD no.	361208	361108	361008
Grinding wheel max Ø, mm	500	500	200
Max width, mm	102	63	38
Max peripheral speed m/s	50	50	30



Dresser roll no.	701012	701002	700992
For GWD art no.	361208	361108	361008
Ø, mm	56	55	36
Width, mm	65	39	21

Gardener

Heat away the weeds

SIEVERT®

Gardener

CONVENIENT

ENVIRONMENTALLY FRIENDLY



Gardener



Heat away the weeds

- Convenient - Saves your knees and back
- Environmentally friendly - No chemicals
- Automatic piezo ignition - No matches needed

Gardener no.	223001	223101	223097
Gas Consumption, g/h	300	400	400
Length, mm	770	700	700
Weight, g	750	750	750
Connection	EU	Sievert	US

Cylinder/gas cartridge not included

Slowly sweep the burner about 5 cm above the weeds. The plant shall be heated, not burned. The heating causes the cell walls in the plant to burst and the plant dies of drying out. A correct heating can be checked by pressing a leaf between the fingertips. A dark green fingerprint shall then appear on the leaf.



Weed. Heat it. 2-3 days later.

After 2-3 days the weeds have wilted completely - with just the need to sweep up and compost. The treatment is best carried out in spring and is most effective against small weeds. Small annual weeds die completely after one treatment. Grass, dandelion and other perennial weeds need repeated treatment throughout the growing season.

Roofing

Complete range of hot-air welding tools and machines



Hot-air welding machines

Whether you should weld modified bitumen such as SBS and APP or plastic membranes such as TPO and PVC by using hot-air, Sievert offers a complete range of hot-air welding machines.

Modified Bitumen Welding



Electric hot-air welding machine
TW 5000



LPG/electric hot-air welding machine
B2



LPG/electric hot-air welding tool
B2



Electric hot-air welding tool
DW 2000

Plastic Welding



Electric hot-air welding machine
TW 5000



Electric hot-air welding tool
DW 2000

DW 2000

The hottest tool on the market



DW 2000 has been specially designed for completing the toughest heating jobs with precision and ease. The revolutionary ergonomic design makes the welder lightweight and easy to handle.



Automatic cool-down mode for safe use prolongs the life of motor and element

Fully adjustable temperature control



Ergonomically designed handle with soft grip

Two-step fan control



Outstanding air flow and pressure. Long life brushless motor

Built in volt-metre

Models:

DW 2000

Voltage	Art no.
230V (EU)	292001



DW 2000 hot-air tool

Technical data DW 2000			
Voltage	230 V ~ Frequency (50/60 Hz)	Power	2000 W
Temperature	150°C - 600°C fully adjustable	Size	330 mm, Ø 48 mm
Air flow	I 205 l/min II 270 l/min	Weight	780 g
Air pressure	I 3000 Pa II 4000 Pa	Display	Digital LED
Emission level	65 dB	Cable length	3 m



**Delivered
in a roofing
tool-box**

Accessories



Nozzle no.	297305	297320	297340	297380
Description	Reduction	Angle slit	Angle slit	Angle slit
Dimension	5 mm	20x2 mm	40x2 mm	80x2mm



Silicon pressure roller no.	297428	297440	297480
Dimension, mm	28x34	45x34	80x34
Steel roller no.	297405		
Dimension	6x50 mm		
Seam test tool no.	297410		



Heating element no.	297201
Voltage	230 V

TW 5000

High Quality Welding Result



The Sievert TW 5000 was designed with the contractor in mind. It is the most versatile, reliable, powerful and easy to operate automatic hot-air welding machine available on the market.

The Sievert TW 5000 can weld any membrane, such as plastic, rubber and modified bitumen.

Sievert's long experience in making heating tools for the roofing industry together with new modern industrial design has created a truly professional and user friendly welding machine.



Four-wheel drive and belt system assures wrinkle-free welding

Powerful engine and efficient drive system allows climbing ability up to 30°

Separate free rolling wheels for easy transport



Easy to operate display unit. Digital display showing temperature, speed and incoming voltage

Runs on 400 V or 230 V

All electronics are made in accordance to highest industrial standard



Powerful fan for high-speed welding


Adjustable handle made of sturdy steel

Automatic start/stop sensor when the hot-air nozzle is engaged/disengaged

TW 5000



TW 5000 hot-air welding machine

Technical data TW 5000			
Temperature	40°C - 650°C fully adjustable	Cable length	90 cm
Speed	0 - 7m/min fully adjustable	Size	56 x 38 x 25 cm
Air flow	0 - 48 l/s fully adjustable	Weight (incl. 8kg)	30 kg
Display	Digital LED	Declaration of conformity	
Emission level	70 dB		



All models are delivered in a sturdy steel transport box.

Models Sievert TW 5000

Model 2990

- Overlap welding of PVC and similar roofing membranes



Plastic welding

Model 2991

- Overlap welding of modified bitumen and similar roofing membranes



Modified bitumen welding

TW 5000 no.	299001	299005	299047	299101
Voltage	400 V ~	220-230 V ~	220-230 V ~	400 V ~
Power	6300 W	5000 W	6300 W	6300 W
Ampere	16 A	22 A	28 A	16 A
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Nozzle width	55 mm			90 mm
Width of welding seam	40-55 mm			70-100 mm

B2

LP Gas hot-air welders



The Sievert B2 is a new, unique series of automatic hot-air welding machines without open flames. The Sievert B2 is specially designed for overlap welding and detail welding of membranes based on modified bitumen such as APP and SBS. The B2 machines operate on LP gas (propane) in combination with electricity. The electric fan assures and gives an optimal hot-air flow through the specially designed nozzle. A new and advanced combustion chamber mixes gas and air before ignition, which results in a steady and extremely powerful and strong jet stream.



Gas/air settings fully adjustable. Safe and efficient

Unique automatic hot air welding machine

Separate free rolling wheels for easy transport



An advanced combustion chamber mixes gas and air before ignition which results in a steady and extremely powerful and strong jet stream

Runs on 110 and 230 V



Operates on LP gas (propane) in combination with electricity

Safe and efficient

Classified as non-open flame welders



B2 LP Gas hot-air welders

Hot-air overlap welding machines

Model 456001

- Overlap welding of modified bitumen membranes.
- For welding seams 95 mm.

Model 456101

- Overlap welding of modified bitumen membranes.
- For welding seams 120 mm.

Hot-air detail welding tool

Model 456201

- For detail and repair jobs.
- Supplied with one straight and one angled nozzle.
- 70 mm nozzle.



Technical data

Technical data B2 welding machines			
Voltage	110 - 230 V~	Temperature	800°C fully adjustable
Power consumption	150 W	Air flow	0-40 l/s fully adjustable
Effect	13,5 kW	Gas type	Propane (LPG)
Gas consumption	1 kg/h - ca 500m welding	Pressure	3 bar
Frequency	50 Hz	Declaration of conformity	CE

B2 Overlap Welder	
Welding speed	0-7 m/min fully adjustable
Dimensions	50 x 108 x 90 cm
Weight	37 kg
Approvals	DG - 3583

B2 Detail Welder	
Dimensions	40 x 11,5 x 22 cm
Weight	2,5 kg
Approvals	DG - 3879

LP gas

Information

Sievert on LP gas

Gaseous paraffins is the correct description for what we call LP gas. LP gas consists of the hydrocarbons propane and butane, or a mixture of the two. These gases are extracted from crude oil. LP gas or LPG stands for liquefied petroleum gas. At normal temperatures, LP gas is gaseous but is a liquid when under pressure. Propane must be distributed in steel cylinders that can withstand high pressure. Butane can be distributed in lighter gas cartridges.

LP gas and safety

Leaking LP gas is a fire hazard.
LP gas is heavier than air.
LP gas uses air during combustion.

There are primarily two things to think about to prevent accidents with LP gas. 1. Avoid leakages. 2. Ensure good ventilation. Leaking LP gas can ignite and cause a fire, or in the worst case, an explosion. The cylinder valve should always be closed when the cylinder is not in use. The cylinder should be stored upright and, if possible, at ground level since LP gas is heavier than air and can therefore accumulate in cellars, manholes etc. Good ventilation is important when working indoors as the flame consumes air. Lack of oxygen causes incomplete combustion, which produces carbon monoxide instead of carbon dioxide. Carbon monoxide is a treacherous and deadly gas.

LP gas and efficiency

Permits very high power outputs.
Energy content is high.
Fuel is easy to store and transport.

A large amount of fuel only occupies a small space and is therefore easy to store and transport. LP gas forms a combustible mixture with air when the proportion of gas is between 2 and 10 percent. When the gas changes from a liquid to a gaseous form, the volume increases by 250 times. In other words, the energy content is high. LP gas can be stored in its container almost indefinitely without the gas breaking down.

LP gas and the environment

LP gas is non-toxic and does not contain hazardous additives.
It does not contaminate air or water.

LP gas does not produce any hazardous combustion gases, just carbon dioxide and water vapor. The gas does not contaminate water, it does not produce soot, it is not corrosive and it does not cause corrosion to iron or other metals. It does not contain lead or heavy metals and is non-toxic. In other words, LP gas is an environmentally friendly fuel. The only additive is a strongly smelling substance that acts as a warning signal for leaking gas. Normally, LP gas has no smell.

LP gas and handling

Work in well-ventilated areas.
Avoid placing the LP gas cylinder near sources of heat.
Ensure that the cylinder is stored upright during transport.

You should regularly check valves and connectors for leakage. Remember also that good ventilation is important at areas where the gas is stored or used. Ventilation is also important to ensure effective combustion. Make sure that the cylinder is at ambient temperature when you begin working. If you are going to use the fuel at temperatures below zero Celsius, use propane instead as butane does not gasify at low temperatures.

LP gas and fire


Always extinguish LP gas fires with powder, never water.
Move LP gas cylinders to a safe place if there is a fire in the vicinity.
If possible, close the valve on the cylinder.

Steel cylinders are fitted with a safety valve that opens if the pressure increases too much. This can occur if there is a fire close to the cylinder. The valve stops the cylinder exploding. To guarantee the function of the safety valve, it is important that the LP gas cylinder is stored in a standing position. In addition, a closed valve stops unchecked gas flow if a hose should become damaged.

LP gas and equipment

Never allow an untrained person to use the equipment.
Only use special LP gas parts.
Be extra careful with valves and connectors.

Never use other valves, burners or hoses that those designed for use with LP gas. Sievert LP gas hose conforms to the EN 559 standard. The hose consists of an internal rubber layer that is LP gas-proof, armouring an external rubber layer that can withstand air and aging. All equipment shown in this product catalogue is manufactured of materials that withstand LP gas and is designed so that the risk for leakage is minimal.

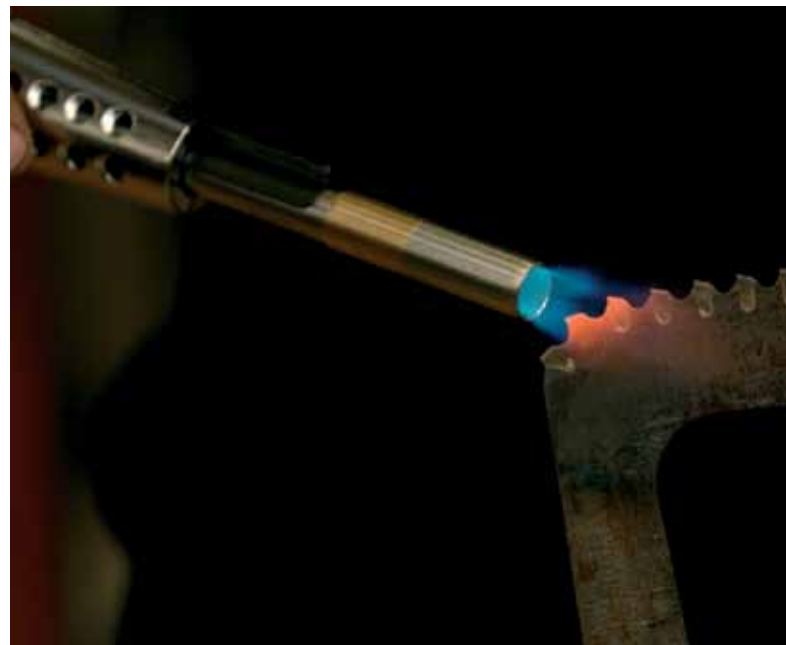

LP gas and checks

Ensure that you have the correct equipment for the job. Make sure that you have tightened all valves and connectors. Regularly inspect the equipment and check that the system is sealed.

Read the instructions for use and follow the safety advice. Use soapy water or a special liquid for detecting leakages on valves and joints to find any leaks. LP gas hoses should be checked very carefully and changed if you see any changes. Bend the hoses and look for cracks in the rubber. Hoses exposed to sunlight with age quicker than those used indoors.

LP gas and storage

LP gas is not affected by long storage periods. Always disconnect equipment from the container. Store the cylinder in a well-ventilated area.

Avoiding storing LP gas cylinders in areas that are warm. Temperatures below zero Celsius are, however, perfectly safe for storage. Ensure that the ventilation is good. In principle, LP gas can be stored indefinitely in its container without the quality being affected. Remember to remove all connectors before storing the equipment. To empty the system of gas, close the valve on the LP gas cylinder. Then close any valves on the rest of the equipment. In this way, you will avoid LP gas spillage when you open the system again.

LP gas and technical specifications

	Butane	Propane
Chemical formula	C ₄ H ₁₀	C ₃ H ₈
Density at 15°C	Heavier than air	Heavier than air
As gas	2.40 kg/m ³	1.85 kg/m ³
As liquid	0.58 kg/l	0.51 kg/l
Boiling point at atmospheric pressure	-2°C	-42°C
Gas pressure at -20°C	0	1.5 bar
Gas pressure at 0°C	0	4 bar
Gas pressure at +20°C	1.3 bar	7.5 bar
Energy content	49.5 MJ/kg 12.6 kWh/kg	50.4 MJ/kg 12.8 kWh/kg
Amount of air required for combustion	12.0 m ³ /kg	12.2 m ³ /kg
Maximum flame temperature with air	1925°C	1925°C
Combustion mixtures, volume-% gas in air	1.5 - 8.5%	2.1 - 9.5%

LP Gas

LP gas output from a cylinder

When LP gas turns from a liquid to a gas, heat is required which is taken from the liquid itself, from the container and from the surrounding air. LP gas and the bottle become cooler which reduces the pressure in the container. For larger burners, and especially during continuous use, a sufficient container size is necessary so that the burner can work at a constant power. When using larger burners or burners with high gas consumption, ensure the cylinder size is large enough to deliver the required gas, without significant temperature drop. Table below shows an example of the maximum quantity of gas possible to use during one hour for burners requiring 2 bar pressure. Conditions for this example are the following: gas – propane, cylinder size 11 kg, continuous gas use during one hour, temperature of air and cylinder.

Temperature	+20°C	0°C
Full cylinder 11 kg propane	3.8 kg	1.6 kg
Half cylinder 5.5 kg propane	1.9 kg	0.85 kg

For large gas burners you need to have big gas cylinders with enough gas or several cylinders linked together.

Temperature of the gas flame

Theoretically, LP gas has a maximum flame temperature of 1925 °C. In practice, this temperature is not reached when heating an object. The temperature achieved depends on the size of the object, how much heat is dispersed, the ability of the burner to transfer heat, the size of the burner and how long the object is heated. Therefore, the choice of burner depends on the job to be carried out.

Melting points of soldering metals

Soldering metal	Temperature
Tin solder	190 - 280°C
Aluminium soft solder	380°C
Aluminium hard solder	580°C
Silver solder	610°C
Phosphor copper solder	720°C
Bronze solder	860°C

Melting points of metals


Metal	Temperature
Lead	327°C
Zinc	419°C
Aluminium	658°C
Silver	961°C
Gold	1063°C
Copper	1084°C

Combination


Chart

Application code

Shows the applications for the product.

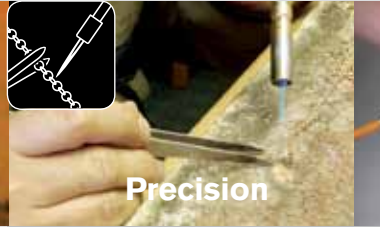

Promatic



336611 BSP 3/8"LH
336628 M14X1

Cyclone burners for soft soldering and brazing

- 334001 Ø14mm
- 333501 Ø19mm
- 333601 Ø25mm

Burners for soft soldering

- 333301 Ø14mm
- 334301 Ø19mm
- 334401 Ø25mm

Pin-point burner

- 333301 Ø14mm

Cyclone burner

- 334001 Ø14mm

Pro 86



348641

Pro 88



348841



348641/348841 BSP 3/8"LH
348642/348842 M14X1

Cyclone burners for soft soldering and brazing

For Pro 86

- 352403 Ø19mm
- 352503 Ø25mm

Burners for soft soldering

For Pro 86

- 393802 Ø17mm
- 393902 Ø17mm
- 394002 Ø17mm
- 394102 Ø22mm
- 871901 Ø17mm
- 872501 Ø25mm

For Pro 86

- 351102
- 350902
- 350101
- 351102

Burners for soft soldering and jewellery work

- 884204 Ø8mm
- 872001 Ø12mm
- 350101

Burners for soft soldering

- 393802 Ø17mm
- 393902 Ø17mm
- 394002 Ø17mm
- 351102

Powerjet



2535

Cyclone burners for soft soldering and brazing

- 870601 Ø14mm
- 870701 Ø16mm

Soft flame burners

Standard burner

- 871001 Ø24mm
- 870401 Ø16mm

Easyjet 2295 EU
Fixed standard burner

Pin-point burner

- 870201 Ø15mm

Large cylinder



Regulator connection:
Shell, POL,
DIN Kombi,
Italian



Propane hoses
Ø 5, 6,3 8mm



Regulator connection:
R 3/8"V



Valve
700001



Refillable
cylinders
2000/ 2012




Cylinder and
cartridge
connection:


Sievert
M14x1,5

EU
7/16"

US
1"

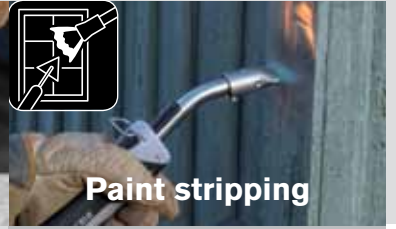

Soft flame burners



- 334891 **Ø28mm**
- 334191 **Ø38mm**
- 334791 **Ø50mm**

Hot-air burners




- 335990 **Ø25mm**
- 334990 **32x15mm**
- 333401 **Ø38mm**

Power burners




- 335002 **Ø40mm**
- 335602 **Ø60mm**
- 335102 **Ø50mm**
- 335302 **Ø60mm**
- 337302 **Ø60mm**

Hot-air burners



- 335890 **32x15mm**

Soldering Irons



- Soldering Iron 337030**
- 700301
- 700250
- 700350
- 700400
- Longlife 700550
- Portable Soldering Iron 338030**
- 700245
- 700500
- 700800
- Longlife 700353

Flat flame burner




- 334501 **40x8mm**

Hot-air burners



- 334990 **32x1,5mm**
- 333401 **Ø38mm**


Soft flame burners



For Pro 86

- 352890 **Ø28mm**
- 352990 **Ø38mm**

Power burners



For Pro 88

- 295101 **Ø34mm**
- 295001 **Ø50mm**
- 295301 **Ø60mm**
- 295402 **Ø70mm**
- 294102 **Ø28mm**
- 294202 **Ø32mm**
- 293401 **Ø34mm**
- 294302 **Ø35mm**
- 294402 **Ø50mm**


Neck tubes Titanium

- 355501-100mm
- 355001-350mm
- 355701-500mm
- 355601-750mm

Neck tubes Brass

- 100mm-350501
- 350mm-351001
- 500mm-350701
- 600mm-350801
- 750mm-350601

Soldering Irons



For Pro 86

- Soldering Iron 349241**
- 708121
- 701633 Longlife
- 701800
- 701630
- 295501
- 701725 Longlife
- 256200
- 707120
- 702070


Flat flame burner



For Pro 86


- 351703 **35x5mm**
- 884204
- 350101

Hot-air burners




- 870801 **Ø38mm**

Soft flame burners



- 871001 **Ø24mm**

Hot-air burners



- 870801 **Ø38mm**

Soft flame burners



- 871001 **Ø24mm**

Hot-air burners



- 716941
- 870801 **Ø38mm**

Search index

Art no.	Product Category	Page	Art no.	Product Category	Page	Art no.	Product Category	Page
200041	Refillable cylinders	42	294302	Pro 88	26	309222	Regulators	41
200060	Refillable cylinders	42	294402	Pro 88	24	309225	Regulators	41
200426	Refillable cylinders	42	295001	Pro 88	29	309229	Regulators	41
201251	Refillable cylinders	42	295101	Pro 88	29	309345	Regulators	41
201260	Refillable cylinders	42	295301	Pro 88	29	309399	Regulators	41
203902	Refillable cylinders Accessories	43	295401	Pro 88	29	333301	Promatic	12
204402	Refillable cylinders Accessories	43	295402	Pro 88	29	333401	Promatic	13
204403	Refillable cylinders Accessories	43	295501	Pro 86	36	333501	Promatic	13
213551	Powerjet	49	296001	Pro 88	26	333601	Promatic	13
215512	Metaljet	48	292001	DW 2000	63	334001	Promatic	12
215513	Metaljet	48	297305	DW 2000	63	334191	Promatic	12
215565	Metaljet	48	297320	DW 2000	63	334301	Promatic	12
219301	Powerjet	49	297340	DW 2000	63	334401	Promatic	12
219741	Pro 86	19	297380	DW 2000	63	334501	Promatic	15
219742	Pro 86	19	297380	DW 2000	63	334791	Promatic	12
220283	Cartridges & cylinders	44	297405	DW 2000	63	334891	Promatic	12
220383	Cartridges & cylinders	44	297410	DW 2000	63	334990	Promatic	13
220483	Cartridges & cylinders	44	297428	DW 2000	63	335002	Promatic	14
220583	Cartridges & cylinders	44	297440	DW 2000	63	335102	Promatic	14
220683	Cartridges & cylinders	45	297480	DW 2000	63	335302	Promatic	14
220883	Cartridges & cylinders	45	298101	Pro 88	27	335402	Promatic	14
220983	Cartridges & cylinders	45	298147	Pro 88	30	335602	Promatic	14
221093	Cartridges & cylinders	44	298201	Pro 88	30	335890	Promatic	13
221183	Cartridges & cylinders	45	298601	Pro 88	30	335990	Promatic	13
221184	Cartridges & cylinders	no	298647	Pro 88	30	335991	Promatic	15
223001	Gardener	59	299001	TW 5000	65	336611	Promatic	11
223101	Gardener	59	299005	TW 5000	65	336617	Promatic	11
223097	Gardener	59	299047	TW 5000	65	336628	Promatic	11
223511	Powerjet	43	299101	TW 5000	65	337026	Soldering Irons	29
228101	Handyjet	55	305401	Regulators	41	337030	Soldering Irons	34
228201	Handyjet	55	305402	Regulators	41	337037	Soldering Irons	34
228301	Handyjet	55	305404	Regulators	41	337093	Soldering Irons	34
229501	Powerjet	49	305405	Regulators	41	337302	Promatic	14
229515	Powerjet	49	305406	Regulators	41	338030	Soldering Irons	33
233511	Powerjet	no	305409	Regulators	41	338093	Soldering Irons	33
233512	Powerjet	49	306111	Regulators	41	344441	Pro 88	27
233518	Powerjet	no	306112	Regulators	41	344442	Pro 88	27
233563	Powerjet	no	306115	Regulators	41	345000	Pro 88	27
243515	Powerjet	no	306119	Regulators	41	346041	Pro 88	27
243518	Powerjet	no	306311	Regulators	41	346042	Pro 88	27
243553	Powerjet	49	306312	Regulators	41	346051	Pro 88	29
253501	Powerjet	47	306314	Regulators	41	346052	Pro 88	29
253511	Powerjet	47	306315	Regulators	41	347052	Pro 88	29
253547	Powerjet	47	306319	Regulators	41	348641	Pro 86	19
256200	Soldering Irons	31	306961	Regulators	41	348642	Pro 86	19
261012	Turbojet	53	306962	Regulators	41	348647	Pro 86	19
261033	Turbojet	53	308111	Regulators	41	348841	Pro 88	25
262033	Turbojet	53	308115	Regulators	41	348842	Pro 88	25
263201	Turbojet	53	308311	Regulators	41	348847	Pro 88	25
264112	Turbojet	53	308315	Regulators	41	349241	Soldering Irons	36
264133	Turbojet	53	309121	Regulators	41	349242	Soldering Irons	36
265012	Regulators	41	309122	Regulators	41	350101	Pro 86	20
265033	Regulators	41	309124	Regulators	41	350501	Pro 86	19
293401	Pro 88	26	309129	Regulators	41	350601	Pro 88	26
294102	Pro 86	21	309175	Regulators	41	350701	Pro 88	26
294202	Pro 88	26	309221	Regulators	41	350801	Pro 88	26

Search index

Art no. Product Category Page

350902	Pro 86	20
351001	Pro 88	26
351102	Pro 86	20
351703	Pro 86	20
352403	Pro 86	21
352503	Pro 86	21
352890	Pro 86	20
352990	Pro 86	20
355001	Pro 88	29
355501	Pro 88	29
355601	Pro 88	29
355701	Pro 88	29
356001	Pro 88	29
356101	Pro 88	29
356201	Pro 88	29
356301	Pro 88	29
356401	Pro 88	29
356501	Pro 88	29
356601	Pro 88	29
356701	Pro 88	29
361008	Grinding-wheel dressers	58
361108	Grinding-wheel dressers	58
361208	Grinding-wheel dressers	58
393802	Pro 86	20
393902	Pro 86	20
394002	Pro 86	21
394102	Pro 86	21
396000	Refillable cylinders	36
410001	Butajet	57
412001	Butajet	57
415061	Accessories	16
415062	Accessories	16
420001	Butajet	56
423000	Butajet	56
430000	Butajet	56
432000	Butajet	57
435000	Butajet	57
456001	B2	67
456101	B2	67
456201	B2	67
645000	Regulators	35
700001	Refillable cylinders Accessories	39
700245	Soldering Irons	33
700250	Soldering Irons	33
700301	Promatic	15, 34
700350	Soldering Irons	34
700353	Soldering Irons	34
700400	Soldering Irons	34
700500	Soldering Irons	34
700550	Soldering Irons	34
700800	Soldering Irons	34
700992	Grinding-wheel dressers	52
701002	Grinding-wheel dressers	52
701012	Grinding-wheel dressers	52
701261	LP Gas propane hoses	38
701290	LP Gas propane hoses	38

Art no. Product Category Page

701291	LP Gas propane hoses	38
701294	LP Gas propane hoses	38
701295	LP Gas propane hoses	38
701501	LP Gas propane hoses	38
701505	LP Gas propane hoses	38
701510	LP Gas propane hoses	38
701522	Grinding-wheel dressers	58
701532	Grinding-wheel dressers	58
701542	Grinding-wheel dressers	58
701630	Soldering Irons	35, 36
701633	Soldering Irons	35, 36
701720	Soldering Irons	35, 36
701725	Soldering Irons	35, 36
701800	Soldering Irons	35, 36
702070	Soldering Irons	35, 36
702621	Refillable cylinders Accessories	43
702871	Refillable cylinders Accessories	43
708121	Pro 86	36
709180	LP Gas propane hoses	39
709621	LP Gas propane hoses	39
711510	LP Gas propane hoses	38
711511	LP Gas propane hoses	38
715161	LP Gas propane hoses	38
716941	Promatic	16
717000	LP Gas propane hoses	39
717020	LP Gas propane hoses	39
717031	Refillable cylinders Accessories	36
717241	Promatic	16
717271	Pro 88	27
717281	Promatic	16
717320	LP Gas propane hoses	38
717321	LP Gas propane hoses	38
717331	LP Gas propane hoses	38
717341	LP Gas propane hoses	38
717431	LP Gas propane hoses	38
720106	Accessories	16
720730	Regulators	41
720740	Refillable cylinders Accessories	37
722001	LP Gas propane hoses	39
754206	LP Gas propane hoses	39
754210	LP Gas propane hoses	39
754213	LP Gas propane hoses	39
754214	LP Gas propane hoses	39
754215	LP Gas propane hoses	39
754216	LP Gas propane hoses	39
757007	Refillable cylinders Accessories	43
769200	Refillable cylinders Accessories	43
770015	LP Gas propane hoses	38
770036	LP Gas propane hoses	38
770037	LP Gas propane hoses	38
770038	LP Gas propane hoses	38
770039	LP Gas propane hoses	38
770044	Pro 88	26
770067	LP Gas propane hoses	39
770082	LP Gas propane hoses	39
770303	Soldering Irons	35

770326	Refillable cylinders Accessories	43
770327	Refillable cylinders Accessories	43
770343	Soldering Irons	31
770347	Soldering Irons	31
770348	Soldering Irons	31
770360	Soldering Irons	35
770361	Soldering Irons	35
770512	LP Gas propane hoses	33
836990	LP Gas propane hoses	38
853090	LP Gas propane hoses	38
870201	Powerjet	50
870401	Powerjet	50
870601	Powerjet	50
870701	Powerjet	50
870801	Powerjet	50
871001	Powerjet	50
871601	Light Line	43
871901	Light Line	22
872001	Light Line	22
872304	Light Line	22
872501	Light Line	22
881647	Light Line	43
884104	Refillable cylinders Accessories	43
884204	Light Line	20
884301	Promatic	15
884301	Accessories	16
900477	LP Gas propane hoses	39
901359	LP Gas propane hoses	39

Merchandise

Tool bags



• New Sievert tool bags perfect for storing and transporting Promatic or Pro torch kits.

Tool bags	500012	500013
Dimensions	Small bag	Large bag

Display stand

Counter-top display stand, for Promatic, New Pro 88/86 and Pro 95.



Powerjet pop-up

Cardboard pop-up with new Sievert powerjet 2535.



Pop-up	500014
Dimensions	160x45 cm

Sievert Rollups

New Handyjet
New Powerjet
DW 2000
PSI

Contact Sievert

Pallet covers	569107	569106
Dimensions	Half EU pallet 80x60 cm	EU pallet 120x80 cm
		





SIEVERT®
Swedish design and quality since 1882.

Sievvert AB
P.O Box 1366
SE-171 26 SOLNA
SWEDEN

Telephone: +46 (0)8 629 22 00
Fax: +46 (0)8 629 22 66

e-mail: info@sievvert.se
Internet: www.sievvert.se