

Catalogue 2013



Index Chapters

	page
Aquaria	5
Seasalt	11
Hydrometer	11
Salt Water Supplements	12
Special Nutrition	14
Plankton	15
Algal resources	15
Fresh Water Supplements	16
Cooling	17
Pumps	18
Protein skimmer	22
Filter systems	25
Filter components	28
Filter material	31
UVC sterilizer	32
Light	33
Measurement and control technology	41
Reverse osmosis	45
CO ₂	46
aqua tools	48
Filter accessories	50
Fish Box	52

Index A - Z

	page
aCone	23
Adapter union AM	50
airmeter	24
aminovit	14
Anthias	9
antigreen	15
antiphos Fe	31
aqua + GH	16
aqua + KH	16
aqua divider	50
aqua therm	44
aquabiovit	14
aquabreed 1000	15
aquafit	40
aquaflowfix	19
aqualife + Vitamins	16
aqualight	39
aqualine-serie	40
aquamoonLED	35
aquaniveau	43
aquareefLED	34
aquaspacelight 400	39
aquaspoon	13/48
aquastarlight T5	36
aquasunLED	33
aquasunlight NG	39
aquasunspot	35
arctic breeze	17
AT-Control	41
Aurelia	10
BactoBalls	31
biobacter	32
Blenny	6
Blue Tower	27
Bubble counter	47
Calciumreactor KR-serie	29
carbolit	31
carbolitreactor	30
CO ₂	46
Coral construct	49
Coral holder	49
Coral Sand	13
Cubicus	49
	7
defroster+ Deniballs	49 31
denimar	32
Dolomite	13
Dosing pump SP-serie	21
easy line	45
ECO Runner-serie	18
Electrode holder	41/43
electrode noider	41/43
ferreal + spureal	16
<u> </u>	50
Filter accessories 15 x 15	
filter bag Filterbox	31/49
Fish Box	
Fish Box System	52
Son Oyotom	

	page
Fish Station	25
Fish trap	48
fishknob	10
floreal + iod	16
Fluidised bed filter FB 5000	30
Gravel Cleaner set	49
Helix Max	32
Hydrocarbonate	13
Hydrocarbonate Reactor HR 400	28
Kalkwasser stirrer KS-serie	30
Kalkwasserpowder	12
Kauderni	7
LEDspot	33
LF controller	41
life A	14
magnetscraper	48
Magnifica 100	8
Malawi Station	25
Marin 1000	26
Mega Mag	48
Merlin plus (PRF-RO)	45
midiflotor	22
miniballs	31
Mini-Deniballs	32
miniflotor	22
Mistral-serie	20
mV computer-Set	42
mV controller	41
M-ventil	47
nano breeze	17
NanoProp 5000	19
Needle valve Nitratereductor NR-serie	51 28
Niveaumat	21
Niveau-Set	27
Non-return ventile	51
Ocean Light	38
Ocean Light LED	34
Ocean Light T5	35
Ocean Runner OR-serie	18
OceanProp 15000	20
Outlet strainer	51
Overflow box OFB	27
Overflow comb	50
ozone	43
Ozone Booster	43
Padova	10
PE-hose	47
Percula	8
pH computer-Set	42
pH controller	41
pH-control-Set	41
phosphatfilter Fe	30
plankton light reactor	15
plankton reactor	15
plexipad	48
pointex	15
Power Compact 24 W	36
Powerfilter PF 1000	19

	page
premium line	45
Pumps NK-/OK-pumps	19
reactor 100	46
reactor 1000	46
reactor 500	46
reactor M	46
Reducing T-piece	51
Reef Construct	49
REEF LIFE antired	15
REEF LIFE pointex	14
REEF LIFE products	12
Reef Salt	11
Reef Station	25
reefdoser	21
refractometer	11
regular	47
Regulation valve	51
Riff-serie	26
Round grate	50
salimeter	11
scraper	49
Seasalt	11
Shot Extension	49
Silencer	24
Silicagel	43
Skim Box	27
spotfix	35
station	47
sulfur pearls	31
Sulphur Nitratereductor SN-serie	29
Sulphur Reactor SR 400	28
sun cover T5	36
sunrise control	34
Sylveo 2	39
Systemfilter	27
T computer-Set	42
T controller	42
T controller twin	42
T5 Center	37
T5 sunbeam	36
T5 tubes	37
Tank union	50
Tap water filter test fluids	45
Titan cooler	17
Titanium heater	44
T-meter	42
T-meter twin	42
Trap-pest	48
Trickle filter T 10000 & 20000	24
Trickle filter T 5000	23
Tridacna	10
Turboflotor 10000	24
Turboflotor 20000	24
Turboflotor-serie	22
volcanit	16
Wooden airstones	24
Yasha	5

Item code EAN-No. Item

Aquaria

560.00 4025901126426 Yasha

Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. Yasha combines the full functionality of a reef aquarium in a compact design. The integrated filter compartment guarantees easy maintenance. With Optiwhite® glass. Equipment:

Current: NanoProp 5000, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: Turboflotor Blue 500 (8 watts), efficient and near silent operation

Light: 3 pcs. LED-lamps aquasunspot with 3 x 1 watt each (14,000 K), filter compartment, with high quality acrylic divider and surface skimmer.

Dimensions (I x w x h): c. 30 x 40 x 30 cm, water height c. 28 cm, c. 33,5 I volume



560.05 4025901130874 Yasha advanced

NeW Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. Yasha combines the full functionality of a reef aquarium in a compact design. The integrated filter compartment guarantees easy maintenance. With Optiwhite® glass.

Current: NanoProp 5000, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: Turboflotor Blue 500 (8 watts), efficient and near silent operation

Light: 3 pcs. LED-lamps aquasunspot with 3 x 3 watt each (14,000 K), filter compartment, with high quality acrylic divider and surface skimmer.

Dimensions ($I \times W \times h$): c. 30 x 40 x 30 cm, water height c. 28 cm, c. 33,5 I volume



560.01 4025901128512 Yasha Stand white

Cabinet for Yasha & Yasha advanced

Cabinet can be used for aquariums with dimensions of around 30 x 40 cm. The cabinet is designed especially for the Yasha & the Yasha advanced nano reeftank. It is built to support the weight of a full aquarium. The cabinet is of a modern and stylish design, to complement many different styles of living areas. The cabinet is supplied flat packed for easy transportation and home assembly with few parts. Dimensions (I \times w \times h): c. 30 \times 40 \times 100 cm



Item code EAN-

EAN-No.

Item

Aquaria

565.00 4025901126501 Blenny

Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. **Blenny** combines the full functionality of a reef aquarium in a compact design. The integrated filter compartment guarantees easy maintenance. With Optiwhite® glass.

Current: **NanoProp 5000**, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: **Turboflotor Blue 500** (8 watts), efficient and near silent operation

Light: 3 pcs. LED-lamps $\bf aquasunspot$ with each 3 x 3 watt (14,000K), energy saving LED light with high light output

Filter: filter compartment, with high quality acrylic divider and surface skimmer

Dimensions: (I x w x h): c. 40 x 50 x 40 cm, water height c. 38 cm, c. 76 I volume



Blenny advanced

565.10 4025901130850 Blenny advanced



Blenny

Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. **Blenny** combines the full functionality of a reef aquarium in a compact design. The integrated lter compartment guarantees easy maintenance. Filter compartment with high quality acrylic divider and surface skimmer. With Optiwhite® glass. Equipment:

Current: **NanoProp 5000**, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: **Turboflotor Blue 500** (8 watts), efficient and near silent operation, light: **aquareefLED** with 18 high-power Cree LED's 3 watt each (7 x 3 watt blue and 11×3 watt $12,000 \times 10^{-2}$ k) with a total power of app. 50 watt. Optionally we recommend the use of our **sunrise control** as programmable light control. The white and blue LEDs could be switched separately in groups. Filter: filter compartment.

Dimensions: ($l \times w \times h$): c. 40 x 50 x 40 cm, water height c. 38 cm, c. 76 l volume



Blenny Stand

565.01 4025901128529 **Blenny Stand** white

Cabinet for Blenny & Blenny advanced

Cabinet can be used for aquariums with dimensions of around 40 x 50 cm. The cabinet is designed especially for the **Blenny** & the **Blenny advanced** nano reeftank. It is built to support the weight of a full aquarium. The cabinet is of a modern and stylish design, to complement many different styles of living areas. The cabinet is supplied flat packed for easy transportation and home assembly with few parts.

Dimensions (I x w x h): c. $40 \times 50 \times 100$ cm

Item code EAN-No.

Item

Aquaria

570.00 4025901130881 Cubicus

NeW



Energy saving complete seawater aquarium in stylish design. By the use of perfect and efficient elements for current, filter technique and illumination this complete aquarium guarantees durable and easy care functionality plus a lot of fun in keeping seawater animals. The design is perfectly configured to direct the focus of the observer to the marine wildlife and to let the technique disappear in the background. The appearance is completed through the use of Optiwhite $^{\circ}$ glass which guarantees the observer the colour rendering of the animals at its best. Current: **NanoProp 500** (12 V, 3 – 7 W), integrated into the rear panel

Skimmer: **Turboflotor Blue 500** (8 watts)

Filter technique: integrated filter tank, separated by a high quality glass rear panel with adiustable surface flow.

Illumination: aquareefLED with 18 high performance Cree LEDs a 3 W (7 x 3 W blue and 11 x 3 W 12.000 K) with a total operating performance of 50 W. Therefore the keeping of light hungry animals is possible without any problems. Optionally we recommend the use of our sunrise control as programmable light control. The white and blue LEDs could be switched separately in groups. The light efficiency is 120 lumen/W.

Dimensions: (I x b x h) app. 50 x 60 x 50 cm, Volume: 140 l, Water level: 47 cm Optionally available: **Cubicus Stand**, Dimensions: (I x b x h) app. $50 \times 60 \times 100$ cm



570.01 4025901130898 Cubicus Stand white

NeW

Cabinet for Cubicus

Cabinet can be used for aquariums with dimensions of around 50×60 cm. The cabinet is designed especially for the Cubicus nano reeftank. It is built to support the weight of a full aquarium. The cabinet is of a modern and stylish design, to complement many different styles of living areas. The cabinet is supplied flat packed for easy transportation and home assembly with few parts.

Dimensions (I x w x h): c. $50 \times 60 \times 100$ cm



522 044 4025901131215 Kauderni with Ocean Light LED 522.04 4025901129823 Kauderni with T5 cover

The stylish way to own a sea water aquarium with plug and play technology.

The Kauderni is a sophisticated saltwater aquarium that combines stylish design and perfect functionality. Furthermore, it is easy to operate. The saltwater aquarium system is supplied with a cabinet in a white high gloss finish, integrated internal filtration and complete lighting system built into a high-quality aluminium cover. The front glass of the aquarium is constructed with Optiwhite® clear glass and the aquarium includes adjustable active ventilation that can be connected, if necessary. Measurements overall approx: 65.5 x 60 x 146 cm (I x b x h) (aquarium measurements approx. $65.5 \times 60 \times 60$ cm). Water height c. 51 cm, Volume approx. 200 I. Filter: Filter compartment incl. **Turboflotor Blue 500** (8 W). Pump: **PF 1000** (10 W) + **NanoProp 5000** (12 V , 3 - 7 W, adjustable). Lighting system: 2 x **Ocean Light LED** 36 W or 4 x T5 with 24 watts each



Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire.







Magnifica 100 white

Aquaria

507.314 4025901131802 Magnifica 100 white 507.344 4025901131819 Magnifica 100 silver



507.104

Integrated saltwater aquarium system complete with filtration system, lights & cabinet The Magnifica is a ready to use system comprising: Aquarium with 10 mm float glass, with a 12 mm Optiwhite® front pane with no stress bars. Volume approx. 320 litres. Water height c. 49.5 cm. Measurements overall approx: $100 \times 65 \times 145$ cm ($1 \times b \times h$) (aquarium measurements approx. 100 x 65 x 60 cm). The filter has got a pure water chamber incl. integrated PF 1000 (10 W) power head pump that can be operated from above. There is a stream chamber on the right and the left each with a NanoProp 5000 (current pump adjustable from 2,000 - 5,000 I/h, 12 V, 3 - 7 W) as well as a protein skimmer Turboflotor Blue 1000 (18 W) with mesh wheel continuously adjustable. Two empty filter cartridges for use with filter media like our carbolit or antiphos Fe. Power consumption of the whole filter unit only 27 - 35 W depending on the power setting of pumps and fans.

The cover is completely closed. The cover includes 2 x Ocean Light LED 54 W and 2 x adjustable fans (spray water safe IP55), which can be switched on if. The power consumption of the fan (3 - 12 V) is only 1.5 - 7 W.



507.004	4025901131130	Percula 100 black with Ocean Light LED
507.034	4025901131147	Percula 100 beech with Ocean Light LED
507.044	4025901131154	Percula 100 silver with Ocean Light LED
507.00	4025001121121	D 1 400 11 1 11 TE
307.00	4025901121151	Percula 100 black with T5 cover
507.03		Percula 100 black with 15 cover Percula 100 beech with T5 cover
	4025901121148	

Integrated saltwater aquarium system complete with filtration system, lights & cabinet

The Percula 100 is a ready to use system comprising: Aquarium: 10 mm float glass, with a 12 mm Optiwhite® front pane with no stress bars, Volume approx, 320 litres, Water height c. 49.5 cm.

Measurements overall approx: 100 x 65 x 131 cm (l x b x h) (aguarium measurements approx. $100 \times 65 \times 60$ cm). The filter has got a pure water chamber incl. integrated **PF 1000** (10 W) power head pump that can be operated from above. There is a stream chamber on the right and the left each with a NanoProp 5000 (current pump adjustable from 2,000 -5,000 l/h, 12 V, 3 - 7 W) as well as a protein skimmer Turboflotor Blue 1000 (18 W) with mesh wheel continuously adjustable. Two empty filter cartridges for use with filter media like our carbolit or antiphos Fe. Power consumption of the whole filter unit only 27 - 35 W depending on the power setting of pumps and fans.

Luminaries: 2 x Ocean Light LED 54 W (open version)

4025901131161 Percula 125 black with Ocean Light LED

Optionally available as T5 version: The cover is completely closed. The cover includes 2 x T5 2 x 39 W and 2 x adjustable fans (spray water safe IP55), which can be switched on if. The power consumption of the fan (3 - 12 V) is only 1.5 - 7 W.



Percula 100/125 silver with LED

507.134 507.144		Percula 125 beech with Ocean Light LED Percula 125 silver with Ocean Light LED
507.10 507.13 507.14	4025901121179	Percula 125 black with T5 cover Percula 125 beech with T5 cover Percula 125 silver with T5 cover

Integrated saltwater aquarium system complete with filtration system, lights & cabinet

The Percula 125 is a ready to use system comprising: Aquarium: 10 mm float glass, with a 12 mm Optiwhite® front pane with no stress bars. Volume approx. 400 litres. Water height c.

Measurements overall approx: 125 x 65 x 131 cm (l x w x h) (aquarium measurements approx. 125 x 65 x 60 cm). The filter has got a pure water chamber incl. integrated PF 1000 (10 W) power head pump that can be operated from above. There is a stream chamber on the right and the left each with a NanoProp 5000 (current pump adjustable from 2,000 - 5,000 l/h, 12 V, 3 - 7 W) as well as a protein skimmer Turboflotor Blue 1000 (18 W) with mesh wheel continuously adjustable. Two empty filter cartridges for use with filter media like our carbolit or antiphos Fe. Power consumption of the whole filter unit only 27 - 35 W depending on the power setting of pumps and fans.

Luminaires: 2 x Ocean Light LED 72 W (open version)

Optionally available as T5 version: The cover is completely closed. The cover includes 2 x T5 2 \times 54 W and 2 x adjustable fans (spray water safe IP55), which can be switched on if required. The power consumption of the fan (3 - 12 V) is only 1.5 - 7 W.

Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire. Item code EA

EAN-No.

Item

Aquaria



Anthias 130 with Fish Station:

7		
3 black with Ocean Light LED	4025901131703	530.004
beech with Ocean Light LED	4025901131710	530.034
7 silver with Ocean Light LED	4025901131727	530.044
4 walnut with Ocean Light LED and Alu frame	4025901131734	530.054

 530.104
 4025901131741
 black with Ocean Light LED

 530.134
 4025901131758
 beech with Ocean Light LED

 530.144
 4025901131765
 silver with Ocean Light LED

530.154 4025901131772 walnut with Ocean Light LED and Alu frame

w/o lighting w/o Fish Station w/o Reef Station

Optional - filter features:

80818 4025901116137 **Helix Max** 18 Watt 502.71 4025901122770 **Niveau-Set**

Saltwater aquarium

The **Anthias 130** saltwater aquarium is a ready to use system comprising: aquarium - glass thickness 10 mm, app. $134,5 \times 66,5 \times 70$ cm, with black silicone joints, cabinet with stainless steel frame, under tank filtration system (High-quality closed glass filter with sliding doors, trickle filter and skimmer **Turboflotor Blue 3000 (Fish Station)** or **aCone 1.5 (Reef Station)**. Circulation pump **ECO Runner**. Prepared for the installation of UV - **Helix Max** 18 Watts and **Niveau-Set**.) Lighting: 2 x **Ocean Light LED** 72 watt

Water height c. 58.5 cm (c. 23.4"), volume app. 520 l (c. 135 gal). Overall dimensions: app. $134 \times 66.5 \times 145$ cm (c. 53" x 26" x 57") (l x w x h)

Anthias 160 walnut

Anthias 160 with Fish Station:

531.00	4025901121032	black
531.03	4025901121049	beech
531.04	4025901120578	silver
531.05	4025901120196	walnut

Anthias 160 with Reef Station:

 531.10
 4025901130362
 black

 531.13
 4025901130379
 beech

 531.14
 4025901130386
 silver

 531.15
 4025901130393
 walnut

w/o lighting w/o Fish Station w/o Reef Station

Optional - filter features:

80818 4025901116137 **Helix Max** 18 Watt 502.71 4025901122770 **Niveau-Set**

Saltwater aquarium

Aquarium app. 160 x 67 x 70 cm ($I \times W \times h$) – 12 mm glass thickness.

Front covers made of anodised aluminium - silver, cabinet finished in walnut. Overall dimensions: app. $163 \times 67 \times 146$ cm, water height c. 60 cm, volume app. 640 l. High-quality closed glass filter with sliding doors, trickle filter and skimmer **Turboflotor Blue 3000 (Fish Station)** or **aCone 1.5 (Reef Station)**. Circulation pump **ECO Runner**. Prepared for the installation of UV - **Helix Max** 18 Watts and **Niveau-Set**. Luminaries: **Ocean Light plus** 2 x 150 W + 2 x T5 54 W in silver



with Twin Station:

532.001	4025901121094	Anthias 200 black
532.031	4025901121100	Anthias 200 beech
532.041	4025901121117	Anthias 200 silver
532.051	4025901121124	Anthias 200 walnu

w/o lighting w/o Twin Station

Optional - filter features:

502.71 4025901122770 **Niveau-Set**

Saltwater aquarium

Aquarium app. 200 x 68 x 70 cm - 12 mm glass thickness. Front covers made of anodised aluminium - silver, cabinet finished in walnut.

Overall dimensions: app. 202.5 x 70.5 x 146 cm, water height c. 60 cm.

Filter: High-quality closed glass filter with sliding doors, trickle filter and skimmer **aCone 1.5** (**Twin Station**). Circulation pump **ECO Runner 6000**. Luminaries: **Ocean Light plus** $3 \times 150 \text{ W} + 2 \times 1580 \text{ W}$ in silver

Water Volume calculated before gravel or decoration.

Aquariums can be produced with alternative lighting, please inquire.





Item code EAN-No.

Aquaria

502.30 4025901120202 **Padova** red 502.36 4025901124446 **Padova** zebrano

Other colors available on request!

w/o lighting w/o filter

Saltwater aquarium

Aquarium without front covers and stress bars (app. $140 \times 70 \times 60$ m), glass thickness: 15 mm, stand from stainless steel with cabinet and glass doors.

Item

Dimensions over all: app. $140 \times 70 \times 154$ cm. Water height c. 57 cm, Volume approx. 550 I

Filtersystem: High-quality closed glass filter with sliding doors, trickle filter and skimmer **Turboflotor Blue 3000**. Circulation pump **ECO Runner**. Prepared for the installation of UV

- **Helix Max** 18 Watts.

Luminaries: aquasunLED 150 W



Aurelia

Jellyfish Tank Comming soon!



Tridacna 200 beech

502.22 4025901119985 **Tridacna 200** beech 502.23 4025901119992 **Tridacna 200** RAL

w/o lighting w/o filter

Saltwater aquarium system

The **Tridacna 200** panoramic aquarium is a ready to use aquarium system with cabinet, filter system and lighting. Aquarium: 15 mm (c. 0.6") float glass. Central overflow chamber with overflow comb and trickle plates. Solid timber trim, water height c. 70 cm (c. 28"). Dimensions including frame: $200 \times 73.5 \times 87$ cm (c. 80" x 29.4" x 34.8"), cabinet: fully assembled in beech, custom colours are also available, filtration: high-quality closed glass filter with sliding doors, trickle filter and skimmer **Turboflotor Blue 3000**. Circulation pump **ECO Runner**. Prepared for the installation of UV - **Helix Max** 18 Watts and **Niveau-Set**. Luminaries: **aquasunlight NG** 3 x 250 W **aqualine 10000** 13000 K metal halide lamps and 2 x 80 W **aqualine T5 Reef Blue** lamps. Volume: c. 980 l (c. 258 gal). Over all dimensions (l x w x h): app. $203.5 \times 73.5 \times 169$ cm, (c. 81.4" x 29.4" x 67.6")







Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire.

Accessories Aquaria

511.10 4025901119954 **fishknob Angel** / pair 511.11 4025901120011 **fishknob Discus** / pair 511.12 4025901120028 **fishknob Seahorse** / pair

Attractive door-knobs

EAN-No.

Item













Seasalt

4025901130959 Reef Salt Nano 1020 g

301.25 **NeW** 301.20 4025901100112 Reef Salt 2 kg

301.10 4025901100105 Reef Salt 4 kg

301.00 4025901100136 Reef Salt 20 kg carton

4025901112887 Reef Salt 25 kg bucket 301.01

Aguarium salt for all modern reef aguaria

Reef Salt is a dynamic new formulation, specifically designed for the needs of the modern reef aquarium. Reef Salt is blended from chemically pure raw materials, continuously quality controlled, achieves elevated levels of calcium and alkalinity reserve without resorting to harmful chelating agents, contains all the essential trace elements and enhanced levels of Strontium and Iodine, contains no nitrates or phosphates, dissolves easily and leaves no residue.

Reef Salt packaging available in a new design in autumn.

300.00 4025901100075 Aqua Medic seasalt 20 kg bag

Synthetic seasalt for aquaria

Aqua Medic seasalt is a top quality product, fulfilling all the requirements of a modern synthetic seasalt. It is formulated from highly purified compounds, and contains a pH buffer and all the essential trace elements needed for saltwater aquaria. It dissolves quickly, leaving no residue, and can be used very shortly after being mixed. Its quality has been proven by its selection by numerous public aquaria, many leading wholesalers of saltwater fish, and thousands of coral reef and fish aquaria. It is the economic solution for large scale applications.

Hydrometer

65900 4014694659006 salimeter

> salimeter is a density meter (hydrometer) allowing easy measurement of the specific gravity of saltwater in aquaria. **salimeter** has a measuring range of 1,000 to 1,040, with graduations at every 0.001 and an accuracy of ± 0.0005 at 25 °C (77 °F). Dimensions: length app. 27 cm, Ø app. 2 cm

65910 4014694659105 refractometer

Temperature compensated refractometer for the determination of salinity

The refractometer is a precision optical instrument used to determine the salt concentration in saltwater aquariums. Its exact value can be determined in seconds and can be read either as absolute salt concentration (°/°°, ppt) or as specific density (kg/l). When a beam of light enters the refractometer it is bent or "refracted" by the water in the test panel. This refraction is proportional to the salinity of the sample and can be directly read by viewing the internal scale. As salinity varies in inverse proportion to temperature refractometer is fully temperature compensated. The strong plastic carrying case contains the refractometer, a pipette for the water sample, a screw driver for calibration and full instructions.

EAN-No.

Item

Salt Water Supplements


REEF LIFE System Coral

The complete solution for supplying reef aquaria with calcium and trace elements without ion shift.

The 3 component system consists of the following components:

- Calcium (System Coral A) for increasing the calcium content
- KH Buffer (System Coral B) for increasing the carbonate hardness
- Trace (System Coral C) provides essential trace elements

For each dosing spoon of KH Buffer, 2 ml of the other two components have to be added.



Highly concentrated calcium additive for enhanced coral growth

Provides optimum calcium content in the aquarium that can be maintained simply with **REEF LIFE System Coral Calcium**.

351.001	4025901129182	REEF LIFE System Coral B KH Buffer 300 g/
		315 ml can
351.010	4025901129199	REEF LIFE System Coral B KH Buffer 1000 g/
		1000 ml can

Carbonate buffer stabilizes the pH value for a healthy aquarium **REEF LIFE System Coral KH Buffer** for increasing the alkalinity.

1 4025001129022 DEEE LIEE System Corp. C Trace 100 ml

350.201	4025901128932	REEF LIFE System Coral C Trace 100 ml
350.202	4025901128949	REEF LIFE System Coral C Trace 250 ml
350.210	4025901128956	REEF LIFE System Coral C Trace 1000 m
350.250	4025901128963	REEF LIFE System Coral C Trace 5000 m

Contains vital trace elements for fish, corals and invertebrates

Provides salt water aquaria with vital trace elements such as boron, chrome, cobalt, copper, fluoride, iron, manganese, molybdenum and zinc. **REEF LIFE System Coral Trace** does not contain any chelating agents.

351.310 4025901129205 **Kalkwasserpowder** 350 g/1000 ml can

For enhanced calcium supply during water top up

The addition of Kalkwasser has several positive effects on the water in a reef aquarium. The calcium level increases, the phosphate concentration is reduced by precipitation and the pH value increases. The growth of hair algae is decreased and the development of calcareous algaes is encouraged.

350.401	4025901128970	REEF LIFE Iodine 100 ml
350.402	4025901128987	REEF LIFE Iodine 250 ml
350.410	4025901128994	REEF LIFE Iodine 1000 ml
350.450	4025901129007	REEF LIFE Iodine 5000 ml

3 component iodine for healthy coral growth and bright colours

REEF LIFE Iodine is an iodide additive especially developed for salt water aquaria. It supplies both fresh and salt water aquaria with iodide and organic and elementary iodine. Whereas iodide and elementary iodine are immediately available for the animals and plants, the organic bond releases iodine slowly and ensures a long term supply. Iodine is an essential trace element for all invertebrates and especially for crustacea which require iodide to assist in sloughing off their shell. When provided with iodine, corals show better growth and more intense colouring.

350.501	4025901129014	REEF LIFE Strontium 100 ml
350.502	4025901129021	REEF LIFE Strontium 250 ml
350.510	4025901129038	REEF LIFE Strontium 1000 ml
350 550	4025901129045	REFE LIFE Strontium 5000 ml

For healthy structure of skeleton of hard corals

REEF LIFE Strontium contains strontium ions in a form that can be easily assimilated by all invertebrates. It is essential for the production and the maintenance of the skeleton of hard corals, the shells of reef mussels and calcareous algae. In the sea, the strontium concentration is about 8 mg/l. There can be a lack of strontium in the aquarium if it isn't re-dosed regularly.

350.601	4025901129052	REEF LIFE Magnesium 100 ml
350.602	4025901129069	REEF LIFE Magnesium 250 ml
350.610	4025901129076	REEF LIFE Magnesium 1000 ml
350.650	4025901129083	REEF LIFE Magnesium 5000 ml

For natural structure of skeleton of corals and calcareous algae

For regular supply of sea water aquaria with normal magnesium need. For aquaria with heavy magnesium consumption, we recommend **REEF LIFE Magnesium Compact**.















EAN-No.

Item





















Salt Water Supplements

351.601 4025901129120 **REEF LIFE Magnesium compact** 250 g/315 ml can 351.610 4025901129137 **REEF LIFE Magnesium compact** 800 g/1000 ml can

For natural structure of skeleton of corals and calcareous algae Concentrated magnesium additive for sea water aquaria.

351.101 4025901129144 **REEF LIFE Calciumbuffer compact** 250 g/315 ml can 351.110 4025901129151 **REEF LIFE Calciumbuffer compact** 800 g/1000 ml can

To increase the calcium level and alkalinity

The perfect solution for calcium supply. The **Calciumbuffer compact** contains calcium and carbonate buffer in an optimum relation.

351.201 4025901129168 **REEF LIFE Balance** 250 g/315 ml can 351.210 4025901129175 **REEF LIFE Balance** 800 g/1000 ml can

Avoids ion shift

The use of calcium chloride and sodium hydrogen carbonate will lead to sodium chloride as a by-product that will cause an ion shift on a long-term basis. In order to avoid this, sea salt containing no sodium chloride has to be added according to the originated quantity sodium chloride so that pure sea salt arises beside the desired lime.

350.101 4025901129090 REEF LIFE OptiClean 100 ml 350.102 4025901129106 REEF LIFE OptiClean 250 ml 350.110 4025901129113 REEF LIFE OptiClean 1000 ml

Liquid filter medium applicable for sea and fresh water aquaria - the quick troubleshooter **OptiClean** contains effective activated micro particles from highly pure Clinoptilolite, a natural mineral. Contaminants such as heavy metals and pesticides attach to that mineral and then they can be removed with a fine filter from the water. In the sea water aquarium, they are also removed with the skimmer. The result is extremely clear and low-pollution water. The animals feel again well.

65930 4025901128826 aquaspoon

Spoon scale for measuring of chemicales and other additives for aquaria Max. 300 g, reading accuracy 0.1 (g, oz, gn, ct), with 2 bucket sizes.

410.95 4025901118469 **Dolomite** 1 l/1250 g

Magnesium and calcium release media for the calciumreactor

It increases the calcium and the magnesium levels of the water. We recommend its addition at a rate of 25 % to our **Hydrocarbonate**.

410.91-1 4025901101157 **Hydrocarbonate** 1 I tub fine (c. 0.25 gal)/1 kg
410.91-2 4025901101164 **Hydrocarbonate** 1 I tub medium (c. 0.25 gal)/1 kg
410.91-3 4025901101171 **Hydrocarbonate** 1 I tub coarse (c. 0.25 gal)/1 kg
410.92-1 4025901101188 **Hydrocarbonate** 5 I bucket fine (c. 1.3 gal)/8 kg
410.92-3 4025901101201 **Hydrocarbonate** 5 I bucket coarse (c. 1.3 gal)/8 kg
410.93-1 4025901101201 **Hydrocarbonate** 5 I bucket fine (c. 3.9 gal)/21 kg
410.93-2 4025901101225 **Hydrocarbonate** 15 I bucket medium (c. 3.9 gal)/21 kg
410.93-3 4025901101232 **Hydrocarbonate** 15 I bucket coarse (c. 3.9 gal)/21 kg
410.93-3 4025901101232 **Hydrocarbonate** 15 I bucket coarse (c. 3.9 gal)/21 kg

Hydrocarbonate is a pure natural product

It is used in calciumreactors, and may be used in filters to increase the hardness of water, and as a substrate material in marine or Malawi/Tanganyika aquaria. A natural calcium-carbonic acid equilibrium is created in all aquariums with an alkaline pH value, and in a calciumreactor supplied with CO₂, the **Hydrocarbonate** is completely dissolved to calcium bicarbonate, becoming available for assimilation by hard and many soft corals, sponges, echinoderms, etc. **Hydrocarbonate** available in 3 grain sizes and 3 packaging sizes: fine (1 - 2 mm) for 'hardening' filters, medium (3 - 5 mm) for calciumreactors, coarse (12 - 15 mm) as filter material.

420.25-1 4025901128468 Aqua Medic Coral Sand 0 - 1 mm 5 kg (11 lbs) bag 420.25-2 4025901128475 Aqua Medic Coral Sand 2 - 5 mm 5 kg (11 lbs) bag 420.20-1 4025901128482 Aqua Medic Coral Sand 10 - 29 mm 5 kg (11 lbs) bag 420.20-2 4025901128444 Aqua Medic Coral Sand 0 - 1 mm 10 kg (22 lbs) bag 420.20-3 4025901128451 Aqua Medic Coral Sand 0 - 5 mm 10 kg (22 lbs) bag 420.15-1 4025901101386 Aqua Medic Coral Sand 0 - 1 mm 25 kg (55 lbs) bag 420.15-2 4025901101451 Aqua Medic Coral Sand 2 - 5 mm 25 kg (55 lbs) bag 420.15-3 4025901101461 Aqua Medic Coral Sand 10 - 29 mm 25 kg (55 lbs) bag

Natural substrate

Cleaned and without additives. Suitable for all marine and malawi aquariums.

EAN-No.

Item









Special Nutrition

4	340.001	4025901129212	plancto	100 m	١l
4	340.002	4025901129229	plancto	250 n	٦l
4	340.010	4025901129236	plancto	1000	ml
4	340.050	4025901129243	plancto	5000	ml

Concentrated food for corals and invertebrates

plancto is a pH stabilized, high qualityconcentrated food for the nutrition of plankton and marine invertebrates. Its unique composition and its particle size of 25 - 200 µm makes it especially suitable for plankton feeders. It is also an excellent single food source for rearing artemia. The inclusion of high taste elements results in visible stimulation of feeding tentacles to encourage high nutrient take up. Even if overdosed it is impossible to effect the animals digestive systems.

4025901129250 **life A** 100 ml 341.001 341.002 4025901129267 life A 250 ml

Decapsulated artemia cysts decapsulated artemia eggs

life A contains approx. 4 million decapsulated artemia cysts which can be hatched in the same way as encapsulated cysts. The hatched nauplia are shell free so they do not have to be separated off. The shells can cause problems for young fish as they can eat them and die of constipation. By using life A, rearing seahorses etc. becomes simple as the decapsulated cysts can be fed directly.

342.001 4025901129274 aquabiovit 100 ml 342.002 4025901129281 aquabiovit 250 ml

Vital vitamins for fish and invertebrates

aquabiovit is a multi vitamin compound for use in fresh and sea water. It's formulation is suited to both, fish and invertebrates. It's regular use enhances growth, strengthens the immune system and increases the willingness to spawn.

342.101 4025901129298 aminovit 100 ml 4025901129304 aminovit 250 ml 342.102

Contains all vital amino acids and vitamins

Amino acid concentrate for coral reef aquaria. Additional food for invertebrates, in particular for LPS, but also for gorgonians, tube worms and sponges. The animals ingest directly - the colours improve and the tissue growth is accelerated. aminovit is also ideal for enriching the dry or frozen food. Or soak the food in an equivalent quantity prior to feeding.

EAN-No.

Item

Plankton

35015 4014694350156 aquabreed 1000

Artemia cultivation unit

A cultivation unit for hatching larger quantities of artemia cysts. The unit can be installed inside or outside the aquarium. The unit may also be used for growing on adult artemia. Capacity: 2,000,000 cysts per hatch.

Contents: **aquabreed 1000** reactor (approx. volume 1 litre), support plate. \emptyset app. 8 cm (c. 3.24"). Length: app. 45 cm (c. 18"). Hose connection: 6 mm (c. 1/4")

35005 4014694350057 plankton reactor

Zooplankton cultivation unit

Many species of salt- and freshwater zooplankton can be cultivated in the **plankton reactor**. The zooplankton is fed with micro-algae from the **plankton light reactor**. The zooplankton has great growth potential: under optimal algal nutrition the number of rotifers (Brachionus) may double over four days. Brachionus is the ideal food for raising many marine fish larvae and invertebrates in the saltwater aquarium.

Contents: **plankton reactor** approx. volume 2.5 litre (c. 0.65 gal), wall bracket and connections for air pump. Ø 8 cm (c. 3.2"). Length: 80 cm (c. 32"). Hose connection: 6 mm (c. 1/4")

35000 4014694350002 plankton light reactor

Phytoplankton (Micro-algae) cultivation unit

The **plankton light reactor** is a simple system for producing plankton in a natural food chain. Within the **plankton light reactor**, micro-algae are produced with light, fertiliser and CO_2 . The micro-algae can be fed directly to many filter-feeding invertebrates, and especially to zooplankton. The growth rate of the micro-algae in the **plankton light reactor** is enormous. If the supply of light, CO_2 and nutrients is continuous, the biomass of the algae may increase four-fold within 24 hours. Both fresh- and saltwater species of phytoplankton can be cultivated. Contents: **plankton light reactor** approx. volume 2.5 I (c. 0.65 gal), wall bracket, connections for air pump, lighting unit with fluorescent lamp (18 W), special reflector and fixing clamps. Ø app. 8 cm (c. 3.2"). Length: app. 80 cm (c. 32"). Hose connection: 6 mm, (c. 1/4")


Algal resources

REEF LIFE antired 100 m	4025901130607	420.001
REEF LIFE antired 250 m	4025901130614	420.002
REEF LIFE antired 1000 r	4025901130621	420.010
DEEE LITER antirod 5000 r	4025001130638	420.050

New

Eliminates red slime algae

antired will successfully eliminate red slime algae in saltwater aquaria. **antired** is safe with invertebrates, is not harmful to nitrifying bacteria and enhances macro algae growth. During treatment, the skimmer has to remain switched on and the carbon filter has to be switched off. The dead algae should be removed rapidly by a power filter.



NeW

Controls Oodinium and Cryptocaryon in saltwater aquaria

pointex treats Oodinium and Cryptocaryon parasites in saltwater aquaria effectively and reliably. **pointex** is not poisonous to fish but is harmful to all types of invertebrates, and can only be used in fish only systems or quarantine aquaria. After treatment it is not necessary to undertake a water change as the product is naturally removed in 20 days.

antigreen 100 ml	4025901130683	421.001
antigreen 250 ml	4025901130690	421.002
antigreen 1000 m	4025901130706	421.010
antigreen 5000 m	4025901130713	421 050

New

Controls algae in fresh water aquaria

antigreen will control blue-green and filamentous green algae in fresh water aquaria. It decomposes harmlessly leaving no residues. When used in accordance with the instructions, it will also stimulate plant growth.













EAN-No.

Item













Fresh Water Supplements

Available from august.

123.001 4025901131284 **aqua +GH** 250 g can

NeW

Increases the total hardness of aquarium water

aqua + GH increases the total hardness in freshwater aquariums. In connection with aqua
 + KH you can produce from reverse osmosis water or too soft water suitable water for fishes and plants.

Available from august.

123.101 4025901131291 aqua +KH 300 g can

NeW

Increases the carbonate hardness of aquarium water

Through a correct adjusted carbonate hardness you could avoid harmful PH up- and downturns. By using **aqua + KH** the PH level could be stabilized and the carbonate hardness could be increased. In combination with **aqua + GH** you can produce from reverse osmosis water fish and plant suitable water.

Available from august.

aqualife + vitamins 100 m	901131314 aqualife + vita	120.001 4025901	120.001	
aqualife + vitamins 250 m	901131321 aqualife + vita	120.002 4025901	120.002	
aqualife + vitamins 1000	901131338 aqualife + vita	120.010 4025901	120.010	
agualife + vitamins 5000	901131345 aqualife + vita	120.050 4025901	120.050	

NeW

High effective water treatment preparation for freshwater aquariums

Tab water often contains heavy metal and chlorine that harms the fishes, it causes diseases and symptoms of poisoning. **aqualife + vitamins** contains suitable chelates and reducer that binds the harmful substances respectively transfers it in harmless compounds. Special protective colloids that have been approved since many years, strengthens the protective function of the mucosa and keep the sensitive craw/ intestinal tract of the animals from damages. Useful vitamins improve the body's defences of the fishes and enhance their well-being.

Available from august.

ferreal + spureal 100 ml	4025901131352	121.001
ferreal + spureal 250 ml	4025901131369	121.002
ferreal + spureal 1000 m	4025901131376	121.010
ferreal + spureal 5000 m	4025901131383	121.050

NeW

Intensive iron fertilzer for freshwater aquariums

ferreal + spureal is a combination compound. It contains beside iron more essential micro elements such as manganese, molybdenum, boron, zinc and cobalt. **ferreal + spureal** prevents with continuous application reduced growth, the yellowing of the leafs and strengthens the plants. The colours of the plants become an intensive glow.

Available from august.

122.001	4025901131390	floreal + iod 100 ml
122.002	4025901131406	floreal + iod 250 ml
122.010	4025901131413	floreal + iod 1000 ml
122.050	4025901131420	floreal + iod 5000 ml

New

High effective compound fertilzer for freshwater aquariums

floreal + iod is an indispensable instrument to **ferreal + spureal**, that adjust the mineral balance of the plants and beyond supplies them with iodine and fluorine. Through this the growth of the plants will be increased. Furthermore iodine increases the vitality and the willingness to spawn of the fish. The contained iodine will be released slowly over several days whereby it is continued available.

Available from august.

21138 4025901131024 **volcanit** 5 kg

New

Freshwater aquarium gravel

volcanit is a pH-neutral aquarium gravel of volcanic origin. The fine pore structure of the gravel encourages bacterial activity that enhances the biological release of nutrients from within the gravel. The results are superb plant growth. **volcanit** is mixed with 10 % ferrolit, a natural long term iron fertilizer derived from Laterite. The resultant black and red colour enhances the beauty of the aquarium plants and the hues of the fish.

EAN-No.

Item











Cooling

107.100 4025901128277 nano breeze

Aquarium cooling fan for nano tanks (Plug and Play)

Spray water protected fan (IP54), $\emptyset=40$ mm. Silent long life fan. With real ball bearing and brush free motor. 12 V low voltage. Power uptake only 1 Watt. Rounds per minute: 5500 RPM. **nano breeze** aquarium fan can easily be fixed at the aquarium frame. It cool down the water by increasing the evaporation.

For temperature-dependet control we recommend optional the use of our **T controller twin**. Content: Fan with holder, Glas clip (for 6-8 mm thickness), Power supply 12 V

arctic breeze 2-pac	4025901120820	107.102
arctic breeze 4-pac	4025901120837	107.104
arctic breeze 6-pac	4025901120844	107.106

Spray water protected fans (IP 55). Silent long life fans, with real ball bearing and brush free motor. 12 V low voltage with adjustable transformer (3 - 12 V) for speed control. By this, the cooling power can be adjusted. High capacity fans, adjustable from 80,000 l/h (double unit at 12 V) to 240,000 l/h (6 fold unit at 12 V). Power uptake only 0.5 - 3 W per fan. **arctic breeze** aquarium fans can easily be fixed at the aquarium frame. It cools down the water by increasing the evaporation. The complete construction is made from corrosion proof plastic and aluminium. For temperature-dependet control we recommend optional the use of our **T controller twin**.

Dimensions ($I \times w \times h$):

arctic breeze 2-pack: app. $16 \times 4 \times 15$ cm arctic breeze 4-pack: app. $28 \times 4 \times 15$ cm arctic breeze 6-pack: app. $40 \times 4 \times 15$ cm

0
0
00
00
00

Titan	150	500	1500	2000	4000
for aquaria up to	100 - 250 l	250 - 500 l	700 - 1,500 l	1,500 - 2,500 l	3,000- 4,000 l
Compressor power	0.1 PS	0.25 PS	0.5 PS	1 PS	2 PS
Power uptake	150 W	190 W	375 W	550 W	1,500 W
Cooling power	200 W	395 W	790 W	1,650 W	4,000 W
Recommended water flow (I/h)	200 - 1,500	500 - 2,000	800 - 2,500	2,000 - 4,000	3,000 - 6,000
Connections	14 mm 1/2" or 20 mm 3/4"	20 mm 3/4" or 25 mm 1"			
Housing material		А	BS/powder-coate	d metal	
Heat exchanger material		Titanium			
Cooling gas		R1	34a		R407c
Dimensions (I x w x h) mm	app. 350 x 300 x 350	app. 390 x	340 x 390	app. 400 x 500 x 440	app. 540 x 700 x 650
Weight	13 kg	14.7 kg	16.4 kg	28.1 kg	60.5 ka

106.050 4025901118476 **Titan 500 Trop** 106.150 4025901118483 **Titan 1500 Trop**

Titan Trop	500	1500	
Compressor power	1/4	1/2	
Power supply	220 -	240 V	
Power uptake cooling	340 W	440 W	
Cooling power	400 W	790 W	
Recommended water flow (I/h)	1,000 - 2,500	1,200 - 3,000	
Connections	20 mm 3/4" or 25 mm 1"		
Housing material	ABS/powder-coated metal		
Dimensions (I x w x h) mm	app. 400 x 500 x 440		
Weight	25 kg 27 kg		

Titan 6000 Professional	4025901121469	108.060
Titan 8000 Professional	4025901121476	108.080
Titan 15000 Professional	4025901122596	108.150

Titan Prof.	6000	8000	15000	
for aquaria up to	3,000 - 6,000 l	4,000 - 8,000 l	7,500 - 15,000 l	
Compressor power	2 PS	3 PS	5 PS	
Power supply	220 -	240 V	380 V ;3 Ph.	
Power uptake: cooling	1,780 W	2,340 W	3,950 W	
Power uptake: heating	1,400 W	1,750 W	2,900 W	
Cooling/Heating power	5,200 W	7,200 W	14,900 W	
Recommended flow rate (I/h)	3,000 - 12,000	4,000 - 16,000	8,000 - 32,000	
Connections	1 1/2"			
Housing material	X50	X5CrNiMo 17-12-2 (V4A Stahl)		
Cooling gas	R410A			
Dimension (I x w x h) mm	app. 710 x 435 x 670	app. 735 x 460 x 720	app. 850 x 550 x 950	
Weight	68 kg	78 kg	150 kg	

Larger cooling units on demand!


EAN-No.

Item



ECO Runner 2700






100.127	4025901128536	ECO Runner 2700
100.137	4025901128543	ECO Runner 3700
100.160	4025901124651	ECO Runner 6000
100.190	4025901126488	ECO Runner 9000
100.220	4025901124668	ECO Runner 12000

Powerful circulation pump for aquaria

For use as circulation and return pump in salt- and freshwater aquaria. Rugged pump housing. Electronic directed energy saving motor with high efficiency. Polished ceramic shaft and bearing guarantees silent operation and long term maintenance free operation. Submerged and non submerged set up is possible. Prefilter basket and hose connections included.

ECO	2700	3700	6000	9000	12000
Voltage	230 V~/50 Hz				
Max. flow I/h	2,700	3,700	6,000	9,000	12,000
Max. head	2.70 m	2.80 m	4.10 m	4.30 m	4.50 m
Power consumption/watts	30	43	70	95	150
Connection pressure/suction side	25 mm (1")		32 mm (1 1/4")	40 mm	(1 1/2")
Cable length in m (indoor use)	3				
Protection rating	IP X8				
Dimensions in cm (I x w x h)	app. 17 x 9 x 14.5 app. 21 x 11.5 x 1		.8		

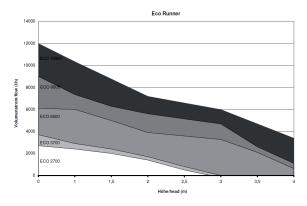



OR 1200



OR 6500

 100.012
 4025901109016
 Ocean Runner OR 1200

 100.025
 4025901101058
 Ocean Runner OR 2500


 100.035
 4025901106701
 Ocean Runner OR 3500

 100.065
 4025901101898
 Ocean Runner OR 6500

Circulation pump for aquaria

The **Ocean Runner** pumps are powerful universal pumps to be used as circulation or current pumps in both salt- and freshwater aquaria. The **Ocean Runners** are supplied with a rugged pump housing, an energy efficient motor, a polished ceramic shaft and ceramic bearings. All these qualities ensure a quiet and maintenance free performance for many years. The **Ocean Runner** pumps are also available in outdoor version with 10 m (c. 32') (**OR 2500/OR 3500**) rubber cable for ponds.

Тур	OR 1200	OR 2500	OR 3500	OR 6000
	1,200	2,400	3,500	6,500
Max. capacity I/h	(c. 300 gph)	(c. 630 gph)	(c. 900 gph)	(c. 1,700 gph)
Max. head in m	1.6 (c. 5.2")	2.6 (c. 7.8")	3.3 (c. 10.7")	3.8 (c. 12.6")
Power uptakes watts	25	38	65	95
Hose connection				
inlet	17 mm	17 mm	27 mm	26 mm
outlet	16 mm	17 mm	21 mm	24 mm
Dimensions cm (I x w x h)	app. 13 x 10 x 15	app. 15.5 x 12.5 x 17.5	app. 18 x 15 x 18	app. 20 x 16 x 22

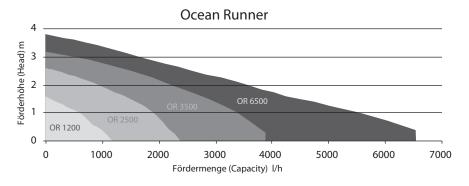

EAN-No.

Item











Pumps - Circulation pumps

4025901116083	pump NK 25.B
4025901116090	pump NK 33.B
4025901113303	pump OK 33.B
4025901113310	pump OK 51.B
4025901113327	pump OK 71.B
4025901113334	pump OK 100.B
	4025901116090 4025901113303 4025901113310 4025901113327

25901124385 Motor Protection Switch pump NK 25, 1.45 A	
25901124675 Motor Protection Switch pump NK 33/OK 33,	1.9 A
25901124682 Motor Protection Switch pump OK 51, 2.7 A	
25901124699 Motor Protection Switch pump OK 71, 3.8 A	
25901124705 Motor Protection Switch pump OK 100, 4.8 A	


(Necessary to use with any NK or OK pump!) Warranty is void, if pumps are used without motor protection switch!

Circulation pump OK / NK

The OK and NK-series circulation pumps are powerful units having a capacity between 13 and 33 m³/h. With the housing moulded in plastic, the pumps are completely saltwater resistant. To improve the operating characteristics OK and NK pumps have an integrated prefilter and the impeller shaft has a rotating seal.

Туре	NK 25	NK 33	OK 33	OK 51	OK 71	OK 100
m³/h at 10 m	-	4.0	4.8	6.6	10.0	14.5
Max. flow at 5 m	8,000 I*	11,000 l*	9,600 I	11,000 l	13,900 l	20,000 l
Max. head	9.25 m	11 m	12 m	14 m	15.5 m	15 m
Power (watt)	0.27	0.30	0.45	0.58	0.75	1.00
A			2.45	2.65	4.00	4.70
V	230	230	230	230	230	230
Dimensions cm						
(Ixwxh)	app. 43	x 21 x27	app.	47.5 x 2	4 x 31	app. 50 x 24 x 31

^{*} max. flow at 3 m

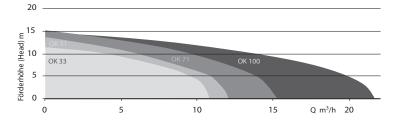



Pumps - Current pumps


103.010 4025901111859 Powerfilter PF 1000

The **Powerfilter PF 1000** is a compact power head pump, combined with a mechanical filter sponge. Despite of its small size the pump is manufactured to the same high standards as the rest of the OR series with a polished ceramic shaft and energy efficient motor. 1,000 l/h, max. head 1 m (c. 3 ft), 10 watts. Dimensions: app. 22 x 6.5 x 6 cm ($I \times W \times h$)

103.050 4025901120622 NanoProp 5000

Adjustable Current pump for reef aquariums

Coral Reef aquariums need strong water movements. NanoProp 5000 is a propeller pump to create strong currents with low power uptake. The shape of the propeller is computer optimised, for high flow and silent operation. 6-12 V DC, low voltage motor, including adjustable safety transformer. Flow can be adjusted from 2,000-5,000 l/h (500-1,250 gph). Power uptake 3 - 7 watts, adjustable. Silent running computer optimised propeller. Vacuum sucker for safe mounting inside the aquarium. Dimensions: app. $9.5 \times 5 \times 9.5 \text{ cm}$ (I x w x h)




Current adjuster to conduct waterflow. For NanoProp 5000 or 40 mm outlet.



EAN-No.

Item



103.150 4025901120073 OceanProp 15000

Current pump for reef aquariums

Coral Reef aquariums need strong water movements to replicate natural conditions. Ocean-**Prop 15000** is a propeller pump that creates a high turnover of water with a low power output. The shape of the propeller has been strategically designed using the latest technology to optimise water movement and silent operation. Combined with the pump controller OceanProp-Control, the pump can be operated by pulsing and creates continuously changing currents. 24 V DC, low voltage motor, including safety transformer. Flow can be adjusted from 5,000 15,000 l/h (1,300 - 4,000 gph). Power uptake 9 - 20 watts, adjustable. Silently designed innovative propeller. Leverage sucker for safe mounting inside the aquarium. Dimensions: app. $14\times9\times10$ cm (l x w x h)

Pumps - Air pumps





NeW 101.005 4025901131222 Mistral 50 ECO - available from august 101.020 4025901109320 Mistral 200 4025901108255 **Mistral 300** 4025901117127 **Mistral 2000** 101.030 101.200 101.400 4025901113297 Mistral 4000

Diaphragm air pump

Dimensions in cm (l x w x h):

This family of powerful diaphragm air pumps has a cast aluminium housing (plastic at **Mistral 50 ECO**) to ensure long life and silent operation. The output of the **Mistral 300** is adjustable with a slide control which alters the magnetic circuit. All units have integrated replaceable air filters and are of low maintenance design. They are ideally suited to supplying air lift filters (under-gravel and box), air stones and protein skimmers using either ceramic or wooden air diffusers.



арр. 17.5 x 16 x 13 арр. 19.5 x 18 x 15

Туре:	Mistral 2000	Mistral 4000	
Power requirements:	220 - 240	V*, 50/60 Hz	
Power uptake:	25 watts	35 watts	
Maximum capacity:	2,500 l/h (625 gph)	4,000 l/h (1,000 gph)	
Capacity at 1 m (3 ft) depth (100 mbar, 1.45 psi):	1,600 l/h (400 gph)	2,900 l/h (750 gph)	
Maximum pressure:	>300 mba	ar, 4.35 psi	
Connection pressure side:	air tube 1	12 mm (½")	
Cable length in m:		3	
Weight:	3.5 kg (7.8 lbs)	5.6 kg (12.4 lbs)	
Housing:	cast aluminium		





Mistral 300



Mistral 4000

EAN-No.

Item



Pumps - Dosing pumps

104.015 4025901116168 Dosing pump **SP 1500** 104.030 4025901111866 Dosing pump **SP 3000**

The dosing pumps **SP 1500** and **SP 3000** range of dosing pumps are economic peristaltic pumps for pumping small volumes of water. They can be used for bypass filters such as the Nitratereductor **NR 1000** and the Calciumreactor **KR 1000**, to top up evaporated water when combined with an **aquaniveau** and for the automatic dosing of fertilisers and minerals. The pump is supplied a long life Santoprene® hose.

SP 1500: 1.5 l/h (c. 0.04 gph), 4.5 watts **SP 3500**: 3.0 l/h (c. 0.08 gph), 4.5 watts




104.031 4025901112481 SP 3000 Niveaumat

Automatic top up unit with peristaltic pump and float switch

The **SP 3000 Niveaumat** will automatically top up evaporated water in fresh and saltwater aquariums. It comprises a **Niveaumat SP 3000** peristaltic pump with a directly connected float switch. The float switch is installed in the aquarium or filter tank at the desired level using its holding unit. As the level drops the **Niveaumat SP 3000** automatically tops up the tank with water from a reservoir (not supplied).

Technical data **Niveaumat**: Capacity: 3 l/h pump, hose: Santoprene®, power consumption: 4.5 watts

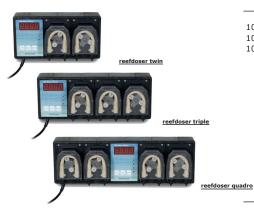

 104.042
 4025901113082
 reefdoser twin

 104.043
 4025901113099
 reefdoser triple

 104.044
 4025901113105
 reefdoser quadro

Dosing pump controller

The **reefdoser** can independently control up to 4 dosing pumps. The interval controller allows for adjustment of the duration of the on/off cycle for each pump over a broad time span - from seconds to days. The **reefdoser** can automate many tasks in an aquarium: - regular dispensing of trace elements and fertilisers in salt- and freshwater aquariums - controlled addition of calcium and bicarbonate into coral reef tanks - accurate dosing of Kalkwasser into coral reef tanks - automatic feeding with live phyto and zoo plankton.

reefdoser triple: with 3 dosing pumps **SP 1500**, app. $29.5 \times 11.5 \times 9$ cm (I x w x h) reefdoser quadro: with 4 dosing pumps **SP 1500**, app. $29.5 \times 11.5 \times 9$ cm (I x w x h) reefdoser quadro: with 4 dosing pumps **SP 1500**, app. $37 \times 11.5 \times 9$ cm (I x w x h)

EAN-No.

Item














Air driven inside skimmer

410.50 4025901100754 miniflotor

New

Internal protein skimmer for aquaria up to 200 litres (c. 50 gal)

The **miniflotor** is a small but powerful air-driven internal protein skimmer. A lime wood air diffuser producing very fine air bubbles is also included. The outer reaction tube is replaceable. A second shorter reaction tube is included in shipment. For the air supply, we recommend the **Mistral 200** membrane air pump.

Ø app. 5 cm (c. 2"), length: with long tube app. 45 cm (c. 18") - with short tube app. 32 cm (c. 12.8"), total width: app. 15 cm (c. 6"), Immersion depth: long tube app. 33 cm (c. 13.2"), short tube app. 20 cm (c. 8")

410.55 4025901100532 midiflotor

Internal protein skimmer for aquaria up to 400 litres (c. 100 gal)

The **midiflotor** is an air-driven counter current internal protein skimmer. The strong holding system mallows movement of the skimmer vertically to adjust the foam production zone. A lime wood air diffuser, producing very fine air bubbles, is included. For the air supply, we recommend the **Mistral 300** membrane air pump. Ø app. 57.5 cm (c. 3"), length: app. 52 cm (c. 21"), total width: app. 15 cm (c. 6"), Immersion depth: app. 30 - 35 cm (c. 12" - 14")

Motor driven inside skimmer

410.10 4025901124729 **Turboflotor Blue 500**

Motor driven internal protein skimmer for saltwater aquaria up to 250 litres

Two holding systems for individual fixing, adjustable in height. Making it suitable for many different styles of aquarium. Power-saving venturi pump with power consumption of only 8 watts. Ceramic bearings for brilliant silent performance. Mesh wheel, which will provide a large amount of air and optimum bubble structure. The **Silencer** ensures an almost soundless operation. A high performance motor driven protein skimmer, efficient foam production with a patented conical foam cup. The water height in the protein skimmer is easily adjustable to allow a maximum foam production.

Dimensions: (I x w x h) app. $14 \times 8 \times 36.5$ cm (c. 5.6" x 3.2" x 14.6"), Immersion depth: app. 23 cm

Motor driven outside skimmer

410.00 4025901117448 **Turboflotor Blue 1000**

External protein skimmer for saltwater aquariums up to 500 litres (c. 125 gal)

The **Turboflotor Blue 1000** is designed for installation in any mode: as a "hang on", it is simply hung over the edge of the aquarium. Only the venturi pump with Aqua Medic mesh wheel is inside the tank. The **Silencer** ensures an almost soundless operation. In the cabinet, it can be installed inside or outside the filter sump. It is designed to fit into nearly every standard aquarium cabinet. Height: app. 46 cm (c. 18"), Footprint: app. 25 x 11 cm (c. 10" x 4.5")

410.06 4025901116502 **Turboflotor Blue 3000**

External protein skimmer for saltwater aquariums from $500 - 1,500 \, I$ (c. $125 - 375 \, gal$) The **Turboflotor Blue 3000** is designed for installation in any mode: as a "hang on", it is simply hung over the edge of the aquarium. Only the venturi pump **Ocean Runner OR 2500** with mesh wheel is inside the tank. In the cabinet, it can be installed inside or outside the filter sump. It is sized to fit nearly every standard aquarium cabinet. Height: app. $56 \, cm$, (c. 22"). Footprint: app. $35 \times 17 \, cm$, (c. 14" x 7")

410.72 4025901106626 Turboflotor 1000 Multi SL

A motor driven external protein skimmer for aquaria from 500 to 1,000 litres (125 - 250 gal) The **Turboflotor 1000 Multi SL** can be fixed to the side of the aquarium ('hang-on' mode), or placed inside or outside the sump of the filter. Its compact size makes it small enough to be installed in the cabinet. In 'hang-on' mode, just the pump is placed inside the aquarium. Equipped with the **Ocean Runner PH** venturi pump. As an option, a large 1.2 litre (c. 0.3 gal) **Filterbox** can be placed over the outlets as a first stage post skimming biological filter. Height: app. 55 cm (c. 22"). Footprint: app. 17 x 17 cm (c. 7" x 7")

410.73 4025901101614 Filterbox for Turboflotor 1000 Multi SL

Post filter for Turboflotor 1000 Multi SL

- Trickle filter for the outlet of the Turboflotor 1000 Multi SL
- Total filter volume 1.2 litre
- For use with Bactoballs or filter sponge
- Removes air bubbles from the outflow of the skimmer

Dimensions: app. 17 x 12 x 13 cm ($I \times W \times h$)

Filterbox

Item code EAN-No.

Item

Protein skimmer

412.015 4025901129311 aCone 1.5 412.030 4025901129403 aCone 3.0

Powerful skimmer for the sump

We offer the aCone skimmer in two different sizes, aCone 1.5 for aquaria up to 1,500 litres, aCone 3.0 for tanks up to 2,500 litres. The ECO Runner venturi pumps including air wheel are very quiet in operation coupled with high air capacity. aCone skimmer have to be placed in a filter tank. No additional pump for the water supply is required.

	aCone 1.5	aCone 3.0
Power Consumption	38 watts	54 watts
Air power	1,200 l/h	2,800 l/h
Pump	Eco Runner 3700	Eco Runner 6000
Total height	app. 53 cm	app. 59,5 cm
Height foam cup	app. 54 cm	app. 61 cm
Required space	app. 35 x 32 cm	app. 50 x 40 cm



aCone 3.0



Turboflotor 5000 Shorty Compact

Turboflotor 5000 baby ECO



Turboflotor 5000 Shorty II



Turboflotor 5000 single 6.0

410.16 4025901100747 Turboflotor 5000 Shorty Compact for aquaria up to 1,500 | 4025901100761 **Turboflotor 5000 Shorty II** 410.17 for aquaria up to 1,500 l

Powerful new skimmers for in cabinet installation

The "Shorties" are manufactured in 2 sizes to fit into most aquarium cabinets. Like the larger models, they are supplied with a venturi pump and our patented needle wheel. The water supply to the skimmer requires a second pump with a capacity of minimum 2,000 l/h (c. 500 gph). The skimmer may also be directly connected to the overflow of the aquarium. In this case it is recommended that a bypass be installed to control the water flow to the skimmer, especially if powerful return pumps are used.

Total height with foam cup:

Shorty Compact: app. 62.5 cm (footprint app. 30 x 40 cm)

Shorty II: app. 73 cm (footprint app. 30 x 50 cm)

400.015 4025901130102 Turboflotor 5000 baby ECO for aquaria up to 2,000 I 400.021 4025901130119 Turboflotor 5000 single 6.0 for aquaria up to 5,000 l

Powerful skimmer with longer contact time for aquaria from 1,500 – 5,000 l (c. 375 - 1,250 $\,$

The skimmer 5000 series were developed for larger aquaria. The reaction pipe has a diameter of 200 mm. A separate pump $(2,000-3,500 \, l/hr)$ is required for the water supply, e. g. **Ocean Runner OR 3500** or **ECO Runner 3700**.

The venturi pumps of our ECO Runner series with air wheel have a high skimming power, are very quiet in operation and have a low power consumption.

T 5000 baby ECO: Total height app. 107 cm, required space app. 50 x 29 cm (without outlet D40). Venturi pump: 1 x **ECO Runner 3700** - 38 Watt

T 5000 single 6.0: Total height app.. 185 cm, required space app: app. 50 x 29 cm (without outlet D40). Venturi pump: 1 x **ECO Runner 6000** - 55 Watt

410.026 4025901131062 Trickle filter for Turboflotor 5000 single 6.0

> The trickle filter is suitable for the connection at the Turboflotor 5000 single 6.0, filled with BactoBalls, app. 20 cm Ø. Height: app. 155 cm, footprint: app. 30 x 35 cm



Trickle filter T 5000 single 6.0







Item

Protein skimmer

400.05 4025901113228 **Turboflotor 10000** 400.15 4025901131680 **Turboflotor 10000** w/o pump

The **Turboflotor 10000** is a smaller version of the **Turboflotor 20000**. It is made of an acrylic pipe and is designed for flow rates up to 10,000 l/h. (c. 2,500 gph). It is recommended for larger aquariums up to 10,000 litres (c. 2,500 gallons) and professional aquaculture systems. Technical data: Reaction chamber \emptyset : 50 cm (c. 20°), total height including foam cup: 200 cm (c. 80°), Injector pump power consumption: 500 watts, air intake: c. 8,000 l/h (c. 2,000 gph), max. water flow: 10,000 l/h (c. 2,500 gph)

400.00 4025901102918 **Turboflotor 20000** 400.10 4025901131697 **Turboflotor 20000** w/o pump

Protein Skimmer for large aquariums

With the production of this skimmer Aqua Medic enters the area of water treatment for large professional aquaria. The Aqua Medic **Turboflotor 20000** is a scaled up version of our proven **Turboflotor 5000** series. A powerful pump is combined with a venturi to provide an injection of c. 3,500 l/h. The maximum water flow rate is 20,000 litres (5,000 gallons) per hour. The **Turboflotor 20000** is designed for larger tanks in public aquaria and for commercial use for pet fish importers and distributors.

Technical data: Reaction chamber Ø: 50 cm (c. 20"), total height including foam collection cup: 310 cm (c. 122"), injector pump power consumption: 900 watts, air intake: c. 8,000 l/h (c. 2,000 gph), maximum water throughput: 20,000 l/h (c. 5,000 gph).

401.00	4025901108781	Trickle filter for Turboflotor 20000, with BactoBalls
401.00-1	4025901131789	Trickle filter for Turboflotor 20000, w/o BactoBalls
401.01	4025901121292	$\textbf{Trickle filter} \ \text{for} \ \textbf{Turboflotor} \ \textbf{10000}, \ \text{with} \ \textbf{BactoBalls}$
401.01-1	4025901131796	Trickle filter for Turboflotor 10000, w/o BactoBalls

Accessories Protein skimmer

410.62 4025901120608 airmeter

Adjustable air-flow sensor which has been developed especially for the skimmer technique. An assembly to most skimmer types is possible without any problems due to the joint fittings (6 and 8 mm) included in delivery. Specific output 100 - 1,000 l.

410.59	4025901126440	Wooden airstones Mini 2 pcs.
410.58	4025901126457	app. 15 x 15 x 57 mm (l x w x h) Wooden airstones Midi 2 pcs.
		app. 18 x 18 x 78 mm (l x w x h)
410.57	4025901100914	Wooden airstones Maxi 1 pc. app. 30 x 30 x 110 mm (l x w x h)

For air driven protein skimmers

Wooden airstones are produced from lime wood with very fine pores. To keep the skimmer running at its optimum performance level, the bubbles have to be monitored regularly, and it is recommended that they are changed every 6 - 8 weeks. In an attractive blister pack.



410.610 4025901124941 **Silencer 100** up to a capacity of 200 l air/h 410.620 4025901124958 **Silencer 200** for a capacity higher than 200 l air/h

Silencer for protein skimmer

The **Silencer 100** and the **Silencer 200** reduce the noise of the air intake of a protein skimmer. The noise may be avoided by the use of the **Silencers**. At the fitting of the **Silencer** you can attach tubes with a diameter of 6/8 mm without any problems.

EAN-No.

Item

Pictures with UV Helix Max



Malawi Station



Fish Station



Reef Station

Filter systems

500.015 4025901130201 Malawi Station

Filter system for fresh and saltwater aquaria up to 1,500 litres

The **Malawi Station** filter system comprises the following components: closed glass filter sump with sliding doors and removable cover, twin filter towers including drawer and biofilter, filled with **BactoBalls**, **ECO Runner 3700** circulation pump. This filter is the perfect unit for high loaded freshwater aquaria, e. g. cichlids. However, it can be used for saltwater as well, if combined with an external protein skimmer. Pipework connections to the aquarium (left hand side): 32 mm flow, return 40 mm. This system is ready for the connection of a **Helix Max** 18 Watt UV steriliser as well as the top up system **Niveau-Set**.

Dimensions of the filter: app. 75.5 x 47.5 x 62 cm (I x w x h)

Optional - filter features:

80818 4025901116137 **Helix Max** 18 Watt 502.71 4025901122770 **Niveau-Set**

501.110 4025901130218 **Fish Station**

A complete filtration system for saltwater aquaria up to 1,000 litres

It comprises the following components: closed glass filter sump with sliding doors and removable cover, prefilter including drawer and biofilter, filled with **BactoBalls**, **Turboflotor Blue 3000** protein skimmer and **ECO Runner 3700** circulation pump. This filter is the perfect unit for aquaria where mainly fish are kept. Pipework connections to the aquarium (left side): 32 mm flow, return 40 mm. All components are inside the filter sump. This system is ready for the connection of a **Helix Max** 18 Watt UV steriliser as well as the top up system **Niveau-Set**. Dimensions of the filter: app. $75.5 \times 47.5 \times 62$ cm (l x w x h)

Optional - filter features:

80818 4025901116137 **Helix Max** 18 Watt 502.71 4025901122770 **Niveau-Set**

501.010 4025901130225 Reef Station

A complete filtration system for Reef aquaria up to 1,000 litres

It comprises the following components: closed glass filter sump with sliding doors and removable cover, a prefilter for taking up activated carbon, phosphate absorbers or bio balls, the **aCone 1.5** protein skimmer and **ECO Runner 3700** circulation pump. Pipework connections to the aquarium (left side): 32 mm flow, return 40 mm. All components are inside the filter sump. This system is ready for the connection of a **Helix Max** 18 Watt UV steriliser as well as the top up system **Niveau-Set**.

Dimensions of the filter: app. 75.5 x 47.5 x 62 cm (I x w x h)

Optional - filter features:

80818 4025901116137 **Helix Max** 18 Watt 502.71 4025901122770 **Niveau-Set**

EAN-No.

Item

Filter systems

500.50 4025901100495 Marin 1000

Compact modular filter system for marine aquaria up to 1,000 litres (c. 250 gallons)

The **Marin 1000** filter system is designed for use under the aquarium. It consists of an enclosed filter sump housing the filter modules. Aquarium water is first treated by the three trickle filter modules that utilise **BactoBalls** as their biological media. A mechanical/carbon filter module is included in the main water flow whilst a patented **Turboflotor 1000** venturi protein skimmer operates on a by pass line. A Nitratereductor **NR 1000** is supplied with water by a dosing pump **SP 3000**.

Dimensions (I x w x h): app. $60.5 \times 40.5 \times 57.5$ cm, (c. 24"x 16"x 23"). For installation an additional minimum of 15 cm (c. 6") in the length is required (Total length 75 cm). Pipework connections: flow 25 mm, return 32 mm




Modular filter system for reef aquaria up to 500 litres (c. 150 gallons)

For installation in the cabinet. The **Riff 500** filter system is a compact 3-stage unit for use in the cabinet under the aquarium. The system comprises a pre-filtration module filled with sponge, for mechanical filtration, a **Turboflotor 1000** protein skimmer with venturi pump and needle wheel, and a post skimming trickle filter filled with **BactoBalls** for biological filtration. A purpose built glass sump is available as an option.

Dimensions: (I x w x h) app. 51 x 17 x 60 cm (c. 21" x 7" x 24").

Pipework connection return 32 mm



6-stage water treatment system for reef aquaria up to 1,000 litres (c. 250 gallons)

The \vec{R} iff 1000 filtration system is designed for installation in the cabinet under an aquarium. In a compact space it contains nearly all the equipment necessary for the maintenance of a successful modern reef aquarium. The system comprises a sump, app. 90 x 36 x 35 cm (c. 36" x 14.5" x 14"), with a mechanical filter chamber containing sponges. From here, the water flows via two venturi pumps into twin **Turboflotor 1000** protein skimmers, with their post skimming trickle towers filled with **BactoBalls**. Additional components are the Nitratereductor **NR 1000** and the Calciumreactor **KR 1000** with dosing pump **SP 3000** and the **Niveaustat**, a system for automatic replenishment of evaporated freshwater from the aquarium. Dimensions: (I x w x h) app. 95 x 36 x 64 cm (c. 38" x 15" x 25.5"). For installation an additional minimum of 15 cm (c. 6") in the length is required (Total length 110 cm (c. 44"). Pipework connections: flow 2 x 25 mm, return 50 mm.



Marin 1000



Riff 500



Riff 1000

Item code EA

EAN-No.

Item

Filter systems

405.00 4025901111842 **Systemfilter 5000** (standard version)

A complete filter system for aquariums and holding tanks up to 5,000 litres (c. 1,250 gallons) **Systemfilter 5000** is a modular filter system delivered ready for use on a plastic pallet. It is designed for use as a centralised filter system for pet shops, for food fish holding tanks and for aquariums up to 5,000 l (c. 1,250 gallons). The standard version comprises the following: pressurised sand filter, backwashable, for mechanical filtration. Trickle towers (3 no.) for biological filtration. Sponge filter with easy access for bio-mechanical prefiltration. Plastic vessel mounted on a plastic pallet $120 \times 80 \text{ cm}$ (c. $48" \times 32"$) as filter sump. UV steriliser (55 watt) and circulation pump capacity $12 \text{ m}^3/\text{h}$ (c. 3,000 gph). Dimensions overall (l x w x h) app. $120 \times 80 \times 165 \text{ cm}$, (c. $48" \times 32" \times 66"$).



Systemfilter 5000 (Example)

406.00 4025901114171 **Systemfilter 10000** (standard version)

A complete filter system for saltwater aquariums and holding tanks up to 10,000 litres (c. 2,500 gallons)

System 10000 is a ready to use system for aquariums or aquarium assemblies up to 10,000 litres. It is designed for public aquariums, but also for holding systems for export and import, as well as for aquaculture applications. It comprises the following components: **Turboflotor 10000** protein skimmer, with venturi nozzle and venturi pump. Two post skimming trickle towers, filled with **BactoBalls**. Fluidised bed filter. Pressurised sand filter. Mechanical prefilter. UV steriliser, 55 watts. Circulation pump 15,000 l/h and filter sump. The complete unit is mounted ready to use on 2 plastic pallets. The units can also be custom designed for any special application. Dimensions overall (l x w x h) app. 200 x 80 x 245 cm, (c. 80" x 32" x 98").



502.71 4025901122770 **Niveau-Set**

Automatic refill system

Comprising: 25 litre canister; self aerating system; **SP 3000 Niveaumat** refill pump with level sensor.



502.63 4025901117523 **Blue Tower**

502.63-1 4025901131529 Blue Tower w/o BactoBalls

The **Blue Tower** comprises the pre-filtration drawer and 2 Biofilter boxes, filled with **Bacto-Balls** (c. 18 l, c. 4.6 gal). It can be used in every suitable filter sump. Dimensions: app. $18 \times 40 \times 51$ cm (7" x 15.7" x 20") (l x w x h)



501.90 4025901116038 **Skim Box**

Surface Skimmer

A bacterial film normally forms at the water surface of almost all aquaria inhibiting gas exchange and often, particularly in saltwater aquariums, forming an unpleasant scum. **Skim box** is a surface skimmer that removes the film and consequently improves the oxygen supply to the aquarium. It is easily installed into any aquarium with suckers mounted on fully adjustable feet. To provide the water movement required it can be connected to most power head pumps up to 2,000 l/h (c. 500 gph) capacity, the injection pump of some protein skimmers and the suction line of many canister filters.



501.70 4025901106404 Overflow box **OFB 2500 I** 501.75 4025901106411 Overflow box **OFB 5000 I**

For connecting to an under tank filter system

The Aqua Medic **Overflow box** hangs over the outside of the aquarium. A constant water level is maintained after the start of the overflow. Water circulation is achieved by pumping the water from the sump into the aquarium, and then via the **Overflow box** back into the sump. This makes it possible to connect aquaria to under the tank filter systems without having to drill holes in the aquarium. The **Overflow box** is manufactured from acrylic and is available in two capacities: **OFB 2500** for up to 2,500 l/h (c. 625 gph), **OFB 5000** for up to 5,000 l/h (c. 1,250 gph) **OFB 2500** (l x w x h): app. 19 x 18 x 25 cm (c. 8" x 7.2" x 10"), **OFB 5000** (l x w x h): app. 19 x 25 x 25 cm (c. 8" x 10" x 10")

Item code EA

EAN-No.

Item

Filter components

410.74 4025901101102 Nitratereductor NR 400

Denitrification filter for aquaria up to 400 litres (c. 100 gallons)

The Nitratereductor **NR 400** is a completely sealed biological filter. It is operated at a very low flow rate. The filter can be installed in almost any position, inside or outside the aquarium or the cabinet. The water flow is provided by connecting to a standard canister filter, power head or by pass circuit. The filter medium – **Deniballs** – is consumed and requires replacement in 9 to 12 months dependant on load. For optimum control we recommend the filter be used in conjunction with an Aqua Medic **mV controller** or an Aqua Medic **mV computer**. The filter is already equipped to accept our specific pressurised electrode. Dimensions - without electrode (I x w x h): app. $14.5 \times 10 \times 37$ cm (c. $5.8" \times 4" \times 14.5"$).

Dimensions - Without electrode (1 x w x n): app. 14.5 x 10 x 37 cm (c. 5.8 x 4 x 14.5). Recommended accessories: **Denimar-**powder and **Deniballs** to feed the anaerobic bacteria. Pressure resistant mV (Redox or ORP) probe - short - with PG 13.5 threaded connection, Dosing pump **SP 1500**.

410.760 4025901124460 Nitratereductor NR Blue

To reduce the nitrate level in salt- and freshwater aquaria up to 1,000 l (260 gal) volume. The Nitratereductor **NR Blue** is an anaerobic biological reactor for removing nitrates from salt- and freshwater aquaria. It has a 5 l (c. 1.2 gal) volume and an internal circulation pump. The **Nitratereductor** works with a flow rate of 1 to 4 l/h (c. 0.25 to 1 gph). In the absence of oxygen this situation promotes bacteria that metabolize nitrate. **Denimar-**powder or **Mini-Deniballs** are used as an organic energy source. The Nitratereductor **NR Blue** is a closed unit that can be integrated into filter systems, but may also be installed to stand alone under the aquarium. **Mini-Deniballs** and **miniballs** included.

Recommended accessories: For constant water flow: Dosing pump **SP 3000**. To monitor and control the process: **mV Controller** and pressure resistant threaded probe short PG 13.5. To feed the bacteria: **Denimar-**powder and **Mini-Deniballs**. Ø app. 23 cm, Height app. 34 cm

410.750 4025901106633 Nitratereductor **NR 1000**

Denitrification filter for aquariums up to 1,000 litres (c. 250 gallons)

The Nitratereductor NR 1000 is an anaerobic biological reactor for removing nitrates from marine and freshwater aquaria. It has a 10 l (c. 4.5 gal) volume and an internal circulation pump. The Nitratereductor NR 1000 works with a flow rate of 1 to 4 l/h (c. 0.25 to 1 gph). The Nitratereductor NR 1000 is a closed unit that can be integrated into filter systems, but may also be installed to stand alone under the aquarium. To monitor this process, it is possible to use a redox potential controller (ORP controller) in conjunction with an electrode inserted in the inbuilt PG 13.5 port or the Dosing pump SP 3000 (supplied) can be connected for a fully controlled system. Dimensions excluding electrode (l x w x h): app. 17 x 17 x 54 cm (c. 7" x 7" x 22"). Recommended accessories: Denimar-powder and Deniballs to feed the anaerobic bacteria, pressure resistant mV (Redox or ORP) probe with PG 13.5 threaded connection.



Denitrification filter for aquaria up to 3,000 litres (c. 800 gallons)

The Nitratereductor **NR 5000** uses the same biological principle as the smaller models. It has a volume of $30 \, \text{I}$ (c $7.5 \, \text{gal}$) and is supplied with an internal circulation pump, plus the connection for a pressurised redox probe with a PG 13.5 thread. Feeding the bacteria can be performed manually with **Denimar** or automatically using **Deniballs** in conjunction with an mV (ORP) controller. The Nitratereductor **NR 5000** is a closed system and should be supplied with feed water via a bypass or a dosing pump at a rate of $12 - 30 \, \text{I/h}$ (c. $3 - 8 \, \text{gph}$). Dimensions excluding electrode (I x w x h): app. $50 \times 30 \times 96$ cm (c. $20'' \times 12'' \times 38.5''$). Recommended accessories: **Denimar-**powder and **Deniballs** to feed the anaerobic bacteria, pressure resistant mV (Redox or ORP) probe with PG 13.5 threaded connection.

410.075 4025901112092 Sulphur Reactor **SR 400** 410.076 4025901112108 Hydrocarbonate Reactor **HR 400**

The Sulphur Reactor $\bf SR~400$ is a Bio-reactor filled with sulphur beads which promote the growth of the specialised bacteria that remove nitrate. As a by product of the biochemical reaction that takes place in the Sulphur Reactor $\bf SR~400$, sulphuric acid is produced and in consequence the Sulphur Reactor $\bf SR~400$ must always be used in combination with a Hydrocarbonate Reactor $\bf HR~400$ in which the sulphuric acid is neutralised. Both reactors are supplied with a strong holding system. \emptyset app. 8 cm (c. 3.1"), length app. 35.5 cm (c. 14"), hose connection 4/6 mm (c. 1/4")













EAN-No.

Item



N 400



N Blue



KR 400







KR 5000

Filter components

410.074 4025901112122 Sulphur Nitratereductor SN 400

The construction of the Sulphur Nitratereductor **SN 400** is very similar to that of the Nitratereductor **NR 400**. An internal pump circulates the water through chambers containing sulphur beads and **Hydrocarbonate**. As a by-product, sulphuric acid is produced which is neutralised by the **Hydrocarbonate** in the filter. The Sulphur Nitratereductor **SN 400** is recommended for aquariums up to 400 litres (100 gallons).

Dimensions: app. $14.5 \times 10 \times 37$ cm (c. 5.7" x 4" x 14.5"). Recommended accessories: Dosing pump **SP 1500**

410.770 4025901124477 Sulphur Nitratereductor **SN Blue**

Sulphur Nitratereductor for saltwater aquaria up to 1,000 I (260 gal) volume

The Sulphur Nitratereductor **SN Blue** is an anaerobic biological reactor for removing nitrates from saltwater aquaria. An internal pump circulates the water through chambers containing sulphur beads and **Hydrocarbonate**. Specialised bacteria develop within the Sulphur Nitratereductor **SN Blue** that utilise sulphur as an energy source to remove nitrate. As a by-product, sulphuric acid is produced which is neutralised by the **Hydrocarbonate** in the filter. The Sulphur Nitratereductor **SN Blue** is recommended for aquaria up to 1,000 litres (260 gal). The filter comes complete with **sulphur pearls** and **Hydrocarbonate**.

Recommended accessories: For constant water flow: Dosing pump **SP 3000**, refill pack **sulfur pearls** and **Hydrocarbonate**.

Ø app. 23 cm, Height app. 34 cm

410.30 4025901101119 Calciumreactor KR 400

A reactor to supply dissolved calcium and calcium bicarbonate ions to reef aquaria up to 400 litres (c. 100 gallons)

The Calciumreactor **KR 400** is a sealed system operating at a very low flow rate. The filter can be installed in almost any position, inside or outside the aquarium or the cabinet. To provide the water flow, we recommend our **SP 1500** dosing pump. The reactor is filled with **Hydrocarbonate** – a pure form of calcium carbonate with an extremely low **phosphate** level. The reactor is already equipped to accept our specific pressurised **pH-electrode** short PG 13.5. Dimensions - without electrode (I x w x h): app. $14.5 \times 10 \times 37$ cm (c. $5.8" \times 4" \times 14.5"$). Recommended accessories: **pressure resistant pH probe** – short, **CO**₂**–set basic**, Dosing pump **SP 1500**, **Hydrocarbonate** as refill.

410.360 4025901124453 Calciumreactor KR Blue

Calciumreactor to supply saltwater aquaria with dissolved Calcium. For aquaria from $250 - 1,000 \mid volume (65 - 260 gal)$

The Calciumreactor \mathbf{KR} \mathbf{Blue} is a hermetically closed system with an integrated circulation pump and CO_2 -recycling. It can be mounted in a bypass, independent from the water level in the aquarium or the filter sump. It comes filled with 4 kg $\mathbf{Hydrocarbonate}$. The addition of CO_2 lowers the pH value in the Calciumreactor \mathbf{KR} \mathbf{Blue} and the $\mathbf{Hydrocarbonate}$ dissolves. Despite the low flow rate of 1-4 l/h (0.25 - 1 gph) high amounts of calcium and bicarbonate ions are delivered into the aquarium, where it is most beneficial to the aquarium inhabitants. The Calciumreactor \mathbf{KR} \mathbf{Blue} is supplied with a port for a pH-probe (PG 13.5). Recommended accessories: For constant water flow: dosing pump \mathbf{SP} 1500. For continuous CO_2 -supply: \mathbf{CO}_2 -set \mathbf{basic} 500 with regulator, \mathbf{bubble} $\mathbf{counter}$ and CO_2 -pressure bottle. For automatic control of the CO_2 -addition: \mathbf{M} -ventil $\mathbf{standard}$, \mathbf{pH} $\mathbf{Controller}$ and \mathbf{pH} -probe with thread \mathbf{PG} 13.5 short. Refill pack \mathbf{Hyd} -rocarbonate and $\mathbf{Dolomite}$ for calcium and magnesium supply of the aquarium. \emptyset app. 23 cm, Height app. 34 cm

410.350 4025901106657 Calciumreactor **KR 1000**

For the supply of dissolved calcium to reef aquaria up to 1,000 litres (c. 250 gallons) The Calciumreactor **KR 1000** is a closed system designed for universal use. It can be operated on a bypass system, independent of the water level in the aquarium, or alternatively be installed in the filter sump. The Calciumreactor **KR 1000** has an integral port to accommodate a PG 13.5 threaded electrode to measure the pH value and a **SP 3000** dosing pump for controlled water flow. Dimensions - without electrode (l x w x h): app. 17 x 17 x 54 cm (c. 7" x 7" x 22"). Recommended accessories: pressure resistant **pH probe** – long - threaded PG 13.5, **CO**₂–**set basic, Hydrocarbonate** as refill.

410.450 4025901106664 Calciumreactor **KR 5000**

For the supply of dissolved calcium to reef aquaria up to 5,000 litres (c. 1,250 gallons) The Calciumreactor **KR 5000**, like our smaller models, is designed as a closed system. An integral pump provides internal water circulation. A PG 13.5 threaded port accepts a electrode for measuring and controlling the pH within the vessel. The reactor has a volume of 30 litres (c. 8 gallons), and is supplied with a 15 l bucket of **Hydrocarbonate**.

Dimensions $\stackrel{.}{-}$ without electrode (I x w x h): app. 50 x 30 x 96 cm (c. 20" x 20" x 38.5"). Recommended accessories: pressure resistant **pH probe** – long - threaded PG 13.5, **CO₂–set basic**, **Hydrocarbonate** as refill.

KS 1000





Item code EAN-No.

Filter components

410.510 4025901113198 Kalkwasser stirrer **KS 1000** 410.550 4025901113204 Kalkwasser stirrer **KS 5000**

For the production of Kalkwasser for saltwater aquaria

Kalkwasser stirrers automatically produce Kalkwasser to replace the evaporated water in saltwater aquaria. They should be used in conjunction with an automatic refill device, e.g. the **Niveaumat**. The top up water is pumped from a reverse osmosis or a reservoir through the **Kalkwasser stirrer**. Inside the unit a sediment of Calciumhydroxide powder is slowly stirred so it is kept in suspension.

Item

The Kalkwasser stirrers are manufactured in 2 sizes:

Kalkwasser stirrer **KS 1000**: for aquariums up to 1,500 litres (c. 400 gal); dimensions: app. 11 cm \emptyset x 50 cm high, (c. 4.3" \emptyset x c. 20"), connection: 4/6 mm (c. 1/4") hose

Kalkwasser stirrer **KS 5000**: for aquariums up to 5,000 litres (c. 1250 gal); dimensions: app. 20 cm \emptyset x 60 cm high, (c. 8" \emptyset x 24"), connection: 4/6 mm (c. 1/4") hose.

Recommended accessories: Niveaumat or aquaniveau with Dosing pump SP 3000

410.600 4025901108866 Fluidised bed filter FB 5000

Fluidised bed sand filter

The **FB 5000** fluidised bed sand filter is a powerful but compact biological sand filter. The water enters the filter from the bottom and keeps the small quartz sand grains fluidised – a huge surface area is created and is optimally supplied with water and nutrients. **FB 5000** can work as biological filter for aquarium systems up to 10,000 litres (c. 2,500 gallons). Dimensions: \emptyset 20 cm (c. 8"), total height: 170 cm (c. 67")

65024 4025901129649 phosphatfilter Fe

Bypass filter for the elimination of phosphate

The **phosphatfilter Fe** is a compact chemical filtration chamber for aquarium use. It can be installed in line with any standard canister filter, or fed via a separate pump. The **phosphatfilter Fe** contains 400 ml of **antiphos Fe**. This reduces the level of phosphate and thereby curtails the growth of filamentous algae. Depending on the phosphate level, one filling of antiphos may be sufficient for an aquarium up to 600 litres (c. 150 gallons) for between 3 - 6 months. The **phosphatfilter Fe** can be used for fresh- and saltwater aquaria.

Ø app. 8 cm (c. 3.2"), length app. 24 cm (c. 9.45"), hose connection: 12 and 16 mm

65026 4014694127314 **carbolitreactor**

Bypass filter for activated carbon

The **carbolitreactor** is a compact chemical filtration chamber for aquarium use. It can be installed in-line with any standard canister filter or fed via with a separate pump. The **carbolitreactor** contains one litre of pH neutral **carbolit**. The **carbolitreactor** can be used for fresh- and saltwater aquaria. One filling lasts, depending on the load and use, for between 10 days (for removal of medications) to up to 12 months (for long term use as biological filter) in a 400 litre (c. 100 gallon) aquarium.

Ø app. 8 cm (c. 3.2"), length app. 35.5 cm (c. 14"), hose connection: 16 mm (c. 2/3")

EAN-No.

Item





















Filter material

		2 pcs., minimum quantity 10 x 2
429.01	4025901115871	filter bag 1, 22 x 15 cm (c. 8.6" x 5.9")
429.02	4025901115888	filter bag 2, 22 x 30 cm (c. 8.6" x 11.8"
429.03	4025901115895	filter bag 3, 22 x 45 cm (c. 8.6" x 17.7"

Zip up media bag

Filter bags are designed to contain fine filter media, such as activated carbon, **antiphos Fe** or other granular media. The **filter bag** is fitted with a zip fastener for quick and easy replacement of the media.

11650	4014694116509	antiphos Fe 500 ml
12650	4014694126508	antiphos Fe 1000 ml
12653	4014694126539	antiphos Fe 5000 ml

For the control of algal growth

Phosphate and silicate remover for freshwater and saltwater aquariums **antiphos Fe** is an ideal medium for selectively extracting phosphate and silicate from aquarium water, thus counteracting unwanted algal growth. **antiphos Fe** is a highly active iron based product containing no aluminium and is completely non toxic to aquarium plants and animals. The binding capacity of **antiphos Fe** is c. 10 g phosphate/kg. Subject to the conditions 500 ml of **antiphos Fe** will treat a normally populated 300 l aquarium for c. 3 – 6 months.

carbolit 500 g/1.25 l, 1.5 mm Pellets (c. 1.1 lbs/125 gal)
carbolit 400 g/1.25 l, 4 mm Pellets (c. 0.9 lbs/100 gal) carbolit 5 l/3.5 kg, 1.5 mm Pellets (c. 7.7 lbs/1 gal)
carbolit 5 l/3 kg, 4 mm Pellets (c. 6.6 lbs/1 gallons)
carbolit 25 kg/62.5 l, 1.5 mm Pellets (c. 55 lbs) carbolit 25 kg/62.5 l, 4 mm Pellets (c. 55 lbs)
4014694125136 4025901119381 4025901119398 4014694115168

For the removal of toxins and colours

Activated carbon pellets for fresh- and saltwater aquaria. **carbolit** comprises of highly efficient activated carbon pellets. **carbolit** quickly clears aquarium water and removes colouring substances, turbidity and medication residues. Yellowing substances such as phenols and tannins that can accumulate in the water are also removed. **carbolit** may also be used as a long-term filter material. **carbolit** is pH neutral.

410.80	4025901101126	BactoBalls 25 box (c. 6.25 gal)
410.81	4025901101133	BactoBalls 5 I bucket (c. 1.3 gal)
410.82	4025901101140	BactoBalls 15 I bucket (c. 3.75 gal)

Biological filter media

BactoBalls are the optimum filter medium for biological filters. They can be used in trickle filters and denitrification reactors, and in larger aquaculture systems. The large surface area of 300 m²/m³ allows or a high concentration of active bacterial biomass.

410.77 4025901117691 **miniballs** 1 l

Filling material for biological filters

miniballs, with a diameter of only 13 mm, are used as biomedia in small filters. They have a much higher packing density and a proportionally similar surface area to the standard **Bacto-Balls**, so a high biological capacity can be achieved even in small filters.

410.79	4025901112085	sulfur pearls 1
410.79-1	4025901112139	sulfur pearls 5 I bucket

Filter medium for Sulphur denitrification reactors

sulfur pearls are sulphur beads formed from pure sulphur. They are used in sulphur nitratereductors as the filter medium and energy source for the bacteria. They have to be replaced from time to time as they are slowly consumed by the bacteria.

Caution: Use only in nitrate removing anaerobic filters having a low water flow rate.

410.78	4025901100853	Deniballs 0,8 l (c. 0.2 gal)
410.78-1	4025901100860	Deniballs 5 I bucket
410.78-3	4025901100884	Deniballs 25 Lbox

A filter material and bacteria feed for the Nitratereductor

Deniballs are manufactured from a unique biologically based plastic. One to three packages of 0.8 litres (c. 0.2 gal) each is enough to supply the Nitratereductor as the sole food source for 12 months. For the Nitratereductor **NR 5000**, about 5 litres (1.3 gal) are required. Changing the **Deniballs** after approximately 12 months is recommended to ensure safe and maintenance free denitrification in fresh- and saltwater aquaria.

EAN-No.

Item

Filter material



411.78 4025901122978 Mini-Deniballs 0,5 l

A filter material and bacteria feed for the Nitratereductor

Mini-Deniballs are manufactured from a unique biologically based plastic. One package of 0.5 litres (c. 0.2 gal) is enough to supply a Nitratereductor as the sole food source for 12 months. Changing the **Mini-Deniballs** after approximately 12 months is recommended to ensure safe and maintenance free denitrification in fresh- and saltwater aquaria.



410.76-1 4025901100846 **denimar** 150 g

Nutrient powder for the Nitratereductor

The bacteria within an anaerobic biofilter need organic nutrients as their energy source to remove nitrate. If **denimar** is dosed daily, high nitrate removal rates can be achieved in the **Nitratereductor**. **denimar** is suited for salt- and freshwater aquaria. It contains no fertilizers and does not foster the growth of algae.



12411 4014694124115 biobacter

bacteria culture for improving nitrification and de-nitrification in aquaria

biobacter is a compound containing freeze-dried living bacteria. It is used to start new biological filters, revitalise filters after using medication, and to improve nitrification in existing aquaria. **biobacter** comprises a glass vial of bacteria and bacteria feed. 1 carton for 250 litres (c. 60 gallons).



UVC sterilizer

Helix Max 5 W	4025901116113	80805
Helix Max 9 W	4025901116120	80809
Helix Max 11 W	4025901120646	80811
Helix Max 18 W	4025901116137	80818
Helix Max 36 W	4025901116106	80836
Helix Max 55 W	4025901116144	80855

Water clarifier for fresh- and saltwater aquariums and garden ponds.

Helix Max UV sterilisers can eliminate single cell algaes giving crystal clear water in aquariums and ponds. The water is directed in a spiral path around the quartz tube resulting in more efficient use of the UV radiation than in standard units. The inlet and outlet fittings can be rotated through 360° for easy mounting at any angle. All **Helix Max** with a 10 m rubber cable and high frequency electronic ballast, for garden ponds, salt- and freshwater aquariums. The electronic ballasts increase the lifetime and the efficacy of the UV lamps.



Helix Max 18 W

Type	Salt water	Recommended	Fresh water	Recommended	Capacity
	aquarium	max. flow	aquarium	max. flow	
5 Watt	25 - 125 l	100 l/h	50 - 250 l	200 l/h	1.8 W/UVC
9 Watt	125 - 250 l	200 l/h	250 - 500 l	500 l/h	2.4 W/UVC
11 Watt	150 - 350 l	300 l/h	350 - 750 l	700 l/h	3.6 W/UVC
18 Watt	250 - 500 l	500 l/h	500 - 1,000 l	1,000 l/h	5.5 W/UVC
36 Watt	500 - 1,000 l	1,000 l/h	1,000 - 2,000 l	2,000 l/h	12 W/UVC
55 Watt	up to 1,500 l	1,500 l/h	bis 3,000 l	3,000 l/h	17 W/UVC
	•				

Type	Cable	Lamp type	max. pressure	Power	Dimensions
	length			connection	l x w in mm
5 Watt	2 m	PL-S-5 Watt	0,3 bar	230 V~/50 Hz	app. 160 x 75
9 Watt	2 m	PL-S-9 Watt	0,3 bar	230 V~/50 Hz	app. 240 x 75
11 Watt	2 m	PL-S-11 Watt	0,3 bar	230 V~ /50 Hz	app. 290 x 75
18 Watt	10 m	PL-L-18 Watt	0,3 bar	230 V~/50 Hz	app. 380 x 120
36 Watt	10 m	PL-L-36 Watt	0,3 bar	230 V~/50 Hz	app. 510 x 120
55 Watt	10 m	PL-L-55 Watt	0,3 bar	230 V~/50 Hz	app. 650 x 120



Spare bulbs for Helix Max:

UVC-Max 5 W	4025901116304	80805-8
UVC-Max 9 W	4025901116311	80809-8
UVC-Max 11 W	4025901123135	80811-8
UVC-Max 18 W	4025901116328	80818-8
UVC-Max 36 W	4025901116335	80836-8
UVC-Max 55 W	4025901116342	80855-8

Item code EA

EAN-No.

Item

Light - LED

83214100 4025901123609 **aquasunLED** 100 W 83214150 4025901123616 **aquasunLED** 150 W

LED aquarium light for saltwater aquaria

Programmable light control for Sunrise/Sunset, moonlight and cloud movement.

The **aquasunLED** is modularly constructed. Each LED module consists of 50 high-power LEDs 1 Watt each (15 x 1 watt blue and 35 x 1 watt 12,000 K) with a total power of 50 watts. The **aquasunLED** is available either as 100 watt (2 modules) or 150 watt (3 modules) version. The light is equipped with a programmable computer control. The light channels for white LEDs, blue LEDs, moonlight and cloud movement are separately controlled by pulse width modulation that makes natural lighting possible. Even a cycle for moon phase is taken into account.

The housing is made of saltwater resistant high-quality anodized aluminium. The special construction with passive cooling makes it possible to operate the light without fans, making the unit very quiet.

Technical data:

- aquasunLED is available in 2 versions: aquasunLED 100 W and aquasunLED 150 W
- high-power LEDs
- luminous efficiency app. 120 lumen/watt
- colour temperature 14,000 K
- LEDs life expectancy according to the manufacturer's data app. 50,000 hours
- For safety 24 V with external power pack
- incl. steel wire suspension
- computer control $\dot{\mbox{\scriptsize with USB}}$ connection for timer and dimming

Light control:

- USB-connection for PC
- software "DimEdit"for Windows is included, no installation on the PC is required.
- 10 control programmes are pre-programmed and can be changed individually with the included software "DimEdit". A software update will be possible online.
- 4 separately programmable and dimmable channels for white LEDs, blue LEDs, moonlight and cloud movement.

Dimensions:

aquasunLED 100 watt: app. $84.5 \times 36 \times 5.5$ cm (I x w x h) **aquasunLED** 150 watt: app. $124.5 \times 36 \times 5.5$ cm (I x w x h)



aquasunLED

LEDspot 100 W



LEDspot 200 W

83414100 4025901131239 **LEDspot 100 W** 83414200 4025901131246 **LEDspot 200 W**

NeW

Splash-proofed LED-spotlight (IP65)

The lights are equipped with 100~W respectively 200 LED chips (Epistar) the durability is app. 35.000~Hrs. The luminous colour is 12.000~K.

The light beam is bundled with a lense to 90°. The luminous flux of the 100 W light is 10.000 lumen and of the 200 W light 20.000 lumen. These lights could replace metal halogen damp lights from 250 W respectively from 400 W.

The control gear unit is placed in a splash-proofed body on the light. The control gear (Meanwell) could be dimmed with a PWM control- e.g. with the Aqua Medic **sunrise control**.

The **LEDspots** will be cooled passive over a massive corrosion resistant aluminium cooling element.

It can be hang up on the central loop with a chain or attached with a holder out of polished stainless steel on the ceiling. Then you can adjust the angle.

Measurements:

LEDspot 100 W: Ø 32 cm, Height: app. 38 cm; LEDspot 200 W: Ø 32 cm, Height: app. 48 cm

Weight:

LEDspot 100 W: app. 8 kg; LEDspot 200 W: app. 11.2 kg

Light - LED

EAN-No.

Item



aguareefLED + aguareefLED



83215000 4025901130430 aquareefLED

New

LED aquarium light for saltwater aquaria

The aquareefLED consists of 18 high-power Cree LED's 3 watt each (7 x 3 watt blue and 11 x 3 watt 12,000 K) with a total power of app. 50 watt. The white and blue LED's can be controlled separately in sections. We recommend using the **sunrise control** as a programmable light control. The sunrise control with pulse width modulation complements the aquareef-LED with 4 controllable light channels for white LED's, blue LED's, moonlight and cloud movement that makes natural lighting possible. Even a cycle for moon phase is taken into account. The housing of the aquareefLED is made of black anodized saltwater resistant aluminium. The special construction with passive cooling makes it possible to operate the light without fans, making the unit very quiet.

Technical data:


- 3 watt Cree high-power LED's- luminous eciency app. 120 lumen/watt
- colour temperature 14,000 K
- LED's life expectancy according to the manufacturer's data app. 50,000 hours
- for safety 24 V with external power supply
- incl. steel wire suspension aquafit 2
- dimensions (I x w x h): app. 27 x 37 x 2.4 cm



83215001 4025901130577 aquareefLED holder

Holder for aquareefLED

Foldable holding device for the aquareefLED for mounting directly to the aquarium glass (e. g. at the aquaria's rear panel)





Programmable light control for aquareefLED/LEDspot

- Four separately programmable and dimmable channels, for example white & blue LEDs, moonlight & cloud movement
- Up to 3 aquareefLEDs are controllable at the same time
- 10 control programmes are pre-programmed and can be changed with the included software DimEdit
- No installation on the PC is required
- Software update is possible online via USB
- 24 V, low voltage for safety



86613 86614 New

86612

4025901130997 Ocean Light LED 36 W/60 cm 4025901131000 Ocean Light LED 54 W/90 cm 4025901131017 Ocean Light LED 72 W/120 cm

LED aquarium shadow column for sea water aquariums

The Ocean Light LED is equipped with high performance Cree LEDs á 3 watt. Through the use of white and blue LEDs arises a colour temperature of app. 14.000 K. The integrated lenses, which are produced with high optical precision, arrange for a absolute plain illumination level. The shapely body of the Ocean Light LED is made of silver-grey anodized, sea water resistant aluminium. The heat conductive construction allows an operation without ventilators.

Therefore the light is completely noiseless. An appropriate fitting, which is adjustable to the length of the aquarium, could be attached to the sides or the aquarium frame and is included in delivery.

A programmable light control is in preparation. An attachment for this has been already integrated into the body.

Technical data:

- 3 Watt Cree high performance LEDs
- light efficiency app. 120 Lumen/watts
- colour temperature 14.000 K
- durability of the LEDs -according to manufacturer's data- 50.000 Hrs.
- safety voltage 24 V with external power supply unit

Versions:

- Ocean Light LED 36 Watt (4 x 3 Watt blue and 8 x 3 Watt 12.000 K) Dimensions (I x w x h): app. $60 \times 12 \times 25 \text{ cm}$ Fitting adjustable for Aquariums with 60 cm – 80 cm length
- Ocean Light LED 54 Watt (6 x 3 Watt blue and 12 x 3 Watt 12.000 K) Dimensions (I x w x h): app. $90 \times 12 \times 25 \text{ cm}$
- Fitting adjustable for Aquariums with 90 cm 110 cm length - Ocean Light LED 72 Watt (8 x 3 Watt blue and 16 x 3 Watt 12.000 K)
- Dimensions (I x w x h): app. $120 \times 12 \times 25 \text{ cm}$

Fitting adjustable for Aquariums with 120 cm - 140 cm length



aquasunspot 3 x 1



quasunspot 7 x 1



aquasunspot 12 x 1



aquasunspot 3 x 3



auasunsnot 3 v 1 blue



quasunspot 7 x 1 blu



uasunspot 12 x 1 blue



aquasunspot 3 x 3 blue





spotfix





Ocean Light T5



Light - LED

EAN-No.

Item code

```
83314003 4025901123647 aquasunspot 3 x 1
83314007 4025901123654 aquasunspot 7 x 1
83314012 4025901123661 aquasunspot 12 x 1
83315003 4025901128307 aquasunspot 3 x 1 blue
83315007 4025901128314 aquasunspot 7 x 1 blue
83315012 4025901128321 aquasunspot 12 x 1 blue
83315303 4025901128321 aquasunspot 3 x 3 blue
```

LED Spot light for saltwater aquaria

aquasunspot are constructed using 1 or 3 watt power LEDs. The combination of white (**10000 K**) and blue LEDs results in a perfect colour spectrum for coral reef aquariums. The light efficiency is c. **90 lumen/watts**. **aquasunspot blue**: Same features as **aquasunspot** but provided with just blue LEDs instead of white & blue LEDs. Can be used as blue additional lighting or moonlight. **aquasunspot** 3 can be used in standard light fittings usually used for 12 V halogen lamps with a 2 pin socket. **aquasunspot** 7 and **aquasunspot** 12 can be used in light fittings using the E27 socket; **aquasunspot** 12 is also compatible with PAR lamps. Technical data:

Item

```
aquasunspot 3 x 1: 3 W, LED: 2 white/1 blue, 2 pins base GU 5.3, 12 V \sim or =, Ø 5 cm aquasunspot 7 x 1: 7 W, LED: 4 white/3 blue, 230 V/50 Hz, Ø 9,2 cm aquasunspot 12 x 1: 12 W, LED: 8 white/4 blue, 230 V/50 Hz, Ø 12 cm aquasunspot 3 x 3: 9 W, LED: 2 white/1 blue, 2 pins base GU 5.3, 12 V \sim or =, Ø 5 cm aquasunspot blue 3 x 1: 3 W, LED: 3 blue, 2 pins base GU 5.3/MR 16, 12 V \sim or =, Ø 5 cm aquasunspot blue 7 x 1: 7 W, LED: 7 blue, 230 V/50 Hz, Ø 9,2 cm aquasunspot blue 12 x 1: 12 W, LED: 12 blue, 230 V/50 Hz, Ø 12 cm aquasunspot blue 3 x 3: 9 W, LED: 3 blue, 2 pins base GU 5.3, 12 V \sim or =, Ø 5 cm
```

83314000 4025901126938 **spotfix**

LED light fixture for aquariums

Fixture for LED light bulbs for aquariums with 6 – 8 mm glass. Made for LED lamps with socket GU 5.3 (= MR16). 12 V, 3 – 9 watts (Aqua Medic **aquasunspot** 3×1 or **aquasunspot** 3×3) Content: LED light fixture, Glass clip (for 6 – 8 mm thickness), Power supply 12 V, comes without lamps

83314001 4025901131055 aquamoonLED - available from august

NeW

Night light for Aquariums

The **aquamoonLED** is equipped with a **aquasunspot 3 x 1 blue** with 3 W with a deep blue fluoresce light radiation. The use of such a moonlight allows the observance of nocturnal animals and reduces the easily startling of the fishes it also avoids that the fishes jump out by night. Also the reproduction and the growth of corals will be influenced by the moonlight. The **aquamoonLED** is conducted by a 12 V safety voltage. The LEDs of the **aquasunspot 3 x 1 blue** have a durability of 50.000 Hrs. A 12 V transformer and a appropriate holder with mounting clip for glass panels of 6-8 mm glass size are included in delivery. Measurement: app. $10 \times 5 \times 10$ cm ($1 \times w \times h$)

Light - T5

Without bulbs, colour: black		
Ocean Light T5 4 x 24 W	4025901125399	83841-1
Ocean Light T5 4 x 39 W	4025901120851	83842-1
Ocean Light T5 4 x 54 W	4025901120868	83843-1
Ocean Light T5 6 x 39 W	4025901120875	83862-1
Ocean Light T5 6 x 54 W	4025901120882	83863-1
Ocean Light T5 8 x 39 W	4025901120899	83882-1
Ocean Light T5 8 x 54 W	4025901120905	83883-1

Super-flat aquarium luminaries system for T5 tubes

Aluminium housing - powder coated, holding unit to mount the light system on top of the aquarium, optionally equipped with Aqua Medic **aquafit** steel wire hanging system, equipped with high performance reflectors, equipped with LED moonlight (separately switchable). 2 electric circuits offer 2 different time settings.

Dimensions (I x w x h):

Ocean Light T5 4 x 24 W: app. 68 x 23.3 x 5 cm

Ocean Light T5 4 x 39 W: app. 97.5 x 23.3 x 5 cm

Ocean Light T5 4 x 54 W: app. 125.5 x 23.3 x 5 cm

Ocean Light T5 6 x 39 W: app. 97.5 x 29.3 x 5 cm

Ocean Light T5 6 x 39 W: app. 97.5 x 29.3 x 5 cm

Ocean Light T5 6 x 39 W: app. 97.5 x 29.3 x 5 cm

Ocean Light T5 8 x 39 W: app. 97.5 x 35.3 x 5 cm

Ocean Light T5 8 x 39 W: app. 125.5 x 35.3 x 5 cm

Item code EAN

EAN-No.

Item









Light - T5

83439-4	4025901113693	aquastarlight T5 4 x 39 W 90 cm (c. 36") silver
83454-1	4014694834540	aquastarlight T5 4 x 54 W 120 cm (c. 48") black
83454-4	4025901113709	aquastarlight T5 4 x 54 W 120 cm (c. 48") silver
83480-1	4014694834809	aquastarlight T5 4 x 80 W 150 cm (c. 60") black
83480-4	4025901113716	aguastarlight T5 4 x 80 W 150 cm (c. 60") silver

The **aquastarlight T5** luminaries is designed to accommodate the T5 fluorescent lamps. The luminaries is extruded from saltwater resistant aluminium and powder coated. It contains four T5 fluorescent lamps, $2 \times T5$ blue $+ 2 \times T5$ white. The **aquastarlight T5** is supplied with high frequency electronic ballasts giving completely flicker free light. These features make them ideal fluorescent lamps for lighting aquariums and terrariums.

Dimensions (I x w x \dot{h}):

aquastarlight T5 4 x 39 W: app. 92 x 20 x 7.7 cm aquastarlight T5 4 x 54 W: app. 122 x 20 x 7.7 cm aquastarlight T5 4 x 80 W: app. 152 x 20 x 7.7 cm

Without bulbs

T5 sunbeam 2 x 39 W	4025901113433	83239
T5 sunbeam 2 x 54 W	4025901113440	83254
TE cunhoam 2 v 80 W	4025001113457	83280

Light beam for T5 lamps

Like all other Aqua Medic Light Systems the **T5 sunbeam** is manufactured in powder coated aluminium. It can be fixed with the **aquafit** suspension kit to the ceiling or it can be directly mounted inside a hood. The **T5 sunbeam** is supplied with water proof lamp holders, high quality electronic ballasts and corrosion protected high efficiency reflectors. The reflectors are simply clipped onto the T5 tubes. Tubes not included.

Dimensions ($I \times w \times h$):

Without bulbs

84321	4025901120035	sun cover T5 2 x 24 W app. 65 cm (c. 25.6")
84422	4025901115925	sun cover T5 2 x 39 W app. 100 cm (c. 40")
84623	4025901116021	sun cover T5 2 x 54 W app. 125 cm (c. 50")
84723	4025901117042	sun cover T5 2 x 54 W app. 130 cm (c. 51.2")

T5 lighting for salt- and freshwater aquariums

The **sun cover T5** lighting fixture offers a superior method of converting the lighting of standard aquariums from T8 to the more powerful T5 lamps. The **sun cover T5** can easily replace the existing T8 luminaries and in many cases the existing lids are compatible with **sun cover T5**. Of course, the **sun cover T5** can also be used with new aquariums of any suitable length. The **sun cover T5** is manufactured from a saltwater resistant aluminium profile and is supplied with high quality reflectors.

84200 4025901128413 **sun cover fit**

Holder for the lamp sun cover T5.

With this holder, the **sun cover** can be fixed at a steel suspension or directly under a plate.

80909 4014694809098 Ocean Blue power compact 24 W

Blue actinic power compact lamp for saltwater aquariums. For combination with metal halide lamps and ${f Ocean}$ ${f White}$ ${f 24}$ ${f W}$.

81909 4014694819097 Ocean White power compact 24 W

Blue-white power compact lamp with a colour temperature of 10000K. For freshwater and marine aquarium.

83221	4025901113969	T5 reflektor 24 W incl. clip
83231	4025901113976	T5 reflektor 39 W incl. clip
83251	4025901113983	T5 reflektor 54 W incl. clip
83281	4025901113990	T5 reflektor 80 W incl. clip
83220	4025901120530	Clip for reflector T5 (stainless steel)

Item code EAN-No. Item

Light - T5

88730

88700	4025901116540	aqualine T5 Reef Blue 24 W 55 cm (c. 22")
88701	4025901116557	aqualine T5 Reef Blue 39 W 85 cm (c. 34")
88702	4025901116564	aqualine T5 Reef Blue 54 W 115 cm (c. 46")
88703	4025901116571	aqualine T5 Reef Blue 80 W 145 cm (c. 58")

aqualine T5 Reef Blue is intended for use in saltwater aquariums with the lamp emitting, almost exclusively, blue light in the spectrum between 400 nm and 500 nm, peaking at 420 nm. These wavelengths enhance the growth of many coral species. In addition, when combined with **Reef White 10K** or **15K** they give the aquarium a most natural appearance.

88710	4025901116625 aqualine T5 Reef White 15K 24 W 55 cm (c. 22")
88711	4025901116632 aqualine T5 Reef White 15K 39 W 85 cm (c. 34")
88712	4025901116649 aqualine T5 Reef White 15K 54 W 115 cm (c. 46")
88713	4025901116656 aqualine T5 Reef White 15K 80 W 145 cm (c. 58")

A blue/white lamp for the illumination of saltwater aquaria
This lamp emits an extremely bright blue/white light, providing ideal illumination for the
saltwater aquarium. The spectrum is chosen to encourage strong coral growth. aqualine
T5 Reef White 15K can be used as the sole light source for an aquarium, as well as in
combination with aqualine T5 Reef Blue.

88720	4025901116588 aqualine T5 Reef White 10K 24 W 55 cm (c. 22")
88721	4025901116595 aqualine T5 Reef White 10K 39 W 85 cm (c. 34")
88722	4025901116601 aqualine T5 Reef White 10K 54 W 115 cm (c. 46")
88723	4025901116618 aqualine T5 Reef White 10K 80 W 145 cm (c. 58")

aqualine T5 Reef White 10K is a bright white lamp with a colour temperature of 10000 K. The lamp simulates tropical sunlight and is the ideal basic illumination for marine as well as freshwater aquaria. For saltwater aquariums, we recommend combining aqualine T5 Reef White 10K with aqualine T5 Reef Blue to increase the blue spectrum whilst for freshwater the combination of aqualine T5 Reef White 10K with aqualine T5 Plant Grow will enhance plant growth.

00730	4025701110005	addamie 13 Flant Grow 24 W 55 cm (c. 22)
88731	4025901116670	aqualine T5 Plant Grow 39 W 85 cm (c. 34")
88732	4025901116687	aqualine T5 Plant Grow 54 W 115 cm (c. 46")
88733	4025901116694	aqualine T5 Plant Grow 80 W 145 cm (c. 58")

4025901116663 aqualine T5 Plant Grow 24 W 55 cm (c. 22")

aqualine T5 Plant Grow is a growth lamp for plants in freshwater aquariums
The lamp accentuates the red and blue parts of the spectrum and comes close to the absorption spectrum of water plants. These wave lengths stimulate photosynthesis and so create excellent condition for luxuriant plant growth. In addition the colours become more vibrant in any fish with red pigmentation (e.g. Cardinal tetra). Combined with aqualine **T5 Reef White 10K, Plant Grow** gives the aquarium a brilliant natural appearance.

Item code EAN-No.

Item

Light - Metal halide





Ocean Light

86212 4014694962120 Ocean Light 150 1 x 150 W 4025901113402 Ocean Light 150 2 x 150 W 86222 86232 4025901117059 Ocean Light 150 3 x 150 W 86213 86223 4025901117080 **Ocean Light 250** 3 x 250 W 86233 86312 4014694963127 **Ocean Light 150 plus** 1 x 150 W + 2 x 24 W T5 blue 86322 86332 4025901116182 **Ocean Light 150 plus** $3 \times 150 \text{ W} + 2 \times 80 \text{ W}$ T5 blue 86313 4025901117097 **Ocean Light 250 plus** $1 \times 250 \text{ W} + 2 \times 24 \text{ W} \text{ T5 blue}$ 86323 4025901117103 **Ocean Light 250 plus** 2 x 250 W + 2 x 54 W T5 blue 86333 4025901117110 Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue

Aquarium Luminaries for metal halide lamps

The luminaries in the Ocean Light series bring the intensity and sparkle of metal halide lighting into your aquarium at a very economic price. Of course, there is no compromise in the known Aqua Medic quality: anodised aluminium housing - high quality reflectors, aqualine 10000 lamps with 13000 K colour temperature, steel wire suspension. Ocean Light: supplied with metal halide bulbs only. Ocean Light plus: which includes the metal halide lamps and 2 aqualine T5 tubes. Individual power cables are provided for separate control of the fluorescent and HQI circuits.

Dimensions (I x w x h): Ocean Light 150 1 x 150 W: app. $60 \times 24 \times 7$ cm Ocean Light 150 2 x 150 W: app. 120 x 24 x 7 cm Ocean Light 150 3 x 150 W: app. 180 x 24 x 7 cm Ocean Light 250 1 x 250 W: app. 60 x 31.5 x 8.2 cm Ocean Light 250 2 x 250 W: app. 120 x 31.5 x 8.2 cm Ocean Light 250 3 x 250 W: app. 180 x 31.5 x 8.2 cm Ocean Light 150 plus 1 x 150 W + 2 x 24 W T5 blue: app. $60 \times 30 \times 8.2$ cm Ocean Light 150 plus 2 x 150 W + 2 x 54 W T5 blue: app. $120 \times 30 \times 8.2$ cm Ocean Light 150 plus 3 x 150 W + 2 x 80 W T5 blue: app. $180 \times 30 \times 8.2 \text{ cm}$ Ocean Light 250 plus 1 x 250 W + 2 x 24 W T5 blue: app. $60 \times 35.5 \times 8.2$ cm Ocean Light 250 plus 2 x 250 W + 2 x 54 W T5 blue: app. $120 \times 35.5 \times 8.2$ cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Item code EAN-No.

Item

Light - Metal halide





		aquasunlight NG 60 cm
85512	4025901114195	1 x 150 W + 2 x T5 24 W
85612	4025901114201	1 x 150 W + 4 x T5 24 W
85513	4025901114218	1 x 250 W + 2 x T5 24 W
85613	4025901114225	1 x 250 W + 4 x T5 24 W
		aquasunlight NG 120 cm
85522	4025901113822	2 x 150 W + 2 x T5 54 W
85622	4025901113839	2 x 150 W + 4 x T5 54 W
85523	4025901113846	2 x 250 W + 2 x T5 54 W
85623	4025901113853	2 x 250 W + 4 x T5 54 W
		aquasunlight NG 180 cm
85532	4025901113860	3 x 150 W + 2 x T5 80 W
85632	4025901113877	3 x 150 W + 4 x T5 80 W
85533	4025901113884	3 x 250 W + 2 x T5 80 W
85633	4025901113891	3 x 250 W + 4 x T5 80 W



The aquasunlight NG combines all the benefits of metal halide lamps with the technology of the new T5 fluorescent lamps. Of course, the fixture is made of saltwater resistant powder coated aluminium and supplied with high purity aluminium reflectors. For long term reliability the electronic components are all manufactured by the leading european manufacturers. As an option high frequency electronic ballasts can be supplied for the metal halide circuits. aquasunlight NG is manufactured in lengths from 600 mm to 1800 mm. Depending on the length it can be supplied with between 1 and 4 metal halide lamps (**aqualine 10000**, 13000 K, 70 – 250 watt, **aqualine 20000**, blue, 70 – 250 watt) and 2 or 4 T5 fluorescent tubes (**aqualine** T5 Reef blue and aqualine T5 Reef white) of 24 - 80 watts.

Dimensions ($I \times w \times h$):

aquasunlight NG 60 cm: app. 60 x 41 x 9.5 cm aquasunlight NG 120 cm: app. 120 x 41 x 9.5 cm aquasunlight NG 180 cm: app. 180 x 41 x 9.5 cm



aguasnacelight 400

		adamobaccii2
89713-1	4014694897132	1 x 250 W black
89713-4	4014694897644	1 x 250 W silver
89723-1	4014694897231	2 x 250 W black
89723-4	4014694897651	2 x 250 W silver
89714-1	4014694897149	1 x 400 W black
89714-4	4014694897620	1 x 400 W silver
89724-1	4014694897248	2 v 400 W black
09/24-1	4014094097240	2 X 400 W DIACK
89724-4	4014694897637	2 x 400 W silver

Aquarium luminaries for 250 watt and 400 watt metal halide lamps

It is designed for 250 watt and 400 watt metal halide lamps and ensures that now even the largest reef aquariums can be fully illuminated. The luminaries is extruded from saltwater proofed aluminium and powder coated. Borosilicate UV protection glass is standard. The lamp is available in single and twin lamp models.

Dimensions ($l \times w \times h$):

aquaspacelight 400 1 x 250 W: app. 60 x 35 x 12.2 cm (c. 24" x 14" x 4.8") aquaspacelight 400 1 x 400 W: app. 60 x 35 x 12.2 cm (c. 24" x 14" x 4.8") aquaspacelight 400 2 x 250 W: app. 120 x 35 x 12.2 cm (c. 48" x 14" x 4.8") aquaspacelight 400 2 x 400 W: app. 120 x 35 x 12.2 cm (c. 48" x 14" x 4.8")



80423	4025901131529	Sylveo 2 250 W cw
80424	4025901131536	Sylveo 2 400 W cw
80415	4014694804154	aqualight 1000 W

New

Splash proof luminaries for metal halide lamps

Aquarium lights in a splash-proofed aluminium housing. With the exception of the 1000 watt version, all the control gear is mounted within the aluminium housing. Models are available for 250, 400 and 1000 watts metal halide bulbs and aqualine 10000 lamps are included.

Sylveo 2 250 W and Sylveo 2 400 W:

app. 41.9 x 44.9 x 17.1 cm (l x w x h), silver power coated, protection class IP 65 aqualight 1000 W:


app. 56 x 35 x 19 cm (I x w x h), black power coated, protection class IP 55 Other wattages available on demand.



Item code EAN-No.

Item

Light - Metal halide



Metal halide lamp for saltwater aquaria

The **aqualine 10000** lamp has a colour temperature of 13000° Kelvin and a high percentage of the light output is at the blue end of the spectrum. **aqualine 10000** was the first metal halide lamp to simulate the lighting conditions on a coral reef and the new lamp gives an even more realistic looking aquarium as the improved twin getters give long term colour stability. The corals show their natural colours and the lighting intensity encourages excellent growth. **aqualine 10000** helps to transform your aquarium into a perfect reef tank.

80982 4014694809821 **aqualine 16000** 150 W 16K 80983 4014694809838 **aqualine 16000** 250 W 16K

A blue/white full spectrum metal halide lamp for marine aquaria

The **aqualine 16000** lamp simulates the light spectrum in deeper waters. It is best used in combination with **aqualine 10000**, but as it is a full spectrum lamp it can also be used as the sole light source, if a high percentage of blue light is required. In these circumstances, there is no need for blue fluorescent lamps and the efflorescing colours of the corals are enhanced.

80971 4014694809715 **aqualine 20000** 70 W 20K 80972 4014694809722 **aqualine 20000** 150 W 20K 80973 4014694809739 **aqualine 20000** 250 W 20K

A blue metal halide lamp for marine aquaria

The **aqualine 20000** blue lamp emits light strongly in the blue end of the spectrum. The use of this "actinic" lamp enhances the fluorescent blue and green colours of many corals. The lamp should be used in combination with **aqualine 10000**. This combination gives the aquarium a beautiful bluish hue.

80974 4014694809746 **Colorlite 400 W** blue 80975 4014694809753 **Colorlite 1000 W** blue

81911 4014694819110 aqualine 5000 70 W 5K 81912 4014694819127 aqualine 5000 150 W 5K 81913 4014694819134 aqualine 5000 250 W 5K

Daylight metal halide lamp for freshwater aquaria

aqualine 5000 is a metal halide lamp with a colour temperature of 5000° Kelvin – attenuated sunlight. This lamp was specially developed for the illumination of freshwater aquaria with its a high percentage of red light and a high intensity – 11000 lumens per watt. It gives planted aquaria a natural appearance and enhances plant growth.

Accessories Light

80400 4014694804000 aquafit

Steel Wire Suspension

The wire suspension system **aquafit** provides a neat and simple method of ceiling mounting of Aqua Medic and other suitable lights. The suspension system contains 2 pcs. of the following: ceiling plate with retaining bush, stainless steel, top screw fitting, wire with ferrule, light fixing incl. top cap, plastic washer, screws and wall fixings and clips to secure the wire's end.

80401 4025901124965 **aquafit 2**

Steel Wire Suspension

Universal Suspension kit for use with all suspended lightning units, provided that the screws in the housing's end plates are of adequate length & not too wide (max. \emptyset 4 mm).

aquafit 2 consists of 2 pieces of: 2 metre stainless steel wire with stopper, ceiling plate with retaining bush, steel wire with height and angle adjustment unit attached, screws and plugs. The suspension kit allows fixing of the lighting unit to the ceiling, and provides easy adjustment in both the height and the angle of unit.













aquafit 2

Item code EAN-No.

Item

Measurement and control technology



A centralised microprocessor controller for aquariums, terrariums or other applications **AT-Control** can measure and control pH, ORP (Redox potential), temperature, conductivity, water level and using the numerous timed circuits, lighting, dosing etc. Programming and control can also be undertaken using a PC via an USB connection. The system is modular in arrangement. It can be enlarged from a basic module to a complete control unit for several aquariums. All the modules are interconnected via USB ports. The data can be downloaded to a PC and shown graphically.

200.00 4025901100204 **pH controller** without probe

pH monitor and controller

NeW

The **pH controller** is a precision instrument for controlling the pH value in aquaria. In combination with a CO_2 system and a solenoid valve the pH can be maintained at a constant level, and the CO_2 supply to aquatic plants or into a calciumreactor can be controlled. The unit is supplied with a large LED display and the control range is digitally adjustable from pH 3.5 to 10.5. **The direction of adjustment can be set up or down.** The **pH controller** has a BNC connection for pH electrodes.

The use of an original Aqua Medic plastic shafted electrode is recommended.

200.50 4025901100259 **pH-control-Set**

Includes: controller, pH-sensor, sensor holder, pH-test fluid and solenoid valve.

200.05 4025901100211 mV controller without probe

Redox-potential (ORP) monitor and controller


The mV controller is designed for monitoring and controlling the redox potential (or ORP oxidation-reduction potential) in aquaria. The unit has a broad controlling range from -500 to a +500 mV, and a measuring range from -1000 to +1000 mV. It can be used to control the supply of ozone in saltwater aquaria and / or for the control of nitrate removal in anaerobic biological filters (Nitratereductor). The unit is supplied with a BNC connection for a mV probe. The use of an original Aqua Medic **plastic shafted electrode** is recommended.

200.10 4025901100228 **LF controller** with probe

Conductivity monitor and controller

The salt content of water can be determined by measuring the electrical conductivity. A special feature of the **LF controller** conductivity monitor and controller is the broad measurement and control range which is divided into 2 bands: from 0 to 2000 μS , the unit is used for monitoring desalinated water and freshwater, and in the range 0 to 200 mS, it is used for brackish and saltwater. The unit can therefore be used for the control of reverse osmosis units, for monitoring breeding tanks with soft water, and for the control of the salt content in marine aquaria. The unit is supplied with a directly connected, saltwater resistant graphite electrode.













EAN-No.

Item















Measurement and control technology

200.15 4025901100235 **T controller CC** with probe 4025901100242 **T controller HC** with probe

Temperature monitor and controller

The **T controller** is available in 2 versions: **T controller HC** for the control of heating systems and **T controller CC** for the control of cooling units. The control range varies from 0 to 50 °C, with an accuracy of ± 0.1 °C. The maximum load is 1000 watts for heaters and 600 watts for coolers. The units are supplied with a waterproof temperature probe.

200.25 4025901130973 T controller twin

New Digital towns ...

Digital temperature monitor & controller, for the control & monitoring of heating systems and cooling units simultaneously

The temperature controller **T controller twin** is used for controlling both heating systems & cooling units. Measuring and switching accuracy is 0.1 °C. The control range varies from 0 – 50 °C, & the set value is in 1 °C increments. **The maximum load for the heating systems & cooling units is 1,200 watts.** Because of the integrated double socket it is possible to connect a heating system & cooling unit simultaneously. The **T controller twin** is supplied with a waterproof temperature probe. The LCD display provides instant information on the current temperature. The minimum and maximum values can be easily adjusted.

203.20 4025901119428 **T-meter**

Submergible digital thermometer incl. rubber sucker and battery.

203.10 4025901130966 T-meter twin

NeW External double-display Thermometer

- large LCD Display simultaneously showing aquarium & ambient temperature

- selectable temperature unit: °C or °F

- with adhesive tape at back side for easy putting on aquarium tank

Ambient: $-10 \sim +50$ °C $(-14 \sim +122$ °F) Aquarium: $-50 \sim +70$ °C $(-58 \sim +158$ °F)

Resolution: 0.1°C / 0.1°F Accuracy: ±1°C (2°F) Power supply: 1.5 V (AG10)

201.00 4025901100266 **pH computer-Set**

Microprocessor controlled pH monitor and controller

The **pH computer-Set** utilises a modern microprocessor, which provides high precision measurement and control. The **pH computer-Set** is used to control precise values of pH in the aquarium or the calciumreactor. The computer can switch up to 500 watts using the supplied external electrical socket. When the calibration key has been selected the unit will automatically calibrate itself to the electrode. A **plastic shafted pH electrode** with BNC fitting and the correct calibration fluids are included.

201.05 4025901100686 **mV computer-Set**

Microprocessor controlled redox-potential (ORP) monitor and controller

The **mV** computer-Set uses the same microprocessor technique as the **pH** computer-Set. Waterproof touch keys are used to set the required values and calibrate the electrode. The **mV** computer-Set is ideal for controlling anaerobic biological filters such as the **Nitratereductor** which have negative redox potential or can control the supply of ozone to the aquarium, or monitor the aquarium water's redox potential. All these functions are possible due to the computer's broad measurement and control range of -500 to +1000 mV. The direction of control can be set upwards or downwards. The status of the direction of control and the output are shown on LED's. A plastic shafted **mV** electrode with a BNC fitting and calibration fluid is included.

201.20 4025901100297 **T computer-Set**

Microprocessor controlled temperature monitor and controller

The **T computer-Set** is a precise multi-functional temperature controller and is complete with a digital temperature sensor. The mode of operation can be set using the function keys, either as a heater or cooler controller. In "heating" mode, the temperature is controlled to the set value using a proportional pulse system with an accuracy of ± 0.1 °C. In the "cooling" mode, the accuracy is ± 0.5 °C. The maximum operating power is 1,000 watts for heaters and 600 watts for coolers.

EAN-No.

Item





Silicagel







test fluids

Measurement and control technology

77113 4014694771135 **aquaniveau** with 1 switch 77114 4014694771142 **aquaniveau** with 2 switch

Electronic level and refill controller

The **aquaniveau** electronic level controller may be used in 2 different modes: As a top up controller with one or two float switches to control the replacement of evaporated water. One switch controls the pumping from a storage vessel (not supplied), the other, if opted for, provides protection to prevent the top up pump (not supplied) from running dry. As maximum/minimum contact to control reverse osmosis units, in conjunction with a solenoid valve. Both level switches are low voltage.

 202.00
 4025901113129
 ozone 25

 202.05
 4025901113136
 ozone 50

 202.10
 4025901113143
 ozone 100

 202.15
 4025901113150
 ozone 200

 202.20
 4025901113167
 ozone 300

The injection of **ozone** into the water can improve the efficiency of protein skimming and raise the ORP (redox potential). The decomposition of toxic nitrite is enhanced whilst the bacteria count in the water decreases, minimising the risk of ill health in the animals. The compounds that produce yellow colouring in the aquarium are broken down and the water stays crystal clear. The ozone generators in the **ozone** – series utilise the latest low voltage technology for safety and reliability. Various models are available with capacities from 25 – 300 mg/h.

65027 4025901116977 **Ozone Booster**

Air dryer

The air dryer is for use with any Aqua Medic Ozone Generators. Ozone output can decrease dramatically if the supply air is very humid. **Ozone Booster** should be used to dry the air, particularly if a protein skimmer is supplied with **ozone** using the humid air present in the aquarium cabinet. In some circumstances ozone production can be almost doubled. The unit utilises **silicagel** as the drying component. The **silicagel** should be changed as soon as the indicator beads change their colour from blue to pink.

12730 4025901116984 **Silicagel** 1 l

Ozone Booster - Refill

Dry granulate with high de-hydration capacity. The indication pearls changing colour from blue to pink if wet.

220.10 4025901100310 Plastic probe pH 220.11 4025901100327 Glass probe pH 220.12 4025901106596 Plastic probe pH PG 13.5 220.13 4025901108279 Plastic probe pH PG 13.5 short 220.16 4025901100334 Plastic probe mV 220.17 4025901100341 Glass probe mV 220.18 4025901106602 Plastic probe mV PG 13.5 220.19 4025901108262 Plastic probe mV PG 13.5 short

Aqua Medic **pH- and mV-electrodes** (Redox-potential) are quality products designed for both accurate measurement and long, trouble free use. Both types of electrodes are available in three versions: Standard electrodes - with plastic shaft, glass electrodes - laboratory standard for extended performance. Electrodes with plastic shaft and PG 13.5 thread - pressure resistant up to 3 bar, and can be used in plumbing fittings or in the closed versions of the Nitratereductors **NR 400** and Calciumreactors **KR 400**. These electrodes are available in a short version for the Calciumreactor **KR 1000** and the Nitratereductor **NR 1000**.

230.00 4025901100358 Electrode holder

An **Electrode holder** is available as an option. It can hold up to four electrodes, and can be attached to the horizontal stress bars inside the aquarium, or directly over the edge of the aquarium glass.

230.004	4025901129564	pH 4 test fluid 60 ml
230.007	4025901129571	pH 7 test fluid 60 ml
230.009	4025901129588	pH 9 test fluid 60 ml
230.300	4025901129595	KCL-solution for pH + mV sensors 60 ml
230.230	4025901129618	230 mV test fluid 60 ml
230.400	4025901129601	Cleaning solution 60 ml
230.250	4025901129625	250 µS test fluid 60 ml
230.050	4025901129632	50 mS test fluid 60 ml

Electrode calibration fluids

The accuracy of all electrodes is dependent upon their calibration. To ensure accurate readings, all electrodes need to be calibrated at regular intervals. To ensure that the fluid values used to calibrate the electrodes remain constant, regular replacement of these fluids should occur.





Item code EAN-No. Item

Measurement and control technology

110.010	4025901112818	Titanium heater 100 W
		for aquaria up 100 - 250 l, length: app. 27 cm (c. 10.6")
110.020	4025901112825	Titanium heater 200 W
		for aquaria up 250 - 500 l, length: app. 28 cm (c. 11")
110.030	4025901112832	Titanium heater 300 W
		for aquaria up 500 - 1,000 l, length: app. 30 cm (c. 11.8")
110.050	4025901112849	Titanium heater 500 W
		for aquaria up 1,000 - 1,500 l, length: app. 32 cm (c. 12.6")

Titan Aquarium Heater

Titanium heaters are the safe alternative to glass heaters in both fresh- and salt water aquaria. The unbreakable titanium housing is seawater resistant and the heaters have both overheat and dry running protection cutouts. The heaters must be used in combination with a temperature controller. For temperature-dependet control we recommend optional the use of our **T controller twin**. \emptyset 20 mm

939 aqua therm 25 W	W / 4 m
946 aqua therm 50 W	W / 4 m
953 aqua therm 75 W	W / 7 m
960 agua therm 100 V	W / 10 m

Low voltage silicone heating cable for under gravel installation in freshwater aquaria By operating a low wattage heating cable under the substrate of a freshwater aquarium a slow thermal convection current is induced which improves the supply of nutrient to the plants, encourages root growth and in consequence gives stronger and healthier plants. The under gravel heater **aqua therm** comes complete with a 12 V safety transformer. The heating cables are fixed on the bottom glass of the aquarium using the sucker mounted clips supplied. Content: heating cable, safety transformer, mounting clips.

ium line 90/150 premium line 300



easy line



Merlin plus (PRF-RO)

Reverse osmosis

EAN-No.

Item code

4025901113020 premium line 90, 75 - 90 l/day U800.25

U800.30 4025901113037 premium line 150, 120 - 150 l/day

U800.35 4025901129816 premium line 300, 240 - 300 l/day

For producing 75 - 300 litres (c. 19 - 79 gal) of purified tap water per day

Item

The premium line reverse osmosis units are compact and versatile superior grade products. They are supplied with two large (10") prefilter housings and their activated carbon and 5µ sediment cartridges can easily be replaced. The membrane, the heart of the unit, is offered in 3 sizes: 90 l/day and 150 l/day as well as a double membrane of 300 l/day. The membrane housing includes a combined flushing valve and flow restrictor and the system can achieve a concentrate to permeate recovery ratio of 3 to 1 with a rejection rate of 95 - 98 %. The prefilter housings and the membrane module are mounted onto a strong powder coated wall mounting bracket.

U700.25 4025901111941 easy line 90, 75 - 90 l/day

U700.30 4025901111958 easy line 150, 120 - 150 I/day

For producing 75 - 150 litres of purified tap water per day (c. 23 - 40 gpd)

easy line 90 and easy line 150 reverse osmosis units are compact and powerful. A sediment filter retains all particles larger than 5 µm and a carbon filter protects the membrane by removing chlorine. We use the latest generation of TFC (Polyamide / Polysulfone) membranes to provide the highest quality treated water, providing a recovery ratio of approximately 3 - 4 concentrate: 1 permeate, and a rejection rate of 90 to 98 %.

U600.71 4025901117707 Merlin plus (PRF-RO)

Reverse osmosis unit with a capacity of c. 2,000 l/day (c. 500 gpd)

The Merlin plus (PRF-RO) reverse osmosis unit operates using just the mains pressure of the tap water (3 - 4 bar), without the need for a high pressure pump. It has 2 high flow membranes and a combined activated carbon/sediment prefilter. Salt rejection is c. 90 - 95 % and the recovery ratio (purewater:wastewater) is 3-4:1. The unit is frame mounted and ready to run. We recommend using an aquaniveau level control with an M-ventil 1/2" to give automatic control of the unit.

Accessories for reverse osmosis

U601.00 4025901102086 Hardness filter 10" incl. CO₂-connection

Filled with Hydrocarbonate, this filter is placed after the reverse osmosis unit to enrich the water with minerals. If CO₂ is injected into the filter, the calcium concentration can be raised even further. The complete filter (housing and cartridge) includes a CO, injection port.

U601.10 4025901108200 Demineralisation filter 10" 4025901108217 Demineralisation filter 1 I U601.11 U601.12 4025901108224 Demineralisation filter 5 I

> Used to remove the last remaining pollutants using a special ion exchange resin, and is placed after the reverse osmosis unit. It reduces the growth of diatom, if silicate level of tab water is too high.



U605.60

U605.65

4025901102208 Membrane 150 I / day U605.01 4025901102116 Activated carbon prefilter w. fittings

U605.06 4025901102130 Sediment 5 μm prefilter w. fittings

4025901102192 Membrane 90 I / day

4025901128352 Flushing valve 90 I/day 4025901128369 Flushing valve 150 I/day U610.01

U610.13 4025901129830 Flushing valve 300 I/day

U606.17 4025901102260 Sediment filter 5 μm

U606.10 4025901102246 Combined filter cartridge carb./sed.

U606.15 4025901102253 Activated carbon filter cartridge

U608.00 4025901102376 Booster pump U630.00 4025901102529 PE-tube 4/6 mm / 1 m

Sediment prefilter



Activated carbon prefilter

Demineralisation filter



CO,

EAN-No.

Item







The complete solution for CO, control

The ${\bf CO_2}$ set professional offers a complete system for ${\bf CO_2}$ control and delivery in one package. The set comprises a safety certified 350 g steel ${\bf CO_2}$ bottle, regular - a pressure regulator for precise adjustment of the quantity of gas, a bubble counter, a ${\bf CO_2}$ -reactor ${\bf M}$, which diffuses high volumes of ${\bf CO_2}$ and is complete with its own pump and a ${\bf M}$ -ventil high quality solenoid valve for automated shut off of the ${\bf CO_2}$ supply. In addition there is a pH computer for accurate determination of the ${\bf CO_2}$ dosing requirement complete with electrode, holder and test fluids. Also included is a length of HDPE ${\bf CO_2}$ hose and a non return valve.

71515 4014694715115 **CO**, **complet** with bottle 71516 4014694715160 **CO**, **complet** without bottle

 ${
m CO}_2$ complet contains all the equipment required to provide ${
m CO}_2$ fertilization in an aquarium The set contains the following: **station** 350 g (c. 0.77 lb.) ${
m CO}_2$ cylinder, **regular** ${
m CO}_2$ pressure regulator, counter ${
m CO}_2$ **bubble counter**, **reactor 500** to allow the ${
m CO}_2$ gas to diffuse into the water efficiently, ${
m CO}_2$ cylinder holder and HDPE ${
m CO}_2$ hose.

71525 4014694715252 **CO,-set basic 350** 71527 4014694715276 **CO,-set basic 500**

CO₂ supply for Calciumreactors

 ${\bf CO_2}$ -Set basic comprises a steel cylinder station with 350 g or 500 g ${\bf CO_2}$, the pressure regulator regular and a **bubble counter**. It is the ideal set for equipment such as calciumreactors, or other applications where no ${\bf CO_2}$ -reactor is needed.



A passive CO₂-reactor for aquariums up to 250 litres (c. 62.5 gallons)

reactor 100 is operated without an additional pump. The CO₂ is forced through a ceramic diaphragm. This creates tiny bubbles that rise slowly in the water and dissolve on their way up.

71111 4014694710110 reactor **500**

reactor **500** introduces CO₂ into the aquarium.

The **reactor 500** is designed for aquaria up to 500 litres (c. 125 gal.). Required pump power: 500 - 1,000 l/h. (c. 125 - 250 gal.) Ø app. 5 cm (c. 2"), length app. 16 cm (c. 6.4").

71113 4014694711131 reactor **1000**

Closed $\mathrm{CO_2}$ -reactor for external use for aquaria up to 2,000 litres (c. 500 gallons) **reactor 1000** is a hermetically sealed unit for introducing $\mathrm{CO_2}$ into larger aquariums. The universal mounting plate enables it to be mounted outside the aquarium or inside the cabinet. This powerful unit can supply aquaria up to 2,000 litres (c. 500 gallons) with $\mathrm{CO_2}$. With 12/16 mm hose tails. Required pump power: 1,500 - 2,000 l/h. (c. 375 - 500 gal.) Total height: app. 37 cm (c. 15"); Ø app. 8 cm (c. 3")

71110 4014694711100 reactor **M**

CO₂-reactor with integrated circulation pump

reactor M is similar to the **reactor 500**, however it is supplied complete with a dedicated circulation pump thus making it independent of any other filters. The pump has a capacity of 300 l/h (c. 75 gph) and a power uptake of 5 watts. Both pump and **reactor** are mounted on a strong mounting plate that can be fixed with suckers into the aquarium. Dimensions: app. 15 \times 10 \times 21 cm (l \times w \times h)









EAN-No.

Item













71411 4014694714118 **station** 350 g with cage 71412 4014694714125 **station** 500 g with cage

71413 4014694714132 **station** 2 kg with cage

CO₂ storage bottle

station is a steel $\mathrm{CO_2}$ storage bottle with an external shut off valve. It is available in three sizes: 350 g, 500 g and 2 kg (c. 0.77 lb., 1.1 lb. and 4.4 lb.) All the cylinders are supplied with a safety cage and the 2 kg size has a base stand.

71011 4014694712114 **regular** with 2 pressure gauges

Pressure regulator for precise control of $\mathrm{CO}_{\scriptscriptstyle 2}$ dosing into the aquarium

regular is chrome plated and offers: a fixed working pressure of c. 1.5 bar, a needle valve for fine adjustment, two pressure gauges to show both the cylinder and working pressures **regular** fits industry standard CO_2 cylinders having an external valve.

U630.00 4025901102529 **PE-hose 4/6 mm / 1 m**

410.150 4025901106428 **Bubble counter**

For monitoring CO₂ dosage

Bubble counter is a simple and safe unit for monitoring the dosing rate of ${\rm CO}_2$ gas into aquaria. It should be installed in the low pressure side of the gas delivery circuit. An integrated non return valve prevents water flow back and a robust mounting plate enables easy fixing to the outside of the aquarium.

230.30 4025901106589 **M-ventil Standard**, nickel plated, 1/8", 2.5 watts

Electronic shut off valve for CO₃-Standard

M-ventil Standard has a high quality nickel plated brass body with a maximum operating pressure of 6 bar, pressure fittings for 6 mm flexible hose and can be connected to all our CO_2 units. The solenoid coil consumes only 2.5 watts of electrical energy to prevent overheating.

230.35 4025901108750 **M-ventil ½**" for tap water, brass

Water shut off valve

M-ventil 1/2" for water is intended for automatic control of reverse osmosis units. The brass body has connections for 1/2" BSP male fittings and is recommended only for use with tap water. The power uptake is 6 watts.

Item code EAI

EAN-No.

Item

















aqua tools

501.80 4025901112115 **Fish trap**

Trap for catching a particular fish in an aquarium

Fish trap is baited with some food and as soon as the desired fish has entered the trap the closing mechanism is simply released – by hand. The **Fish trap** is constructed in such a way that when it is removed from the aquarium with the fish inside it remains half full of water. This method considerably reduces the stress on the fish.

Dimensions (I x w x h): app. $27.5 \times 17 \times 17 \text{ cm}$

501.81 4025901112788 Trap-pest

Universal trap for crabs, snails and bristle worms - for fresh- and saltwater

Trap-pest is an automatic trap for removing undesirable bristle worms, crabs or snails from an aquarium. Bristle worms crawl through a funnel into the trap and cannot find their way out whilst crabs and snails pass through a one way curtain which blocks their return path. The **Trap-pest** is simply baited from the outside.

Dimensions (I x w x h): app. $15.5 \times 7.5 \times 8.5 \text{ cm}$

65930 4025901128826 aquaspoon

Spoon scale for measuring of chemicales and other additives for aquaria Max. 300 g, reading accuracy 0,1 (g, oz, gn, ct), with 2 bucket sizes.

67000 4025901113068 **Mega Mag 1** 67001 4025901113075 **Mega Mag 2**

67101 4025901119770 **Spare pads Mega Mag 1 & 2**, 2 pcs.

Magnetic glass cleaners for panes between 10 and 32 mm (c. 0.4" and 1.25")

Mega Mag glass cleaners are completely sealed and corrosion protected and are suitable for use in fresh- and saltwater aquaria. The cleaning pads of the inner magnet and the felt pads of the outer magnet can be easily replaced. **Mega Mag** glass cleaners contain extremely strong magnets and have to be handled with care. Cleaning surface 8 x 11 cm.

Mega Mag 1 for glass from 10 – 19 mm (c. 0.4" – 0.75")

Mega Mag 2 for glass from 15 – 32 mm (c. 0.6" – 1.25")

67002 4025901113952 **Mega Mag 3**

67103 4025901122954 **Spare pads Mega Mag 3**, 2 pcs.

Magnet glass cleaner for large aquariums

Mega Mag 3 is a powerful magnetic cleaner for large aquariums, with panel thicknesses up to 55 mm. As with the smaller models in the **Mega Mag** range, the cleaning pads are easily renewed or a **plexipad** can be fitted for the cleaning of acrylic aquariums. Cleaning surface 10×14 cm.

67100 4025901116915 plexipad Mega Mag 1 & 2

67102 4025901120066 plexipad Mega Mag 3

Cleaning pad for Mega~Mag to protect acrylic

When using **Mega Mag** cleaners on acrylic aquariums the existing glass cleaning pad should be replaced with **plexipad**. This material is specially selected for cleaning acrylic and is fixed on the inner magnet to protect the acrylic panels from scratching. **plexipad** can be easily changed when worn.

67010 4025901116892 **magnetscraper**

Blade accessory for **Mega Mag**

magnetscraper is an accessory for the Mega Mag glass cleaner. It converts the Mega Mag from a simple magnet into a bladed cleaner. Now, even the most resistant algae can be removed. The magnetscraper simply snaps onto the Mega Mag 1 or Mega Mag 2 and secured with a single screw. It can easily be removed if required.

67011 4025901116908 **magnetscraper blades**, package 5 pcs.

Spare blades for Mega Mag

EAN-No.

Item

aqua tools

66000 4014694660026 scraper 66001

4025901113051 scraper blades 5 pcs.

Aquarium glass cleaner

scraper is a multiple use blade cleaner. The 150 mm wide blade makes it easy to remove even the most resistant calcareous algaes from the aquarium glass. Extended durability with stainless steel anti-corrosive coating - specially made sharp blade. The removable blade protector also acts as a squeegee for cleaning the outside of the aquarium glass. A unique feature of the **scraper** is the hinge which allows the blade head to be turned through 180°. This facility allows the user to clean the aquarium even when the tank decoration, such as rocks or roots, are very close to the glass.



2 pcs., minimum quantity 10 x 2

4025901115871 **filter bag 1**, 22 x 15 cm (c. 8.6" x 5.9") 4025901115888 **filter bag 2**, 22 x 30 cm (c. 8.6" x 11.8") 429.02 429.03 4025901115895 filter bag 3, 22 x 45 cm (c. 8.6" x 17.7")

Zip up media bag

Filter bags are designed to contain fine filter media, such as activated carbon, antiphos Fe or other granular media. The filter bag is fitted with a zip fastener for quick and easy repla-

39510 4025901116922 Gravel Cleaner set

This robustly constructed Gravel Cleaner set is fitted with an adjustable elbow so that it can even reach under rock formations or into caves. The Gravel Cleaner head can be removed and replaced with a cleaning brush for dealing with detritus on rockwork. In either case the detritus is flushed away by attaching a hose, which can then go to waste or to a canister filter for water return. The water flow is adjustable using the inbuilt tap. A feature of the unit are the hinges that can be turned through 45°, so the dirt can be removed even from the most inaccessible areas.

420.60 4025901106459 **Reef Construct**, 2 x 56 g (2 x c. 2 oz) sticks 4025901128642 **Reef Construct**, 1008 g, 18 x 56 g (18 x c. 2 oz) sticks

A two-component resin for safe and easy attachment of stones and corals in the aquarium. A two-part epoxy putty to secure rock and hard and soft corals in the aquarium. Reef Construct solves many of the problems encountered during the aqua-scaping of fresh- and saltwater aquariums. Reef Construct is a fast curing, two-part epoxy putty that can even be used

420.70 4025901130423 Coral Construct

NeW Under water glue

For safe and easy attachment of coral frags inside and outside the aquarium. Harden quickly in and outside of the water.

underwater. It adheres to rock, wood, metal, glass, plastic, concrete and most other materials.

68000 4025901120653 defroster+

> For defrosting of frozen food and enrichment with amino acids and vitamins. For marine and freshwater fish. The frozen food is thawed in the defroster box, protected from light and vitamin saving. With the defroster+ sieve, it is separated from the nitrate and phosphate enriched thawing water and can be enriched with essential vitamins and amino acids (aminovit). Incl. defroster+ Box with lid and sieve, 40 ml aminovit.



39520 4025901120738 Coral strap (5 pcs.)

Secure strap for soft corals and live rock

Extra wide strap with rounded and thickened edges that do not cut into the tissue of the corals. For vegetative propagation of the soft corals. Saltwater resistant and PVC-free. Re-usable! Length app. 31 cm

68010 4025901124934 Shot Extension 68011 4025901126464 **Shot Injector** (10 pcs.)

> Syringe with extension to eradicate aiptasia and glass anemones or other nuisance organisms simply in saltwater aquaria.

4025901117486 Coral holder 230.03

The Aqua Medic Coral holder is the solution to present invertebrates and clams in shop systems. The holder has a flexible system, adjustable on the dimensions of the animals. With a water-resistant marker, the holder can be signed with name of the species and price.









Item code EAN- Vo. Item

Filter accessories

416.00 4025901100983 **PVC-quadratic pipe** 15 x 15 cm transp./price per metre

This pipe can be used for the construction of filter components, including trickle filters, denitrifying reactors, calciumreactors, etc.

415.00 4025901100945 **Trickle plate** 15 x 15 cm

Trickle plate, $15 \times 15 \text{ cm}$ (c. 6" \times 6"). Can be mounted on the rectangular pipe, to evenly distribute the water.

415.10 4025901100952 **Trickle plate** 30 x 30 cm

415.20 4025901100969 **Lid for trickle plate** 15 x 15 cm

Top lid for trickle plate, 15 x 15 cm (c. 6" x 6"). With a connection for 20 mm Ø pipe.

415.25 4025901100976 **Bottom plate** 15 x 15 cm


Base for rectangular pipe, 15 x 15 cm (c. 6" x 6"). Can be glued to the bottom of the rectangular pipe.

415.30 4025901101881 **Grid for quadratic pipe** 15 x 15 cm

Grate 15 x 15 cm (c. 6" x 6"). Grate for rectangular pipe, useful for holding filter material in place.

418.00 4025901108767 **Overflow comb with holder** 32 cm

Overflow comb, for the construction of aquarium overflows. The water flows evenly and fish, plant matter and coarse detritus are prevented from entering the overflow chamber. The **holder** is glued on the overflow chamber and the **overflow comb** is pressed securely into the holder, whilst leaving it easy to remove for cleaning and maintenance. Length: app. 32 cm, (c. 12.8")



415.41 4025901113792 **Round grate 40** mm transparent

415.32 4025901102987 Round grate 50 mm black

415.42 4025901113808 **Round grate 50** mm transparent

415.33 4025901100624 **Round grate 63** mm black 415.43 4025901113815 **Round grate 63** mm transparent

Ideal for preventing larger detritus flowing through they are manufactured in three sizes. \emptyset 40 mm, 50 mm and 63 mm (c. 1.6", 2" and 2.5")

4025901119916 Tank union D 40

417.25 4025901119893 **Tank union D 25** 417.32 4025901119909 **Tank union D 32**

417.40

Tank union from ABS for the connection of aquariums to PVC hard pipes.


416.132 4025901125054 Adapter union AM 32 mm

416.140 4025901125061 **Adapter union AM** 40 mm

For pipe 32/40 mm and pipe 40/50 mm.

418.10 4025901120059 **aqua divider** 4 pcs.

With **aqua divider** it is possible to mount a glass sheet into an aquarium or terrarium without using any glue. The groove is holding a 4 mm glass sheet. The fastening is done by the rubber suckers. With **aqua divider** you can separate animals inside of the aquarium.



Trickle plate

Grid for quadratic pipe















Regulation valve 4/6





needle vavle

Item code EAN-No. Item

Filter accessories

Outlet strainer 20 mm	4025901107180	418.20
Outlet strainer 25 mm	4025901107197	418.25
Outlet strainer 32 mm	4025901107203	418.32
Outlet strainer 40 mm	4025901107210	418.40
Outlet strainer 50 mm	4025901107227	418.50
Outlet strainer 63 mm	4025901107234	418.63

Outlet strainers are manufactured out of ABS pipe and have slits to prevent coarse detritus passing through. Available in the following diameter pipe sizes: 20 mm, 25 mm, 32 mm, 40 mm, 50 mm, 63 mm.

410.41	4025901106510	Reducing T-piece 9/12 - 4/6
410.40	4025901101973	Reducing T-piece 12/16 - 4/6
410.42	4025901106527	Reducing T-piece 16/22 - 4/6

410.44 4025901125320 **Regulation valve FBS**

High quality **regulation valve** for hose inlet diameter in 4/6 mm and 6/8 mm - outlet diameter 4/6 mm. Connection fittings can be changed. Durable materials ensure low wear for constant adjustment. The **regulation valve** can be used for air and for water (e. g. **Nitratereductor** and **Calciumreactor**).

410.47 4025901128635 **Regulation valve 4/6** mm 2 pcs.

NeW

Flow control valve for flexible tube with a diameter of 4/6 mm. The valve can be used for air or water.

410.43 4025901127911 **Non-return valve 4/6** mm 2 pcs.

Check valve for a tube of 6 mm. Suitable for gas and water. In an attractive blister pack.

410.46 4025901114003 needle valve

The Aqua Medic **needle valve** is completely manufactured from plastic and can be used in fresh- and in the saltwater without any problems. By its set screw it is simply and very accurately adjustable. The Aqua Medic **needle valve** is supplied with two connections, one for hose with 4 mm inside diameter, the other one for 6 mm inside diameter. With the help of this valve the flow rate of Nitratereductors or Calciumreactors can be easily regulated.



Fish Box System









Fish Box

403.10 4025901131932 Fish Box Base System

EAN-No.

Following equipment is optional:

Item

403.11	4025901131949	Panels with doors
403.12	4025901131956	Filter saltwater
403.13	4025901131963	Filter freshwater
403.14	4025901131970	Lighting LED 6K 20 W/pc.
403.15	4025901131987	Lighting LED 10 K 20 W/pc.
403.16	4025901131994	Lighting LED column 7 W 10K/pc.
403.01	4025901120332	UV-light 36 W

Professional holding system for shrimps & invertebrates

For use as a high quality sales system in your aquatic store, or in a laboratory for research purposes.

The **Fish Box Basic System** contains:

- aluminium rack complete with plumbing
- 45 water outlets with valves
- 5 rows equipped with **Fish boxes** (Either 9 x small size **Fish Boxes** in each row, or 4 x medium size Fish Boxes in each row: please specify)

Overall dimensions: $130 \times 50 \times 215 \text{ cm}$

In addition, following options can be added if required:


- aluminium side panels and aluminium sliding doors to cover the filter chamber
- UV light 36 W, built-in
- Saltwater filter system with protein skimmer Turboflotor Blue 1000, sediment filter & return pump Ocean Runner 6500
- Freshwater filter system with sediment filter & return pump Ocean Runner 6500


Lighting options can be added if required:


- Light system 20 W LED per row, app. 6000K Light system 20 W LED per row, app. 10000K
- Light system 7 W LED per row fresh- or saltwater


402.11	4025901117028	Fish Box small without handle PC
		app. 12 x 16.5 x 17.5 cm
402.13	4025901118384	Fish Box middle without handle PC
		app. 24 x 16.5 x 17.5 cm
402.12	4025901117035	Fish Box large without handle handle PC
		app. 35 x 27 x 39 cm


Plastic Tanks from Polycarbonate for fish transport & professional fish holding units Tanks do have inbuilt inlet and outlet ports and can easily be combined to form large holding systems. Every box can be removed from circulation. The Fish Box can also be used for transportation of single fishes. In laboratories it can be used for breeding and holding laboratory fish such as zebra fish (Danio rerio). The boxes can be autoclaved at 120° C.

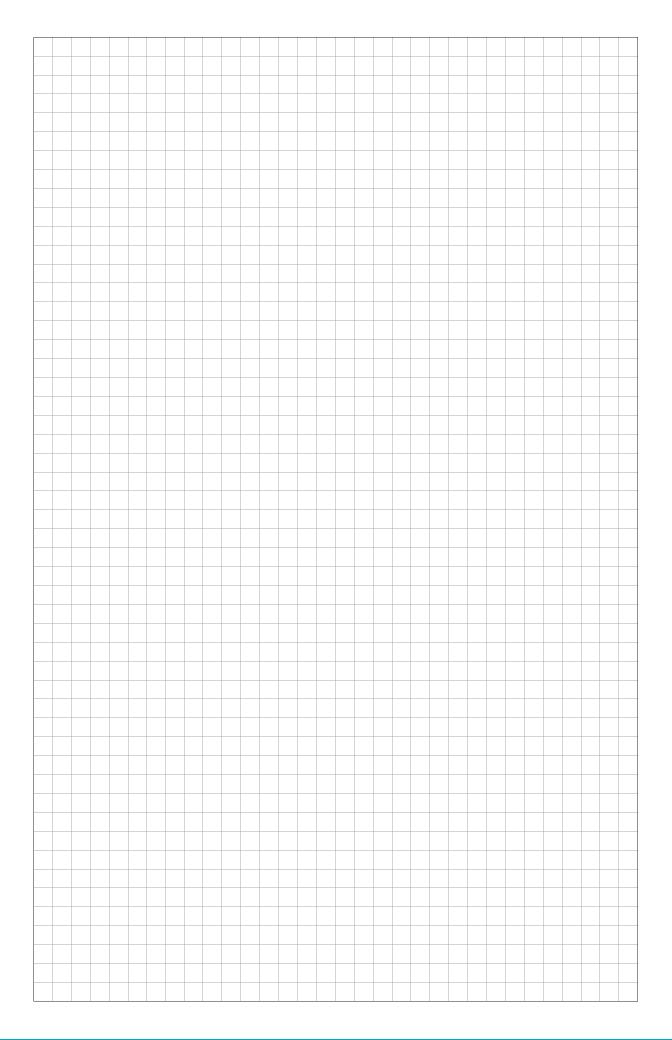


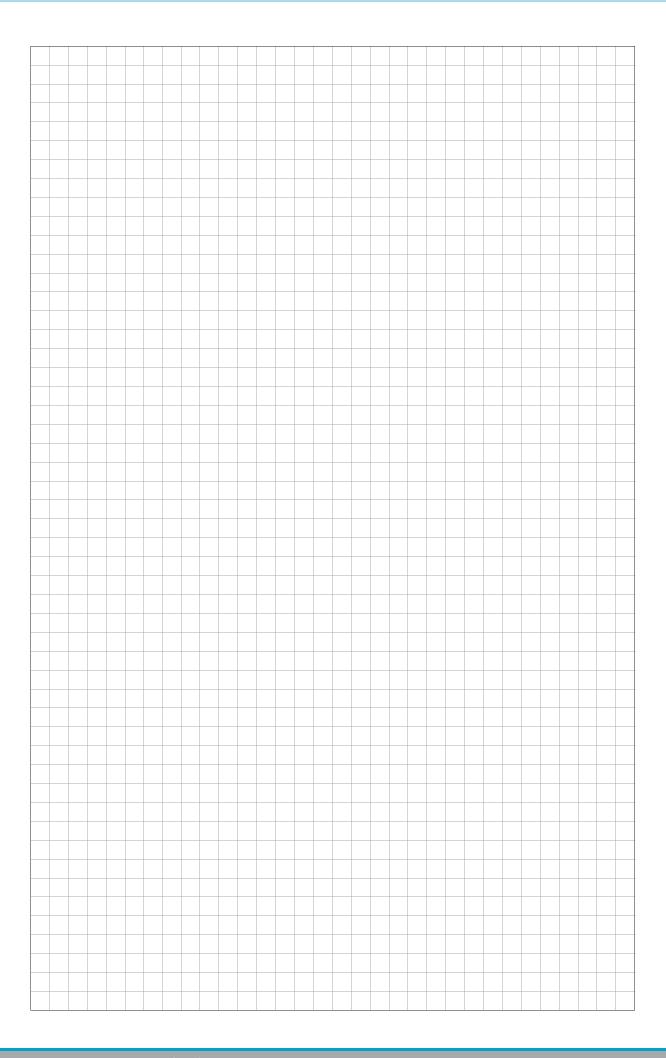

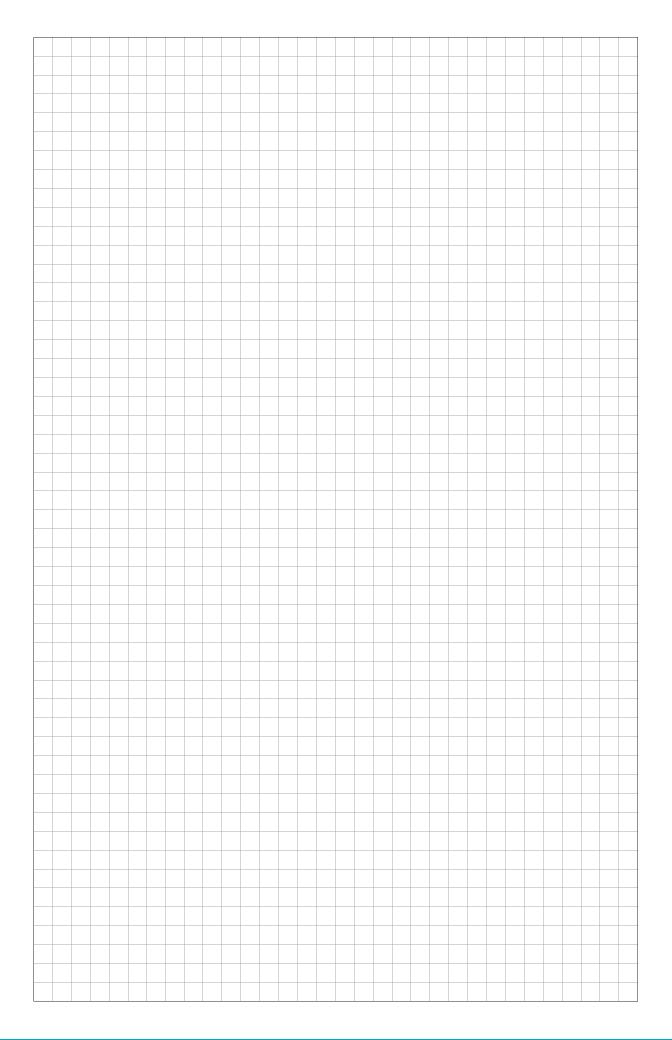

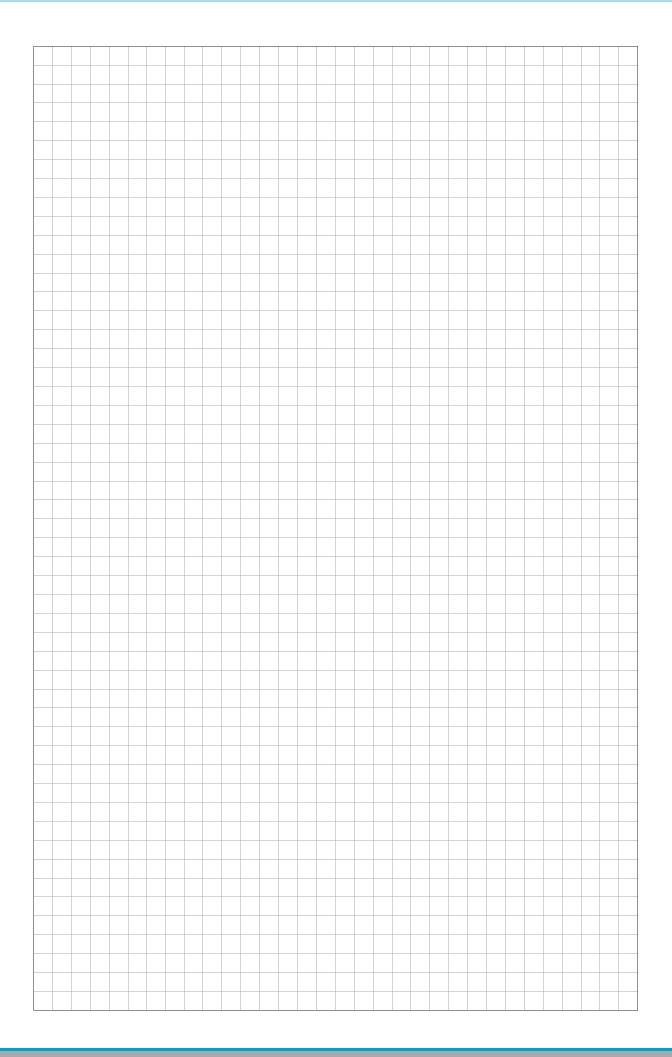

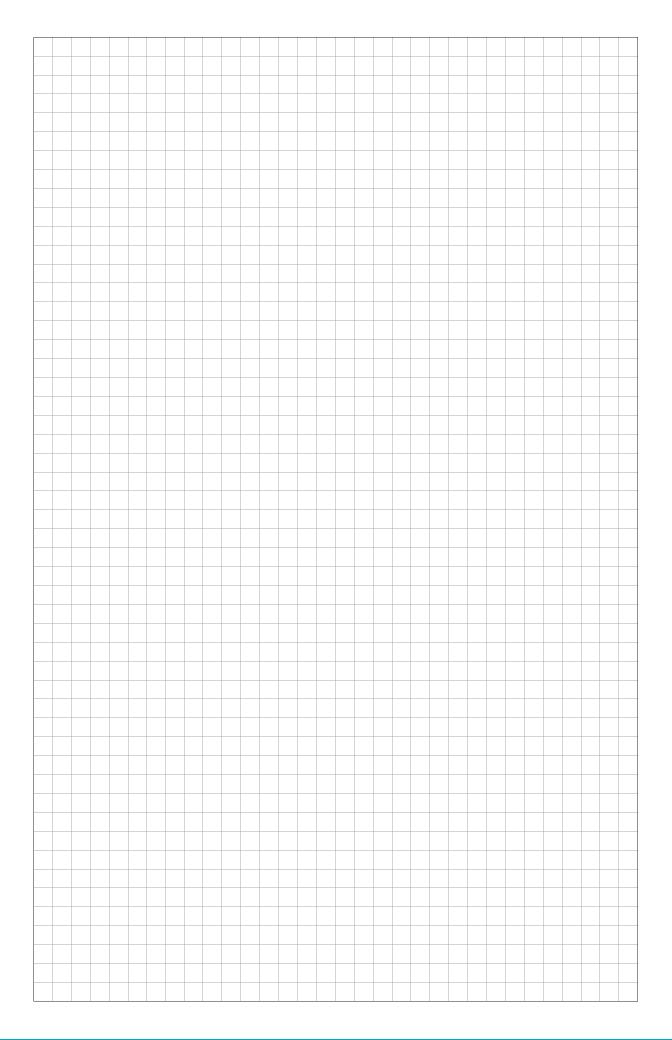

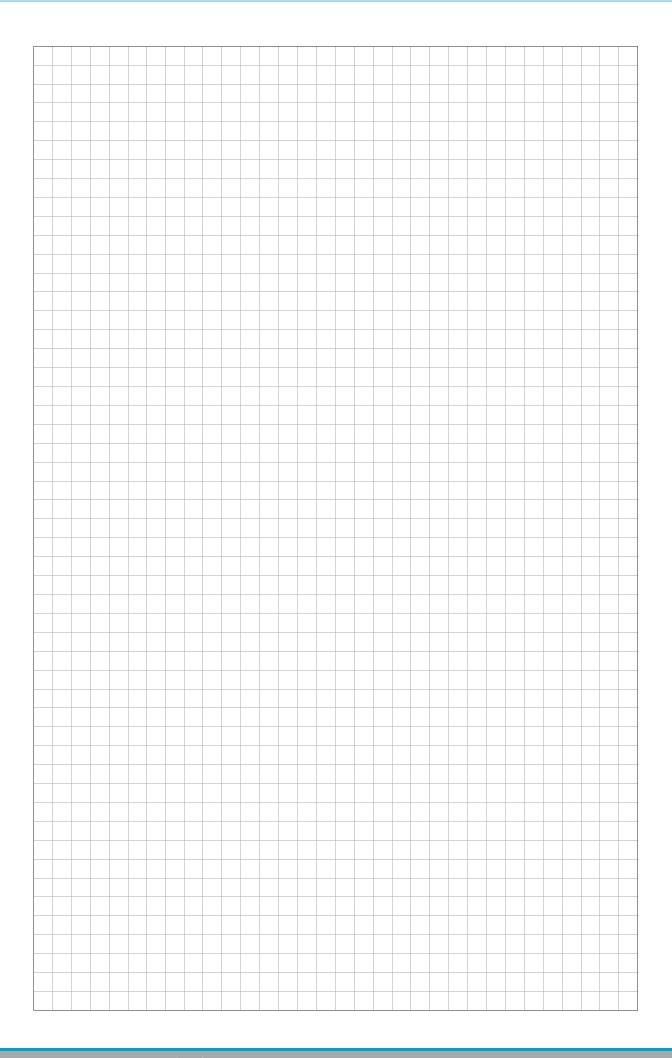



E-Mail: info@aqua-medic.de

Managing Director: Dipl.-Ing. Oliver Wehage Development Director: Dr. Manfred Schlüter

HRB 16246 AG Osnabrück Tax No.: 65/201/30005 VAT No.: DE117575590 WEEE-Reg.-Nr.: DE 88550220

AB Aqua Medic GmbH | Gewerbepark 24 | 49143 Bissendorf, Germany | Phone +49 5402 99110 | Fax +49 5402 991119

www.aqua-medic.de