

Catalogue 2013





Index Chapters

	page
Aquaria	5
Seasalt	11
Hydrometer	11
Salt Water Supplements	12
Special Nutrition	14
Plankton	15
Algal resources	15
Fresh Water Supplements	16
Cooling	17
Pumps	18
Protein skimmer	22
Filter systems	25
Filter components	28
Filter material	31
UVC sterilizer	32
Light	33
Measurement and control technology	41
Reverse osmosis	45
CO ₂	46
aqua tools	48
Filter accessories	50
Fish Box	52

page

Index A - Z

	page
aCone	23
Adapter union AM	50
airmeter	24
aminovit	14
Anthias	9
antigreen	15
antiphos Fe	31
aqua + GH	16
aqua + KH	16
aqua divider	50
aqua therm	44
aquabiovit	14
aquabreed 1000	15
aquafit	40
aquaflowfix	19
aqualife + Vitamins	16
aqualight	39
aqualine-serie	40
aquamoonLED	35
aquaniveau	43
aquareefLED	34
aquaspacelight 400	39
aquaspoon	13/48
aquastarlight T5	36
aquasunLED	33
aquasunlight NG	39
aquasunspot	35
arctic breeze	17
AT-Control	41
Aurelia	10
BactoBalls	31
biobacter	32
Blenny	6
Blue Tower	27
Bubble counter	47
Calciumreactor KR-serie	29
carbolit	31
carbolitreactor	30
CO ₂	46
Coral construct	49
Coral holder	49
Coral Sand	13
Coral Strap	49
Cubicus	7
defroster+	49
Deniballs	31
denimar	32
Dolomite	13
Dosing pump SP-serie	21
easy line	45
ECO Runner-serie	18
Electrode holder	41/43
electrodes	43
ferreal + spureal	16
Filter accessories 15 x 15	21/40
filter bag	31/49
Filterbox	22
Fish Box Fish Box System	52
Fish Box System	52

	page
Fish Station	25
Fish trap	48
fishknob	10
floreal + iod	16
Fluidised bed filter FB 5000	30
Gravel Cleaner set	49
Helix Max	32
Hydrocarbonate	13
Hydrocarbonate Reactor HR 400	28
Kalkwasser stirrer KS-serie	30
Kalkwasserpowder	12
Kauderni	7
LEDspot	33
LF controller	41
life A	14
magnetscraper	48
Magnifica 100	8
Malawi Station	25
Marin 1000	26
Mega Mag	48
Merlin plus (PRF-RO)	45
midiflotor	22
miniballs	31
Mini-Deniballs	32
miniflotor	22
Mistral-serie	20
mV computer-Set	42
mV controller	41
M-ventil	47
nano breeze	17
NanoProp 5000	19
Needle valve	51
Nitratereductor NR-serie	28
Niveaumat	21
Niveau-Set	27
Non-return ventile	51
Ocean Light	38
Ocean Light LED	34
Ocean Light T5	35
Ocean Runner OR-serie	18
OceanProp 15000	20
Outlet strainer	51
Overflow box OFB	27
Overflow comb	50
ozone	43
Ozone Booster	43
Padova	10
PE-hose	47
Percula	8
pH computer-Set	42
pH controller	41
pH-control-Set	41
phosphatfilter Fe	30
plankton light reactor	15
plankton reactor	15
plexipad	48
F	
pointex	15
pointex Power Compact 24 W	15 36

	page
premium line	45
Pumps NK-/OK-pumps	19
reactor 100	46
reactor 1000	46
reactor 500	46
reactor M	46
Reducing T-piece	51
Reef Construct	49
REEF LIFE antired	15
REEF LIFE pointex	14
REEF LIFE products	12
Reef Salt	11
Reef Station	25
reefdoser	21
refractometer	11
regular	47
Regulation valve	51
Riff-serie	26
Round grate	50
salimeter	11
scraper	49
Seasalt	11
Shot Extension	49
Silencer	24
Silicagel	43
Skim Box	27
spotfix	35
station	47
sulfur pearls	31
Sulphur Nitratereductor SN-serie	29
Sulphur Reactor SR 400	28
sun cover T5	36
sunrise control	34
Sylveo 2	39
Systemfilter	27
T computer-Set	42
T controller	42
T controller twin	42
T5 Center	37
T5 sunbeam	36
T5 tubes	37
Tank union	50
Tap water filter	45
test fluids	43
Titan cooler	17
Titanium heater	44
T-meter	42
T-meter twin	42
Trap-pest	48
Trickle filter T 10000 & 20000	24
Trickle filter T 5000	23
Tridacna	10
Turboflotor 10000	24
Turboflotor 20000	24
Turboflotor-serie	22
volcanit	16
Wooden airstones	24
Yasha	5
	5

EAN-No.

Aquaria

Yasha

Yasha advanced

560.00 4025901126426 Yasha

Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. Yasha combines the full functionality of a reef aquarium in a compact design. The integrated filter compartment guarantees easy maintenance. With Optiwhite® glass. Equipment:

Current: NanoProp 5000, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: Turboflotor Blue 500 (8 watts), efficient and near silent operation

Light: 3 pcs. LED-lamps aquasunspot with 3 x 1 watt each (14,000 K), filter compartment, with high quality acrylic divider and surface skimmer.

Dimensions (I x w x h): c. 30 x 40 x 30 cm, water height c. 28 cm, c. 33,5 I volume

Item

560.05 4025901130874 Yasha advanced

New Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. Yasha combines the full functionality of a reef aquarium in a compact design. The integrated filter compartment guarantees easy maintenance. With Optiwhite® glass. Equipment:

Current: NanoProp 5000, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: Turboflotor Blue 500 (8 watts), efficient and near silent operation

Light: 3 pcs. LED-lamps aquasunspot with 3 x 3 watt each (14,000 K), filter compartment, with high quality acrylic divider and surface skimmer.

Dimensions (I x w x h): c. 30 x 40 x 30 cm, water height c. 28 cm, c. 33,5 l volume



Yasha Stand

560.01 4025901128512 Yasha Stand white

Cabinet for Yasha & Yasha advanced


Cabinet can be used for aquariums with dimensions of around 30 x 40 cm. The cabinet is designed especially for the **Yasha** & the **Yasha advanced** nano reeftank. It is built to support the weight of a full aquarium. The cabinet is of a modern and stylish design, to complement many different styles of living areas. The cabinet is supplied flat packed for easy transportation and home assembly with few parts. Dimensions (I x w x h): c. $30 \times 40 \times 100$ cm

EAN-No.

565.00

Aquaria





4025901126501 Blenny

Ready to go saltwater aquarium with proven technology and high quality components. Blenny combines the full functionality of a reef aquarium in a compact design. The integrated filter compartment guarantees easy maintenance. With Optiwhite® glass.

Current: NanoProp 5000, located in the back wall, easily adjustable for desired water moment (12 V, 3 - 7 W). Protein skimmer: Turboflotor Blue 500 (8 watts), efficient and near silent operation

Light: 3 pcs. LED-lamps aquasunspot with each 3 x 3 watt (14,000K), energy saving LED light with high light output

Filter: filter compartment, with high quality acrylic divider and surface skimmer

Item

Dimensions: (I x w x h): c. 40 x 50 x 40 cm, water height c. 38 cm, c. 76 I volume

565.10 4025901130850 Blenny advanced

New

565.01

Saltwater aquarium

Ready to go saltwater aquarium with proven technology and high quality components. Blenny combines the full functionality of a reef aquarium in a compact design. The integrated lter com-partment guarantees easy maintenance. Filter compartment with high quality acrylic divider and surface skimmer. With Optiwhite® glass.

Equipment:

Current: NanoProp 5000, located in the back wall, easily adjustable for desired water mo-ment (12 V, 3 - 7 W). Protein skimmer: **Turboflotor Blue 500** (8 watts), efficient and near silent operation, light: aquareefLED with 18 high-power Cree LED's 3 watt each (7 x 3 watt blue and 11 x 3 watt 12,000 K) with a total power of app. 50 watt. Optionally we recommend the use of our sunrise control as programmable light control. The white and blue LEDs could be switched separately in groups. Filter: filter compartment.

Dimensions: (I x w x h): c. 40 x 50 x 40 cm, water height c. 38 cm, c. 76 I volume

Blenny advanced



Cabinet for Blenny & Blenny advanced

4025901128529 Blenny Stand white

Cabinet can be used for aquariums with dimensions of around 40 x 50 cm. The cabinet is designed especially for the Blenny & the Blenny advanced nano reeftank. It is built to support the weight of a full aquarium. The cabinet is of a modern and stylish design, to complement many different styles of living areas. The cabinet is supplied flat packed for easy transportation and home assembly with few parts.

Dimensions (I x w x h): c. 40 x 50 x 100 cm

Blenny Stand

Item

Aquaria

570.00 4025901130881 **Cubicus**

New





Cubicus Stand



Complete Seawater Aquarium

Energy saving complete seawater aquarium in stylish design. By the use of perfect and efficient elements for current, filter technique and illumination this complete aquarium guarantees durable and easy care functionality plus a lot of fun in keeping seawater animals. The design is perfectly configured to direct the focus of the observer to the marine wildlife and to let the technique disappear in the background. The appearance is completed through the use of Optiwhite[®] glass which guarantees the observer the colour rendering of the animals at its best. Current: **NanoProp 500** (12 V, 3 - 7 W), integrated into the rear panel

Skimmer: **Turboflotor Blue 500** (8 watts)

Filter technique: integrated filter tank, separated by a high quality glass rear panel with adjustable surface flow.

Illumination: **aquareefLED** with 18 high performance Cree LEDs a 3 W (7 x 3 W blue and 11 x 3 W 12.000 K) with a total operating performance of 50 W. Therefore the keeping of light hungry animals is possible without any problems. Optionally we recommend the use of our **sunrise control** as programmable light control. The white and blue LEDs could be switched separately in groups. The light efficiency is 120 lumen/W.

Dimensions: ($I \times b \times h$) app. 50 x 60 x 50 cm, Volume: 140 l, Water level: 47 cm Optionally available: **Cubicus Stand**, Dimensions: ($I \times b \times h$) app. 50 x 60 x 100 cm

570.01 4025901130898 Cubicus Stand white

New

Cabinet for Cubicus

Cabinet can be used for aquariums with dimensions of around 50 x 60 cm. The cabinet is designed especially for the **Cubicus** nano reeftank. It is built to support the weight of a full aquarium. The cabinet is of a modern and stylish design, to complement many different styles of living areas. The cabinet is supplied flat packed for easy transportation and home assembly with few parts.

Dimensions (I x w x h): c. 50 x 60 x 100 cm

522.044 4025901131215 Kauderni with Ocean Light LED 522.04 4025901129823 Kauderni with T5 cover

The stylish way to own a sea water aquarium with plug and play technology. The **Kauderni** is a sophisticated saltwater aquarium that combines stylish design and perfect functionality. Furthermore, it is easy to operate. The saltwater aquarium system is supplied with a cabinet in a white high gloss finish, integrated internal filtration and complete lighting system built into a high-quality aluminium cover. The front glass of the aquarium is constructed with Optiwhite[®] clear glass and the aquarium includes adjustable active ventilation that can be connected, if necessary. Measurements overall approx: $65.5 \times 60 \times 146$ cm ($1 \times b \times h$) (aquarium measurements approx. $65.5 \times 60 \times 60$ cm). Water height c. 51 cm, Volume approx. 200 I. Filter: Filter compartment incl. **Turboflotor Blue 500** (8 W). Pump: **PF 1000** (10 W) + **NanoProp 5000** ($12 \vee$, $3 - 7 \otimes$, adjustable). Lighting system: $2 \times$ **Ocean Light LED** 36 W or $4 \times T5$ with 24 watts each

Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire.



EAN-No.

Aquaria

Magnifica 100 white

Percula 100/125 silver with T5

507.314 4025901131802 Magnifica 100 white 507.344 4025901131819 Magnifica 100 silver New

> Integrated saltwater aquarium system complete with filtration system, lights & cabinet The Magnifica is a ready to use system comprising: Aquarium with 10 mm float glass, with a 12 mm Optiwhite® front pane with no stress bars. Volume approx. 320 litres. Water height c. 49.5 cm. Measurements overall approx: 100 x 65 x 145 cm (l x b x h) (aguarium measurements approx. 100 x 65 x 60 cm). The filter has got a pure water chamber incl. integrated PF 1000 (10 W) power head pump that can be operated from above. There is a stream chamber on the right and the left each with a NanoProp 5000 (current pump adjustable from 2,000 - 5,000 l/h, 12 V, 3 - 7 W) as well as a protein skimmer Turboflotor Blue 1000 (18 W) with mesh wheel continuously adjustable. Two empty filter cartridges for use with filter media like our carbolit or antiphos Fe. Power consumption of the whole filter unit only 27 - 35 W depending on the power setting of pumps and fans.

Item

The cover is completely closed. The cover includes 2 x Ocean Light LED 54 W and 2 x adjustable fans (spray water safe IP55), which can be switched on if. The power consumption of the fan (3 - 12 V) is only 1.5 - 7 W.

- 507.004 4025901131130 Percula 100 black with Ocean Light LED 507.034 4025901131147 Percula 100 beech with Ocean Light LED 507.044 4025901131154 Percula 100 silver with Ocean Light LED 507.00 4025901121131 Percula 100 black with T5 cover 507.03 4025901121148 Percula 100 beech with T5 cover
- 507.04 4025901121155 Percula 100 silver with T5 cover

Integrated saltwater aquarium system complete with filtration system, lights & cabinet The Percula 100 is a ready to use system comprising: Aquarium: 10 mm float glass, with a 12 mm Optiwhite® front pane with no stress bars. Volume approx. 320 litres. Water height c. 49.5 cm.

Measurements overall approx: $100 \times 65 \times 131$ cm (I x b x h) (aquarium measurements approx. 100 x 65 x 60 cm). The filter has got a pure water chamber incl. integrated PF 1000 (10 W) power head pump that can be operated from above. There is a stream chamber on the right and the left each with a NanoProp 5000 (current pump adjustable from 2,000 -5,000 l/h, 12 V, 3 - 7 W) as well as a protein skimmer Turboflotor Blue 1000 (18 W) with mesh wheel continuously adjustable. Two empty filter cartridges for use with filter media like our carbolit or antiphos Fe. Power consumption of the whole filter unit only 27 - 35 W depending on the power setting of pumps and fans.

Luminaries: 2 x Ocean Light LED 54 W (open version)

Optionally available as T5 version: The cover is completely closed. The cover includes 2 x T5 2 x 39 W and 2 x adjustable fans (spray water safe IP55), which can be switched on if. The power consumption of the fan (3 - 12 V) is only 1.5 - 7 W.

- 507.104 4025901131161 Percula 125 black with Ocean Light LED 507.134 4025901131178 Percula 125 beech with Ocean Light LED 507.144 4025901131185 Percula 125 silver with Ocean Light LED
- 507.10 4025901121162 Percula 125 black with T5 cover
- 507.13 4025901121179 Percula 125 beech with T5 cover
- 507.14 4025901121186 Percula 125 silver with T5 cover

Integrated saltwater aquarium system complete with filtration system, lights & cabinet The Percula 125 is a ready to use system comprising: Aquarium: 10 mm float glass, with a 12 mm Optiwhite® front pane with no stress bars. Volume approx. 400 litres. Water height c. 49.5 cm.

Measurements overall approx: 125 x 65 x 131 cm (l x w x h) (aquarium measurements approx. 125 x 65 x 60 cm). The filter has got a pure water chamber incl. integrated PF 1000 (10 W) power head pump that can be operated from above. There is a stream chamber on the right and the left each with a NanoProp 5000 (current pump adjustable from 2,000 - 5,000 l/h, 12 V, 3 - 7 W) as well as a protein skimmer Turboflotor Blue 1000 (18 W) with mesh wheel continuously adjustable. Two empty filter cartridges for use with filter media like our carbolit or antiphos Fe. Power consumption of the whole filter unit only 27 - 35 W depending on the power setting of pumps and fans.


Luminaires: 2 x Ocean Light LED 72 W (open version)

Optionally available as T5 version: The cover is completely closed. The cover includes 2 x T5 2 x 54 W and 2 x adjustable fans (spray water safe IP55), which can be switched on if required. The power consumption of the fan (3 - 12 V) is only 1.5 - 7 W.

Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire.



Percula 100/125 silver with LED

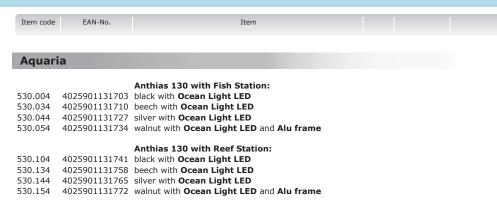

w/o lighting w/o Fish Station w/o Reef Station

Anthias 130 silver

Optional - filter features:

80818 4025901116137 Helix Max 18 Watt 502.71

4025901122770 Niveau-Set

Saltwater aquarium

The **Anthias 130** saltwater aquarium is a ready to use system comprising; aquarium - glass thickness 10 mm, app. 134,5 x 66,5 x 70 cm, with black silicone joints, cabinet with stainless steel frame, under tank filtration system (High-quality closed glass filter with sliding doors, trickle filter and skimmer Turboflotor Blue 3000 (Fish Station) or aCone 1.5 (Reef Station). Circulation pump ECO Runner. Prepared for the installation of UV - Helix Max 18 Watts and Niveau-Set.) Lighting: 2 x Ocean Light LED 72 watt

Water height c. 58.5 cm (c. 23.4"), volume app. 520 l (c. 135 gal). Overall dimensions: app. 134 x 66.5 x 145 cm (c. 53" x 26" x 57") (l x w x h)

Anthias	160	with	Fish	Station:
---------	-----	------	------	----------

- 531.00 4025901121032 black 531.03 4025901121049 beech
- 531.04 4025901120578 silver
- 4025901120196 walnut 531.05

Anthias 160 with Reef Station:

- 531.10 4025901130362 black
- 531.13 4025901130379 beech 4025901130386 silver 531.14
- 531.15 4025901130393 walnut

w/o lighting w/o Fish Station w/o Reef Station

Optional - filter features:

- 80818 4025901116137 Helix Max 18 Watt
- 502.71 4025901122770 Niveau-Set



Anthias 200 walnut

Saltwater aquarium


Aquarium app. 160 x 67 x 70 cm (l x w x h) – 12 mm glass thickness.

Front covers made of anodised aluminium - silver, cabinet finished in walnut. Overall dimensions: app. 163 x 67 x 146 cm, water height c. 60 cm, volume app. 640 l. High-quality closed glass filter with sliding doors, trickle filter and skimmer Turboflotor Blue 3000 (Fish Station) or aCone 1.5 (Reef Station). Circulation pump ECO Runner. Prepared for the installation of UV - Helix Max 18 Watts and Niveau-Set. Luminaries: Ocean Light plus 2×150 W + $2 \times T5$ 54 W in silver

		with Twin Station:
532.001	4025901121094	Anthias 200 black
532.031	4025901121100	Anthias 200 beech
532.041	4025901121117	Anthias 200 silver
532.051	4025901121124	Anthias 200 walnut

w/o lighting

w/o Twin Station



4025901122770 Niveau-Set



Saltwater aquarium

Aquarium app. 200 x 68 x 70 cm - 12 mm glass thickness. Front covers made of anodised aluminium - silver, cabinet finished in walnut.

Overall dimensions: app. 202.5 x 70.5 x 146 cm, water height c. 60 cm.

Filter: High-quality closed glass filter with sliding doors, trickle filter and skimmer aCone 1.5 (Twin Station). Circulation pump ECO Runner 6000. Luminaries: Ocean Light plus 3 x 150 W + 2 x T5 80 W in silver

Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire.



502.71



and the second	
	Z
THE R. L. L.	
	Padova red

Aquaria

Item code

502.30 4025901120202 **Padova** red 502.36 4025901124446 **Padova** zebr

EAN-No.

4025901124446 **Padova** zebrano Other colors available on request!

> w/o lighting w/o filter

Saltwater aquarium

Aquarium without front covers and stress bars (app. $140 \times 70 \times 60$ m), glass thickness: 15 mm, stand from stainless steel with cabinet and glass doors.

Item

Dimensions over all: app. 140 x 70 x 154 cm. Water height c. 57 cm, Volume approx. 550 l

Filtersystem: High-quality closed glass filter with sliding doors, trickle filter and skimmer **Turboflotor Blue 3000**. Circulation pump **ECO Runner**. Prepared for the installation of UV - **Helix Max** 18 Watts.

Luminaries: aquasunLED 150 W

Padova white



Padova black

Aurelia

Jellyfish Tank Comming soon!

502.22 4025901119985 **Tridacna 200** beech 502.23 4025901119992 **Tridacna 200** RAL

> w/o lighting w/o filter



The **Tridacna 200** panoramic aquarium is a ready to use aquarium system with cabinet, filter system and lighting. Aquarium: 15 mm (c. 0.6°) float glass. Central overflow chamber with overflow comb and trickle plates. Solid timber trim, water height c. 70 cm (c. 28"). Dimensions including frame: 200 x 73.5 x 87 cm (c. 80" x 29.4" x 34.8"), cabinet: fully assembled in beech, custom colours are also available, filtration: high-quality closed glass filter with sliding doors, trickle filter and skimmer **Turboflotor Blue 3000**. Circulation pump **ECO Runner**. Prepared for the installation of UV - **Helix Max** 18 Watts and **Niveau-Set**. Luminaries: **aquasunlight NG** 3 x 250 W **aqualine 10000** 13000 K metal halide lamps and 2 x 80 W **aqualine T5 Reef Blue** lamps. Volume: c. 980 I (c. 258 gal). Over all dimensions (I x w x h): app. 203.5 x 73.5 x 169 cm, (c. 81.4" x 29.4" x 67.6")

Water Volume calculated before gravel or decoration. Aquariums can be produced with alternative lighting, please inquire.

Accessories Aquaria

 511.10
 4025901119954
 fishknob Angel / pair

 511.11
 4025901120011
 fishknob Discus / pair

 511.12
 4025901120028
 fishknob Seahorse / pair

Attractive door-knobs



Tridacna 200 beech

EAN-No.













Seasal	t	
301.25 New	4025901130959	Reef Salt Nano 1020 g
301.20	4025901100112	Reef Salt 2 kg
301.10	4025901100105	Reef Salt 4 kg
301.00	4025901100136	Reef Salt 20 kg carton

Item

4025901112887 Reef Salt 25 kg bucket 301.01

Aquarium salt for all modern reef aquaria

Reef Salt is a dynamic new formulation, specifically designed for the needs of the modern reef aquarium. Reef Salt is blended from chemically pure raw materials, continuously quality controlled, achieves elevated levels of calcium and alkalinity reserve without resorting to harmful chelating agents, contains all the essential trace elements and enhanced levels of Strontium and Iodine, contains no nitrates or phosphates, dissolves easily and leaves no residue.

Reef Salt packaging available in a new design in autumn.

300.00 4025901100075 Aqua Medic seasalt 20 kg bag

Synthetic seasalt for aquaria

Aqua Medic seasalt is a top quality product, fulfilling all the requirements of a modern synthetic seasalt. It is formulated from highly purified compounds, and contains a pH buffer and all the essential trace elements needed for saltwater aquaria. It dissolves quickly, leaving no residue, and can be used very shortly after being mixed. Its quality has been proven by its selection by numerous public aquaria, many leading wholesalers of saltwater fish, and thousands of coral reef and fish aquaria. It is the economic solution for large scale applications.

Hydrometer


65900 4014694659006 salimeter

salimeter is a density meter (hydrometer) allowing easy measurement of the specific gravity of saltwater in aquaria. **salimeter** has a measuring range of 1,000 to 1,040, with graduations at every 0.001 and an accuracy of ± 0.0005 at 25 °C (77 °F). Dimensions: length app. 27 cm, Ø app. 2 cm

65910 4014694659105 refractometer

Temperature compensated refractometer for the determination of salinity

The refractometer is a precision optical instrument used to determine the salt concentration in saltwater aquariums. Its exact value can be determined in seconds and can be read either as absolute salt concentration (°/°°, ppt) or as specific density (kg/l). When a beam of light enters the refractometer it is bent or "refracted" by the water in the test panel. This refraction is proportional to the salinity of the sample and can be directly read by viewing the internal scale. As salinity varies in inverse proportion to temperature refractometer is fully temperature compensated. The strong plastic carrying case contains the refractometer, a pipette for the water sample, a screw driver for calibration and full instructions.



REEF LIFE System Coral

The complete solution for supplying reef aquaria with calcium and trace elements without ion shift.

The 3 component system consists of the following components:

- Calcium (System Coral A) for increasing the calcium content
- KH Buffer (System Coral B) for increasing the carbonate hardness

Item

- Trace (System Coral C) provides essential trace elements

For each dosing spoon of KH Buffer, 2 ml of the other two components have to be added.

350.001 4025901128895 REEF LIFE System Coral A Calcium 100 ml 350.002 4025901128901 REEF LIFE System Coral A Calcium 250 ml 350.010 4025901128918 REEF LIFE System Coral A Calcium 1000 ml 4025901128925 REEF LIFE System Coral A Calcium 5000 ml 350.050 Highly concentrated calcium additive for enhanced coral growth Provides optimum calcium content in the aquarium that can be maintained simply with REEF LIFE System Coral Calcium. 4025901129182 REEF LIFE System Coral B KH Buffer 300 g/ 351.001 315 ml can 351.010 4025901129199 REEF LIFE System Coral B KH Buffer 1000 g/ 1000 ml can Carbonate buffer stabilizes the pH value for a healthy aquarium REEF LIFE System Coral KH Buffer for increasing the alkalinity. 4025901128932 REEF LIFE System Coral C Trace 100 ml 350.201 350.202 4025901128949 REEF LIFE System Coral C Trace 250 ml 350.210 4025901128956 REEF LIFE System Coral C Trace 1000 ml 350.250 4025901128963 REEF LIFE System Coral C Trace 5000 ml Contains vital trace elements for fish, corals and invertebrates Provides salt water aquaria with vital trace elements such as boron, chrome, cobalt, copper, fluoride, iron, manganese, molybdenum and zinc. REEF LIFE System Coral Trace does not contain any chelating agents. 351.310 4025901129205 Kalkwasserpowder 350 g/1000 ml can For enhanced calcium supply during water top up The addition of Kalkwasser has several positive effects on the water in a reef aquarium. The calcium level increases, the phosphate concentration is reduced by precipitation and the pH value increases. The growth of hair algae is decreased and the development of calcareous algaes is encouraged. 350.401 4025901128970 REEF LIFE Iodine 100 ml 350.402 350.410 4025901128987 REEF LIFE Iodine 250 ml 4025901128994 **REEF LIFE Iodine** 1000 ml 350.450 4025901129007 REEF LIFE Iodine 5000 ml 3 component iodine for healthy coral growth and bright colours REEF LIFE Iodine is an iodide additive especially developed for salt water aquaria. It supplies both fresh and salt water aquaria with iodide and organic and elementary iodine. Whereas iodide and elementary iodine are immediately available for the animals and plants, the organic bond releases iodine slowly and ensures a long term supply. Iodine is an essential trace element for all invertebrates and especially for crustacea which require iodide to assist in sloughing off their shell. When provided with iodine, corals show better growth and more intense colourina. 350.501 4025901129014 REEF LIFE Strontium 100 ml 4025901129021 REEF LIFE Strontium 250 ml 350.502 350.510 4025901129038 REEF LIFE Strontium 1000 ml 350.550 4025901129045 REEF LIFE Strontium 5000 ml For healthy structure of skeleton of hard corals REEF LIFE Strontium contains strontium ions in a form that can be easily assimilated by all invertebrates. It is essential for the production and the maintenance of the skeleton of hard corals, the shells of reef mussels and calcareous algae. In the sea, the strontium concentration is about 8 mg/l. There can be a lack of strontium in the aquarium if it isn't re-dosed regularly. 350.601 4025901129052 REEF LIFE Magnesium 100 ml 350.602 4025901129069 REEF LIFE Magnesium 250 ml 350.610 4025901129076 REEF LIFE Magnesium 1000 ml 4025901129083 REEF LIFE Magnesium 5000 ml 350.650 For natural structure of skeleton of corals and calcareous algae For regular supply of sea water aquaria with normal magnesium need. For aquaria with heavy magnesium consumption, we recommend REEF LIFE Magnesium Compact.

C A T A L O G U E

Item code	EAN-No.	Item
Salt W	ater Supple	ments
351.601	4025901129120	REEF LIFE Magnesium compact 250 g/315 ml can
351.610	4025901129137	REEF LIFE Magnesium compact 800 g/1000 ml can
		ucture of skeleton of corals and calcareous algae magnesium additive for sea water aguaria.

 351.101
 4025901129144
 REEF LIFE Calciumbuffer compact 250 g/315 ml can

 351.101
 4025901129151
 REEF LIFE Calciumbuffer compact 800 g/1000 ml can

To increase the calcium level and alkalinity The perfect solution for calcium supply. The **Calciumbuffer compact** contains calcium and carbonate buffer in an optimum relation.

351.201 4025901129168 **REEF LIFE Balance** 250 g/315 ml can 351.210 4025901129175 **REEF LIFE Balance** 800 g/1000 ml can

Avoids ion shift

The use of calcium chloride and sodium hydrogen carbonate will lead to sodium chloride as a by-product that will cause an ion shift on a long-term basis. In order to avoid this, sea salt containing no sodium chloride has to be added according to the originated quantity sodium chloride so that pure sea salt arises beside the desired lime.

350.101 4025901129090 REEF LIFE OptiClean 100 ml 350.102 4025901129106 REEF LIFE OptiClean 250 ml 350.110 4025901129113 REEF LIFE OptiClean 1000 ml

Liquid filter medium applicable for sea and fresh water aquaria - the quick troubleshooter **OptiClean** contains effective activated micro particles from highly pure Clinoptilolite, a natural mineral. Contaminants such as heavy metals and pesticides attach to that mineral and then they can be removed with a fine filter from the water. In the sea water aquarium, they are also removed with the skimmer. The result is extremely clear and low-pollution water. The animals feel again well.

65930 4025901128826 **aquaspoon**

Spoon scale for measuring of chemicales and other additives for aquaria Max. 300 g, reading accuracy 0,1 (g, oz, gn, ct), with 2 bucket sizes.

410.95 4025901118469 **Dolomite** 1 l/1250 g

Magnesium and calcium release media for the calciumreactor It increases the calcium and the magnesium levels of the water. We recommend its addition at a rate of 25 % to our **Hydrocarbonate**.



410.91-1	4025901101157	Hydrocarbonate 1 I tub fine (c. 0.25 gal)/1 kg
410.91-2	4025901101164	Hydrocarbonate 1 I tub medium (c. 0.25 gal)/1 kg
410.91-3	4025901101171	Hydrocarbonate 1 tub coarse (c. 0.25 gal)/1 kg
410.92-1	4025901101188	Hydrocarbonate 5 bucket fine (c. 1.3 gal)/8 kg
410.92-2	4025901101195	Hydrocarbonate 5 bucket medium (c. 1.3 gal)/8 kg
410.92-3	4025901101201	Hydrocarbonate 5 bucket coarse (c. 1.3 gal)/8 kg
410.93-1	4025901101218	Hydrocarbonate 15 bucket fine (c. 3.9 gal)/21 kg
		the second se

410.93-2 4025901101225 **Hydrocarbonate** 15 l bucket medium (c. 3.9 gal)/21 kg 410.93-3 4025901101232 **Hydrocarbonate** 15 l bucket coarse (c. 3.9 gal)/21 kg

Hydrocarbonate is a pure natural product

It is used in calciumreactors, and may be used in filters to increase the hardness of water, and as a substrate material in marine or Malawi/Tanganyika aquaria. A natural calcium-carbonic acid equilibrium is created in all aquariums with an alkaline pH value, and in a calciumreactor supplied with CO₂, the **Hydrocarbonate** is completely dissolved to calcium bicarbonate, be coming available for assimilation by hard and many soft corals, sponges, echinoderms, etc. **Hydrocarbonate** available in 3 grain sizes and 3 packaging sizes: fine (1 - 2 mm) for 'hardening' filters, medium (3 - 5 mm) for calciumreactors, coarse (12 - 15 mm) as filter material.





Natural substrate

Cleaned and without additives. Suitable for all marine and malawi aquariums.



Item code

340.001

340.002 340.010

340.050

EAN-No.

4025901129212 plancto 100 ml

4025901129229 **plancto** 250 ml

4025901129236 plancto 1000 ml


4025901129243 plancto 5000 ml

Concentrated food for corals and invertebrates

Special Nutrition

-		
Los FJF planets	122	
-	ALC: N	
1		
	1	10
AQUA MEDIC	days, 1818	Acres into

5



digestive systems.

341.001 4025901129250 life A 100 ml 341.002 4025901129267 life A 250 ml

Decapsulated artemia cysts decapsulated artemia eggs

life A contains approx. 4 million decapsulated artemia cysts which can be hatched in the same way as encapsulated cysts. The hatched nauplia are shell free so they do not have to be separated off. The shells can cause problems for young fish as they can eat them and die of constipation. By using life A, rearing seahorses etc. becomes simple as the decapsulated cysts can be fed directly.

plancto is a pH stabilized, high qualityconcentrated food for the nutrition of plankton and

Item

342.001 4025901129274 aquabiovit 100 ml 342.002 4025901129281 aquabiovit 250 ml

> Vital vitamins for fish and invertebrates aquabiovit is a multi vitamin compound for use in fresh and sea water. It's formulation is suited to both, fish and invertebrates. It's regular use enhances growth, strengthens the immune system and increases the willingness to spawn.



342.101 4025901129298 aminovit 100 ml

342.102 4025901129304 aminovit 250 ml

> Contains all vital amino acids and vitamins Amino acid concentrate for coral reef aquaria. Additional food for invertebrates, in particular for LPS, but also for gorgonians, tube worms and sponges. The animals ingest directly - the colours improve and the tissue growth is accelerated. aminovit is also ideal for enriching the dry or frozen food. Or soak the food in an equivalent quantity prior to feeding.

Item code EAN-No.

Plankton

aguabreed 1000

35015 4014694350156 aquabreed 1000

Artemia cultivation unit

A cultivation unit for hatching larger quantities of artemia cysts. The unit can be installed inside or outside the aquarium. The unit may also be used for growing on adult artemia. Capacity: 2,000,000 cysts per hatch Contents: aquabreed 1000 reactor (approx. volume 1 litre), support plate. Ø app. 8 cm (c.

Item

3.24"). Length: app. 45 cm (c. 18"). Hose connection: 6 mm (c. 1/4")

35005 4014694350057 plankton reactor

Zooplankton cultivation unit

Many species of salt- and freshwater zooplankton can be cultivated in the plankton reactor. The zooplankton is fed with micro-algae from the plankton light reactor. The zooplankton has great growth potential: under optimal algal nutrition the number of rotifers (Brachionus) may double over four days. Brachionus is the ideal food for raising many marine fish larvae and invertebrates in the saltwater aquarium.

Contents: plankton reactor approx. volume 2.5 litre (c. 0.65 gal), wall bracket and connections for air pump. Ø 8 cm (c. 3.2"). Length: 80 cm (c. 32"). Hose connection: 6 mm (c. 1/4")

35000 4014694350002 plankton light reactor

Phytoplankton (Micro-algae) cultivation unit

The plankton light reactor is a simple system for producing plankton in a natural food chain. Within the plankton light reactor, micro-algae are produced with light, fertiliser and CO₂. The micro-algae can be fed directly to many filter-feeding invertebrates, and especially to zooplankton. The growth rate of the micro-algae in the plankton light reactor is enormous. If the supply of light, CO₂ and nutrients is continuous, the biomass of the algae may increase four-fold within 24 hours. Both fresh- and saltwater species of phytoplankton can be cultivated. Contents: plankton light reactor approx. volume 2.5 | (c. 0.65 gal), wall bracket, connections for air pump, lighting unit with fluorescent lamp (18 W), special reflector and fixing clamps. Ø app. 8 cm (c. 3.2"). Length: app. 80 cm (c. 32"). Hose connection: 6 mm, (c. 1/4")

Algal resources

420.001	4025901130607	REEF LIFE antired 100 ml
420.001	4025901130607	REEF LIFE antired 100 ml

- 420.002 4025901130614 REEF LIFE antired 250 ml 420.010 4025901130621 REEF LIFE antired 1000 ml
- 420.050 4025901130638 REEF LIFE antired 5000 ml
- New Eliminates red slime algae

antired will successfully eliminate red slime algae in saltwater aquaria. antired is safe with invertebrates, is not harmful to nitrifying bacteria and enhances macro algae growth. During treatment, the skimmer has to remain switched on and the carbon filter has to be switched off. The dead algae should be removed rapidly by a power filter.

- 420.101 4025901130645 REEF LIFE pointex 100 ml 420.102
- 4025901130652 REEF LIFE pointex 250 ml 4025901130669 REEF LIFE pointex 1000 ml 420.110
- 420.150 4025901130676 REEF LIFE pointex 5000 ml

New Controls Oodinium and Cryptocaryon in saltwater aquaria pointex treats Oodinium and Cryptocaryon parasites in saltwater aquaria effectively and re-

liably. pointex is not poisonous to fish but is harmful to all types of invertebrates, and can only be used in fish only systems or quarantine aquaria. After treatment it is not necessary to undertake a water change as the product is naturally removed in 20 days.



421.001	4025901130683	antigreen 100 ml
421.002	4025901130690	antigreen 250 ml
421.010	4025901130706	antigreen 1000 ml
421.050	4025901130713	antigreen 5000 ml

New Controls algae in fresh water aquaria

antigreen will control blue-green and filamentous green algae in fresh water aquaria. It decomposes harmlessly leaving no residues. When used in accordance with the instructions, it will also stimulate plant growth.



Item code EAN-No.

Item

Fresh Water Supplements

Available from august.

4025901131284 **aqua +GH** 250 g can

123.001

123.101

New

New Increases the total hardness of aquarium water

aqua + GH increases the total hardness in freshwater aquariums. In connection with **aqua + KH** you can produce from reverse osmosis water or too soft water suitable water for fishes and plants.



Available from august. 4025901131291 aqua +KH 300 g can

New Increases the carbonate hardness of aquarium water

Through a correct adjusted carbonate hardness you could avoid harmful PH up- and downturns. By using **aqua + KH** the PH level could be stabilized and the carbonate hardness could be increased. In combination with **aqua + GH** you can produce from reverse osmosis water fish and plant suitable water.

	-	
ADUA MICH		

-

Available from august.

 120.001
 4025901131314
 aqualife + vitamins
 100 ml

 120.002
 4025901131321
 aqualife + vitamins
 250 ml

 120.010
 4025901131338
 aqualife + vitamins
 1000 ml

 120.050
 4025901131345
 aqualife + vitamins
 5000 ml

 120.050
 4025901131345
 aqualife + vitamins
 5000 ml

High effective water treatment preparation for freshwater aquariums Tab water often contains heavy metal and chlorine that harms the fishes, it causes diseases and symptoms of poisoning. **aqualife + vitamins** contains suitable chelates and reducer that binds the harmful substances respectively transfers it in harmless compounds. Special protective colloids that have been approved since many years, strengthens the protective function of the mucosa and keep the sensitive craw/ intestinal tract of the animals from damages. Useful vitamins improve the body's defences of the fishes and enhance their well-being.







Available from august.

- 121.001 4025901131352 ferreal + spureal 100 ml
- 121.002 4025901131369 ferreal + spureal 250 ml
- 121.010 4025901131376 ferreal + spureal 1000 ml
- 121.050 4025901131383 ferreal + spureal 5000 ml
- New Intensive iron fertilzer for freshwater aquariums

ferreal + spureal is a combination compound. It contains beside iron more essential micro elements such as manganese, molybdenum, boron, zinc and cobalt. **ferreal + spureal** prevents with continuous application reduced growth, the yellowing of the leafs and strengthens the plants. The colours of the plants become an intensive glow.

Available from august.

- 122.001 4025901131390 floreal + iod 100 ml
- 122.002 4025901131406 **floreal + iod** 250 ml
- 122.010 4025901131413 **floreal + iod** 1000 ml 122.050 4025901131420 **floreal + iod** 5000 ml
- 122.050 4025901151420 **Horeal + Iou** 5000 IIII

New High effective compound fertilzer for freshwater aquariums

floreal + iod is an indispensable instrument to **ferreal + spureal**, that adjust the mineral balance of the plants and beyond supplies them with iodine and fluorine. Through this the growth of the plants will be increased. Furthermore iodine increases the vitality and the willingness to spawn of the fish. The contained iodine will be released slowly over several days whereby it is continued available.

Available from august. 4025901131024 volcanit 5 kg

New Freshwater aquarium grave

21138

Freshwater aquarium gravel volcanit is a pH-neutral aquarium gravel of volcanic origin. The fine pore structure of the gravel encourages bacterial activity that enhances the biological release of nutrients from within the gravel. The results are superb plant growth. volcanit is mixed with 10 % ferrolit, a natural long term iron fertilizer derived from Laterite. The resultant black and red colour enhances the beauty of the aquarium plants and the hues of the fish.

arctic breeze 2-pack

arctic breeze 4-pack

arctic breeze 6-pack

Titan 150

Titan 4000

Titan 6000 Professional

Cooling

4025901128277 nano breeze 107.100

Aquarium cooling fan for nano tanks (Plug and Play)

Spray water protected fan (IP54), $\emptyset = 40$ mm. Silent long life fan. With real ball bearing and brush free motor. 12 V low voltage. Power uptake only 1 Watt. Rounds per minute: 5500 RPM. nano breeze aquarium fan can easily be fixed at the aquarium frame. It cool down the water by increasing the evaporation.

Item

For temperature-dependet control we recommend optional the use of our **T controller twin**. Content: Fan with holder, Glas clip (for 6 - 8 mm thickness), Power supply 12 V

107.102 4025901120820 arctic breeze 2-pack 107.104 4025901120837 arctic breeze 4-pack 107.106 4025901120844 arctic breeze 6-pack

Spray water protected fans (IP 55). Silent long life fans, with real ball bearing and brush free motor. 12 V low voltage with adjustable transformer (3 - 12 V) for speed control. By this, the cooling power can be adjusted. High capacity fans, adjustable from 80,000 l/h (double unit at 12 V) to 240,000 l/h (6 fold unit at 12 V). Power uptake only 0.5 - 3 W per fan. **arctic breeze** aquarium fans can easily be fixed at the aquarium frame. It cools down the water by increasing the evaporation. The complete construction is made from corrosion proof plastic and aluminium. For temperature-dependet control we recommend optional the use of our **T controller twin**.

```
Dimensions (I \times w \times h):
arctic breeze 2-pack: app. 16 x 4 x 15 cm
arctic breeze 4-pack: app. 10 x 4 x 15 cm arctic breeze 4-pack: app. 28 x 4 x 15 cm arctic breeze 6-pack: app. 40 x 4 x 15 cm
```

4025901113945	Titan 150
4025901108293	Titan 500
4025901108309	Titan 1500
4025901108743	Titan 2000
4025901112801	Titan 4000
	4025901108293 4025901108309 4025901108743

Titan	150	500	1500	2000	4000	
for aquaria up to	100 - 250 l	250 - 500 l	700 - 1,500 l	1,500 - 2,500 l	3,000- 4,000 l	
Compressor power	0.1 PS	0.25 PS	0.5 PS	1 PS	2 PS	
Power uptake	150 W	190 W	375 W	550 W	1,500 W	
Cooling power	200 W	395 W	790 W	1,650 W	4,000 W	
	200 -	500 -	800 -	2,000 -	3,000 -	
Recommended water flow (I/h)	1,500	2,000	2,500	4,000	6,000	
	14 mm 1/2"		•			
Connections	or	20 mm 3/4" or 25 mm 1"				
	20 mm 3/4"					
Housing material		А	BS/powder-coate	d metal		
Heat exchanger material			Titanium			
Cooling gas		R1	34a		R407c	
Dimensions (I x w x h) mm	app. 350 x 300 x 350	app. 390 >	< 340 x 390	app. 400 x 500 x 440	app. 540 x 700 x 650	
Weight	13 ka	14.7 kg	16.4 kg	28.1 ka	60.5 kg	

106.050 4025901118476 Titan 500 Trop 106.150 4025901118483 Titan 1500 Trop

Titan Trop	500	1500	
Compressor power	1/4	1/2	
Power supply	220 - 240 V		
Power uptake cooling	340 W	440 W	
Cooling power	400 W	790 W	
Recommended water flow (I/h)	1,000 - 2,500	1,200 - 3,000	
Connections	20 mm 3/4" or 25 mm 1"		
Housing material	ABS/powder-coated metal		
Dimensions (I x w x h) mm	app. 400 x 500 x 440		
Weight	25 kg	27 kg	

108.060	4025901121469	Titan 6000 Professional
108.080	4025901121476	Titan 8000 Professional


108.150 4025901122596 Titan 15000 Professional

Titan Prof.	6000	8000	15000	
for aquaria up to	3,000 - 6,000 l	4,000 - 8,000 l	7,500 - 15,000 l	
Compressor power	2 PS	3 PS	5 PS	
Power supply	220 -	240 V	380 V ;3 Ph.	
Power uptake: cooling	1,780 W	2,340 W	3,950 W	
Power uptake: heating	1,400 W	1,750 W	2,900 W	
Cooling/Heating power	5,200 W	7,200 W	14,900 W	
Recommended flow rate (I/h)	3,000 - 12,000	4,000 - 16,000	8,000 - 32,000	
Connections		1 1/2"		
Housing material	X50	CrNiMo 17-12-2 (V4A St	ahl)	
Cooling gas				
Dimension (I x w x h) mm	app. 710 x 435 x 670	app. 735 x 460 x 720	app. 850 x 550 x 950	
Weight	68 kg	78 kg	150 kg	

AQUA MEDIC

Larger cooling units on demand!





17

Item


Pumps - Circulation pumps

100.127 100.137 100.160 100.190	4025901128543 4025901124651 4025901126488	ECO Runner 2700 ECO Runner 3700 ECO Runner 6000 ECO Runner 9000
100.220		ECO Runner 12000

Powerful circulation pump for aquaria For use as circulation and return pump in salt- and freshw

For use as circulation and return pump in salt- and freshwater aquaria. Rugged pump housing. Electronic directed energy saving motor with high efficiency. Polished ceramic shaft and bearing guarantees silent operation and long term maintenance free operation. Submerged and non submerged set up is possible. Prefilter basket and hose connections included.

ECO	2700	3700	6000	9000	12000
Voltage		230 V~/50 Hz			
Max. flow l/h	2,700	3,700	6,000	9,000	12,000
Max. head	2.70 m	2.80 m	4.10 m	4.30 m	4.50 m
Power consumption/watts	30	43	70	95	150
Connection pressure/suction side	ction side 25 mm (1") 32 mm (1 1/4") 40 mm (1 1/		(1 1/2")		
Cable length in m (indoor use)	3				
Protection rating	IP X8				
Dimensions in cm (I x w x h)	app. 17 >	(9 x 14.5	app. 21	x 11.5 x 1	.8

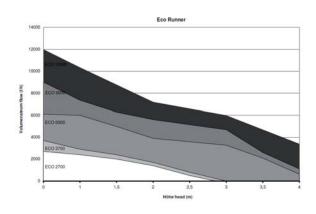


100.012	4025901109016	Ocean Runner OR 1200
100.025	4025901101058	Ocean Runner OR 2500
100.035	4025901106701	Ocean Runner OR 3500
100.065	4025901101898	Ocean Runner OR 6500

Circulation pump for aquaria

The **Ocean Runner** pumps are powerful universal pumps to be used as circulation or current pumps in both salt- and freshwater aquaria. The **Ocean Runners** are supplied with a rugged pump housing, an energy efficient motor, a polished ceramic shaft and ceramic bearings. All these qualities ensure a quiet and maintenance free performance for many years. The **Ocean Runner** pumps are also available in outdoor version with 10 m (c. 32') (**OR 2500/OR 3500**) rubber cable for ponds.

Тур	OR 1200	OR 2500	OR 3500	OR 6000
	1,200	2,400	3,500	6,500
Max. capacity l/h	(c. 300 gph)	(c. 630 gph)	(c. 900 gph)	(c. 1,700 gph)
Max. head in m	1.6 (c. 5.2")	2.6 (c. 7.8")	3.3 (c. 10.7")	3.8 (c. 12.6")
Power uptakes watts	25	38	65	95
Hose connection				
inlet	17 mm	17 mm	27 mm	26 mm
outlet	16 mm	17 mm	21 mm	24 mm
Dimensions cm (I x w x h)	app. 13 x 10 x 15	app. 15.5 x 12.5 x 17.5	app. 18 x 15 x 18	app. 20 x 16 x 22

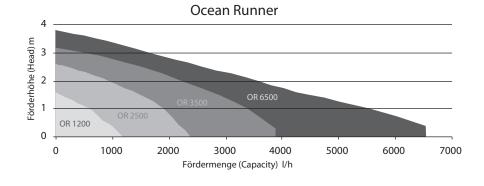



ECO Runner 2700





OR 1200




<u>OR 6500</u>

Item

Pumps - Circulation pumps





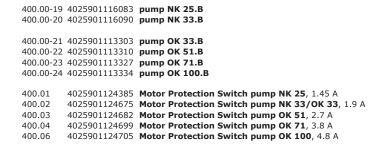


(Necessary to use with any NK or OK pump!) Warranty is void, if pumps are used without motor protection switch!

Circulation pump OK / NK

The OK and NK-series circulation pumps are powerful units having a capacity between 13 and 33 m³/h. With the housing moulded in plastic, the pumps are completely saltwater resistant. To improve the operating characteristics **OK** and **NK** pumps have an integrated prefilter and the impeller shaft has a rotating seal.

Туре	NK 25	NK 33	OK 33	OK 51	OK 71	OK 100
m³/h at 10 m	-	4.0	4.8	6.6	10.0	14.5
Max. flow at 5 m	8,000 l*	11,000 l*	9,600 l	11,000 l	13,900 l	20,000 l
Max. head	9.25 m	11 m	12 m	14 m	15.5 m	15 m
Power (watt)	0.27	0.30	0.45	0.58	0.75	1.00
A			2.45	2.65	4.00	4.70
V	230	230	230	230	230	230
Dimensions cm						
(I x w x h)	app. 43	x 21 x27	app.	47.5 x 2	4 x 31	app. 50 x 24 x 31


max. flow at 3 m

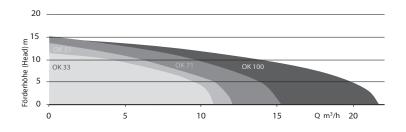

Pumps - Current pumps

103.010 4025901111859 Powerfilter PF 1000

The Powerfilter PF 1000 is a compact power head pump, combined with a mechanical filter sponge. Despite of its small size the pump is manufactured to the same high standards as the rest of the OR series with a polished ceramic shaft and energy efficient motor. 1,000 l/h, max. head 1 m (c. 3 ft), 10 watts. Dimensions: app. 22 x 6.5 x 6 cm (l x w x h)



Adjustable Current pump for reef aquariums

Coral Reef aquariums need strong water movements. NanoProp 5000 is a propeller pump to create strong currents with low power uptake. The shape of the propeller is computer optimised, for high flow and silent operation. 6 - 12 V DC, low voltage motor, including adjustable safety transformer. Flow can be adjusted from 2,000 – 5,000 l/h (500 - 1,250 gph). Power uptake 3 - 7 watts, adjustable. Silent running computer optimised propeller. Vacuum sucker for safe mounting inside the aquarium.

Dimensions: app. $9.5 \times 5 \times 9.5$ cm ($I \times w \times h$)



Current adjuster to conduct waterflow. For NanoProp 5000 or 40 mm outlet.





NanoProp 5000

Pumps - Current pumps

103.150 4025901120073 OceanProp 15000

Current pump for reef aquariums

Coral Reef aquariums need strong water movements to replicate natural conditions. **Ocean-Prop 15000** is a propeller pump that creates a high turnover of water with a low power output. The shape of the propeller has been strategically designed using the latest technology to optimise water movement and silent operation. Combined with the pump controller **OceanProp-Control**, the pump can be operated by pulsing and creates continuously changing currents. 24 V DC, low voltage motor, including safety transformer. Flow can be adjusted from 5,000 – 15,000 l/h (1,300 - 4,000 gph). Power uptake 9 – 20 watts, adjustable. Silently designed innovative propeller. Leverage sucker for safe mounting inside the aquarium. Dimensions: app. 14 x 9 x 10 cm (l x w x h)

Item

Pumps - Air pumps

NeW 101.005 4025901131222 Mistral 50 ECO - available from august 101.020 4025901109320 Mistral 200 101.030 4025901108255 Mistral 300 101.200 4025901117127 Mistral 2000 101.400 4025901113297 Mistral 4000



Diaphragm air pump

This family of powerful diaphragm air pumps has a cast aluminium housing (plastic at **Mistral 50 ECO**) to ensure long life and silent operation. The output of the **Mistral 300** is adjustable with a slide control which alters the magnetic circuit. All units have integrated replaceable air filters and are of low maintenance design. They are ideally suited to supplying air lift filters (under-gravel and box), air stones and protein skimmers using either ceramic or wooden air diffusers.

Туре:	Mistral 50 ECO	Mistral 200	Mistral 300
Power requirements:	220 V, 50/60 Hz	230 V/50 Hz	
Power uptake:	1,8 watts	4 watts	8 watts
Maximum capacity:	78 l/h (19.5 gph)	300 l/h (75 gph)	380 l/h (95 gph)
Capacity at 1 m (3 ft) depth (100 mbar, 1.45 psi):	50 l/h (12.5 gph)	200 l/h (50 gph)	300 l/h (75 gph)
Maximum pressure:	120 mbar (1.73 psi)	250 mbar (3.6 psi)	470 mbar (6.8 psi)
Connection pressure side:		air tube 4/6 mm (¼")	
Cable length in m:	1.4		3
Weight:	0,23 kg (app. 0,53 lbs)	1.36 kg (app. 3.1 lbs)	1.75 kg (app. 3.7 lbs)
Housing:	plastic	cast alu	uminium
Dimensions in cm (l x w x h):	app. 8.8 x 6.0 x 5.3	app. 17.5 x 7.5 x 9.5	app. 19 x 8.5 x 10

Туре:	Mistral 2000	Mistral 4000
Power requirements:	220 - 240	V", 50/60 Hz
Power uptake:	25 watts	35 watts
Maximum capacity:	2,500 l/h (625 gph)	4,000 l/h (1,000 gph)
Capacity at 1 m (3 ft) depth (100 mbar, 1.45 psi):	1,600 l/h (400 gph)	2,900 l/h (750 gph)
Maximum pressure:	>300 mba	ar, 4.35 psi
Connection pressure side:	air tube 1	12 mm (1/377)
Cable length in m:		3
Weight:	3.5 kg (7.8 lbs)	5.6 kg (12.4 lbs)
Housing:	cast al	uminium
Dimensions in cm (l x w x h):	app. 17.5 x 16 x 13	app. 19.5 x 18 x 15













Mistral 4000

		CATALO	GUE		
	Item code	EAN-No.	Item		
	Pumps	- Dosing pumps			
Dosing pump	104.015 104.030	pumps for pumping sma Nitratereductor NR 100	mp SP 3000 1500 and SP 3000 range of all volumes of water. They ca 0 and the Calciumreactor KR niveau and for the automati life Santoprene® hose. 14 gph), 4.5 watts	in be used for bypass 1000 , to top up evap	filters such as the brated water when
SP 3000 Niveaumat	104.031	The SP 3000 Niveaum aquariums. It comprises float switch. The float sw its holding unit. As the with water from a reserve	ith peristaltic pump and float at will automatically top up a a Niveaumat SP 3000 pe itch is installed in the aquariu evel drops the Niveaumat S	evaporated water in fr eristaltic pump with a um or filter tank at the SP 3000 automatically	directly connected desired level using tops up the tank
- AA	104.042 104.043 104.044	4025901113082 reefdoser 4025901113099 reefdoser 4025901113105 reefdoser	triple		
reefdoser twin reefdoser triple	<u>idro</u>	for adjustment of the du seconds to days. The re sing of trace elements a calcium and bicarbonate tanks - automatic feedin reefdoser twin : with 2 reefdoser triple : with 2	pendently control up to 4 dos ration of the on/off cycle for e efdoser can automate many nd fertilisers in salt- and fresh into coral reef tanks - accur g with live phyto and zoo pla dosing pumps SP 1500 , app dosing pumps SP 1500 , ap h 4 dosing pumps SP 1500 , a	each pump over a broa y tasks in an aquarium nwater aquariums - cou rate dosing of Kalkwas nkton. 0. 22.5 x 11.5 x 9 cm (p. 29.5 x 11.5 x 9 cm	d time span - from : - regular dispen- ttrolled addition of ser into coral reef I x w x h) (I x w x h)

EAN-No.

Protein skimmer

Air driven inside skimmer

410.50 4025901100754 miniflotor

New Internal protein skimmer for aquaria up to 200 litres (c. 50 gal)

The miniflotor is a small but powerful air-driven internal protein skimmer. A lime wood air diffuser producing very fine air bubbles is also included. The outer reaction tube is replaceable. A second shorter reaction tube is included in shipment. For the air supply, we recommend the Mistral 200 membrane air pump.

Item

Ø app. 5 cm (c. 2"), length: with long tube app. 45 cm (c. 18") - with short tube app. 32 cm (c. 12.8"), total width: app. 15 cm (c. 6"), Immersion depth: long tube app. 33 cm (c. 13.2"), short tube app. 20 cm (c. 8")

410.55 4025901100532 midiflotor

Internal protein skimmer for aquaria up to 400 litres (c. 100 gal)

The midiflotor is an air-driven counter current internal protein skimmer. The strong holding system mallows movement of the skimmer vertically to adjust the foam production zone. A lime wood air diffuser, producing very fine air bubbles, is included. For the air supply, we recommend the Mistral 300 membrane air pump. Ø app. 57.5 cm (c. 3"), length: app. 52 cm (c. 21"), total width: app. 15 cm (c. 6"), Immersion depth: app. 30 - 35 cm (c. 12" - 14")

Motor driven inside skimmer

4025901124729 Turboflotor Blue 500 410.10

Motor driven internal protein skimmer for saltwater aquaria up to 250 litres Two holding systems for individual fixing, adjustable in height. Making it suitable for many different styles of aquarium. Power-saving venturi pump with power consumption of only 8 watts. Ceramic bearings for brilliant silent performance. Mesh wheel, which will provide a large amount of air and optimum bubble structure. The Silencer ensures an almost soundless operation. A high performance motor driven protein skimmer, efficient foam production with a patented conical foam cup. The water height in the protein skimmer is easily adjustable to

allow a maximum foam production. Dimensions: (I x w x h) app. 14 x 8 x 36.5 cm (c. 5.6" x 3.2" x 14.6"), Immersion depth: app. 23 cm

Motor driven outside skimmer

410.00 4025901117448 Turboflotor Blue 1000

External protein skimmer for saltwater aquariums up to 500 litres (c. 125 gal) The Turboflotor Blue 1000 is designed for installation in any mode: as a "hang on", it is simply hung over the edge of the aquarium. Only the venturi pump with Aqua Medic mesh wheel is inside the tank. The Silencer ensures an almost soundless operation. In the cabinet, it can be installed inside or outside the filter sump. It is designed to fit into nearly every standard aquarium cabinet. Height: app. 46 cm (c. 18"), Footprint: app. 25 x 11 cm (c. 10" x 4.5")

410.06 4025901116502 Turboflotor Blue 3000

External protein skimmer for saltwater aquariums from 500 - 1,500 | (c. 125 - 375 gal) The Turboflotor Blue 3000 is designed for installation in any mode: as a "hang on", it is simply hung over the edge of the aquarium. Only the venturi pump Ocean Runner OR 2500 with mesh wheel is inside the tank. In the cabinet, it can be installed inside or outside the filter sump. It is sized to fit nearly every standard aquarium cabinet. Height: app. 56 cm, (c. 22"). Footprint: app. 35 x 17 cm, (c. 14" x 7")

4025901106626 Turboflotor 1000 Multi SL 410.72

A motor driven external protein skimmer for aquaria from 500 to 1,000 litres (125 - 250 gal) The Turboflotor 1000 Multi SL can be fixed to the side of the aquarium ('hang-on' mode), or placed inside or outside the sump of the filter. Its compact size makes it small enough to be installed in the cabinet. In 'hang-on' mode, just the pump is placed inside the aquarium. Equipped with the Ocean Runner PH venturi pump. As an option, a large 1.2 litre (c. 0.3 gal) Filterbox can be placed over the outlets as a first stage post skimming biological filter. Height: app. 55 cm (c. 22"). Footprint: app. 17 x 17 cm (c. 7" x 7")



Turboflotor 1000 Multi SL

410.73 4025901101614 Filterbox for Turboflotor 1000 Multi SL

Post filter for Turboflotor 1000 Multi SL

- Trickle filter for the outlet of the Turboflotor 1000 Multi SL
- Total filter volume 1.2 litre
- For use with Bactoballs or filter sponge
- Removes air bubbles from the outflow of the skimmer
- Dimensions: app. 17 x 12 x 13 cm (l x w x h)



Item

Protein skimmer

acre 1.5


412.015 4025901129311 **aCone 1.5** 412.030 4025901129403 **aCone 3.0**

Powerful skimmer for the sump

We offer the **aCone** skimmer in two different sizes, **aCone 1.5** for aquaria up to 1,500 litres, **aCone 3.0** for tanks up to 2,500 litres. The **ECO Runner** venturi pumps including **air wheel** are very quiet in operation coupled with high air capacity. **aCone** skimmer have to be placed in a filter tank. No additional pump for the water supply is required.

	aCone 1.5	aCone 3.0
Power Consumption	38 watts	54 watts
Air power	1,200 l/h	2,800 l/h
Pump	Eco Runner 3700	Eco Runner 6000
Total height	app. 53 cm	app. 59,5 cm
Height foarn cup	app. 54 cm	app. 61 cm
Required space	app. 35 x 32 cm	app. 50 x 40 cm

aCone 3.0

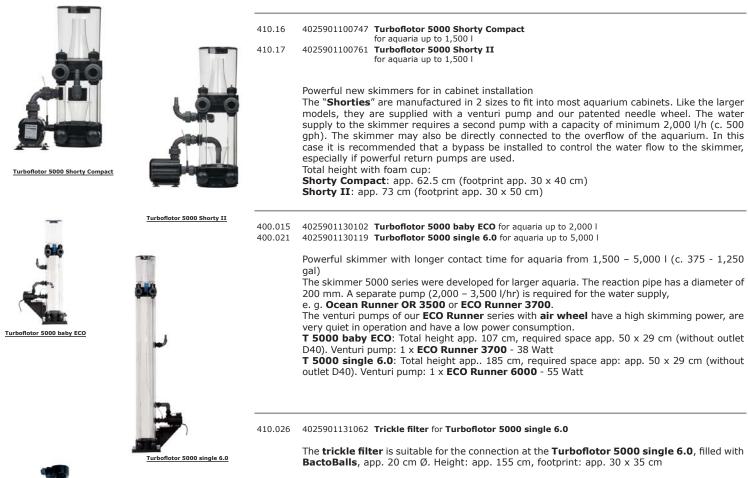



Trickle filter T 5000 single 6.0




.

- Protein skimmer
- 400.05 4025901113228 **Turboflotor 10000** 400.15 4025901131680 **Turboflotor 10000** w/o pump

The **Turboflotor 10000** is a smaller version of the **Turboflotor 20000**. It is made of an acrylic pipe and is designed for flow rates up to 10,000 l/h. (c. 2,500 gph). It is recommended for larger aquariums up to 10,000 litres (c. 2,500 gallons) and professional aquaculture systems. Technical data: Reaction chamber \emptyset : 50 cm (c. 20"), total height including foam cup: 200 cm (c. 80"), Injector pump power consumption: 500 watts, air intake: c. 8,000 l/h (c. 2,000 gph), max. water flow: 10,000 l/h (c. 2,500 gph)

Item



Protein Skimmer for large aquariums

With the production of this skimmer Aqua Medic enters the area of water treatment for large professional aquaria. The Aqua Medic **Turboflotor 20000** is a scaled up version of our proven **Turboflotor 5000** series. A powerful pump is combined with a venturi to provide an injection of c. 3,500 l/h. The maximum water flow rate is 20,000 litres (5,000 gallons) per hour. The **Turboflotor 20000** is designed for larger tanks in public aquaria and for commercial use for pet fish importers and distributors.

Technical data: Reaction chamber Ø: 50 cm (c. 20"), total height including foam collection cup: 310 cm (c. 122"), injector pump power consumption: 900 watts, air intake: c. 8,000 l/h (c. 2,000 gph), maximum water throughput: 20,000 l/h (c. 5,000 gph).

401.00 4025901108781 Trickle filter for Turboflotor 20000, with BactoBalls

401.00-1 4025901131789 Trickle filter for Turboflotor 20000, w/o BactoBalls

401.01 4025901121292 Trickle filter for Turboflotor 10000, with BactoBalls

401.01-1 4025901131796 Trickle filter for Turboflotor 10000, w/o BactoBalls

Accessories Protein skimmer

410.62 4025901120608 **airmeter**

Adjustable air-flow sensor which has been developed especially for the skimmer technique. An assembly to most skimmer types is possible without any problems due to the joint fittings (6 and 8 mm) included in delivery. Specific output 100 - 1,000 l.

410.59	4025901126440	Wooden airstones Mini 2 pcs.
		app. 15 x 15 x 57 mm (l x w x h)
410.58	4025901126457	Wooden airstones Midi 2 pcs.
		app. 18 x 18 x 78 mm (l x w x h)
410.57	4025901100914	Wooden airstones Maxi 1 pc.
		app. 30 x 30 x 110 mm (l x w x h)

For air driven protein skimmers

Wooden airstones are produced from lime wood with very fine pores. To keep the skimmer running at its optimum performance level, the bubbles have to be monitored regularly, and it is recommended that they are changed every 6 - 8 weeks. In an attractive blister pack.



410.610 4025901124941 Silencer 100 up to a capacity of 200 l air/h

410.620 4025901124958 Silencer 200 for a capacity higher than 200 I air/h

Silencer for protein skimmer The **Silencer 100** and the **Silencer 200** reduce the noise of the air intake of a protein skimmer. The noise may be avoided by the use of the **Silencers**. At the fitting of the **Silencer** you can attach tubes with a diameter of 6/8 mm without any problems.



filter T 10000



Turboflotor 10000

EAN-No.


Pictures with UV Helix Max

Malawi Station





Fish Station



Reef Station

Filter systems

500.015 4025901130201 Malawi Station

Filter system for fresh and saltwater aquaria up to 1,500 litres

Item

The Malawi Station filter system comprises the following components: closed glass filter sump with sliding doors and removable cover, twin filter towers including drawer and biofilter, filled with BactoBalls, ECO Runner 3700 circulation pump. This filter is the perfect unit for high loaded freshwater aquaria, e. g. cichlids. However, it can be used for saltwater as well, if combined with an external protein skimmer. Pipework connections to the aquarium (left hand side): 32 mm flow, return 40 mm. This system is ready for the connection of a Helix Max 18 Watt UV steriliser as well as the top up system **Niveau-Set**. Dimensions of the filter: app. $75.5 \times 47.5 \times 62$ cm (I x w x h)

		Optional - filter features:
80818	4025901116137	Helix Max 18 Watt
502.71	4025901122770	Niveau-Set

501.110 4025901130218 Fish Station

A complete filtration system for saltwater aquaria up to 1,000 litres

It comprises the following components: closed glass filter sump with sliding doors and remo-vable cover, prefilter including drawer and biofilter, filled with **BactoBalls**, **Turboflotor Blue** 3000 protein skimmer and ECO Runner 3700 circulation pump. This filter is the perfect unit for aquaria where mainly fish are kept. Pipework connections to the aquarium (left side): 32 mm flow, return 40 mm. All components are inside the filter sump. This system is ready for the connection of a Helix Max 18 Watt UV steriliser as well as the top up system Niveau-Set. Dimensions of the filter: app. $75.5 \times 47.5 \times 62 \text{ cm} (I \times W \times h)$

		Optional - filter features:
80818	4025901116137	Helix Max 18 Watt
502.71	4025901122770	Niveau-Set

501.010 4025901130225 Reef Station

A complete filtration system for Reef aquaria up to 1,000 litres It comprises the following components: closed glass filter sump with sliding doors and removable cover, a prefilter for taking up activated carbon, phosphate absorbers or bio balls, the aCone 1.5 protein skimmer and ECO Runner 3700 circulation pump. Pipework connections to the aquarium (left side): 32 mm flow, return 40 mm. All components are inside the filter sump. This system is ready for the connection of a Helix Max 18 Watt UV steriliser as well as the top up system Niveau-Set. Dimensions of the filter: app. 75.5 x 47.5 x 62 cm (l x w x h)

		Optional - filter features:
80818	4025901116137	Helix Max 18 Watt
502.71	4025901122770	Niveau-Set

connections: flow 25 mm, return 32 mm

Item code EAN-No.

Filter systems

500.50 4025901100495 Marin 1000

Marin 1000



Riff 500



Riff 1000

Compact modular filter system for marine aquaria up to 1,000 litres (c. 250 gallons) The **Marin 1000** filter system is designed for use under the aquarium. It consists of an enclosed filter sump housing the filter modules. Aquarium water is first treated by the three trickle filter modules that utilise **BactoBalls** as their biological media. A mechanical/carbon filter module is included in the main water flow whilst a patented **Turboflotor 1000** venturi protein skimmer operates on a by pass line. A Nitratereductor **NR 1000** is supplied with water by a dosing pump **SP 3000**. Dimensions ($l \times w \times h$): app. 60.5 x 40.5 x 57.5 cm, (c. 24"x 16"x 23"). For installation an additional minimum of 15 cm (c. 6") in the length is required (Total length 75 cm). Pipework

Item

501.10 4025901100518 Riff 500

Modular filter system for reef aquaria up to 500 litres (c. 150 gallons) For installation in the cabinet. The **Riff 500** filter system is a compact 3-stage unit for use in the cabinet under the aquarium. The system comprises a pre-filtration module filled with sponge, for mechanical filtration, a **Turboflotor 1000** protein skimmer with venturi pump and needle wheel, and a post skimming trickle filter filled with **BactoBalls** for biological filtration. A purpose built glass sump is available as an option. Dimensions: $(l \times w \times h)$ app. 51 x 17 x 60 cm (c. 21" x 7" x 24"). Pipework connection return 32 mm

501.00 4025901100501 **Riff 1000**

6-stage water treatment system for reef aquaria up to 1,000 litres (c. 250 gallons)

The **Riff 1000** filtration system is designed for installation in the cabinet under an aquarium. In a compact space it contains nearly all the equipment necessary for the maintenance of a successful modern reef aquarium. The system comprises a sump, app. 90 x 36 x 35 cm (c. $36" \times 14.5" \times 14"$), with a mechanical filter chamber containing sponges. From here, the water flows via two venturi pumps into twin **Turboflotor 1000** protein skimmers, with their post skimming trickle towers filled with **BactoBalls**. Additional components are the Nitratereductor **NR 1000** and the Calciumreactor **KR 1000** with dosing pump **SP 3000** and the **Niveausta**, a system for automatic replenishment of evaporated freshwater from the aquarium. Dimensions: (1 × w × h) app. 95 x 36 × 64 cm (c. $38" \times 15" \times 25.5"$). For installation an additional minimum of 15 cm (c. 6") in the length is required (Total length 110 cm (c. 44"). Pipework connections: flow 2 x 25 mm, return 50 mm.

Item

Filter systems

4025901111842 Systemfilter 5000 (standard version) 405.00

Systemfilter 5000 (Example)


Systemfilter 10000 (Example)





Blue Tower

Skim Box



app. 120 x 80 x 165 cm, (c. 48" x 32" x 66").

System 10000 is a ready to use system for aquariums or aquarium assemblies up to 10,000 litres. It is designed for public aquariums, but also for holding systems for export and import, as well as for aquaculture applications. It comprises the following components: Turboflotor 10000 protein skimmer, with venturi nozzle and venturi pump. Two post skimming trickle towers, filled with BactoBalls. Fluidised bed filter. Pressurised sand filter. Mechanical prefilter. UV steriliser, 55 watts. Circulation pump 15,000 l/h and filter sump. The complete unit is mounted ready to use on 2 plastic pallets. The units can also be custom designed for any special application. Dimensions overall (I x w x h) app. 200 x 80 x 245 cm, (c. 80" x 32" x 98").

A complete filter system for aquariums and holding tanks up to 5,000 litres (c. 1,250 gallons) Systemfilter 5000 is a modular filter system delivered ready for use on a plastic pallet. It is designed for use as a centralised filter system for pet shops, for food fish holding tanks and for aquariums up to 5,000 I (c. 1,250 gallons). The standard version comprises the following: pressurised sand filter, backwashable, for mechanical filtration. Trickle towers (3

no.) for biological filtration. Sponge filter with easy access for bio-mechanical prefiltration. Plastic vessel mounted on a plastic pallet 120 x 80 cm (c. 48" x 32") as filter sump. UV steriliser (55 watt) and circulation pump capacity 12 m³/h (c. 3,000 gph). Dimensions overall (l x w x h)

4025901122770 Niveau-Set 502.71

Automatic refill system

Comprising: 25 litre canister; self aerating system; SP 3000 Niveaumat refill pump with level sensor.

502.63 4025901117523 Blue Tower

502.63-1 4025901131529 Blue Tower w/o BactoBalls

The **Blue Tower** comprises the pre-filtration drawer and 2 Biofilter boxes, filled with **Bacto-Balls** (c. 18 l, c. 4.6 gal). It can be used in every suitable filter sump. Dimensions: app. 18 x 40 x 51 cm (7" x 15.7" x 20") (l x w x h)

501.90 4025901116038 Skim Box

Surface Skimmer

501.70

501.75

A bacterial film normally forms at the water surface of almost all aquaria inhibiting gas exchange and often, particularly in saltwater aquariums, forming an unpleasant scum. Skim **box** is a surface skimmer that removes the film and consequently improves the oxygen supply to the aquarium. It is easily installed into any aquarium with suckers mounted on fully adjustable feet. To provide the water movement required it can be connected to most power head pumps up to 2,000 l/h (c. 500 gph) capacity, the injection pump of some protein skimmers and the suction line of many canister filters.



For connecting to an under tank filter system

4025901106404 Overflow box OFB 2500 I

4025901106411 Overflow box OFB 5000 I

The Aqua Medic Overflow box hangs over the outside of the aquarium. A constant water level is maintained after the start of the overflow. Water circulation is achieved by pumping the water from the sump into the aquarium, and then via the Overflow box back into the sump. This makes it possible to connect aquaria to under the tank filter systems without having to drill holes in the aquarium. The Overflow box is manufactured from acrylic and is available in two capacities: OFB 2500 for up to 2,500 l/h (c. 625 gph), OFB 5000 for up to 5,000 l/h (c. 1,250 gph) **OFB 2500** (I x w x h): app. 19 x 18 x 25 cm (c. 8" x 7.2" x 10"), **OFB 5000** (I x w x h): app. 19 x 25 x 25 cm (c. 8" x 10" x 10")

No

Filter components

410.74 4025901101102 Nitratereductor NR 400

Denitrification filter for aquaria up to 400 litres (c. 100 gallons)

Item

The Nitratereductor **NR 400** is a completely sealed biological filter. It is operated at a very low flow rate. The filter can be installed in almost any position, inside or outside the aquarium or the cabinet. The water flow is provided by connecting to a standard canister filter, power head or by pass circuit. The filter medium – **Deniballs** – is consumed and requires replacement in 9 to 12 months dependant on load. For optimum control we recommend the filter be used in conjunction with an Aqua Medic **mV controller** or an Aqua Medic **mV computer**. The filter is already equipped to accept our specific pressurised electrode. Dimensions - without electrode (| x w x h): app. 14.5 x 10 x 37 cm (c. 5.8" x 4" x 14.5"). Recommended accessories: **Denimar**-powder and **Deniballs** to feed the anaerobic bacteria. Pressure resistant mV (Redox or ORP) probe - short - with PG 13.5 threaded connection, Dosing pump **SP 1500**.

410.760 4025901124460 Nitratereductor NR Blue

To reduce the nitrate level in salt- and freshwater aquaria up to 1,000 I (260 gal) volume The Nitratereductor **NR Blue** is an anaerobic biological reactor for removing nitrates from salt- and freshwater aquaria. It has a 5 I (c. 1.2 gal) volume and an internal circulation pump. The **Nitratereductor** works with a flow rate of 1 to 4 I/h (c. 0.25 to 1 gph). In the absence of oxygen this situation promotes bacteria that metabolize nitrate. **Denimar**-powder or **Mini-Deniballs** are used as an organic energy source. The Nitratereductor **NR Blue** is a closed unit that can be integrated into filter systems, but may also be installed to stand alone under the aquarium. **Mini-Deniballs** and **miniballs** included. Recommended accessories: For constant water flow: Dosing pump **SP 3000**. To monitor and

control the process: **mV Controller** and pressure resistant threaded probe short PG 13.5. To feed the bacteria: **Denimar**-powder and **Mini-Deniballs**. Ø app. 23 cm, Height app. 34 cm

410.750 4025901106633 Nitratereductor NR 1000

Denitrification filter for aquariums up to 1,000 litres (c. 250 gallons)

The Nitratereductor **NR 1000** is an anaerobic biological reactor for removing nitrates from marine and freshwater aquaria. It has a 10 l (c. 4.5 gal) volume and an internal circulation pump. The Nitratereductor **NR 1000** works with a flow rate of 1 to 4 l/h (c. 0.25 to 1 gph). The Nitratereductor **NR 1000** is a closed unit that can be integrated into filter systems, but may also be installed to stand alone under the aquarium. To monitor this process, it is possible to use a redox potential controller (ORP controller) in conjunction with an electrode inserted in the inbuilt PG 13.5 port or the Dosing pump **SP 3000** (supplied) can be connected for a fully controlled system. Dimensions excluding electrode (l x w x h): app. 17 x 17 x 54 cm (c. 7" x 7" x 22"). Recommended accessories: **Denimar**-powder and **Deniballs** to feed the anaerobic bacteria, pressure resistant mV (Redox or ORP) probe with PG 13.5 threaded connection.

410.850 4025901106640 Nitratereductor NR 5000

Denitrification filter for aquaria up to 3,000 litres (c. 800 gallons)

The Nitratereductor **NR 5000** uses the same biological principle as the smaller models. It has a volume of 30 l (c 7.5 gal) and is supplied with an internal circulation pump, plus the connection for a pressurised redox probe with a PG 13.5 thread. Feeding the bacteria can be performed manually with **Denimar** or automatically using **Deniballs** in conjunction with an mV (ORP) controller. The Nitratereductor **NR 5000** is a closed system and should be supplied with feed water via a bypass or a dosing pump at a rate of 12 - 30 l/h (c. 3 - 8 gph). Dimensions excluding electrode (l x w x h): app. $50 \times 30 \times 96$ cm (c. $20^{\circ} x 12^{\circ} x 38.5^{\circ}$). Recommended accessories: **Denimar**-powder and **Deniballs** to feed the anaerobic bacteria, pressure resistant mV (Redox or ORP) probe with PG 13.5 threaded connection.

 410.075
 4025901112092
 Sulphur Reactor SR 400

 410.076
 4025901112108
 Hydrocarbonate Reactor HR 400

The Sulphur Reactor **SR 400** is a Bio-reactor filled with sulphur beads which promote the growth of the specialised bacteria that remove nitrate. As a by product of the biochemical reaction that takes place in the Sulphur Reactor **SR 400**, sulphuric acid is produced and in consequence the Sulphur Reactor **SR 400** must always be used in combination with a Hydrocarbonate Reactor **HR 400** in which the sulphuric acid is neutralised. Both reactors are supplied with a strong holding system. Ø app. 8 cm (c. 3.1"), length app. 35.5 cm (c. 14"), hose connection 4/6 mm (c. 1/4")







Filter components

410.074 4025901112122 Sulphur Nitratereductor SN 400

The construction of the Sulphur Nitratereductor SN 400 is very similar to that of the Nitratereductor NR 400. An internal pump circulates the water through chambers containing sulphur beads and **Hydrocarbonate**. As a by-product, sulphuric acid is produced which is neutralised by the **Hydrocarbonate** in the filter. The Sulphur Nitratereductor **SN 400** is recommended for aquariums up to 400 litres (100 gallons). Dimensions: app. 14.5 x 10 x 37 cm (c. 5.7" x 4" x 14.5"). Recommended accessories: Dosing pump SP 1500

Item

4025901124477 Sulphur Nitratereductor SN Blue 410.770

> Sulphur Nitratereductor for saltwater aquaria up to 1,000 I (260 gal) volume The Sulphur Nitratereductor SN Blue is an anaerobic biological reactor for removing nitrates from saltwater aquaria. An internal pump circulates the water through chambers containing sulphur beads and Hydrocarbonate. Specialised bacteria develop within the Sulphur Nitratereductor **SN Blue** that utilise sulphur as an energy source to remove nitrate. As a by-product, sulphuric acid is produced which is neutralised by the **Hydrocarbonate** in the filter. The Sulphur Nitratereductor SN Blue is recommended for aquaria up to 1,000 litres (260 gal). The filter comes complete with sulphur pearls and Hydrocarbonate.

> Recommended accessories: For constant water flow: Dosing pump SP 3000, refill pack sulfur pearls and Hydrocarbonate.

Ø app. 23 cm, Height app. 34 cm

410.30 4025901101119 Calciumreactor KR 400

> A reactor to supply dissolved calcium and calcium bicarbonate ions to reef aquaria up to 400 litres (c. 100 gallons)

The Calciumreactor KR 400 is a sealed system operating at a very low flow rate. The filter can be installed in almost any position, inside or outside the aquarium or the cabinet. To provide the water flow, we recommend our SP 1500 dosing pump. The reactor is filled with Hydrocarbonate - a pure form of calcium carbonate with an extremely low phosphate level. The reactor is already equipped to accept our specific pressurised **pH-electrode** short PG 13.5. Dimensions - without electrode ($I \times w \times h$): app. 14.5 x 10 x 37 cm (c. 5.8" x 4" x 14.5"). Recommended accessories: pressure resistant pH probe - short, CO,-set basic, Dosing pump SP 1500, Hydrocarbonate as refill.

410.360 4025901124453 Calciumreactor KR Blue

Calcium reactor to supply saltwater aquaria with dissolved Calcium. For a quaria from 250 – 1,000 l volume (65 – 260 gal)



The Calciumreactor KR Blue is a hermetically closed system with an integrated circulation pump and CO₂-recycling. It can be mounted in a bypass, independent from the water level in the aquarium or the filter sump. It comes filled with 4 kg Hydrocarbonate. The addition of CO, lowers the pH value in the Calciumreactor KR Blue and the Hydrocarbonate dissolves. Despite the low flow rate of 1 - 4 l/h (0.25 - 1 gph) high amounts of calcium and bicarbonate ions are delivered into the aquarium, where it is most beneficial to the aquarium inhabitants. The Calciumreactor KR Blue is supplied with a port for a pH-probe (PG 13.5). Recommended accessories: For constant water flow: dosing pump SP 1500. For continuous CO₂-supply: CO₂-set basic 500 with regulator, bubble counter and CO₂-pressure bottle. For automatic control of the CO₂-addition: M-ventil stan-dard, pH Controller and pH-probe with thread PG 13.5 short. Refill pack Hydrocarbonate and Dolomite for calcium and magnesium supply of the aquarium. Ø app. 23 cm, Height app. 34 cm

410.350 4025901106657 Calciumreactor KR 1000

> For the supply of dissolved calcium to reef aquaria up to 1,000 litres (c. 250 gallons) The Calciumreactor KR 1000 is a closed system designed for universal use. It can be operated on a bypass system, independent of the water level in the aquarium, or alternatively be installed in the filter sump. The Calciumreactor KR 1000 has an integral port to accommodate a PG 13.5 threaded electrode to measure the pH value and a SP 3000 dosing pump for controlled water flow. Dimensions - without electrode (I x w x h): app. 17 x 17 x 54 cm (c. 7" x 7" x 22"). Recommended accessories: pressure resistant pH probe - long - threaded PG 13.5, CO,-set basic, Hydrocarbonate as refill.

410.450 4025901106664 Calciumreactor KR 5000

For the supply of dissolved calcium to reef aquaria up to 5,000 litres (c. 1,250 gallons) The Calciumreactor KR 5000, like our smaller models, is designed as a closed system. An integral pump provides internal water circulation. A PG 13.5 threaded port accepts a electrode for measuring and controlling the pH within the vessel. The reactor has a volume of 30 litres (c. 8 gallons), and is supplied with a 15 I bucket of Hydrocarbonate. Dimensions - without electrode (I x w x h): app. 50 x 30 x 96 cm (c. 20" x 20" x 38.5").

Recommended accessories: pressure resistant pH probe - long - threaded PG 13.5, CO,-set basic, Hydrocarbonate as refill.












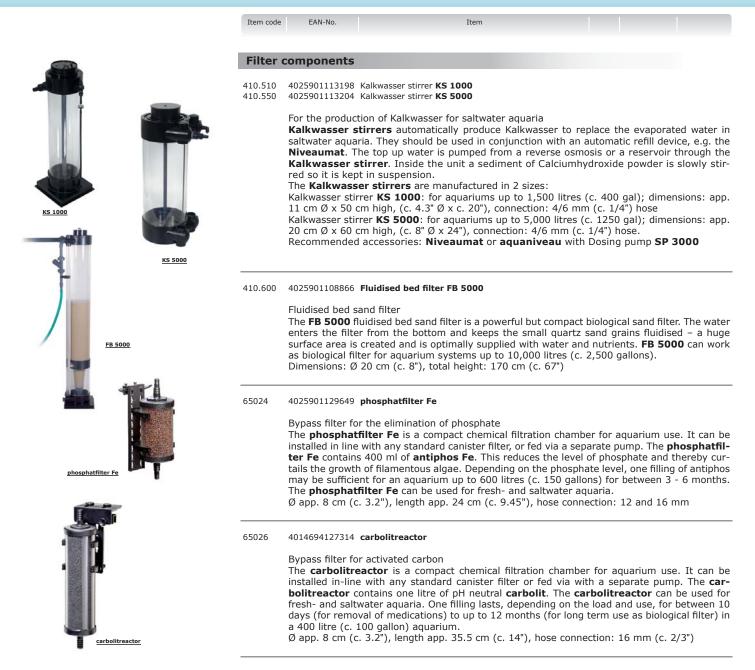

С	Α	Т	Α	L	0	G	U	E



the **Deniballs** after approximately 12 months is recommended to ensure safe and maintenance free denitrification in fresh- and saltwater aquaria.

EAN-No.

Filter material

411.78 4025901122978 Mini-Deniballs 0,5 l



A filter material and bacteria feed for the Nitratereductor Mini-Deniballs are manufactured from a unique biologically based plastic. One package of 0.5 litres (c. 0.2 gal) is enough to supply a Nitratereductor as the sole food source for 12 months. Changing the Mini-Deniballs after approximately 12 months is recommended to ensure safe and maintenance free denitrification in fresh- and saltwater aquaria.

Item

410.76-1 4025901100846 **denimar** 150 g

Nutrient powder for the Nitratereductor

The bacteria within an anaerobic biofilter need organic nutrients as their energy source to remove nitrate. If denimar is dosed daily, high nitrate removal rates can be achieved in the Nitratereductor. denimar is suited for salt- and freshwater aquaria. It contains no fertilizers and does not foster the growth of algae.

12411 4014694124115 **biobacter**

bacteria culture for improving nitrification and de-nitrification in aquaria biobacter is a compound containing freeze-dried living bacteria. It is used to start new biological filters, revitalise filters after using medication, and to improve nitrification in existing aquaria. **biobacter** comprises a glass vial of bacteria and bacteria feed. 1 carton for 250 litres (c. 60 gallons).

UVC sterilizer

Helix Max 5 W	4025901116113	80805
Helix Max 9 W	4025901116120	80809
Helix Max 11 W	4025901120646	80811
Helix Max 18 W	4025901116137	80818
Helix Max 36 W	4025901116106	80836
Helix Max 55 W	4025901116144	80855

Water clarifier for fresh- and saltwater aquariums and garden ponds.

Helix Max UV sterilisers can eliminate single cell algaes giving crystal clear water in aquariums and ponds. The water is directed in a spiral path around the quartz tube resulting in more efficient use of the UV radiation than in standard units. The inlet and outlet fittings can be rotated through 360° for easy mounting at any angle. All Helix Max with a 10 m rubber cable and high frequency electronic ballast, for garden ponds, salt- and freshwater aquariums. The electronic ballasts increase the lifetime and the efficacy of the UV lamps.

aquarium 50 - 250 250 - 500 350 - 750	max. flow 200 l/h 500 l/h	1.8 W/UVC 2.4 W/UVC
250 - 500 l	500 l/h	2.4 W/UVC
250 750	700 1/5	0.0.11/10/00
350 - 750 1	700 l/h	3.6 W/UVC
500 - 1,000	1,000 l/h	5.5 W/UVC
1,000 - 2,000	l 2,000 l/h	12 W/UVC
bis 3,000 l	3,000 l/h	17 W/UVC
	1,000 - 2,000	1,000 - 2,000 l 2,000 l/h

Туре	Cable	Lamp type	max. pressure	Power	Dimensions
	length			connection	I x w in mm
5 Watt	2 m	PL-S-5 Watt	0,3 bar	230 V~/50 Hz	app. 160 x 75
9 Watt	2 m	PL-S-9 Watt	0,3 bar	230 V~/50 Hz	app. 240 x 75
11 Watt	2 m	PL-S-11 Watt	0,3 bar	230 V~ /50 Hz	app. 290 x 75
18 Watt	10 m	PL-L-18 Watt	0,3 bar	230 V~/50 Hz	app. 380 x 120
36 Watt	10 m	PL-L-36 Watt	0,3 bar	230 V~/50 Hz	app. 510 x 120
55 Watt	10 m	PL-L-55 Watt	0,3 bar	230 V~/50 Hz	app. 650 x 120



Spare bulbs for Helix Max: 80805-8 4025901116304 UVC-Max 5 W 80809-8 4025901116311 UVC-Max 9 W 80811-8 4025901123135 UVC-Max 11 W 80818-8 4025901116328 UVC-Max 18 W 80836-8 4025901116335 UVC-Max 36 W 4025901116342 UVC-Max 55 W 80855-8





Helix Max 18 W

Light - LED

- 83214100 4025901123609 aquasunLED 100 W
- 83214150 4025901123616 aquasunLED 150 W
 - LED aquarium light for saltwater aquaria

Programmable light control for Sunrise/Sunset, moonlight and cloud movement.

Item

The aquasunLED is modularly constructed. Each LED module consists of 50 high-power LEDs 1 Watt each (15 x 1 watt blue and 35 x 1 watt 12,000 K) with a total power of 50 watts. The **aquasunLED** is available either as 100 watt (2 modules) or 150 watt (3 modules) version. The light is equipped with a programmable computer control. The light channels for white LEDs, blue LEDs, moonlight and cloud movement are separately controlled by pulse width modulation that makes natural lighting possible. Even a cycle for moon phase is taken into account. The housing is made of saltwater resistant high-quality anodized aluminium. The special construction with passive cooling makes it possible to operate the light without fans, making the unit very quiet.

Technical data:

- aquasunLED is available in 2 versions: aquasunLED 100 W and aquasunLED 150 W
- high-power LEDs
- luminous efficiency app. 120 lumen/watt - colour temperature 14,000 K
- LEDs life expectancy according to the manufacturer's data app. 50,000 hours
- For safety 24 V with external power pack
- incl. steel wire suspension
- computer control with USB connection for timer and dimming

Light control:

- USB-connection for PC
- software "DimEdit" for Windows is included, no installation on the PC is required.
- 10 control programmes are pre-programmed and can be changed individually with the included software "DimEdit". A software update will be possible online.
- 4 separately programmable and dimmable channels for white LEDs, blue LEDs, moonlight and cloud movement.

Dimensions:

aquasunLED 100 watt: app. 84.5 x 36 x 5.5 cm (I x w x h) aquasunLED 150 watt: app. 124.5 x 36 x 5.5 cm (l x w x h)

83414100 4025901131239 LEDspot 100 W 83414200 4025901131246 LEDspot 200 W

New

Splash-proofed LED-spotlight (IP65)

The lights are equipped with 100 W respectively 200 LED chips (Epistar) the durability is app. 35.000 Hrs. The luminous colour is 12.000 K.

The light beam is bundled with a lense to 90°. The luminous flux of the 100 W light is 10.000 lumen and of the 200 W light 20.000 lumen. These lights could replace metal halogen damp lights from 250 W respectively from 400 W.

The control gear unit is placed in a splash-proofed body on the light. The control gear (Meanwell) could be dimmed with a PWM control- e.g. with the Aqua Medic sunrise control.

The LEDspots will be cooled passive over a massive corrosion resistant aluminium cooling element.

It can be hang up on the central loop with a chain or attached with a holder out of polished stainless steel on the ceiling. Then you can adjust the angle.

Measurements:

LEDspot 100 W: Ø 32 cm, Height: app. 38 cm; LEDspot 200 W: Ø 32 cm, Height: app. 48 cm

Weight: LEDspot 100 W: app. 8 kg; LEDspot 200 W: app. 11.2 kg



aquasunLED







Light - LED

83215000 4025901130430 aquareefLED

New LED aquarium light for saltwater aquaria

The aquareefLED consists of 18 high-power Cree LED's 3 watt each (7 x 3 watt blue and 11 x 3 watt 12,000 K) with a total power of app. 50 watt. The white and blue LED's can be controlled separately in sections. We recommend using the sunrise control as a programmable light control. The sunrise control with pulse width modulation complements the aquareef-LED with 4 controllable light channels for white LED's, blue LED's, moonlight and cloud movement that makes natural lighting possible. Even a cycle for moon phase is taken into account. The housing of the aquareefLED is made of black anodized saltwater resistant aluminium. The special construction with passive cooling makes it possible to operate the light without fans, making the unit very quiet. Technical data:

- 3 watt Cree high-power LED's- luminous eciency app. 120 lumen/watt - colour temperature 14,000 K
- LED's life expectancy according to the manufacturer's data app. 50,000 hours

Item

- for safety 24 V with external power supply
- incl. steel wire suspension aquafit 2
- dimensions (I x w x h): app. 27 x 37 x 2.4 cm
- 83215001 4025901130577 aquareefLED holder



aquareefLED

aguareefLED + aguareefLED

New Holder for aquareefLED

Foldable holding device for the **aquareefLED** for mounting directly to the aquarium glass (e. g. at the aquaria's rear panel)

83200000 4025901130867 sunrise control

New Programmable light control for aquareefLED/LEDspot

- Four separately programmable and dimmable channels, for example white & blue LEDs, moonlight & cloud movement
 - Up to 3 aquareefLEDs are controllable at the same time
- 10 control programmes are pre-programmed and can be changed with the included software DimEdit
- No installation on the PC is required
- Software update is possible online via USB
- 24 V, low voltage for safety

86612 4025901130997 Ocean Light LED 36 W/60 cm 86613 4025901131000 Ocean Light LED 54 W/90 cm 86614 4025901131017 Ocean Light LED 72 W/120 cm

New

LED aquarium shadow column for sea water aquariums

The Ocean Light LED is equipped with high performance Cree LEDs a 3 watt. Through the use of white and blue LEDs arises a colour temperature of app. 14.000 K. The integrated lenses, which are produced with high optical precision, arrange for a absolute plain illumination level. The shapely body of the Ocean Light LED is made of silver-grey anodized, sea water resistant aluminium. The heat conductive construction allows an operation without ventilators. Therefore the light is completely noiseless. An appropriate fitting, which is adjustable to the

length of the aquarium, could be attached to the sides or the aquarium frame and is included in delivery.

A programmable light control is in preparation. An attachment for this has been already integrated into the body.

Technical data:

- 3 Watt Cree high performance LEDs
- light efficiency app. 120 Lumen/watts
- colour temperature 14.000 K
- durability of the LEDs -according to manufacturer's data- 50.000 Hrs.
- safety voltage 24 V with external power supply unit

Versions:

- Ocean Light LED 36 Watt (4 x 3 Watt blue and 8 x 3 Watt 12.000 K) Dimensions (I x w x h): app. 60 x 12 x 25 cm
- Fitting adjustable for Aquariums with 60 cm 80 cm length
- Ocean Light LED 54 Watt (6 x 3 Watt blue and 12 x 3 Watt 12.000 K) Dimensions (l x w x h): app. 90 x 12 x 25 cm
- Fitting adjustable for Aquariums with 90 cm 110 cm length - Ocean Light LED 72 Watt (8 x 3 Watt blue and 16 x 3 Watt 12.000 K) Dimensions (I x w x h): app. 120 x 12 x 25 cm
- Fitting adjustable for Aquariums with 120 cm 140 cm length



Ocean Light LED 36 W

sunrise control

Item code

.

EAN-No.

Item









aquasunspot 3 x 3



aquasunspot 3 x 3 blue

nspot 12 x 1 blue











Light -	LED	
83314003	4025901123647	aquasunspot 3 x 1
83314007	4025901123654	aquasunspot 7 x 1
83314012	4025901123661	aquasunspot 12 x 1
83314303	4025901126471	aquasunspot 3 x 3
83315003	4025901128307	aquasunspot 3 x 1 blue
83315007	4025901128314	aquasunspot 7 x 1 blue
83315012	4025901128321	aquasunspot 12 x 1 blue
83315303	4025901128338	aquasunspot 3 x 3 blue

LED Spot light for saltwater aquaria

aquasunspot are constructed using 1 or 3 watt power LEDs. The combination of white (10000 K) and blue LEDs results in a perfect colour spectrum for coral reef aquariums. The light efficiency is c. 90 lumen/watts. aquasunspot blue: Same features as aquasunspot but provided with just blue LEDs instead of white & blue LEDs. Can be used as blue additional lighting or moonlight. aquasunspot 3 can be used in standard light fittings usually used for 12 V halogen lamps with a 2 pin socket. **aquasunspot** 7 and **aquasunspot** 12 can be used in light fittings using the E27 socket; **aquasunspot** 12 is also compatible with PAR lamps. Technical data: aquasunspot 3 x 1: 3 W, LED: 2 white/1 blue, 2 pins base GU 5.3, 12 V ~ or =, Ø 5 cm aquasunspot 7 x 1: 7 W, LED: 4 white/3 blue, 230 V/50 Hz, Ø 9,2 cm aquasunspot 12 x 1: 12 W, LED: 8 white/4 blue, 230 V/50 Hz, Ø 12 cm aquasunspot 3 x 3: 9 W, LED: 2 white/1 blue, 2 pins base GU 5.3, 12 V \sim or =, Ø 5 cm aquasunspot blue 3 x 1: 3 W, LED: 3 blue, 2 pins base GU 5.3/MR 16, 12 V ~ or =, \emptyset 5 cm aquasunspot blue 7 x 1: 7 W, LED: 7 blue, 230 V/50 Hz, \emptyset 9,2 cm aquasunspot blue 12 x 1: 12 W, LED: 12 blue, 230 V/50 Hz, Ø 12 cm

aquasunspot blue 3 x 3: 9 W, LED: 3 blue, 2 pins base GU 5.3, 12 V ~ or =, Ø 5 cm

83314000 4025901126938 **spotfix**

LED light fixture for aquariums Fixture for LED light bulbs for aquariums with 6 - 8 mm glass. Made for LED lamps with socket GU 5.3 (= MR16). 12 V, 3 – 9 watts (Aqua Medic aquasunspot 3 x 1 or aquasunspot 3 x 3) Content: LED light fixture, Glass clip (for 6 - 8 mm thickness), Power supply 12 V, comes without lamps

83314001 4025901131055 aquamoonLED - available from august

New Night light for Aquariums

The aquamoonLED is equipped with a aquasunspot 3 x 1 blue with 3 W with a deep blue fluoresce light radiation. The use of such a moonlight allows the observance of nocturnal animals and reduces the easily startling of the fishes it also avoids that the fishes jump out by night. Also the reproduction and the growth of corals will be influenced by the moonlight. The aquamoonLED is conducted by a 12 V safety voltage. The LEDs of the aquasunspot 3 x 1 blue have a durability of 50.000 Hrs. A 12 V transformer and a appropriate holder with mounting clip for glass panels of 6 - 8 mm glass size are included in delivery. Measurement: app. 10 x 5 x 10 cm (I x w x h)

Light - T5

		Without bulbs, colour: black
83841-1	4025901125399	Ocean Light T5 4 x 24 W
83842-1	4025901120851	Ocean Light T5 4 x 39 W
83843-1	4025901120868	Ocean Light T5 4 x 54 W
83862-1	4025901120875	Ocean Light T5 6 x 39 W
83863-1	4025901120882	Ocean Light T5 6 x 54 W
83882-1	4025901120899	Ocean Light T5 8 x 39 W
83883-1	4025901120905	Ocean Light T5 8 x 54 W

Super-flat aquarium luminaries system for T5 tubes Aluminium housing - powder coated, holding unit to mount the light system on top of the aquarium, optionally equipped with Aqua Medic aquafit steel wire hanging system, equipped with high performance reflectors, equipped with LED moonlight (separately switchable). 2 electric circuits offer 2 different time settings. Dimensions (I x w x h): Ocean Light T5 4 x 24 W: app. 68 x 23.3 x 5 cm Ocean Light T5 4 x 39 W: app. 97.5 x 23.3 x 5 cm Ocean Light T5 4 x 54 W: app. 125.5 x 23.3 x 5 cm

Ocean Light T5 6 x 39 W: app. 97.5 x 29.3 x 5 cm Ocean Light T5 6 x 54 W: app. 125.5 x 29.3 x 5 cm Ocean Light T5 8 x 39 W: app. 97.5 x 35.3 x 5 cm

Ocean Light T5 8 x 54 W: app. 125.5 x 35.3 x 5 cm

	Item code	e EAN-No. Item
	Trem code	
	Light -	- T5
		4014694834540 aquastarlight T5 4 x 54 W 120 cm (c. 48") black 4025901113709 aquastarlight T5 4 x 54 W 120 cm (c. 48") silver 4014694834809 aquastarlight T5 4 x 80 W 150 cm (c. 60") black
aquastariight TS		The aquastarlight T5 luminaries is designed to accommodate the T5 fluorescent lamps. The luminaries is extruded from saltwater resistant aluminium and powder coated. It contains four T5 fluorescent lamps, $2 \times T5$ blue + $2 \times T5$ white. The aquastarlight T5 is supplied with high frequency electronic ballasts giving completely flicker free light. These features make them ideal fluorescent lamps for lighting aquariums and terrariums. Dimensions ($1 \times w \times h$): aquastarlight T5 4 x 39 W: app. 92 x 20 x 7.7 cm aquastarlight T5 4 x 54 W: app. 122 x 20 x 7.7 cm aquastarlight T5 4 x 80 W: app. 152 x 20 x 7.7 cm
	83239 83254 83280	Without bulbs 4025901113433 T5 sunbeam 2 x 39 W 4025901113440 T5 sunbeam 2 x 54 W 4025901113457 T5 sunbeam 2 x 80 W
<u>T5 sunbeam</u>		Light beam for T5 lamps Like all other Aqua Medic Light Systems the T5 sunbeam is manufactured in powder coated aluminium. It can be fixed with the aquafit suspension kit to the ceiling or it can be directly mounted inside a hood. The T5 sunbeam is supplied with water proof lamp holders, high quality electronic ballasts and corrosion protected high efficiency reflectors. The reflectors are simply clipped onto the T5 tubes. Tubes not included. Dimensions ($1 \times w \times h$): T5 sunbeam 2 x 39 W: app. 91.5 x 14.5 x 7.2 cm T5 sunbeam 2 x 54 W: app. 121.5 x 14.5 x 7.2 cm T5 sunbeam 2 x 80 W: app. 151.5 x 14.5 x 7.2 cm
	84321 84422 84623 84723	Without bulbs 4025901120035 sun cover T5 2 x 24 W app. 65 cm (c. 25.6") 4025901115925 sun cover T5 2 x 39 W app. 100 cm (c. 40") 4025901116021 sun cover T5 2 x 54 W app. 125 cm (c. 50") 4025901117042 sun cover T5 2 x 54 W app. 130 cm (c. 51.2")
sun cover T5	ð	T5 lighting for salt- and freshwater aquariums The sun cover T5 lighting fixture offers a superior method of converting the lighting of stan- dard aquariums from T8 to the more powerful T5 lamps. The sun cover T5 can easily replace the existing T8 luminaries and in many cases the existing lids are compatible with sun cover T5 . Of course, the sun cover T5 can also be used with new aquariums of any suitable length. The sun cover T5 is manufactured from a saltwater resistant aluminium profile and is supplied with high quality reflectors.
a in course fa	84200	4025901128413 sun cover fit
		Holder for the lamp sun cover T5 . With this holder, the sun cover can be fixed at a steel suspension or directly under a plate.
	80909	4014694809098 Ocean Blue power compact 24 W
		Blue actinic power compact lamp for saltwater aquariums. For combination with metal halide lamps and ${\it Ocean White 24 W}.$
ie.	81909	4014694819097 Ocean White power compact 24 W
		Blue-white power compact lamp with a colour temperature of 10000K. For freshwater and marine aquarium.
M	83221 83231 83251 83281 83220	4025901113969 T5 reflektor 24 W incl. clip 4025901113976 T5 reflektor 39 W incl. clip 4025901113983 T5 reflektor 54 W incl. clip 4025901113990 T5 reflektor 80 W incl. clip 4025901120530 Clip for reflector T5 (stainless steel)
T5 reflector		

Item code EAN-No.

Light - T5

 88700
 4025901116540
 aqualine T5 Reef Blue 24 W 55 cm (c. 22")

 88701
 4025901116557
 aqualine T5 Reef Blue 39 W 85 cm (c. 34")

 88702
 4025901116564
 aqualine T5 Reef Blue 54 W 115 cm (c. 46")

 88703
 4025901116571
 aqualine T5 Reef Blue 80 W 145 cm (c. 58")

aqualine T5 Reef Blue is intended for use in saltwater aquariums with the lamp emitting, almost exclusively, blue light in the spectrum between 400 nm and 500 nm, peaking at 420 nm. These wavelengths enhance the growth of many coral species. In addition, when combined with **Reef White 10K** or **15K** they give the aquarium a most natural appearance.

Item

- 88710 4025901116625 aqualine T5 Reef White 15K 24 W 55 cm (c. 22")
- 88711 4025901116632 aqualine T5 Reef White 15K 39 W 85 cm (c. 34")
- 88712 4025901116649 aqualine T5 Reef White 15K 54 W 115 cm (c. 46")
- 88713 4025901116656 aqualine T5 Reef White 15K 80 W 145 cm (c. 58")

A blue/white lamp for the illumination of saltwater aquaria This lamp emits an extremely bright blue/white light, providing ideal illumination for the saltwater aquarium. The spectrum is chosen to encourage strong coral growth. **aqualine T5 Reef White 15K** can be used as the sole light source for an aquarium, as well as in combination with **aqualine T5 Reef Blue**.

- 88720 4025901116588 aqualine T5 Reef White 10K 24 W 55 cm (c. 22")
- 88721 4025901116595 aqualine T5 Reef White 10K 39 W 85 cm (c. 34")
- 88722 4025901116601 aqualine T5 Reef White 10K 54 W 115 cm (c. 46")
- 88723 4025901116618 aqualine T5 Reef White 10K 80 W 145 cm (c. 58")

aqualine T5 Reef White 10K is a bright white lamp with a colour temperature of 10000 K. The lamp simulates tropical sunlight and is the ideal basic illumination for marine as well as freshwater aquaria. For saltwater aquariums, we recommend combining **aqualine T5 Reef White 10K** with aqualine **T5 Reef Blue** to increase the blue spectrum whilst for freshwater the combination of aqualine **T5 Reef White 10K** with aqualine **T5 Plant Grow** will enhance plant growth.

- 88730 4025901116663 aqualine T5 Plant Grow 24 W 55 cm (c. 22")
- 88731 4025901116670 aqualine T5 Plant Grow 39 W 85 cm (c. 34")
- 88732 4025901116687 aqualine T5 Plant Grow 54 W 115 cm (c. 46")
- 88733 4025901116694 aqualine T5 Plant Grow 80 W 145 cm (c. 58")

aqualine T5 Plant Grow is a growth lamp for plants in freshwater aquariums The lamp accentuates the red and blue parts of the spectrum and comes close to the absorption spectrum of water plants. These wave lengths stimulate photosynthesis and so create excellent condition for luxuriant plant growth. In addition the colours become more vibrant in any fish with red pigmentation (e.g. Cardinal tetra). Combined with aqualine **T5 Reef White 10K, Plant Grow** gives the aquarium a brilliant natural appearance.









Item code EAN-No.

Item

Light - Metal halide





Ocean Light

86212 86222 86232	4014694962120 Ocean Light 150 1 x 150 W 4025901113402 Ocean Light 150 2 x 150 W 4025901117059 Ocean Light 150 3 x 150 W
86213 86223 86233	4025901117066 Ocean Light 250 1 x 250 W 4025901117073 Ocean Light 250 2 x 250 W 4025901117080 Ocean Light 250 3 x 250 W
86312 86322 86332	4014694963127 Ocean Light 150 plus 1 x 150 W + 2 x 24 W T5 blue 4025901113419 Ocean Light 150 plus 2 x 150 W + 2 x 54 W T5 blue 4025901116182 Ocean Light 150 plus 3 x 150 W + 2 x 80 W T5 blue
86313 86323 86333	4025901117097 Ocean Light 250 plus 1 x 250 W + 2 x 24 W T5 blue 4025901117103 Ocean Light 250 plus 2 x 250 W + 2 x 54 W T5 blue 4025901117110 Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue

Aquarium Luminaries for metal halide lamps

The luminaries in the **Ocean Light** series bring the intensity and sparkle of metal halide lighting into your aquarium at a very economic price. Of course, there is no compromise in the known Aqua Medic quality: anodised aluminium housing - high quality reflectors, **aqualine 10000** lamps with 13000 K colour temperature, steel wire suspension. **Ocean Light**: supplied with metal halide bulbs only. **Ocean Light plus**: which includes the metal halide lamps and 2 **aqualine T5 tubes**. Individual power cables are provided for separate control of the fluorescent and HQI circuits. Dimensions (I x w x h):

Dimensions (I x w x h): Ocean Light 150 1 x 150 W: app. 60 x 24 x 7 cm Ocean Light 150 2 x 150 W: app. 120 x 24 x 7 cm Ocean Light 150 3 x 150 W: app. 180 x 24 x 7 cm Ocean Light 250 1 x 250 W: app. 180 x 24 x 7 cm Ocean Light 250 2 x 250 W: app. 120 x 31.5 x 8.2 cm Ocean Light 250 3 x 250 W: app. 180 x 31.5 x 8.2 cm Ocean Light 150 plus 1 x 150 W + 2 x 24 W T5 blue: app. 60 x 30 x 8.2 cm Ocean Light 150 plus 2 x 150 W + 2 x 54 W T5 blue: app. 120 x 30 x 8.2 cm Ocean Light 150 plus 3 x 150 W + 2 x 80 W T5 blue: app. 180 x 30 x 8.2 cm Ocean Light 250 plus 1 x 250 W + 2 x 24 W T5 blue: app. 60 x 30 x 8.2 cm Ocean Light 250 plus 3 x 150 W + 2 x 80 W T5 blue: app. 10 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 54 W T5 blue: app. 120 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 120 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm Ocean Light 250 plus 3 x 250 W + 2 x 80 W T5 blue: app. 180 x 35.5 x 8.2 cm

Item code EAN-No.

85512

85612

85513

85613

85522

85622 85523

85623

85532 85632 85533

85633

Item

aquasunlight NG 60 cm

aquasunlight NG 120 cm

aguasunlight NG 180 cm

4025901114195 1 x 150 W + 2 x T5 24 W

4025901114201 1 x 150 W + 4 x T5 24 W

4025901114218 1 x 250 W + 2 x T5 24 W

4025901114225 1 x 250 W + 4 x T5 24 W

4025901113822 2 x 150 W + 2 x T5 54 W 4025901113839 2 x 150 W + 4 x T5 54 W

4025901113846 2 x 250 W + 2 x T5 54 W

4025901113853 2 x 250 W + 4 x T5 54 W

4025901113860 3 x 150 W + 2 x T5 80 W 4025901113877 3 x 150 W + 4 x T5 80 W

4025901113884 3 x 250 W + 2 x T5 80 W


4025901113891 3 x 250 W + 4 x T5 80 W

Light - Metal halide







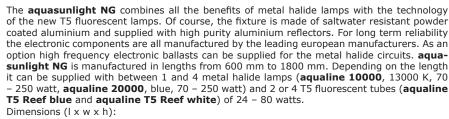

aquasunlight NG 60 cm: app. 60 x 41 x 9.5 cm aquasunlight NG 120 cm: app. 120 x 41 x 9.5 cm aquasunlight NG 180 cm: app. 180 x 41 x 9.5 cm

aquaspacelight	400
----------------	-----

89713-1	4014694897132	1 x 250 W black	
89713-4	4014694897644	1 x 250 W silver	
89723-1	4014694897231	2 x 250 W black	
00720 1			
89723-4	4014694897651	2 x 250 W silver	
89714-1	4014694897149	1 x 400 W black	
	1021091097219		
89714-4	4014694897620	1 x 400 W silver	
89724-1	4014694897248	2 x 400 W black	
09724-1	4014094097240	2 X 400 W DIACK	
89724-4	4014694897637	2 x 400 W silver	

Aquarium luminaries for 250 watt and 400 watt metal halide lamps It is designed for 250 watt and 400 watt metal halide lamps and ensures that now even the largest reef aquariums can be fully illuminated. The luminaries is extruded from saltwater proofed aluminium and powder coated. Borosilicate UV protection glass is standard. The lamp is available in single and twin lamp models. Dimensions ($1 \times w \times h$): aquaspacelight 400 1 × 250 W: app. 60 × 35 × 12.2 cm (c. 24" × 14" × 4.8") aquaspacelight 400 1 × 400 W: app. 60 × 35 × 12.2 cm (c. 24" × 14" × 4.8") aquaspacelight 400 2 × 250 W: app. 120 × 35 × 12.2 cm (c. 48" × 14" × 4.8") aquaspacelight 400 2 × 400 W: app. 120 × 35 × 12.2 cm (c. 48" × 14" × 4.8")

 80423
 4025901131529
 Sylveo 2 250 W cw

 80424
 4025901131536
 Sylveo 2 400 W cw

 80415
 4014694804154
 aqualight 1000 W

- - -



Sylveo 2

NeW Splash proof luminaries for metal halide lamps Aquarium lights in a splash-proofed aluminium housing. With the exception of the 1000 watt version, all the control gear is mounted within the aluminium housing. Models are available for 250, 400 and 1000 watts metal halide bulbs and **aqualine 10000** lamps are included. Sylveo 2 250 W and Sylveo 2 400 W: app. 41.9 x 44.9 x 17.1 cm (l x w x h), silver power coated, protection class IP 65 aqualight 1000 W: app. 56 x 35 x 19 cm (l x w x h), black power coated, protection class IP 55 Other wattages available on demand.







Item code EAN-No.

Light - Metal halide

aqualine 10000 70 W 13K	4014694809418	80941
aqualine 10000 150 W 13K	4014694809425	80942
aqualine 10000 175 W E39 13K	4014694809500	80950
aqualine 10000 250 W 13K	4014694809432	80943
aqualine 10000 250 W E40 13K	4014694809531	80951
aqualine 10000 400 W E40 13K	4014694809449	80944
agualine 10000 1000 W E40 13K	4014694809456	80945

Metal halide lamp for saltwater aquaria The aqualine 10000 lamp has a colour temperature of 13000° Kelvin and a high percentage of the light output is at the blue end of the spectrum. aqualine 10000 was the first metal halide lamp to simulate the lighting conditions on a coral reef and the new lamp gives an even more realistic looking aquarium as the improved twin getters give long term colour stability. The corals show their natural colours and the lighting intensity encourages excellent growth. aqualine 10000 helps to transform your aquarium into a perfect reef tank.

Item

80982 4014694809821 aqualine 16000 150 W 16K 80983 4014694809838 aqualine 16000 250 W 16K

A blue/white full spectrum metal halide lamp for marine aquaria The aqualine 16000 lamp simulates the light spectrum in deeper waters. It is best used in combination with aqualine 10000, but as it is a full spectrum lamp it can also be used as the sole light source, if a high percentage of blue light is required. In these circumstances, there is no need for blue fluorescent lamps and the efflorescing colours of the corals are enhanced.

80971 4014694809715 aqualine 20000 70 W 20K 80972 4014694809722 aqualine 20000 150 W 20K 4014694809739 aqualine 20000 250 W 20K 80973

A blue metal halide lamp for marine aquaria

The aqualine 20000 blue lamp emits light strongly in the blue end of the spectrum. The use of this "actinic" lamp enhances the fluorescent blue and green colours of many corals. The lamp should be used in combination with aqualine 10000. This combination gives the aquarium a beautiful bluish hue.

80974 4014694809746 Colorlite 400 W blue 4014694809753 Colorlite 1000 W blue 80975

4014694819110 aqualine 5000 70 W 5K 81911

81912 4014694819127 aqualine 5000 150 W 5K 81913

4014694819134 aqualine 5000 250 W 5K

Daylight metal halide lamp for freshwater aquaria

aqualine 5000 is a metal halide lamp with a colour temperature of 5000° Kelvin - attenuated sunlight. This lamp was specially developed for the illumination of freshwater aquaria with its a high percentage of red light and a high intensity - 11000 lumens per watt. It gives planted aquaria a natural appearance and enhances plant growth.

Accessories Light

4014694804000 aquafit 80400

Steel Wire Suspension

The wire suspension system **aquafit** provides a neat and simple method of ceiling mounting of Aqua Medic and other suitable lights. The suspension system contains 2 pcs. of the following: ceiling plate with retaining bush, stainless steel, top screw fitting, wire with ferrule, light fixing incl. top cap, plastic washer, screws and wall fixings and clips to secure the wire's end.

80401 4025901124965 aquafit 2

in both the height and the angle of unit.

Steel Wire Suspension Universal Suspension kit for use with all suspended lightning units, provided that the screws in the housing's end plates are of adequate length & not too wide (max. Ø 4 mm). aquafit 2 consists of 2 pieces of: 2 metre stainless steel wire with stopper, ceiling plate with retaining bush, steel wire with height and angle adjustment unit attached, screws and plugs.

The suspension kit allows fixing of the lighting unit to the ceiling, and provides easy adjustment

aquafit 2



Item code EAN-No.

.

Item

. . . .

Measurement and control technology



AT-Control system	

pH-control-Set

LF Cont

4025901116700	AT-Control system set incl. Interface USB & Tem- perature sensor
4025001116717	•
4025901110795	
	Electrodes & test fluids see page 43.
	Interface Level + Temperature
	Temperature probe
	Level Sensor cpl.
	Interface Conductivity
4025901117233	Conductivity Probe
4025901116816	Interface Density
4025901117240	Density Probe
	Calibration liquid 52 mS 50 ml for AT-Control
4025901120080	Ethernet module
	Connection for the AT-Control to the Internet for
	online-control of the aquarium
4025901120103	Interface USB
	Connection for your PC.
4025901121018	Active Hub
	Additional 6 pcs. USB-connections AT-Control
4025901120806	SMS Module
	By the aid of the SMS module, the AT-Control can send
	alerts and notification of emergent to your mobile phone.
4025901120097	Interface Water Leakage
	Connection for up to two water leakage sensor
4025901120110	Water leakage sensor
	4025901116717 4025901116793 4025901116793 4025901116793 4025901117257 4025901117257 4025901116816 4025901116816 4025901120080 4025901120103 4025901120103 4025901120108 4025901120806 4025901120097

230.00 4025901120110 Water leakage set

A centralised microprocessor controller for aquariums, terrariums or other applications **AT-Control** can measure and control pH, ORP (Redox potential), temperature, conductivity, water level and using the numerous timed circuits, lighting, dosing etc. Programming and control can also be undertaken using a PC via an USB connection. The system is modular in arrangement. It can be enlarged from a basic module to a complete control unit for several aquariums. All the modules are interconnected via USB ports. The data can be downloaded to a PC and shown graphically.

200.00 4025901100204 **pH controller** without probe

NeW pH monitor and controller

The **pH controller** is a precision instrument for controlling the pH value in aquaria. In combination with a CO_2 system and a solenoid value the pH can be maintained at a constant level, and the CO_2 supply to aquatic plants or into a calciumreactor can be controlled. The unit is supplied with a large LED display and the control range is digitally adjustable from pH 3.5 to 10.5. **The direction of adjustment can be set up or down.** The **pH controller** has a BNC connection for pH electrodes.

The use of an original Aqua Medic **plastic shafted electrode** is recommended.

200.50 4025901100259 pH-control-Set

Includes: controller, pH-sensor, sensor holder, pH-test fluid and solenoid valve.

200.05 4025901100211 **mV controller** without probe

Redox-potential (ORP) monitor and controller

The **mV controller** is designed for monitoring and controlling the redox potential (or ORP - oxidation-reduction potential) in aquaria. The unit has a broad controlling range from -500 to a +500 mV, and a measuring range from -1000 to +1000 mV. It can be used to control the supply of ozone in saltwater aquaria and / or for the control of nitrate removal in anaerobic biological filters (**Nitratereductor**). The unit is supplied with a BNC connection for a mV probe. The use of an original Aqua Medic **plastic shafted electrode** is recommended.

200.10 4025901100228 LF controller with probe

Conductivity monitor and controller

The salt content of water can be determined by measuring the electrical conductivity. A special feature of the **LF controller** conductivity monitor and controller is the broad measurement and control range which is divided into 2 bands: from 0 to 2000 μ S, the unit is used for monitoring desalinated water and freshwater, and in the range 0 to 200 mS, it is used for brackish and saltwater. The unit can therefore be used for the control of reverse osmosis units, for monitoring breeding tanks with soft water, and for the control of the salt content in marine aquaria. The unit is supplied with a directly connected, saltwater resistant graphite electrode.



Item code EAN-No.

Measurement and control technology

 200.15
 4025901100235
 T controller CC with probe

 200.20
 4025901100242
 T controller HC with probe

Temperature monitor and controller

The **T controller** is available in 2 versions: **T controller HC** for the control of heating systems and **T controller CC** for the control of cooling units. The control range varies from 0 to 50 °C, with an accuracy of ± 0.1 °C. The maximum load is 1000 watts for heaters and 600 watts for coolers. The units are supplied with a waterproof temperature probe.

Item

200.25 4025901130973 **T controller twin**

New Digital temperature monitor & controller, for the control & monitoring of heating systems and cooling units simultaneously

The temperature controller **T controller twin** is used for controlling both heating systems & cooling units. Measuring and switching accuracy is 0.1 °C. The control range varies from 0 – 50 °C, & the set value is in 1 °C increments. **The maximum load for the heating systems & cooling units is 1,200 watts.** Because of the integrated double socket it is possible to connect a heating system & cooling unit simultaneously. The **T controller twin** is supplied with a waterproof temperature probe. The LCD display provides instant information on the current temperature. The minimum and maximum values can be easily adjusted.

203.20 4025901119428 **T-meter**

Submergible digital thermometer incl. rubber sucker and battery.

203.10 4025901130966 **T-meter twin**

New External double-display Thermometer

- large LCD Display simultaneously showing aquarium & ambient temperature

- selectable temperature unit: $^{\circ}$ C or $^{\circ}$ F - with adhesive tape at back side for easy putting on aquarium tank
- Ambient: -10 ~ +50 °C (-14~ +122°F)

Aquarium: -50 ~ +70 °C (-58 ~ +158°F)

Resolution: 0.1°C / 0.1°F

Accuracy: ±1°C (2°F)

Power supply: 1.5 V (AG10)

201.00 4025901100266 pH computer-Set


Microprocessor controlled pH monitor and controller

The **pH computer-Set** utilises a modern microprocessor, which provides high precision measurement and control. The **pH computer-Set** is used to control precise values of pH in the aquarium or the calciumreactor. The computer can switch up to 500 watts using the supplied external electrical socket. When the calibration key has been selected the unit will automatically calibrate itself to the electrode. A **plastic shafted pH electrode** with BNC fitting and the correct calibration fluids are included.

201.05 4025901100686 mV computer-Set

Microprocessor controlled redox-potential (ORP) monitor and controller

The **mV computer-Set** uses the same microprocessor technique as the **pH computer-Set**. Waterproof touch keys are used to set the required values and calibrate the electrode. The **mV computer-Set** is ideal for controlling anaerobic biological filters such as the **Nitratereduc-tor** which have negative redox potential or can control the supply of ozone to the aquarium, or monitor the aquarium water's redox potential. All these functions are possible due to the computer's broad measurement and control range of -500 to +1000 mV. The direction of control can be set upwards or downwards. The status of the direction of control and the output are shown on LED's. A plastic shafted **mV electrode** with a BNC fitting and calibration fluid is included.



Microprocessor controlled temperature monitor and controller

The **T computer-Set** is a precise multi-functional temperature controller and is complete with a digital temperature sensor. The mode of operation can be set using the function keys, either as a heater or cooler controller. In "heating" mode, the temperature is controlled to the set value using a proportional pulse system with an accuracy of ± 0.1 °C. In the "cooling" mode, the accuracy is ± 0.5 °C. The maximum operating power is 1,000 watts for heaters and 600 watts for coolers.











Item code EAN-No

Item

Measurement and control technology

- 77113 4014694771135 aquaniveau with 1 switch 77114 4014694771142 aquaniveau with 2 switch
 - Electronic level and refill controller

The **aquaniveau** electronic level controller may be used in 2 different modes: As a top up controller with one or two float switches to control the replacement of evaporated water. One switch controls the pumping from a storage vessel (not supplied), the other, if opted for, provides protection to prevent the top up pump (not supplied) from running dry. As maximum/ minimum contact to control reverse osmosis units, in conjunction with a solenoid valve. Both level switches are low voltage.

ozone 25	4025901113129	202.00
ozone 50	4025901113136	202.05
ozone 100	4025901113143	202.10
ozone 200	4025901113150	202.15
ozone 300	4025901113167	202 20

The injection of **ozone** into the water can improve the efficiency of protein skimming and raise the ORP (redox potential). The decomposition of toxic nitrite is enhanced whilst the bacteria count in the water decreases, minimising the risk of ill health in the animals. The compounds that produce yellow colouring in the aquarium are broken down and the water stays crystal clear. The ozone generators in the ozone - series utilise the latest low voltage technology for safety and reliability. Various models are available with capacities from 25 - 300 mg/h.

65027 4025901116977 Ozone Booster

Air dryer

The air dryer is for use with any Aqua Medic Ozone Generators. Ozone output can decrease dramatically if the supply air is very humid. Ozone Booster should be used to dry the air, particularly if a protein skimmer is supplied with ozone using the humid air present in the aquarium cabinet. In some circumstances ozone production can be almost doubled. The unit utilises silicagel as the drying component. The silicagel should be changed as soon as the indicator beads change their colour from blue to pink.

4025901116984 Silicagel 1 | 12730

Ozone Booster - Refill

Dry granulate with high de-hydration capacity. The indication pearls changing colour from blue to pink if wet.

Plastic probe pH	4025901100310	220.10
Glass probe pH	4025901100327	220.11
Plastic probe pH PG 13.5	4025901106596	220.12
Directic mucho will DC 12 E	4025001100270	220 12

- Plastic probe pH PG 13.5 short 220.13 40259011082/9
- 220.16 4025901100334 Plastic probe mV
- 220.17 4025901100341 Glass probe mV
- 220.18 4025901106602 Plastic probe mV PG 13.5
- 220.19 4025901108262 Plastic probe mV PG 13.5 short

Aqua Medic pH- and mV-electrodes (Redox-potential) are quality products designed for both accurate measurement and long, trouble free use. Both types of electrodes are available in three versions: Standard electrodes - with plastic shaft, glass electrodes - laboratory standard for extended performance. Electrodes with plastic shaft and PG 13.5 thread - pressure resistant up to 3 bar, and can be used in plumbing fittings or in the closed versions of the Nitratereductors NR 400 and Calciumreactors KR 400. These electrodes are available in a short version for the Calciumreactor KR 1000 and the Nitratereductor NR 1000.

230.00 4025901100358 Electrode holder

An **Electrode holder** is available as an option. It can hold up to four electrodes, and can be attached to the horizontal stress bars inside the aquarium, or directly over the edge of the aquarium glass.

230.004 230.007 230.009	4025901129571	pH 4 test fluid 60 ml pH 7 test fluid 60 ml pH 9 test fluid 60 ml
230.300 230.230 230.400 230.250 230.050	4025901129618 4025901129601 4025901129625	KCL-solution for pH + mV sensors 60 ml 230 mV test fluid 60 ml Cleaning solution 60 ml 250 µS test fluid 60 ml 50 mS test fluid 60 ml

Electrode calibration fluids

The accuracy of all electrodes is dependent upon their calibration. To ensure accurate readings, all electrodes need to be calibrated at regular intervals. To ensure that the fluid values used to calibrate the electrodes remain constant, regular replacement of these fluids should occur.











Item code EAN-No.

\sim	меа
A	110.0
	110.0
	110.0
	110.0
Titanium heater	
Stratter and	

Measurement and control technology

110.010	4025901112818	Titanium heater 100 W
		for aquaria up 100 - 250 l, length: app. 27 cm (c. 10.6")
110.020	4025901112825	Titanium heater 200 W
		for aquaria up 250 - 500 l, length: app. 28 cm (c. 11")
110.030	4025901112832	Titanium heater 300 W
		for aquaria up 500 - 1,000 l, length: app. 30 cm (c. 11.8")
110.050	4025901112849	Titanium heater 500 W
		for aquaria up 1,000 - 1,500 l, length: app. 32 cm (c. 12.6")

Titan Aquarium Heater

Titanium heaters are the safe alternative to glass heaters in both fresh- and salt water aquaria. The unbreakable titanium housing is seawater resistant and the heaters have both overheat and dry running protection cutouts. The heaters must be used in combination with a temperature controller. For temperature-dependet control we recommend optional the use of our **T controller twin**. Ø 20 mm

- qua therm
- 39620 4025901116939 aqua therm 25 W / 4 m
- 39625 4025901116946 aqua therm 50 W / 4 m
- 39630 39635 4025901116953 aqua therm 75 W / 7 m

4025901116960 aqua therm 100 W / 10 m

Low voltage silicone heating cable for under gravel installation in freshwater aquaria

Item

By operating a low wattage heating cable under the substrate of a freshwater aquarium a slow thermal convection current is induced which improves the supply of nutrient to the plants, encourages root growth and in consequence gives stronger and healthier plants. The under gravel heater **aqua therm** comes complete with a 12 V safety transformer. The heating cables are fixed on the bottom glass of the aquarium using the sucker mounted clips supplied. Content: heating cable, safety transformer, mounting clips.

Item code EAN-No.

Reverse osmosis

- U800.25 4025901113020 premium line 90, 75 - 90 l/day
- U800.30 4025901113037 premium line 150, 120 - 150 l/day
- U800.35 4025901129816 premium line 300, 240 - 300 l/day

For producing 75 – 300 litres (c. 19 – 79 gal) of purified tap water per day

Item

The premium line reverse osmosis units are compact and versatile superior grade products. They are supplied with two large (10") prefilter housings and their activated carbon and 5μ sediment cartridges can easily be replaced. The membrane, the heart of the unit, is offered in 3 sizes: 90 l/day and 150 l/day as well as a double membrane of 300 l/day. The membrane housing includes a combined flushing valve and flow restrictor and the system can achieve a concentrate to permeate recovery ratio of 3 to 1 with a rejection rate of 95 - 98 %. The prefilter housings and the membrane module are mounted onto a strong powder coated wall mounting bracket.

- U700.25 4025901111941 easy line 90, 75 90 l/day
- U700.30 4025901111958 easy line 150, 120 150 l/day

For producing 75 - 150 litres of purified tap water per day (c. 23 - 40 gpd) easy line 90 and easy line 150 reverse osmosis units are compact and powerful. A sediment filter retains all particles larger than 5 µm and a carbon filter protects the membrane by removing chlorine. We use the latest generation of TFC (Polyamide / Polysulfone) membranes to provide the highest quality treated water, providing a recovery ratio of approximately 3 - 4 concentrate : 1 permeate, and a rejection rate of 90 to 98 %.

U600.71 4025901117707 Merlin plus (PRF-RO)

Reverse osmosis unit with a capacity of c. 2,000 l/day (c. 500 gpd) The Merlin plus (PRF-RO) reverse osmosis unit operates using just the mains pressure of the tap water (3 - 4 bar), without the need for a high pressure pump. It has 2 high flow membranes and a combined activated carbon/sediment prefilter. Salt rejection is c. 90 - 95 % and the recovery ratio (purewater:wastewater) is 3-4:1. The unit is frame mounted and ready to run. We recommend using an aquaniveau level control with an M-ventil 1/2" to give automatic control of the unit.

Accessories for reverse osmosis

U601.00 4025901102086 Hardness filter 10" incl. CO₂-connection

Filled with Hydrocarbonate, this filter is placed after the reverse osmosis unit to enrich the water with minerals. If CO_2 is injected into the filter, the calcium concentration can be raised even further. The complete filter (housing and cartridge) includes a CO₂ injection port.



easy line

Merlin plus (PRF-RO)

um line 90/150

premium line 300

U601.10 4025901108200 Demineralisation filter 10" 4025901108217 Demineralisation filter 1 l U601.11

U601.12 4025901108224 Demineralisation filter 5 I

> Used to remove the last remaining pollutants using a special ion exchange resin, and is placed after the reverse osmosis unit. It reduces the growth of diatom, if silicate level of tab water is too high.



U605.60 U605.65		Membrane 90 / day Membrane 150 / day
U605.01	4025901102116	Activated carbon prefilter w. fittings
U605.06	4025901102130	Sediment 5 μm prefilter w. fittings
U610.06 U610.01 U610.13	4025901128369	Flushing valve 90 l/day Flushing valve 150 l/day Flushing valve 300 l/day
U606.17	4025901102260	Sediment filter 5 µm
U606.10	4025901102246	Combined filter cartridge carb./sed.
U606.15	4025901102253	Activated carbon filter cartridge
U608.00 U630.00		Booster pump PE-tube 4/6 mm / 1 m

Sediment prefilter

Item code EAN-No.

CO,

71535 4025901116991 CO,-set professional

The complete solution for CO₂ control

The CO, set professional offers a complete system for CO, control and delivery in one package. The set comprises a safety certified 350 g steel CO, bottle, regular - a pressure regulator for precise adjustment of the quantity of gas, a **bubble counter**, a CO₂-**reactor M**, which diffuses high volumes of CO₂ and is complete with its own pump and a **M-ventil** high quality solenoid valve for automated shut off of the CO₂ supply. In addition there is a **pH computer** for accurate determination of the CO₂ dosing requirement complete with electrode, holder and **test fluids**. Also included is a length of HDPE CO_2 hose and a non return valve.

Item

71515 4014694715115 CO, complet with bottle 71516

4014694715160 CO, complet without bottle

CO₂ complet contains all the equipment required to provide CO₂ fertilization in an aquarium The set contains the following: **station** 350 g (c. 0.77 lb.) CO₂ cylinder, **regular** CO₂ pressure regulator, counter CO₂ bubble counter, reactor 500 to allow the CO₂ gas to diffuse into the water efficiently, CO_2 cylinder holder and HDPE CO_2 hose.

71525 4014694715252 CO,-set basic 350 71527 4014694715276 CO,-set basic 500

CO₂ supply for Calciumreactors

CO,-Set basic comprises a steel cylinder station with 350 g or 500 g CO,, the pressure regulator regular and a bubble counter. It is the ideal set for equipment such as calciumreactors, or other applications where no $\mathbf{CO}_{\mathbf{2}}\text{-}\mathbf{reactor}$ is needed.

71130 4025901117158 reactor 100

A passive CO2-reactor for aquariums up to 250 litres (c. 62.5 gallons) **reactor 100** is operated without an additional pump. The CO_2 is forced through a ceramic diaphragm. This creates tiny bubbles that rise slowly in the water and dissolve on their way up.

71111 4014694710110 reactor 500

reactor 500 introduces CO₂ into the aquarium. The reactor 500 is designed for aquaria up to 500 litres (c. 125 gal.). Required pump power: 500 - 1,000 l/h. (c. 125 - 250 gal.) Ø app. 5 cm (c. 2"), length app. 16 cm (c. 6.4").

71113 4014694711131 reactor 1000

Closed CO₂-reactor for external use for aquaria up to 2,000 litres (c. 500 gallons) reactor 1000 is a hermetically sealed unit for introducing CO, into larger aquariums. The universal mounting plate enables it to be mounted outside the aquarium or inside the cabinet. This powerful unit can supply aquaria up to 2,000 litres (c. 500 gallons) with CO₂ With 12/16 mm hose tails. Required pump power: 1,500 - 2,000 l/h. (c. 375 - 500 gal.) Total height: app. 37 cm (c. 15"); Ø app. 8 cm (c. 3")

71110 4014694711100 reactor M

CO,-reactor with integrated circulation pump

reactor M is similar to the reactor 500, however it is supplied complete with a dedicated circulation pump thus making it independent of any other filters. The pump has a capacity of 300 I/h (c. 75 gph) and a power uptake of 5 watts. Both pump and reactor are mounted on a strong mounting plate that can be fixed with suckers into the aquarium. Dimensions: app. 15 x 10 x 21 cm (l x w x h)







Item code

CO, 71411

71412

71413

EAN-No. Item 4014694714118 station 350 g with cage 4014694714125 station 500 g with cage 4014694714132 station 2 kg with cage

CO, storage bottle

station is a steel CO, storage bottle with an external shut off valve. It is available in three sizes: 350 g, 500 g and 2 kg (c. 0.77 lb., 1.1 lb. and 4.4 lb.) All the cylinders are supplied with a safety cage and the 2 kg size has a base stand.

71011 4014694712114 regular with 2 pressure gauges

Pressure regulator for precise control of $\mathrm{CO}_{\!_2}$ dosing into the aquarium regular is chrome plated and offers: a fixed working pressure of c. 1.5 bar, a needle valve for fine adjustment, two pressure gauges to show both the cylinder and working pressures regular fits industry standard CO_2 cylinders having an external valve.


U630.00 4025901102529 PE-hose 4/6 mm / 1 m

410.150 4025901106428 Bubble counter

> For monitoring CO₂ dosage Bubble counter is a simple and safe unit for monitoring the dosing rate of CO, gas into aquaria. It should be installed in the low pressure side of the gas delivery circuit. An integrated non return valve prevents water flow back and a robust mounting plate enables easy fixing to the outside of the aquarium.

230.30 4025901106589 M-ventil Standard, nickel plated, 1/8", 2.5 watts

Electronic shut off valve for CO₂-Standard **M-ventil Standard** has a high quality nickel plated brass body with a maximum operating pressure of 6 bar, pressure fittings for 6 mm flexible hose and can be connected to all our CO₂ units. The solenoid coil consumes only 2.5 watts of electrical energy to prevent overheating.



Water shut off valve


M-ventil 1/2" for water is intended for automatic control of reverse osmosis units. The brass body has connections for 1/2" BSP male fittings and is recommended only for use with tap water. The power uptake is 6 watts.



		САТ	A L	OGU	E			
	Item code	EAN-No.			Item			
	aqua t	402590111211 Trap for catc Fish trap is	hing a p baited v	articular fish with some fo	in an aquarium ood and as soon as t			
E		that when it method cons	s remov iderably	ved from the reduces the	ased – by hand. The aquarium with the fi stress on the fish. 5 x 17 x 17 cm			
Fish trap	501.81	402590111278	8 Trap-	pest				
Trap-pest		Trap-pest is an aquarium whilst crabs Trap-pest is	an aut Bristle and sna	omatic trap f worms craw ails pass thro baited from	nd bristle worms - fo for removing undesi I through a funnel in ough a one way cur the outside. 5 x 7.5 x 8.5 cm	rable brist to the tra	tle worms, c p and canno	rabs or snails from t find their way out
(I)	65930	402590112882	6 aquas	spoon				
CHERY Z					emicales and other 1 (g, oz, gn, ct), wit			
aquaspoon Mega Mag 1	67000 67001 67101	402590111306 402590111307 402590111977	5 Mega	Mag 2	1ag 1 & 2 , 2 pcs.			
		Mega Mag g use in fresh- of the outer strong magn Mega Mag 1	lass cle and sa magne ets and for gla	aners are co ltwater aquar t can be eas have to be h ss from 10 –	s between 10 and 32 impletely sealed and ria. The cleaning par- sily replaced. Mega nandled with care. Cl 19 mm (c. 0.4" – 0. 32 mm (c. 0.6" – 1.	l corrosion ds of the i Mag gla leaning su .75")	n protected a inner magne iss cleaners	and are suitable for et and the felt pads contain extremely
Spare pads	67002 67103	402590111395 402590112295			1ag 3 , 2 pcs.			
Mega Mag 3		Mega Mag 3 to 55 mm. A	is a po s with t	he smaller n	juariums netic cleaner for larg nodels in the Mega itted for the cleanin	Mag rang	e, the clean	ing pads are easily
	67100 67102	402590111691 402590112006						
plexipad		When using be replaced	Mega M with ple magne	lag cleaners xipad . This it to protect	rotect acrylic on acrylic aquarium material is specially the acrylic panels f	selected	for cleaning	acrylic and is fixed
magnetscraper	67010	402590111689	2 magn	etscraper				
		from a simpl ved. The ma	per is a e magne gnetsc	an accessory et into a blad raper simply	for the Mega Mag g led cleaner. Now, eve y snaps onto the Me be removed if requir	en the mo ega Mag :	st resistant a	algae can be remo-
	67011	402590111690	8 magn	etscraper bla	i des , package 5 pcs.			
magnetscraper blades		Spare blades	for Me	ga Mag				

Item code

EAN-No.



66000

66001

429 429 429

filter bag

Gravel Cleaner set

4014694660026 scraper 4025901113051 scraper blades 5 pcs. Aquarium glass cleaner scraper is a multiple use blade cleaner. The 150 mm wide blade makes it easy to remove even the most resistant calcareous algaes from the aquarium glass. Extended durability with stainless steel anti-corrosive coating - specially made sharp blade. The removable blade protector also acts as a squeegee for cleaning the outside of the aquarium glass. A unique feature of the scraper is the hinge which allows the blade head to be turned through 180°. This facility allows the user to clean the aquarium even when the tank decoration, such as rocks or roots, are very close to the glass.

Item

		2 pcs., minimum quantity 10 x 2
9.01	4025901115871	filter bag 1, 22 x 15 cm (c. 8.6" x 5.9")
9.02	4025901115888	filter bag 2, 22 x 30 cm (c. 8.6" x 11.8")
9.03	4025901115895	filter bag 3, 22 x 45 cm (c. 8.6" x 17.7")

Zip up media bag

Filter bags are designed to contain fine filter media, such as activated carbon, antiphos Fe or other granular media. The filter bag is fitted with a zip fastener for quick and easy replacement of the media.

39510 4025901116922 Gravel Cleaner set

This robustly constructed Gravel Cleaner set is fitted with an adjustable elbow so that it can even reach under rock formations or into caves. The Gravel Cleaner head can be removed and replaced with a cleaning brush for dealing with detritus on rockwork. In either case the detritus is flushed away by attaching a hose, which can then go to waste or to a canister filter for water return. The water flow is adjustable using the inbuilt tap. A feature of the unit are the hinges that can be turned through 45°, so the dirt can be removed even from the most inaccessible areas.

420.60 4025901106459 **Reef Construct**, 2 x 56 g (2 x c. 2 oz) sticks 420.61

4025901128642 Reef Construct, 1008 g, 18 x 56 g (18 x c. 2 oz) sticks

A two-component resin for safe and easy attachment of stones and corals in the aquarium. A two-part epoxy putty to secure rock and hard and soft corals in the aquarium. Reef Construct solves many of the problems encountered during the aqua-scaping of fresh- and saltwater aquariums. Reef Construct is a fast curing, two-part epoxy putty that can even be used underwater. It adheres to rock, wood, metal, glass, plastic, concrete and most other materials.

- 420.70 4025901130423 Coral Construct
- New

Under water glue

For safe and easy attachment of coral frags inside and outside the aquarium. Harden quickly in and outside of the water.

68000 4025901120653 defroster+

For defrosting of frozen food and enrichment with amino acids and vitamins. For marine and freshwater fish. The frozen food is thawed in the defroster box, protected from light and vitamin saving. With the defroster+ sieve, it is separated from the nitrate and phosphate enriched thawing water and can be enriched with essential vitamins and amino acids (aminovit). Incl. defroster+ Box with lid and sieve, 40 ml aminovit.

39520 4025901120738 Coral strap (5 pcs.)

> Secure strap for soft corals and live rock Extra wide strap with rounded and thickened edges that do not cut into the tissue of the corals. For vegetative propagation of the soft corals. Saltwater resistant and PVC-free. Re-usable! Length app. 31 cm

68010 4025901124934 Shot Extension 68011

4025901126464 Shot Injector (10 pcs.)

Syringe with extension to eradicate aiptasia and glass anemones or other nuisance organisms simply in saltwater aquaria.

4025901117486 Coral holder 230.03

> The Aqua Medic Coral holder is the solution to present invertebrates and clams in shop systems. The holder has a flexible system, adjustable on the dimensions of the animals. With a water-resistant marker, the holder can be signed with name of the species and price.



defroster ·



Item code EAN-No.

Filter accessories

416.00 4025901100983 PVC-quadratic pipe 15 x 15 cm transp./price per metre

> This pipe can be used for the construction of filter components, including trickle filters, denitrifying reactors, calciumreactors, etc.

Item





Overflow comb with holder

(to of)

Adapter union AM

1116

415.00 4025901100945 Trickle plate 15 x 15 cm

> Trickle plate, 15 x 15 cm (c. 6" x 6"). Can be mounted on the rectangular pipe, to evenly distribute the water.

- 415.10 4025901100952 Trickle plate 30 x 30 cm
- 415.20 4025901100969 Lid for trickle plate 15 x 15 cm

Top lid for trickle plate, 15 x 15 cm (c. 6" x 6"). With a connection for 20 mm Ø pipe.

415.25 4025901100976 Bottom plate 15 x 15 cm

Base for rectangular pipe, 15×15 cm (c. 6" \times 6"). Can be glued to the bottom of the rectangular pipe.

415.30 4025901101881 Grid for quadratic pipe $15 \times 15 \text{ cm}$

> Grate 15 x 15 cm (c. 6" x 6"). Grate for rectangular pipe, useful for holding filter material in place.

418.00 4025901108767 Overflow comb with holder 32 cm

> Overflow comb, for the construction of aquarium overflows. The water flows evenly and fish, plant matter and coarse detritus are prevented from entering the overflow chamber. The holder is glued on the overflow chamber and the overflow comb is pressed securely into the holder, whilst leaving it easy to remove for cleaning and maintenance. Length: app. 32 cm, (c. 12.8")

```
415.31
         4025901102864 Round grate 40 mm black
415.41
         4025901113792 Round grate 40 mm transparent
415.32
         4025901102987 Round grate 50 mm black
415.42
         4025901113808 Round grate 50 mm transparent
415.33
         4025901100624 Round grate 63 mm black
415.43
         4025901113815 Round grate 63 mm transparent
```

Ideal for preventing larger detritus flowing through they are manufactured in three sizes. Ø 40 mm, 50 mm and 63 mm (c. 1.6", 2" and 2.5")

Tank union D 25	4025901119893	417.25
Tank union D 32	4025901119909	417.32
Tank union D 40	4025901119916	417.40

Tank union from ABS for the connection of aquariums to PVC hard pipes.

416.132 4025901125054 Adapter union AM 32 mm 4025901125061 Adapter union AM 40 mm 416.140

For pipe 32/40 mm and pipe 40/50 mm.

418.10 4025901120059 aqua divider 4 pcs.

> With aqua divider it is possible to mount a glass sheet into an aquarium or terrarium without using any glue. The groove is holding a 4 mm glass sheet. The fastening is done by the rubber suckers. With **aqua divider** you can separate animals inside of the aquarium.

		CATALO	GUE		
	Item code	EAN-No.	Item		
-	Filter a	accessories			
	418.20 418.25 418.32 418.40 418.50 418.63	4025901107180 Outlet si 4025901107197 Outlet si 4025901107203 Outlet si 4025901107210 Outlet si 4025901107227 Outlet si 4025901107234 Outlet si	trainer 25mm trainer 32mm trainer 40mm trainer 50mm trainer 63mm		
Outlet strainer			nanufactured out of ABS pipe able in the following diameter		
	410.41 410.40 410.42	4025901106510 Reducin 4025901101973 Reducin 4025901106527 Reducin	g T-piece 12/16 - 4/6		
Reducing T-piece		Reducing T-pieces and the Calciumreact	re used for the connection of or .	bypass filters like the ${f N}$	itratereductor
	410.44	4025901125320 Regulati	on valve FBS		
Regulation valve FBS		4/6 mm. Connection fit	n valve for hose inlet diameter tings can be changed. Durable ation valve can be used for a	e materials ensure low w	ear for constant
	410.47	4025901128635 Regulati	on valve 4/6 mm 2 pcs.		
Regulation valve 4/6	New	Flow control valve for f or water.	lexible tube with a diameter o	f 4/6 mm. The valve car	be used for air
🤞 🐢	410.43	4025901127911 Non-ret			
<u>Non-return valve</u>		Check valve for a tube In an attractive blister	of 6 mm. Suitable for gas and pack.	water.	
	410.46	4025901114003 needle v	alve		
needle vavie		fresh- and in the saltwa tely adjustable. The Aq with 4 mm inside diame	e valve is completely manufa iter without any problems. By i ua Medic needle valve is sup eter, the other one for 6 mm in reductors or Calciumreactors c	its set screw it is simply a plied with two connection side diameter. With the h	and very accura- ns, one for hose

4025901131932 Fish Box Base System

Item code

Fish Box

403.10

EAN-No.



Fish Box System



-			Following equipment is optional:
11	403.11	4025901131949	Panels with doors
	403.12	4025901131956	Filter saltwater
	403.13	4025901131963	Filter freshwater
8	403.14	4025901131970	Lighting LED 6K 20 W/pc.
4	403.15	4025901131987	Lighting LED 10 K 20 W/pc.
8	403.16	4025901131994	Lighting LED column 7 W 10K/pc.
4	403.01	4025901120332	UV-light 36 W
88			
		Professional ho	olding system for shrimps & invertebrates
			igh quality sales system in your aquatic
1		purposes.	3 1 7 7 1 1

The Fish Box Basic System contains:

- aluminium rack complete with plumbing
- 45 water outlets with valves
- 5 rows equipped with Fish boxes (Either 9 x small size Fish Boxes in each row, or 4 x medium size Fish Boxes in each row: please specify)

store, or in a laboratory for research

Overall dimensions: 130 x 50 x 215 cm

- In addition, following options can be added if required:
- aluminium side panels and aluminium sliding doors to cover the filter chamber

Item

- UV light 36 W, built-in
- Saltwater filter system with protein skimmer Turboflotor Blue 1000, sediment filter & return pump Ocean Runner 6500
- Freshwater filter system with sediment filter & return pump Ocean Runner 6500
- Lighting options can be added if required:
- Light system 20 W LED per row, app. 6000K

4025901117028 Fish Box small without handle PC

4025901118384 Fish Box middle without handle PC app. 24 x 16.5 x 17.5 cm

- Light system 20 W LED per row, app. 10000K
- Light system 7 W LED per row fresh- or saltwater

app. 12 x 16.5 x 17.5 cm





402.11

402.13

402.12

4025901117035 **Fish Box large** without handle handle PC app. 35 x 27 x 39 cm Plastic Tanks from Polycarbonate for fish transport & professional fish holding units Tanks do have inbuilt inlet and outlet ports and can easily be combined to form large holding systems. Every box can be removed from circulation. The Fish Box can also be used for transportation of single fishes. In laboratories it can be used for breeding and holding laboratory fish

such as zebra fish (Danio rerio). The boxes can be autoclaved at 120° C.

Fish Box large

52

				-														
<u> </u>					-+	 												
	-			+	\neg	-												
					-	-												
			T	T	T	T		T										
\vdash	-			+	+	-												
-																 		
L																		
-					-	-										 		
-					_											 		
			T	T	T	T		T										
-																		
				-														
1																		

-																
-																
-																
-															 	
-																

											 	1				
					 						 		 \vdash			
													$ \top$		T	
											 	1				
]				T]
													\vdash			
<u> </u>					 						 		 \vdash			
L			1									1				

<u> </u>																
<u> </u>																
-																
-																
-													 			
-							 						 			

											 	1				
					 						 		 \vdash			
													$ \top$		T	
											 	1				
]				T]
													\vdash			
<u> </u>					 						 		 \vdash			
L			1									1				

<u> </u>																
<u> </u>																
-																
-																
-													 			
-							 						 			



E-Mail: info@aqua-medic.de

Managing Director: Dipl.-Ing. Oliver Wehage Development Director: Dr. Manfred Schlüter

HRB 16246 AG Osnabrück Tax No.: 65/201/30005 VAT No.: DE117575590 WEEE-Reg.-Nr.: DE 88550220

AB Aqua Medic GmbH | Gewerbepark 24 | 49143 Bissendorf, Germany | Phone +49 5402 99110 | Fax +49 5402 991119

www.aqua-medic.de

Technical changes reserved