

## Standard Operation Procedure for Reporting AMC work

**TCODE –IE02 and goto equipment zone tab enter voltage level update all equipment voltage level so they can appear in BSR equipment selection screen.**

The screenshot displays the SAP TCODE IE02 interface for 'Change Equipment: Zone, Circle & D'. The main data area shows the following information:


Equipment	CT-0132-029-00228	Category	E	Electrical equipment
Description	CT-132KV-TELK-B-220615/23 Intern.n...			
Status	INST	INTC		
Valid From	02.05.2001	Valid To	31.12.9999	

The 'Zone, Circle & Division' tab is selected and highlighted with a red circle. Below the main data area, the 'User data' section contains several input fields:


- Specification 1
- Specification 2
- Specification 3
- Specification 4
- Specification 5
- Purchasing Doc.
- VOLTAGE TYPE** (highlighted with a red circle) set to **132**

The SAP logo and page number '110' are visible at the bottom of the screen.

## Step-1 Go to KPI AMC TCODE- ZPMBSR

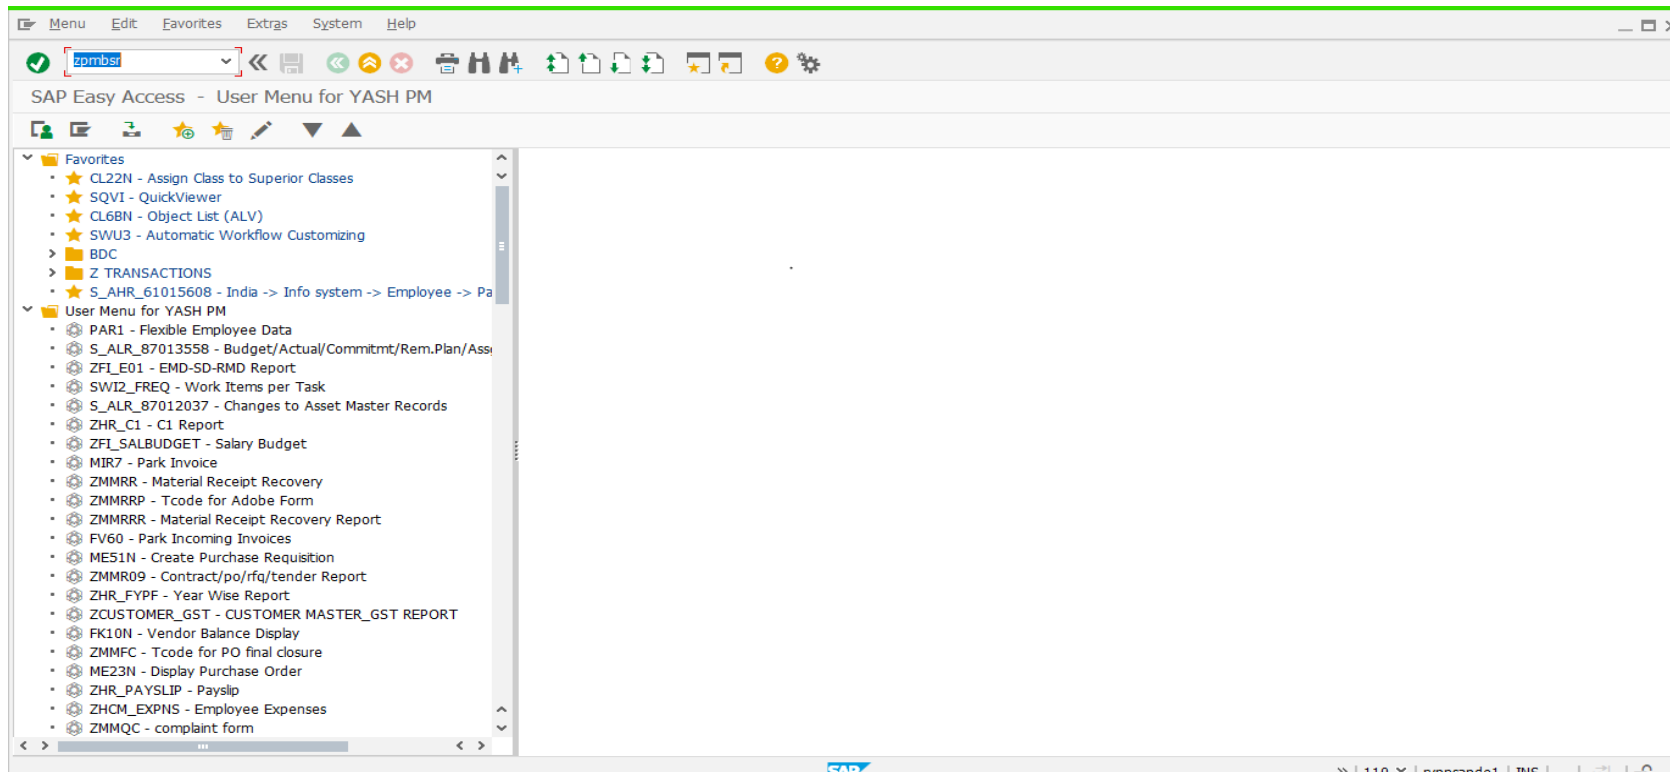

**Step-2 After executing screen open select 132 / 220 /400 KV GSS**

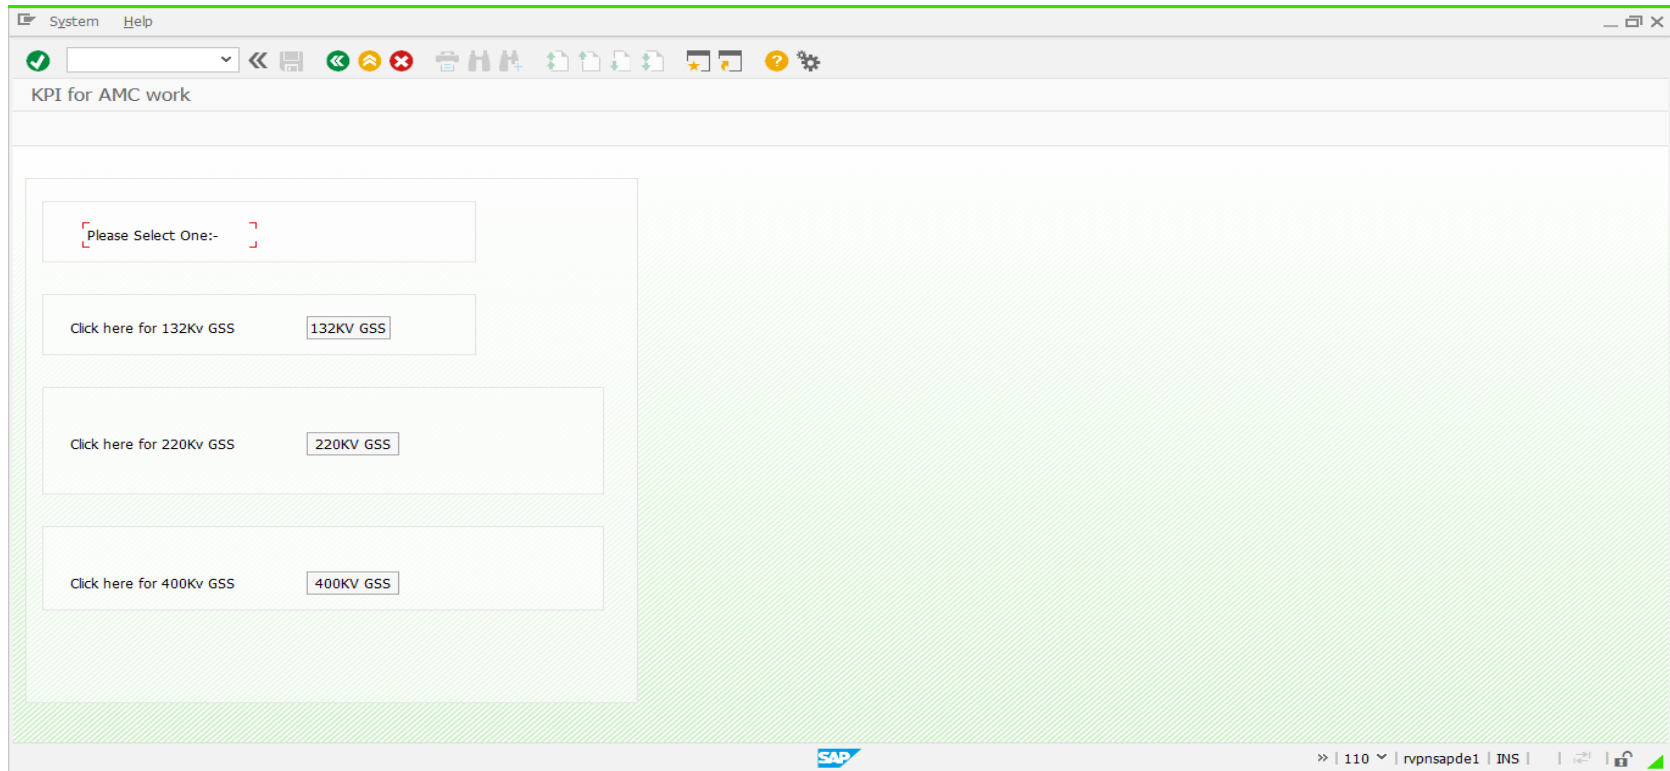


**Step-3 After selecting GSS screen open**

The screenshot shows a software application window with the following elements:

- Title Bar:** 'System Help' and window control icons (minimize, maximize, close).
- Toolbar:** A series of icons for navigation and actions, including a green checkmark, a dropdown arrow, and various arrow and document icons.
- Section Header:** 'KPI for AMC work'.
- Instructions:**
  - INSTRUCTIONS:**
  - 1. Please Press Enter after every selection .
  - PLEASE CHOOSE THE OPTIONS AS REQUIRED :
- Form Fields:**
  - PLANNER GROUP:** A text input field with a small icon to its right.
  - FREQUENCY:** A text input field.
  - VOLTAGE LEVEL:** A text input field.
  - BSR NO.:** A text input field.
  - YEAR:** A checkbox that is checked.
  - VEINDOR NO.:** A checkbox that is checked, followed by a greyed-out text input field.
  - ENTER TRANSACTION ID:** A text input field.
- Buttons:** Three buttons labeled 'CREATE', 'CHANGE', and 'DISPLAY' are positioned at the bottom of the form area.

**Step-4 Select Planner group & Frequency, Voltage, BSR number Year & Vendor remember always press enter tab after every selection & then go to Create tab**

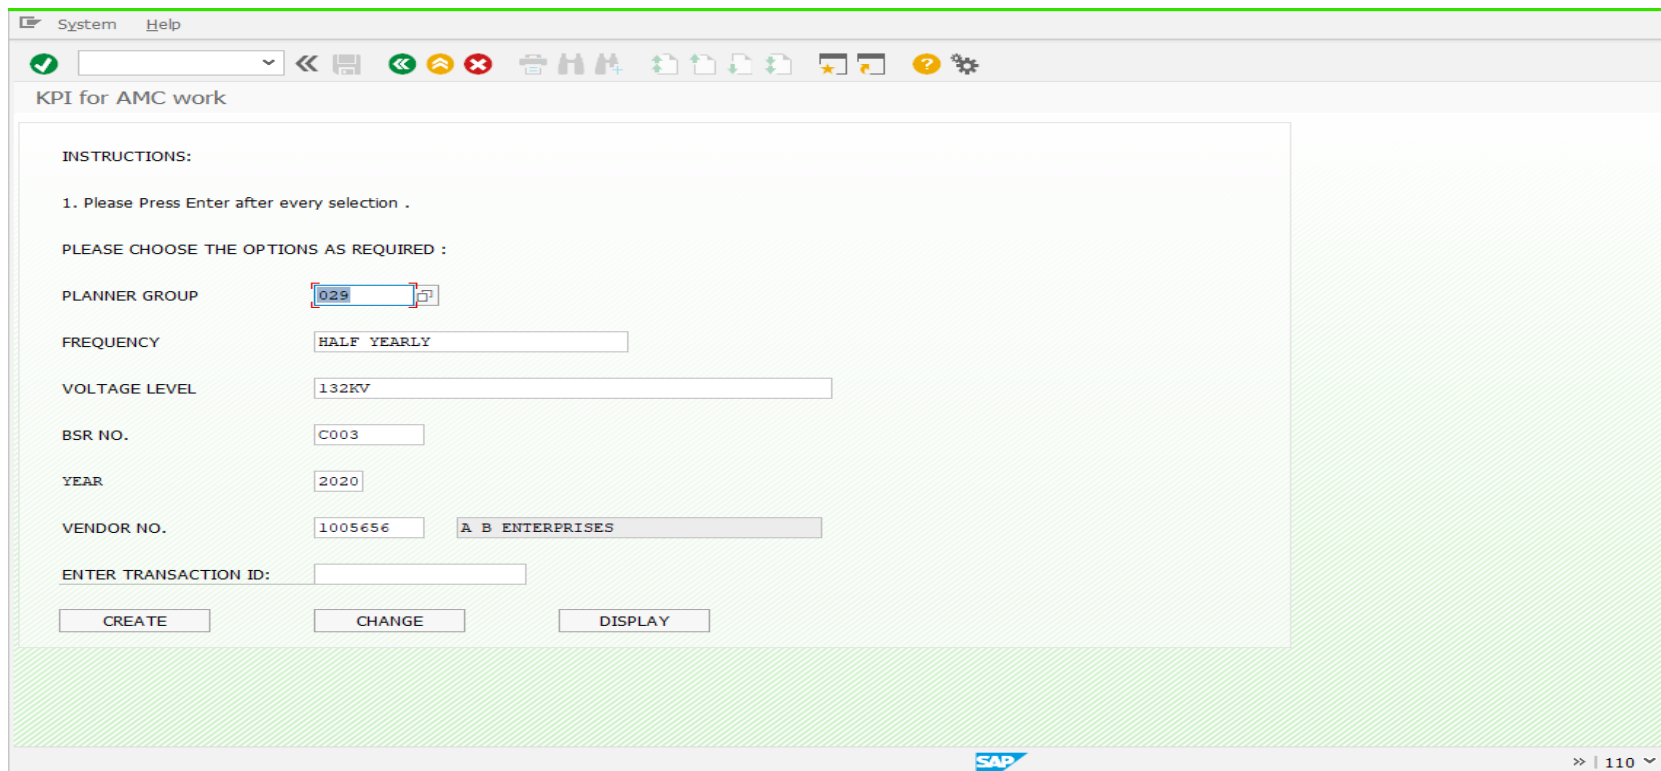

The screenshot shows the SAP 'KPI for AMC work' configuration screen. The window title is 'System Help'. The main content area contains the following fields and options:

- INSTRUCTIONS:**
  - 1. Please Press Enter after every selection .
- PLEASE CHOOSE THE OPTIONS AS REQUIRED :**
- PLANNER GROUP:** Input field containing '029'.
- FREQUENCY:** Input field containing 'HALF YEARLY'.
- VOLTAGE LEVEL:** Input field containing '132KV'.
- BSR NO.:** Input field containing 'C003'.
- YEAR:** Input field containing '2020'.
- VENDOR NO.:** Input field containing '1005656' and a dropdown menu showing 'A B ENTERPRISES'.
- ENTER TRANSACTION ID:** Input field.

At the bottom of the form, there are three buttons: 'CREATE', 'CHANGE', and 'DISPLAY'. The SAP logo and page number '110' are visible in the bottom right corner.

**Step-5 Following screen open Fill information like Functional location, Equipment, Date of Maintenance, work status, Observation, Measurement result  
select work status –YES/NO after filling required detail click submit**


The screenshot displays the SAP 'KPI for AMC work' screen. At the top, there is a menu bar with 'System' and 'Help'. Below it is a toolbar with various icons. The main area contains several input fields: 'PLANNER GROUP' with value '524', 'BSR DESCRIPTION' with value 'PM of 400 kV Class CT', 'ZONE' with value 'C.E. (T&C-AJMER)', 'CIRCLE' with value 'Bhilwara', 'Total No. of Objects' with value '1', 'BSR ITEM NO.' with value 'A004', 'FREQUENCY' with value 'HALF YEARLY', and 'UOM' with value 'NUMBER'. Below these fields is a table with the following data:

FUNCTION LOCATION	FUNCTION LOCATION DESCRIPTION	EQUIPMENT	EQUIPMENT DESCRIPTION	DATE OF MAINTENANCE	WORK STATUS
		CT-0400-524-00271	CT-400KV-500-1000-2000/1R, 5C-CGIL-44939S	19.12.2020	YES

Below the table are several icons for actions like insert, delete, and refresh. At the bottom left, there is a 'SUBMIT' button. Below the button, there are 'Instructions:' which include: '1. After opening the current screen you have to press the insert row button first.' The SAP logo is visible at the bottom center, and the status bar at the bottom right shows '110 | rvpsapde1 | INS |'.

**Step-6 A transaction ID will generate For the purpose of Change/Display, We can open it with Transaction ID**

**in T-Code "ZPMBSR"**

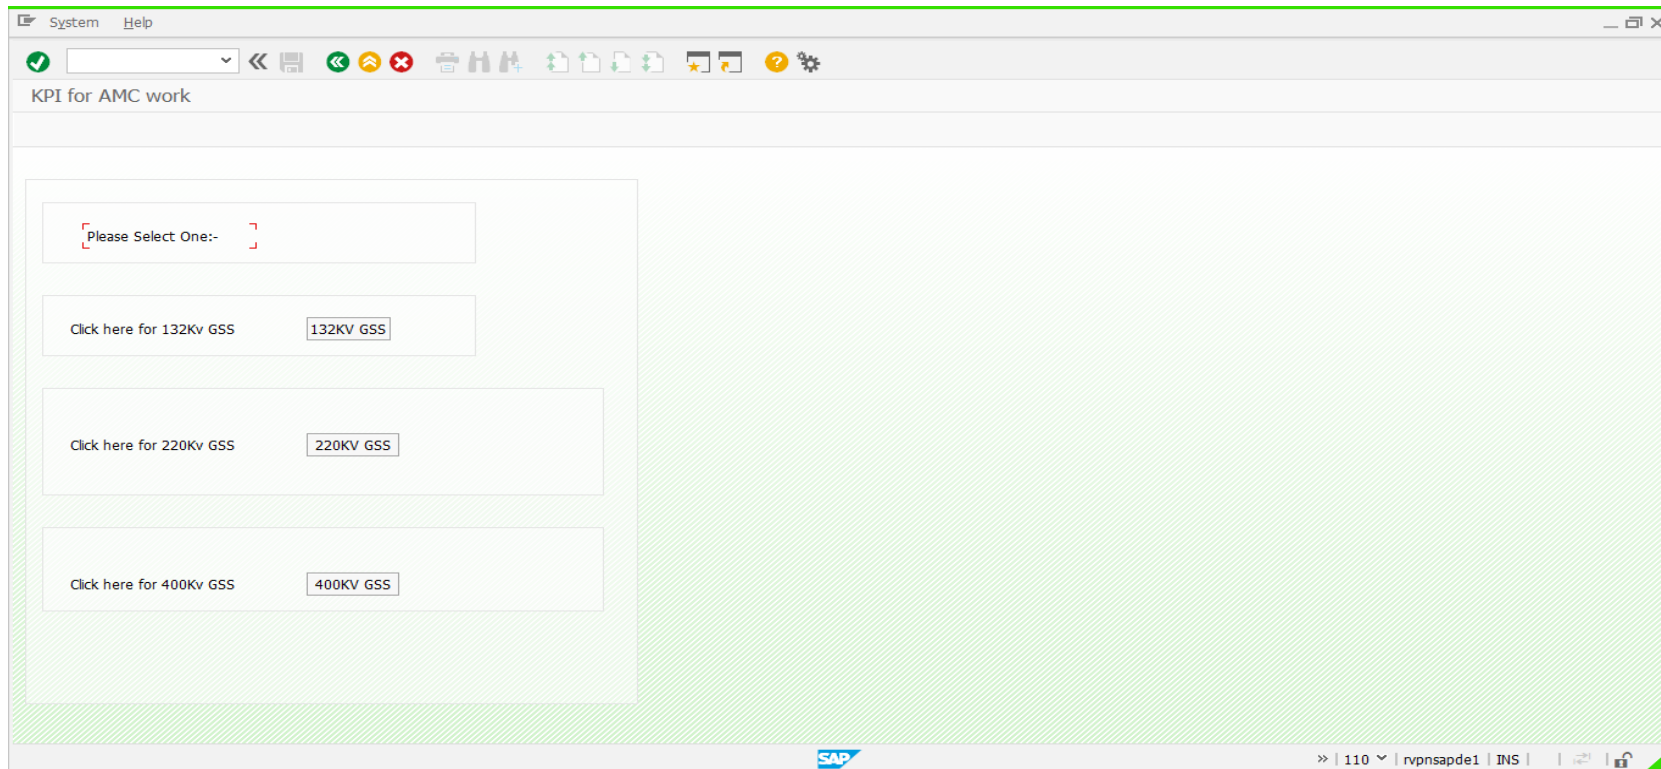

**Step-7 For having Print of list of BSR Item, Put type of GSS in**

**ZPMFBSR T-Code and go to “Display” Tab and press “Print Icon”(Use Output Device as “LP01”).For print in PDF press Tcode-PDF!**





Program Edit Goto System Help

ALV REPORT FOR BSR

TYPE OF GSS(132,220 OR 400) 132

BSR NO .		to		
FREQUENCY		to		
PERIOD		to		
PLANNER GROUP		to		

SAP >> | 110 | rvpnsapde1 | INS |

Text Edit Goto Extrgs System Help

Print Preview of PDF Page 00042 of 00045

Archive Print and Archive

**ANNEXURE-C**

**FORMAT OF DELIVERABLES FOR PAYMENT AGAINST BSR ITEM BY CONTRACTOR/SERVICE PROVIDER.**

**REPORT OF PAYMENT OF VARIOUS MAIN. WORK AS PER BSR**

**REPORTING PERIOD : 12.01.2021**

The inspection/ observation, action taken/testing report for the various maintenance activities/ works as carried out by the service provider/ contractor for the above reporting period are as under:

Trans ID	BSR Item no	BSR Description	Frequency	UOM	Vendor Description	Fiscal Year	Line item	Function Location	Equipment	Date of maintenance	Work Status(yes/no)	Shutdown Required(yes/no)
0000000057		Arrestor	YEARLY		ENTERPRISES							
0000000000 0000000057	C006	PM of 132 kV Class Surge Arrestor	HALF YEARLY	Number	JBS ENTERPRISES	2020	0000000013	2200-7402-0132-BAY06	LA-0132-402-00262	22.09.2020	YES	YES
0000000000 0000000057	C006	PM of 132 kV Class Surge Arrestor	HALF YEARLY	Number	JBS ENTERPRISES	2020	0000000014	2200-7402-0132-BAY06	LA-0132-402-263	22.09.2020	YES	YES
0000000000 0000000057	C006	PM of 132 kV Class Surge Arrestor	HALF YEARLY	Number	JBS ENTERPRISES	2020	0000000015	2200-7402-0132-BAY06	LA-0132-402-264	22.09.2020	YES	YES

SAP >> | 110 | rvpnsapde1 | INS |

Text Edit Goto Extras System Help

pdf

Print Preview of PDF Page 00043 of 00045

Archive Print and Archive

**ANNEXURE-C**

**FORMAT OF DELIVERABLES FOR PAYMENT AGAINST BSR ITEM BY CONTRACTOR/SERVICE PROVIDER.**

**REPORT OF PAYMENT OF VARIOUS MAIN. WORK AS PER BSR**

**REPORTING PERIOD : 12.01.2021**

The inspection/ observation, action taken/testing report for the various maintenance activities/ works as carried out by the service provider/ contractor for the above reporting period are as under:

GSS:220kv MIA (Alwar)

Trans ID	BSR Item no	BSR Description	Frequency	UOM	Vendor Description	Fiscal Year	Line item	Function Location	Equipment	Date of maintenance	Work Status(yes/no)	Shutdown Required(yes/no)
0000000000 0000000058	C008	PM of 3- Phase 132 kV Isolator with or without Earth Switch	HALF YEARLY	Number	A B ENTERPRISES	2020	0000000001	1200-7174-0033-BAY11		29.07.2020	NO	
0000000000 0000000058	C008	PM of 3- Phase 132 kV Isolator with or without Earth Switch	HALF YEARLY	Number	A B ENTERPRISES	2020	0000000002	1200-7174-0033-BAY11		29.07.2020	YES	YES

SAP >> | 110 | rvpsapde1 | INS

Text Edit Goto Extrgs System Help

Print Preview of PDF

Archive Print a

**ANNEXURE-C**  
**FORMAT OF DELIVERABLES FOR PAYMENT AGAINST BSR ITEM BY CONTRACTOR/SERVICE PROVIDER.**  
**REPORT OF PAYMENT OF VARIOUS MAINT. WORK AS PER BSR**  
**REPORTING PERIOD - 12.01.2021**

The Inspection/ observation, action taken/testing report for the various maintenance activities/ works as carried out by the service provider/ contractor for the above reporting period are as under:

GSS:132kv Sitapura

Trans ID	BSR Item no	BSR Description	Frequency	CON	Vendor Description	Recd Year	Line Item	Function Location	Equipment	Date of maintenance	Work Status(yes/no)	Shutdowns Required(yes/no)
0000000000	C008	PM of 3-Phase 132 kV Class Power Transformer (all ratings)	HALF YEARLY	Number	BSR ENTERPRISE	2020	0000000001	2206-7402-01132-0A-Y10	TSP-01132-402-400013	13.09.2020	YES	YES
0000000000	C008	PM of 3-Phase 132 kV Class Power Transformer (all ratings)	HALF YEARLY	Number	BSR ENTERPRISE	2020	0000000002	2206-7402-01132-0A-Y06	TSP-01132-402-400048	22.09.2020	YES	YES
0000000000	C008	PM of 3-Phase 132 kV Class Power Transformer (all ratings)	HALF YEARLY	Number	BSR ENTERPRISE	2020	0000000003	2206-7402-01132-0A-Y04	TSP-01132-402-400041	30.08.2020	YES	YES

GSS:220kv MIA (A)

Trans ID	BSR Item no	BSR Description
0000000000	C008	PM of 3-Phase Isolator w/ Earth Sw
0000000000	C008	PM of 3-Phase Isolator w/ Earth Sw

SERVICE PROVIDER/CONTRACTOR REPRESENTATIVE

The above items with quantity are verified for the payment to service provider/contractor as all the actions as required by the BSR item technical requirements have been fulfilled.

XEN/AEN (400/220/132 KV GSS) RUPN..... (Official Seal with signature)	AEN/JEN (400/220/132 KV GSS) RUPN..... (Official Seal with signature)
---	---

11.69 x 8.26 in

**SERVICE PROVIDER.**

Carried out by

Trans ID	Work Status(yes/no)	Shutdowns Required(yes/no)
00	N O	
00	YES	YES

» | 110 | rvpnsapde1 | INS |

**Step 8. For Report Run T-Code "ZPMRBSR"**

The screenshot displays the SAP Easy Access user menu for 'YASH PM'. The search bar at the top contains 'zpmRbsr'. The left-hand navigation pane shows a tree structure with the following items:

- ★ CL22N - Assign Class to Superior Classes
- ★ SQVI - QuickViewer
- ★ CL68N - Object List (ALV)
- ★ SWU3 - Automatic Workflow Customizing
- BDC
- Z TRANSACTIONS
  - ★ S\_AHR\_61015608 - India -> Info system -> Employee -> P...
- User Menu for YASH PM
  - ME21N - Create Purchase Order
  - PAR1 - Flexible Employee Data
  - S\_ALR\_87013558 - Budget/Actual/Commitmt/Rem.Plan/Ass
  - ZFI\_E01 - EMD-SD-RMD Report
  - SWI2\_FREQ - Work Items per Task
  - S\_ALR\_87012037 - Changes to Asset Master Records
  - ZHR\_C1 - C1 Report
  - ZFI\_SALBUDGET - Salary Budget
  - MIR7 - Park Invoice
  - ZMMRR - Material Receipt Recovery
  - ZMMRRP - Tcode for Adobe Form
  - ZMMRRR - Material Receipt Recovery Report
  - FV60 - Park Incoming Invoices
  - ME51N - Create Purchase Requisition
  - ZMMR09 - Contract/po/rfq/tender Report
  - ZHR\_FYFP - Year Wise Report
  - ZCUSTOMER\_GST - CUSTOMER MASTER\_GST REPORT
  - FK10N - Vendor Balance Display
  - ZMMFC - Tcode for PO final closure
  - ME23N - Display Purchase Order
  - ZHR\_PAYSLIP - Payslip

The right-hand pane is dominated by a large, semi-transparent watermark of the Rajasthan Transco logo, which features a stylized power transmission tower and the text 'RAJASTHAN TRANSCO'.

At the bottom of the window, the SAP logo is visible on the left, and the status bar on the right shows '110 | rvpsapde1 | INS |' along with system icons.

Program Edit Goto System Help

ALV REPORT FOR BSR

TYPE OF GSS(132,220 OR 400)

BSR NO .	<input type="text"/>	to	<input type="text"/>	<input type="button" value="↗"/>
FREQUENCY	<input type="text"/>	to	<input type="text"/>	<input type="button" value="↗"/>
PERIOD	<input type="text"/>	to	<input type="text"/>	<input type="button" value="↗"/>
PLANNER GROUP	<input type="text"/>	to	<input type="text"/>	<input type="button" value="↗"/>

SAP >> | 110 | rvpnsapde1 | INS |

ALV REPORT FOR BSR

TRANS.	ZONE	CIRCLE	PLANNER GROUP	BSR ITEM NO	BSR DESCRIPTION	FREQUENCY	UOM	VOLTAGE LEVEL	VENDOR NO	VENDOR DESCRIPTION	FISCAL YEAR	FUNCTION LOCATION
34	C.E.(T&C-JAIPUR)	Jaipur Ci...	132kv Sitapura	C001	PM of 3-Phase 132 kV Class Power T...	HALF YEARLY	Number	132	1003100	JBS ENTERPRISES	2020	2200-7402-0132-BAY02 2200-7402-0132-BAY06 2200-7402-0132-BAY04
35	C.E.(T&C-JAIPUR)	Jaipur Ci...	132kv Puranaghat	C003	PM of 132 kV Class CT	HALF YEARLY	Number	132 KV	1003100	JBS ENTERPRISES	2020	2200-7048-0132-BAY03
36	C.E.(T&C-JAIPUR)	Jaipur Ci...	132kv Puranaghat	C001	PM of 3-Phase 132 kV Class Power T...	QUARTERLY	Number	132 KV	1003100	JBS ENTERPRISES	2020	2200-7048-0132-BAY06
37	C.E.(T&C-JAIPUR)	Jaipur Ci...	132kv Puranaghat	C003	PM of 132 kV Class CT	QUARTERLY	Number	132 KV	1003100	JBS ENTERPRISES	2020	2200-7048-0132-BAY09 2200-7048-0132-BAY01 2200-7048-0132-BAY01 2200-7048-0132-BAY09 2200-7048-0132-BAY09 2200-7048-0132-BAY06 2200-7048-0132-BAY06 2200-7048-0132-BAY06
38	C.E.(T&C-JAIPUR)	Jaipur Ci...	132kv Puranaghat	C003	PM of 132 kV Class CT	QUARTERLY	Number	132 KV	1003100	JBS ENTERPRISES	2020	2200-7048-0132-BAY09 2200-7048-0132-BAY01 2200-7048-0132-BAY01 2200-7048-0132-BAY01 2200-7048-0132-BAY09 2200-7048-0132-BAY09 2200-7048-0132-BAY06 2200-7048-0132-BAY06 2200-7048-0132-BAY06

SAP | 110 | rvnpsapde1 | INS