

# AEG

POWERTOOLS

POWERING PROFESSIONALS SINCE 1898

## CATALOGUE 2010/11

[www.aeg-powertools.com](http://www.aeg-powertools.com)





# AEG POWERTOOLS POWERING PROFESSIONALS SINCE 1898

AEG POWERTOOLS promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.



## AEG HISTORY

Since being founded, AEG POWERTOOLS has been leading the way in new product development. By introducing the first transportable drilling machines in 1898, portable powertools were born. Over 100 years later AEG are still offering the professional user innovative, powerful solutions...

**PROUD PAST... EXCITING FUTURE...**

# FEATURES KEY



**FIX-TEC system**  
For changing accessories in seconds.



**Keyless Safety Guard**  
Safety guard adjustment without the use of a tool.



**Impact Driver**  
For heavy duty screwdriving applications.



**AVS Anti-Vibration-System**  
Significantly reduces vibration by up to 50%.



**Soft Hammer Mode**  
Reduces blow energy for increased control.



**HEX 1/4"**  
1/4" quick release hex fitment.



**Safety Clutch**  
Protects user and machine if a drill bit should jam.



**2-Speed Gear**  
2-speed gearbox, for optimum speed to suit application.



**Pendulum Action**  
For a faster, more aggressive cut.



**Dust Extraction**  
Integrated dust extraction for a clean working environment.



**Drill Only**  
Single mode - rotary drilling.



**Kitbox**  
Heavy duty kitbox.



**Electronics**  
With variable speed pre-selection, softstart, constant speed and overload protection.



**Drill And Hammer Drill**  
2 mode - rotary and rotary hammer drilling.



**Kitbag**  
Heavy duty kitbag.



**L.E.D.**  
For workplace illumination.



**Chisel And Hammer Drill**  
2 mode - rotary hammer drill with chipping/demolition function.



**Crosscut Capacity**  
Maximum crosscut capacity of saw.



**Metal Chuck**  
For enhanced durability.



**Combi Hammer**  
3 mode - rotary and rotary hammer drilling with chiselling/demolition function.



**Mitre Saw Blade Laser**  
Projects the cut line onto material.



**Rotatable Handle**  
Provides optimum comfort during grinding and cutting.



**Chisel Drill**  
Chiseling/demolition machine.



**Mitre Capacity**  
Maximum mitre angle right and left.



**Diamond System**  
designed for maximum performance when used with diamond accessories.



**Hook and Loop**  
Easy sandpaper attachment without the clamps.



**Bevel Capacity**  
Maximum bevel angle right and left.

# AEG

# POWERTOOLS

## CATALOGUE CONTENTS



<b>CORDLESS SYSTEMS</b>	<b>06 – 25</b>
18 V POWER	08 – 15
14.4 V POWER	16 – 17
12 V POWER	18 – 22
FLASHLIGHTS & BATTERY LAMPS	23 – 23
BATTERIES & CHARGERS	24 – 25
<b>HAMMER SYSTEMS</b>	<b>26 – 31</b>
ROTARY HAMMERS	28 – 28
COMBI HAMMERS	29 – 30
HAMMER VIBRATION RATING	31 – 31
<b>DRILLING SYSTEMS</b>	<b>32 – 35</b>
PERCUSSION DRILLS	34 – 34
<b>METALWORKING</b>	<b>36 – 39</b>
SMALL ANGLE GRINDERS	38 – 38
METAL CHOPSAW	39 – 39
<b>WOODWORKING</b>	<b>40 – 53</b>
ROUTERS	42 – 43
PLANER	43 – 43
JIGSAWS	44 – 45
MULTI CONSTRUCTION MATERIAL SAW	46 – 46
CIRCULAR SAWS	47 – 47
MITRE SAW & MITRE SAW LEGSTAND	48 – 48
RECIPROCATING SAWS	49 – 49
RANDOM ORBIT SANDERS	50 – 51
PALM SANDER	51 – 51
BELT SANDER	52 – 52
DUST EXTRACTION	53 – 53
<b>ACCESSORIES</b>	<b>54 – 57</b>





# TOTAL CORDLESS POWER

## THE CORDLESS SYSTEM

AEG POWERTOOLS offer today's professional user a wide range of innovative, powerful cordless solutions that are capable of performing in the toughest conditions.

### RANGE INCLUDES

18 V POWER

14.4 V POWER

12 V POWER

BATTERIES & CHARGERS

## 18 V RANGE

The comprehensive 18 V Range from AEG POWERTOOLS offers innovative, powerful solutions for today's professional user.

**NEW**

BSB 18 G Li



BS 18 G Li



## COMPACT 18 V



BMS 18C Li



BS 18C Li



BSS 18C Li

## HEAVY DUTY 18 V



BSB 18 Li

BKS 18 Li



BHO 18 Li



BUS 18 Li



BST 18X Li

## BATTERY SYSTEMS

**LITHIUM ION**  
**18V POWER**

- Overload protection
- Superior power to weight ratio
- No memory effect
- Minimal self discharge
- Extended battery life – more charge cycles
- 18 V NiCd version also available



## 18 V PREMIUM HAMMERDRILL/DRIVER

**POWER & PERFORMANCE**

Model: BSB 18 Li

### ROBUST CHUCK

13 mm Rohm full metal chuck maintains superior grip in the toughest of applications.

### CLUTCH

24 Stage torque adjustment for complete control.

### SELECTOR SWITCH

3 Mode selector switch for fast, easy mode changes between applications.

### SIDE HANDLE

Innovative positioning of side handle eliminates the need for a collar thus reducing overall tool length.

### RUBBER GRIP

Ergonomic soft-grip for added comfort.

### LED

Well positioned LED illuminates workplace without obstruction

Standard Equipment – 2 x batteries, charger, side handle and kitbox




ALSO AVAILABLE:  
NiCd Version

### Features

- Compact & powerful for high torque applications
- 64 Nm maximum torque delivers complete power
- 2-speeds – 0–450/0–1600 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock
- LED – for work place illumination
- 3 mode selector – ease of use between applications
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

### Specification

No. of batteries – 2 x 3 Ah  
 Charger – 30 min\*  
 Weight – 2.6 kg  
 Drilling wood/metal/masonry – 38/13/16 mm  
 Chuck – 1.5–13 mm  
 Max torque – 64 Nm  
 No load speed – 0–450/0–1600 rpm  
 Voltage – 18 V



Cat No. BSB 18 Li Article No. 4935 4100 95 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196715  
 Cat No. BSB 18 NiCd Article No. 4935 4101 00 Version. 2 x 2 Ah NiCd batteries, 60 min\* charger EAN No. 4002395410100

## 18 V HAMMERDRILL/DRIVER

Model: BSB 18 G Li



**NEW**

Standard Equipment – 2 x batteries, charger and kitbox

ALSO AVAILABLE:  
NiCd Version

### Features

- Compact & powerful for completion of all jobsite applications
- 47 Nm maximum torque delivers complete power
- 2 speeds – 0–400/0–1500 rpm
- 24 stage torque adjustment for complete control
- Fixtec 13 mm single sleeve chuck with full metal jaws
- 3 mode selector – ease of use between functions
- Powerful fade free lithium-ion 18 V power pack
- Overload protection\*\*

### Specification

No. of batteries – 2 x 1.5 Ah  
 Charger – 30 min\*  
 Weight – 1.9 kg  
 Drilling wood/metal/masonry – 34/13/12 mm  
 Chuck – 1.5–13 mm  
 Max torque – 47 Nm  
 No load speed – 0–400/0–1500 rpm  
 Voltage – 18 V



Cat No. BSB 18 G Li-152C Article No. 4935 4107 92 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395130436  
 Cat No. BSB 18 C NC-172C Article No. 4935 4108 49 Version. 2 x 1.7 Ah NiCd batteries, 60 min\* charger EAN No. 4002395130092

\* Charge times based on 2 Ah NiCd Battery \*\* Lithium-ion products only

## 18 V ULTRA COMPACT DRILL/DRIVER

COMPACT  
POWER

Model: BS 18C Li

ALSO AVAILABLE: 3 Ah Li-ion version &amp; zero version

## Features

- Small, compact & powerful for high torque applications
- 52 Nm maximum torque delivers complete power
- 2-speeds – 0–450/0–1650 rpm
- Integrated clutch and chuck for a more compact design
- LED for work place illumination
- Forward and reverse
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

## Specification

No. of batteries	2 x 1.5 Ah
Charger	30 min*
Weight	2.0 kg
Drilling metal/wood	13/36 mm
Chuck	1.5–13 mm
Max torque	52 Nm
No load speed	0–450/0–1650 rpm
Voltage	18 V



Standard Equipment – 1 screwdriver bit, 2 x batteries, charger and kitbox



NEW

Cat No. BS 18C Li Article No. 4935 4108 01 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395130153  
 Cat No. BS 18C Li Article No. 4935 4101 10 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196784  
 Cat No. BS 18C 0 Article No. 4935 4113 40 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395196814



\* Charge times based on 2 Ah NiCd Battery \*\* Lithium-ion products only

## 18 V TRADESMAN DRILL/DRIVER

Model: BS 18 G Li

## Features

- Compact & powerful for completion of all jobsite applications
- 47 Nm maximum torque delivers complete power
- 2-speeds – 0–400/0–1500 rpm
- 24 stage torque adjustment for complete control
- Fixtec 13 mm single sleeve chuck with full metal jaws
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

## Specification

No. of batteries – 2 x 1.5 Ah

Charger – 30 min\*

Weight – 1.8 kg

Drilling metal/wood – 13/34 mm

Chuck – 1.5–13 mm

Max torque – 47 Nm

No load speed – 0–400/0–1500 rpm

Voltage – 18 V

Standard Equipment – 2 x batteries, charger and kitbox

ALSO AVAILABLE: NiCd version



Cat No. BS 18 G Li-152C Article No. 4935 4108 01 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395130153  
 Cat No. BS 18 G NC-172C Article No. 4935 4108 04 Version. 2 x 1.7 Ah NiCd batteries, 60 min\* charger EAN No. 4002395130177

## 18 V ULTRA COMPACT IMPACT DRIVER

ULTRA  
COMPACT

Model: BSS 18C Li

## Features

- Ultra compact, well balanced impact driver
- Superior ergonomics
- 155 Nm maximum torque
- Delivers up to 3100 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- 1/4" Hex bit reception
- Built in LED illuminates work surface
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

## Specification

No. of batteries – 2 x 1.5 Ah

Charger – 30 min\*

Weight – 1.6 kg

Max torque – 155 Nm

No load speed – 0–2400 rpm

Impact rate – 0–3100 ipm

Tool reception – 1/4" Hex

Voltage – 18 V

Standard Equipment – 1 screwdriver bit, 2 x batteries, charger and kitbox

ALSO AVAILABLE: 3 Ah Li-ion version, NiCd version &amp; zero version



Cat No. BSS 18C Li Article No. 4935 4101 20 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196838  
 Cat No. BSS 18C Li Article No. 4935 4103 05 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395131617  
 Cat No. BSS 18C NiCd Article No. 4935 4103 10 Version. 2 x 2 Ah NiCd Batteries, 60 min\* charger EAN No. 4002395131624  
 Cat No. BSS 18C0 Article No. 4935 4116 60 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395310955

# 18 V ULTRA COMPACT RECIPROCATING SAW

**COMPACT INNOVATION**

Model: BMS 18C Li

ALSO AVAILABLE:  
Zero version

**FIXTEC SYSTEM**

For fast easy blade changes.

**ULTRA COMPACT**

For one handed use.

**SLIM PROFILE**

Allows cutting in tight spaces.

**LARGE TRIGGER**

2 finger trigger for easy operation.

**AEG lithium-Ion**

Lightweight battery system.



## Features

- Innovative design for confined spaces
- Operational with one hand due to compact design
- 3500 strokes per minute and 12.7 mm stroke length for fast cutting applications
- FIXTEC for fast and easy keyless blade change
- Built-in LED
- 2 Finger variable speed trigger
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

## Specification

No. of batteries - 1 x 3.0 Ah  
 Charger - 30 min\*  
 Weight - 2.2 kg  
 Stroke length - 12.7 mm  
 Strokes per minute - 0-3500 rpm  
 Voltage - 18 V



Standard Equipment - 1 x blades, 1 x battery, charger and kitbox



Cat No. BMS 18C Li Article No. 4935 4101 50 Version. 1 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196968  
 Cat No. BMS 18C 0 Article No. 4935 4114 30 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395196975



\* Charge times based on 2 Ah NiCd Battery \*\* Lithium-ion products only

## 18 V PENDULUM ACTION RECIPROCATING SAW

**POWER & PERFORMANCE**

Model: BUS 18 Li

### Features

- Pendulum action for increased performance
- 3300 strokes per minute and 19 mm stroke length for fast cutting applications
- FIXTEC for fast and easy keyless blade change
- Adjustable shoe
- Saw blade can be turned 180° for various applications
- Variable speed trigger
- Soft-grip
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

ALSO AVAILABLE: Zero Version



### Specification

No. of batteries – 2 x 3 Ah  
 Charger – 30 min\*  
 Weight – 3.5 kg  
 Stroke length – 19 mm  
 Strokes per minute – 0–3300 rpm  
 Voltage – 18 V

Standard Equipment – 2 x blades, 2 x battery, charger and kitbox



Cat No. BUS 18 Li Article No. 4935 4101 40 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196920  
 Cat No. BUS 18 0 Article No. 4935 4114 60 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197019

## 18 V HEAVY DUTY CIRCULAR SAW

**POWER & PERFORMANCE**

Model: BKS 18 Li

### Features

- Compact, light and well balanced
- Magnesium die cast base for durability
- 165 mm blade on the right hand side for excellent visibility of cutting line
- Large 50° bevel capacity
- Dust chute can be rotated for best dust ejection
- Lock off switch for safety
- Spindle lock for fast blade changing
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

ALSO AVAILABLE: Zero Version



### Specification

No. of batteries – 2 x 3 Ah  
 Charger – 30 min\*  
 Weight – 3.6 kg  
 Saw blade Ø – 165 mm  
 Arbor – 15.87 mm (5/8")  
 Bevel capacity – 50°  
 No load speed – 4400 rpm  
 Cutting depth at 45° – 0–41 mm  
 Cutting depth at 90° – 0–54 mm  
 Voltage – 18 V

Standard Equipment – 2 x batteries, charger, 165 mm TCT blade, side fence and kitbox



Cat No. BKS 18 Li Article No. 4935 4101 30 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196883  
 Cat No. BKS 18 0 Article No. 4935 4115 20 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197118

## 18 V HEAVY DUTY JIGSAW

Model: BST 18X Li

## Features

- Pendulum action for increased cutting performance
- Metal gearbox for extended durability
- Professional, die-cast aluminium base plate
- Patented FIXTEC system for fast keyless blade change
- Variable speed trigger
- Ergonomic soft-grip for comfortable use
- Electronic motor brake
- Powerful fade free lithium-ion 18 volt power pack
- Overload protection\*\*

## Specification

No. of batteries – 2 x 3 Ah  
 Charger – 30 min\*  
 Weight – 3.5 kg  
 Stroke – 26 mm

No load stroke rate – 0–2050 spm  
 Bevel cutting angle – to 45°  
 Cutting depth in soft wood – 80 mm  
 Voltage – 18 V

ALSO AVAILABLE: Zero Version



Standard Equipment – 2 x batteries, charger, plastic shoe cover, anti splintering device, 2 x blades and kitbox



Cat No. BST 18X Li Article No. 4935 4131 50 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395197507  
 Cat No. BST 18 0 Article No. 4935 4131 30 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395197460

## 18 V CORDLESS PLANER

Model: BHO 18/0

## Features

- Additional front handle with soft-grip for convenient two hand working
- Large dust bag for a dust free working area
- Adjustment switch for easy adjustment of cutting depth
- Front and rear shoe have a v-groove for easy chamfer cutting
- Automatic kickstand to protect surfaces from accidental planer contact
- Lock off switch for safety
- Ergonomic handle design with large soft-grip area for maximum comfort
- Die-cast base for high durability

## Specification

Width – 82 mm  
 Rebate depth – 0–12.5 mm  
 Cutting depth – 0–1.6 mm

Weight – 3.4 kg  
 No load speed – 12,000 rpm  
 Voltage – 18 V



Standard Equipment – side fence, dust extraction, parallel guide, spanner, 2 spare blades



Cat No. BHO 18 KIT Article No. 4935 4131 85 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger, kitbag EAN No. 4002395197576  
 Cat No. BHO 18 0 Article No. 4935 4131 75 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395197552

## CONTRACTOR PACK – 18 V 5 PIECE COMBO

Model: JP 18 A5

### Contains

- BSB 18 – Heavy duty hammerdrill/driver
- BSS 18 – Impact driver
- BUS 18 – Pendulum action reciprocating saw
- BKS 18 – Heavy duty circular saw
- FL 18 – Flashlight
- 2 powerful fade free 3 Ah lithium-ion 18 volt power packs\*\*
- Charger



Standard Equipment – 2 x 3 Ah Li-ion batteries, 30 min\* charger, contractor bag



Cat No. JP 18 A5 Li Article No. 4935 4101 55 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196999

## CONTRACTOR PACK – 18 V 4 PIECE COMBO

Model: JP 18 A4C

### Contains

- BS 18C – Compact drill/driver
- BSS 18C – Compact impact driver
- BMS 18C – Compact reciprocating saw
- BLL 18C – Flashlight
- 2 powerful fade free 1.5 Ah lithium-ion 18 volt power packs\*\*
- Charger



Standard Equipment – 2 x 1.5 Ah Li-ion batteries, 30 min\* charger, contractor bag



Cat No. JP 18 A4C Li Article No. 4935 4105 29 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395132485

## 14.4 V HAMMERDRILL/DRIVER

Model: BSB 14 STX NiCd

## Features

- Hammerdrill mode for drilling masonry and stone
- 63 Nm maximum torque delivers complete power
- 22-stage torque adjustment
- Electronic switch with variable speed
- 2-speed gearbox
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock

## Specification

No. of batteries – 2 x 2 Ah

Charger – 60 min\*

Weight – 2.9 kg

Drilling metal/wood/masonry – 13/36/16 mm

Chuck – 1.5–13 mm

Max torque – 63 Nm

No load speed – 0–420/0–1600 rpm

Voltage – 14.4 V

Standard Equipment – 2 x batteries,  
charger, side handle and kitbox



Cat No. BSB 14 STX NiCd Article No. 4935 4019 44 Version. 2 x 2 Ah NiCd batteries, 60 min\* charger EAN No. 4002395124633

## 14.4 V HAMMERDRILL/DRIVER

Model: BSB 14 G NiCd

## Features

- Compact & powerful for completion of all jobsite applications
- 32 Nm maximum torque delivers complete power
- 2 speeds – 0–400/0–1400 rpm
- 24-stage torque adjustment
- Fixtec 10 mm single sleeve chuck with full metal jaws
- 3 mode selector – ease of use between functions

## Specification

No. of batteries – 2 x 1.4 Ah

Charger – 60 min\*

Weight – 1.8 kg

Drilling metal/wood/masonry – 10/32/8 mm

Chuck – 1.5–10 mm

Max torque – 32 Nm

No load speed – 0–400/0–1400 rpm

Voltage – 14.4 V

Standard Equipment – 2 x batteries,  
charger and kitbox



NEW



Cat No. BSB 14 G NiCd Article No. 4935 4107 95 Version. 2 x 1.4 Ah NiCd batteries, 60 min\* charger EAN No. 4002395130412

\* Charge times based on 2 Ah NiCd Battery



## 14.4 V DRILL/DRIVER

Model: BS 14 G NiCd

## Features

- Compact & powerful for completion of all jobsite applications
- 32 Nm maximum torque delivers high power to weight ratio
- 2-speeds – 0–400/0–1400 rpm
- 24-stage torque adjustment for complete control
- Fixtec 10 mm single sleeve chuck with full metal jaws

Standard Equipment – 2 x batteries, charger and kitbox

## Specification

No. of batteries – 2 x 1.4 Ah  
 Charger – 60 min\*  
 Weight – 1.7 kg  
 Drilling metal/wood – 10/32 mm  
 Chuck – 1.5–10 mm  
 Max torque – 32 Nm  
 No load speed – 0–400/0–1400 rpm  
 Voltage – 14.4 V



NEW

AEG 3 ANNÉES  
 YEARS  
 JAHRE  
 WARRANTY • GARANTIE

32  
Nm

Cat No. BS 14 G NC-142C Article No. 4935 4108 07 Version. 2 x 1.4 Ah NiCd batteries, 60 min\* charger EAN No. 4002395130139

## 14.4 V COMPACT IMPACT DRIVER

Model: BSS 14 Li

## Features

- Compact, well balanced impact driver
- Industrial magnesium gearbox and gears for extended life
- Delivers 3300 impacts per minute for increased productivity
- 85 Nm maximum torque
- 1/4" Hex bit reception
- Built in LED illuminates work surface
- Powerful fade free lithium-ion 14.4 volt power pack

Standard Equipment – 2 x batteries, charger, side handle and kitbox

## Specification

No. of batteries – 2 x 3 Ah  
 Charger – 30 min\*  
 Weight – 2.1 kg  
 No load speed – 0–2500 rpm  
 Impact rate – 0–3300 ipm  
 Max torque – 85 Nm  
 Tool reception – 1/4" Hex  
 Voltage – 14.4 V

ALSO AVAILABLE: NiCd Version &amp; Zero Version



AEG 3 ANNÉES  
 YEARS  
 JAHRE  
 WARRANTY • GARANTIE

**Li**THIUM ION  
 14.4v POWER

85  
Nm

Cat No. BSS 14 Li Article No. 4935 4045 39 Version. 2 x 3 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395196166

Cat No. BSS14 NiCd Article No. 4935 4045 38 Version. 2 x 2 Ah NiCd batteries, 60 min\* charger EAN No. 4002395196159

Cat No. BSS 14 0 Article No. 4935 4019 00 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395124541

\* Charge times based on 2 Ah NiCd Battery

## 12 V HAMMERDRILL/DRIVER

Model: BSB 12 G NiCd

## Features

- Compact & powerful for completion of all jobsite applications
- 30 Nm maximum torque delivers complete power
- 2 speeds – 0–350/0–1350 rpm
- 24-stage torque adjustment
- Fixtec 10 mm single sleeve chuck with full metal jaws
- 3 mode selector – ease of use between functions



## Specification

No. of batteries	2 x 1.4 Ah
Charger	60 min*
Weight	1.7 kg
Drilling metal/wood/masonry	10/30/6 mm
Chuck	1.5–10 mm
Max torque	30 Nm
No load speed	0–350/0–1350 rpm
Voltage	12 V

Standard Equipment – 2 x batteries, charger and kitbox



NEW



BSB 12 G NC-142C Article No. 4935 4107 98 Version. 2 x 1.4 Ah NiCd batteries, 60 min\* charger EAN No. 4002395130191



\* Charge times based on 2 Ah NiCd Battery

## RIGHT ANGLED IMPACT DRIVER

Model: BSS 12 RW NiCd

## Features

- Compact right-angled head – ideal for fastening in tight spaces
- 79 Nm torque
- Industrial metal gearbox and gears for superior durability
- 1/4" Hex bit reception
- Variable speed paddle switch
- Mar resistant head cover – helps protect work-piece from accidental damage

ALSO AVAILABLE: Zero Version

## Specification

No. of batteries	1 x 2 Ah
Charger	60 min*
Weight	2.3 kg
Chuck	1/4" Hex
Max torque	79 Nm
No load speed	0–2200 rpm
Voltage	12 V

Standard Equipment – 1 x 2 Ah battery, charger and contractor bag



Cat No. BSS 12 RW NiCd Article No. 4935 4103 25 Version. 1 x 2 Ah NiCd batteries, 60 min\* charger EAN No. 4002395131655  
 Cat No. BSS 12 RW 0 Article No. 4935 4117 30 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395137619



\* Charge times based on 2 Ah NiCd Battery

**LITHIUM ION**  
**12V POWER**

**AEG**  
**POWERTOOLS**

**3** ANNÉES  
YEARS  
JAHRE  
WARRANTY • GARANTIE



# COMPACT POWER

The compact screwdriving and impact driving range from **AEG POWERTOOLS** offers compact and ergonomically superior tools that let you do more with less! These products harness our advances in motor technology, high-strength lightweight materials, and compact design to combine big performance with small size and weight, meaning they're easier to fit into tight spaces, use for long periods, carry and store.


12 V 2-SPEED ULTRA COMPACT DRILL/DRIVER

COMPACT  
POWER

Model: BS 12C2 Li

Features

- Compact pocket drill/screwdriver measuring only 171 mm
- 17-stage torque adjustment plus additional drilling stage
- 2-speed gearbox for wide range of applications
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surface
- Overload protection

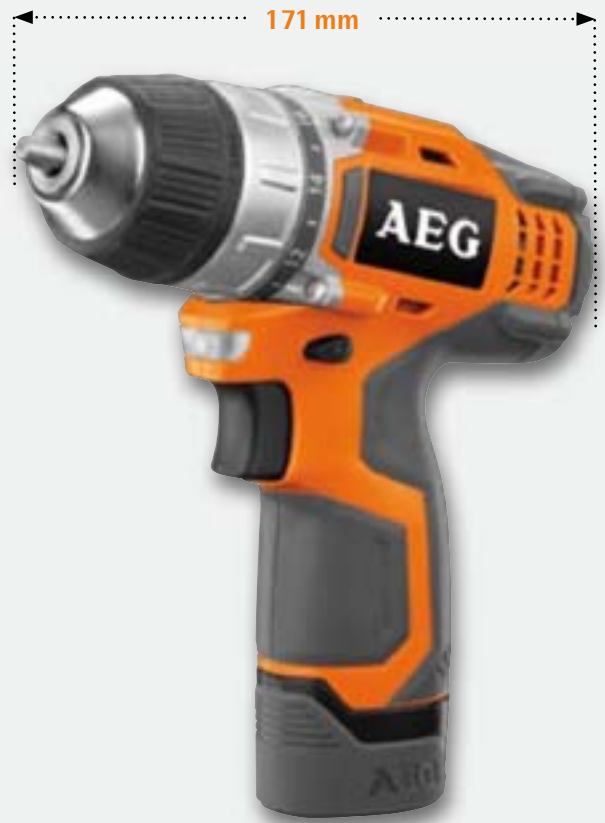

Specification

No. of batteries	2 x 1.5 Ah
Charger	30 min*
Weight	1.1 kg
Drilling steel/soft wood	10/20 mm
Chuck	1.5–10 mm
Max torque	25 Nm
No load speed	0–320/0–1300 rpm
Voltage	12 V

Standard Equipment – 2 x batteries, charger and kitbox



Cat No. BS 12C2 Li Article No. 4935 4101 95 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395197149



\* Charge times based on 2 Ah NiCd Battery

## 12 V ULTRA COMPACT DRILL/DRIVER

COMPACT  
POWER

Model: BS 12C Li

## Features

- Compact pocket drill/screwdriver measuring only 160 mm
- 17-stage torque adjustment plus additional drilling stage
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surfaces
- Overload protection

## Specification

No. of batteries - 2 x 1.5 Ah	Chuck - 1.5-10 mm
Charger - 30 min*	Max torque - 18.5 Nm
Weight - 1.1 kg	No load speed - 0-575 rpm
Drilling steel/soft wood - 10/20 mm	Voltage - 12 V



Standard Equipment - 2 x batteries, charger and kitbox

Cat No. BS 12C Li Article No. 4935 4130 45 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395197286



## 12 V ULTRA COMPACT IMPACT DRIVER

COMPACT  
POWER

Model: BSS 12C Li

## Features

- Ultra compact impact driver
- 113 Nm torque
- Industrial metal gearbox and gears for superior durability
- 1/4" Hex bit reception
- Ergonomic soft-grip design
- Built in LED illuminates the work surface
- Overload protection

## Specification

No. of batteries - 2 x 1.5 Ah	No load speed - 0-1800 rpm
Charger - 30 min*	Impact rate - 0-2400 ipm
Weight - 1.2 kg	Tool reception - 1/4" Hex
Max torque - 113 Nm	Voltage - 12 V



Standard Equipment - 2 x batteries, charger and kitbox

Cat No. BSS 12C Li Article No. 4935 4103 15 Version. 2 x 1.5 Ah Li-ion batteries, 30 min\* charger EAN No. 4002395131631



## FLASHLIGHTS/BATTERY LAMPS

	Catalogue Number	Voltage	Article Number 4932	EAN Number 4002395
	FL 12	12 V	3521 00	367535
	FL 14	14 V	3521 01	367542
	FL 18	18 V	3521 02	367559
	BLL 12C	12 V	3521 62	368150
	BLL 18C	18 V	3521 64	368174
	BFL 18	18 V	3521 63	368167

## AEG POWERTOOLS LI-ION TECHNOLOGY



## THE NEW LI-ION RANGE

AEG POWERTOOLS lithium ion technology provides the optimum power platform for today's professional user by protecting both battery and machine in 3 ways:

### 1) Electronic current protection

- shuts down if excessive current draw may harm battery and machine
- thermal shutdown protects battery if temperature gets too high
- protects individual cells from over discharging

### 2) Robust construction

- AEG POWERTOOLS lithium ion technology benefits from robust internal and external design features as illustrated above, to ensure optimum durability

### 3) Individual cell monitoring

- individual cells charge and discharge at different rates - AEG POWERTOOLS lithium ion technology offers tailored charging and discharging for individual cells for maximum cell life



















## BATTERIES AND CHARGERS





### AEG BATTERY PACKS

Long-life, high capacity packs without any memory effect. The excellent contact system with perfectly protected self cleaning contacts offers the lowest possible resistance between battery and tool for optimum performance.

### BATTERIES

		Catalogue Number	Chemistry	Capacity Ah	Charger Compatibility Charge Time*	Article Number	EAN Number
18 V		L1830R	Li-Ion	3.0	AL1218 / 60 min* BL1218 / 30 min*	4932 3521 14	4002395367672
		L1815R	Li-Ion	1.5		4932 3521 60	4002395368259
		B1820R	NiCd	2.0		4932 3521 12	4002395367658
		B1814G	NiCd	1.4		4932 3525 33	4002395371914
14.4 V		L1430R	Li-Ion	3.0	AL1214G / 60 min* AL1218 / 60 min* BL1218 / 30 min*	4932 3998 11	4002395364664
		M1430R	NiMH	3.0		4932 3997 01	4002395364664
		B1420R	NiCd	2.0		4932 3521 09	4002395367627
		B1415R	NiCd	1.5		4932 3521 08	4002395367610
		B1414G	NiCd	1.4		4932 3525 31	4002395371891
12 V		L1215	Li-Ion	1.5	LL1230 / 30 min*	4932 3520 95	4002395367481
		M1230R	NiMH	3.0	AL1214G / 60 min* AL1218 / 60 min* BL1218 / 30 min*	4932 3521 07	4002395367603
		B1220R	NiCd	2.0		4932 3521 06	4002395367597
		B1215R	NiCd	1.5		4932 3521 05	4002395367580
		B1214G	NiCd	1.4		4932 3525 32	4002395371907

### CHARGERS

	Catalogue Number	Chemistry	Charge Time*	Article Number	EAN Number
	AL 1214 G	NiCd, NiMH, Li-Ion 12-14 V	60 min*	4932 3524 82	4002395371419
	AL 1218	NiCd, NiMH, Li-Ion 12-18 V		4932 3525 28	4002395371860
	BL 1218	NiCd, NiMH, Li-Ion 12-18 V	30 min*	4932 3520 93	4002395368884
	LL 1230	Li-Ion 12 V		4932 3520 96	4002395367498

\* Charge times based on 2Ah NiCd Battery



# REAL HAMMER POWER

## THE HAMMER SYSTEM

**AEG POWERTOOLS** offer an extensive selection of high performance rotary, combination, chipping and demolition hammers. These high performance tools are engineered for outstanding reliability and durability and designed for optimised comfort and ease of use. Innovative AEG patented solutions such as **FIXTEC**, **AVS (Anti-Vibration System)**, **Softgrip** and advanced electronics guarantee the best professional results.

### RANGE INCLUDES

SDS-PLUS ROTARY HAMMERS

SDS-PLUS COMBI HAMMERS

HAMMER VIBRATION RATING

**AEG**

POWERTOOLS


**3** ANNÉES  
YEARS  
JAHRE  
WARRANTY • GARANTIE

## SDS-PLUS ROTARY HAMMER

Model: BH 22 E

## Features

- Powerful 650 watt motor
- 22 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal, forward and reverse mechanism

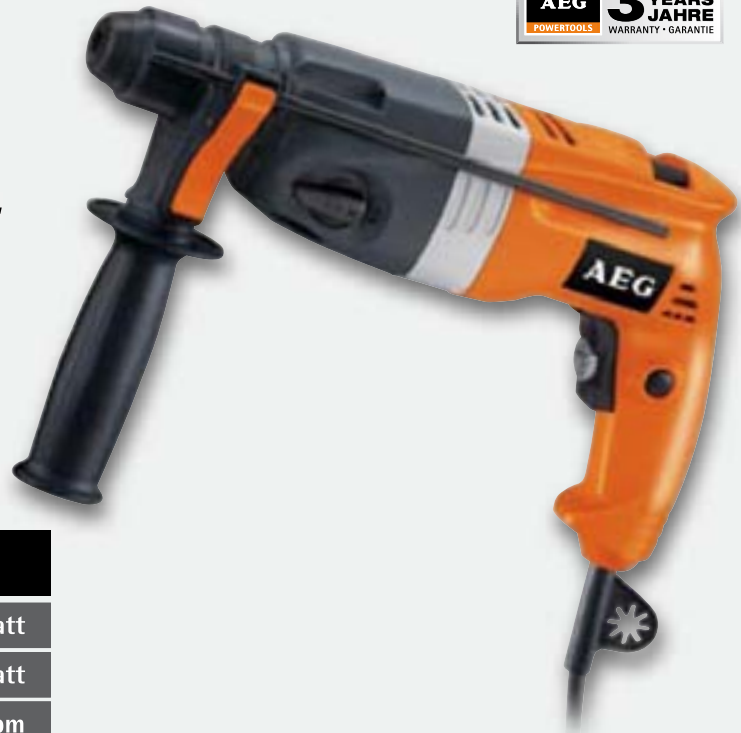

## Specification

Power input	650 watt
Power output	325 watt
No load speed	0–1290 rpm
Blow energy	2.5 J
Tool reception	SDS-Plus
Hammer rate (full load)	0–3700 bpm
Drilling concrete/steel/wood	22/13/30 mm
Weight	2.5 kg

Standard Equipment – Side handle, metal depth gauge, 4 m cable and kitbox

Cat No. BH 22 E Article No. 4935 4102 30 Version. 110 V EAN No. 4002395198771  
Cat No. BH 22 E Article No. 4935 4102 35 Version. 240 V EAN No. 4002395198788



## SDS-PLUS COMBI HAMMER

Model: KH 24 E

### Features

- Powerful 720 watt motor
- 24 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort

### Specification

Power input	720 watt
Power output	360 watt
No load speed	1500 rpm
Impact energy	2.7 J
Hammer rate (full load)	0–4500 bpm
Drilling concrete/steel/wood	24/13/30 mm
Weight	2.6 kg



Standard Equipment – Side handle, keyless chuck, metal depth gauge, 4 m cable and kitbox



Cat No. KH 24 E Article No. 4935 4094 85 Version. 110 V EAN No. 4002395193110  
 Cat No. KH 24 E Article No. 4935 4094 90 Version. 240 V EAN No. 4002395193127



## SDS-PLUS COMBI HAMMER

Model: KH 28 Super XE

## Features

- Powerful 1010 watt motor
- 28 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Soft-grip handle for comfort
- Electronic overload protection
- No load speed limitation



## Specification

Power input	1010 watt
Power output	505 watt
No load speed	1500 rpm
Impact energy	3.1 J
Hammer rate (full load)	5000 bpm
Drilling concrete/steel/wood	28/13/30 mm
Weight	2.8 kg

Standard Equipment – Side handle, FIXTEC adaptor and keyless chuck, metal depth gauge, 4 m cable and kitbox

Cat No. KH 28 Super XE Article No. 4935 4094 80 Version. 110 V EAN No. 4002395193448  
 Cat No. KH 28 Super XE Article No. 4935 3875 50 Version. 240 V EAN No. 4002395193080





## POWER TO PROTECT

AEG POWERTOOLS is committed to producing hard hitting, low vibration hammers which allow professional users to carry out heavy duty job site applications safely.

A new directive in 2005 – The EU Physical Agents (Vibration) Directive 2002/44/EC states that Hand Arm Vibration (HAV) should be considered an official risk to health and safety in the workplace. These vibrations are expressed in terms of acceleration –  $m/s^2$ . All AEG POWERTOOLS hammers are rated by their tri-axle vibration levels as required by this directive, as shown in the table below, so professional users can work safely in line with this directive.

### ROTARY/COMBINATION HAMMERS

Model		Power input	Blow energy	Hammer Rate	tri-axle vibration level drilling	tri-axle vibration level chiselling	Weight
BH 22 E		720 W	2.7 J	0 - 4500 bpm	14.0 $m/s^2$	n/a	2.4 kg
KH 26 E		800 W	2.9 J	0 - 4500 bpm	15.0 $m/s^2$	15.0 $m/s^2$	2.6 kg
KH 28 Super XE		1010 W	3.1 J	0 - 5000 bpm	15.4 $m/s^2$	13.5 $m/s^2$	2.8 kg





# POWER TO DRILL DEEPER

## DRILLING SYSTEMS

**AEG POWERTOOLS** offer the power to drill deeper with their powerful range of percussion drills offering enhanced performance, reliability and durability for todays professional user.

**RANGE INCLUDES**

PERCUSSION DRILLS

**AEG**

POWERTOOLS

**3** ANNÉES  
YEARS  
JAHRE  
WARRANTY • GARANTIE

## PERCUSSION DRILL

Model: SB 20 2E

## Features

- Compact and powerful 750 watt percussion drill
- AVS anti-vibration system for more comfortable use
- Safety clutch for user protection
- 2-speed gearbox for increased torque and versatility
- Ergonomic soft-grip design for comfort
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck



## Specification

Power input	750 watt
Power output	410 watt
No load speed	0-1000/0-3200 rpm
Drilling concrete/steel/wood	20/13/40 mm
Max torque	56 Nm
Chuck	1.5-13 mm
Weight	2.8 kg

Standard Equipment – Side handle, metal depth gauge,  
4 m cable and kitbox



Cat No. SB 20-2E Article No. 4935 4110 20 Version. 110 V EAN No. 4002395196623  
Cat No. SB 20-2E Article No. 4935 4110 10 Version. 240 V EAN No. 4002395196616







# POWER TO PERFORM

## METALWORKING SYSTEMS

**AEG POWERTOOLS** offer an extensive range of grinders in a wide variety of power classes for the most diverse professional applications. These high performance tools are equipped with advanced features to ensure comfort and ease of use in the most challenging environments.

### RANGE INCLUDES

SMALL ANGLE GRINDERS

ABRASIVE CHOPSAW



## SMALL ANGLE GRINDER

Model: WS 6-115

## Features

- Compact powerful 670 watt motor
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock




## Specification

Power input – 670 watt  
 Power output – 370 watt  
 No load speed – 10,000 rpm  
 Cutting depth – 28 mm  
 Grinding disc Ø – 115 mm  
 Spindle thread – M14  
 Weight – 1.9 kg



Standard Equipment – Additional handle, flange nut and spanner



Cat No. WS 6-115 Article No. 4935 4135 00 Version. 110 V EAN No. 4002395198566

Cat No. WS 6-115 Article No. 4935 4135 05 Version. 240 V EAN No. 4002395198573

## LARGE ANGLE GRINDER

Model: WS 21-230 E

## Features

- Powerful 2100 watt motor
- Epoxy-coated field windings and armature – prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch
- Line lock out function for increased user protection
- Softstart for smooth startup

ALSO AVAILABLE: WS 21-230 DMS (without Line lock out and Softstart function)

## Specification

Power input – 2100 watt  
 Power output – 1350 watt  
 No load speed – 6400 rpm  
 Cutting depth – 68 mm  
 Grinding disc Ø – 230 mm  
 Spindle thread – M14  
 Weight – 4.9 kg



Standard Equipment – 4 m cable, additional handle, flange nut, safety guard and spanner

NEW



Cat No. WS 21-230 E Article No. 4935 4114 95 Version. 220-240 V EAN No. 4002395131037

Cat No. WS 21-230 DMS Article No. 4935 4115 05 Version. 220-240 V EAN No. 4002395131044

## METAL CHOPSAW

Model: SMT 355

### Features





- Powerful 2300 watt motor
- -45°/0°/45° mitre capacity with quick release mitre clamp
- Spindle lock for easy wheel and accessory changing
- Deflector protects the user from sparks
- Oversize guard for added safety
- On board wrench storage
- Rubber feet for greater stability
- Replaceable carbon brushes



### Specification

Power input	2300 watt
No load speed	3800 rpm
Wheel diameter	355 mm
Bore diameter	25.4 mm
Weight	16.5 kg

Standard Equipment – 4 m cable, 355 mm cutting disc, spanner



Cat No. SMT 355 Article No. 4935 4103 70 Version. 110 V EAN No. 4002395129652  
 Cat No. SMT 355 Article No. 4935 4103 65 Version. 240 V EAN No. 4002395129645



# POWER TO SHAPE THE FUTURE

## WOODWORKING SYSTEMS

**AEG POWERTOOLS** woodworking range offers a comprehensive selection of high performance machines to take on the most varied, professional applications. All of these tools offer ease of use, reliability, durability and features to ensure professional efficiency and best results.

### RANGE INCLUDES

ROUTERS

PLANER

JIGSAWS

CIRCULAR SAWS AND RECIPROCATING SAWS

RANDOM ORBIT AND BELT SANDERS

MITRE SAW AND LEGSTAND

DUST EXTRACTION

**AEG**

POWERTOOLS

**3** ANNÉES  
YEARS  
JAHRE  
WARRANTY • GARANTIE





**AEG**

**AEG**

## COMBO ROUTER

Model: MF 1400 KE

## Features

- 2 routers in one for maximum flexibility in all kinds of application
- Soft start to prevent sudden kickback
- Integrated electronics maintain constant speed under load
- Variable speed electronics for optimum control in a wide range of materials
- Large softgrip handles for decreased vibration and greater comfort
- Flat motor housing with integrated rubber feet for convenient upside down bit change with spindle lock
- Premium collet and shaft design minimises run out
- Built in LED for unparalleled workplace illumination
- Through table depth adjustment for ultimate convenience



FIXED BASE

Standard Equipment – 5 guide brushes, 3 dust extraction adaptors, parallel guide, 2 collets (8/12 mm), 2 keys, oval base, round base, chip shield and contractors bag

PLUNGE BASE



## Specification

Power input	1400 watt
Collet capacity	8/12 mm
Plunge capacity	64 mm
No load speed	10,000–23,000 rpm
Weight	5.7 kg

NEW



## ROUTER

Model: OF 2050 E


## Features

- Powerful 2050 watt motor
- Electronic variable speed control
- Plunge depth set by calibrated dial
- Micro depth adjustment
- 3-stage depth stop lock
- Vertical depth adjustment scales

## Specification

Power input max. – 2050 watt  
 Collet capacity – 6/8/12 mm  
 Plunge capacity – 66 mm  
 No-load speed – 10,000–20,000 rpm  
 Weight – 6.2 kg

Standard Equipment – 4 m cable, 6/8/12 mm collet, spanner, parallel guide, 4 guide bushes, router bit and dust adaptor



Cat No. OF 2050 E Article No. 4935 4036 75 Version. 110 V EAN No. 4002395193202  
 Cat No. OF 2050 E Article No. 4935 4104 25 Version. 240 V EAN No. 4002395125876

## PLANER

Model: PL 750

## Features

- Powerful 750 watt motor
- Left and right chip ejection for greater convenience
- Heel shoe protects the base, blade and work surface
- 0.2 mm stage depth adjustment setting for greater control and accuracy
- Depth scale indicator

## Specification

Power input max. – 750 watt  
 No load speed – 16,000 rpm  
 Cutting depth – 2 mm  
 Cutting width – 82 mm  
 Max. rebate – 12 mm  
 Weight – 2.9 kg

Standard Equipment – 2 blades, edge guide, dust bag, key



Cat No. PL 750 Article No. 4935 4107 75 Version. 240 V EAN No. 4002395130498

## TOPHANDLE JIGSAW

Model: STEP 90 X

## Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic design with integrated soft-grip for comfortable handling
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45°




## Specification

Power input	600 watt
Power output	300 watt
No load stroke rate	1000–3200 rpm
Mitre cutting angle to	45°
Stroke	19 mm
Pendulum settings	4 Stages
Max. cutting depth in wood/steel/aluminium	100/8/15 mm
Weight	2 kg



Standard Equipment – 4 m cable, blade, anti-splintering guard, dust cap and kitbox



Cat No. STEP 90 X Article No. 4935 4129 27 Version. 240 V EAN No. 4002395192861



## TOPHANDLE JIGSAW

Model: STEP 1200 BX

## Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- AVS anti-vibration mechanism for user comfort
- Ergonomic top handle design with integrated soft-grip
- Sawdust blower keeps cutting line clear for accuracy
- Base plate can be moved backwards for sawing close to edges and for precise mitre cuts to 45°




## Specification

Power input	600 watt
Power output	300 watt
No load stroke rate	500–3000 rpm
Mitre cutting angle to	45°
Stroke	26 mm
Pendulum settings	4 Stages
Max. cutting depth in wood/steel/aluminium	110/10/30 mm
Weight	2.4 kg



Standard Equipment – 4 m cable, blade, anti splintering guard, sliding shoe, dust cap, suction adaptor and kitbox

Cat No. STEP 1200 BX Article No. 4935 4128 65 Version. 110 V EAN No. 4002395192731  
 Cat No. STEP 1200 BX Article No. 4935 4128 74 Version. 240 V EAN No. 4002395192755



# MULTI CONSTRUCTION MATERIAL SAW

Model: MBS 30 Turbo



Unique on board active dust collection – patent pending

AVAILABLE JULY 2010



**AEG** **3** ANNÉES  
POWER TOOLS WARRANTY \* GARANTIE

## Features

- 90% dust collection efficiency – best in class!
- Comes complete with all dust collection components
- Height adjustment – for precise depth setting
- Powerful 1010 watt motor for cutting a wide range of materials quickly and easily
- Ergonomic inline motor design, well balanced for extended use
- Dust sealed gearbox design for optimal performance in dusty environments
- Lightweight magnesium guards and base for less user fatigue during extended use
- Spindle lock for quick and easy blade changes

## Specification

Power input	1010 watt
Power output	450 watt
No load speed	9000 rpm
Cutting depth 90°/45°	31/26 mm
Saw blade/Arbor Ø	127/20 mm
Weight	3.4 kg

**Standard Equipment** – Premium 6 tooth fibre cement saw blade, premium 40 tooth saw blade for accurate cuts in wood, diamond disc for tiles, granite, ceramic, cover & clamp for dust free job site (for 10 l bucket), Hose 2,60 m for dust extraction, second flange for diamond disk, edge guard, allen key for quick saw blade change, delivered in box



Guide Rail 1.4 m  
Article No. 4932 3525 58  
EAN No. 4002395372164

Guide rail not included in standard equipment

Cat No. MBS 30 Turbo Article No. 4935 4103 95 Version. 240 V EAN No. 4002395193257



## 165 MM CIRCULAR SAW

Model: KS 55 C

## Features

- Powerful 1200 watt motor
- 0–50° bevel capacity with 45° positive position stop
- High strength composite shoe for durability
- Externally accessible brushes for easy replacement
- Integrated dust blower keeps cut line clear for accuracy
- Soft-grip handle for comfort

Standard Equipment – Contractors bag, 4 m cable, parallel fence, 24 tooth TCT blade, spanner

## Specification

Power input – 1200 watt  
 Power output – 611 watt  
 No load speed – 6100 rpm  
 Bevel – 0–50°  
 Cutting depth 90/45/50° – 54/45/38mm  
 Saw blade/Arbor Ø – 165/20 mm  
 Weight – 3.7 kg



Cat No. KS 55 C Article No. 4935 4104 10 Version. 110 V EAN No. 4002395193165  
 Cat No. KS 55 C Article No. 4935 4104 05 Version. 240 V EAN No. 4002395193158

## 185 MM CIRCULAR SAW

Model: KS 66 C

## Features

- Powerful 1600 watt motor for heavy duty applications
- 56° bevel capacity with 45° positive position stop
- Magnesium upper and lower guard offers lightweight high strength
- Full length kerf indicator for accurate cutting
- Externally accessible brushes for easy replacement
- Integrated dust blower keeps cut line clear for accuracy
- Soft-grip handle for comfort

Standard Equipment – Contractors bag, 4 m cable, parallel fence, 24 tooth TCT blade, spanner

## Specification

Power input – 1600 watt  
 Power output – 765 watt  
 No load speed – 5800 rpm  
 Bevel – 56°  
 Cutting depth 90/45/56° – 61/49/35 mm  
 Saw blade/Arbor Ø – 185/30 mm  
 Weight – 4.8 kg



Cat No. KS 66 C Article No. 4935 4104 20 Version. 110 V EAN No. 4002395193196  
 Cat No. KS 66 C Article No. 4935 4104 15 Version. 240 V EAN No. 4002395193189



## SLIDING COMPOUND MITRESAW

Model: PS 305 DG

## Features

- Powerful 1800 watt motor delivers 4400 rpm
- Large cutting capacities include a massive maximum crosscut of 343 x 111 mm at 90°
- Double bevel 0–47° left or right
- Mitres 60° left or right, perfect for awkward mitres
- Rugged cast construction with huge table area
- Cam operated mitre lock for fast angle adjustment



## Specification

Power input	1800 watt
Blade diameter	305 x 30 mm
No load speed	4400 rpm
Mitre capacity (left/right)	60°
Depth of cut	111 mm
Crosscut capacity	343 mm
Weight	31 kg

Standard Equipment – 60 tooth 305 mm blade



Cat No. PS 305 DG Article No. 4935 4102 20 Version. 110 V EAN No. 4002395126026  
 Cat No. PS 305 DG Article No. 4935 4102 15 Version. 240 V EAN No. 4002395126019

## UNIVERSAL MITRE SAW LEGSTAND

Model: PSU 2500

## Features

- Extendable to 2.5 m
- Folds in half for easy transportation and storage
- Lightweight construction for portability
- 250 kg maximum load



Cat No. PSU 2500 Article No. 4935 4115 85 EAN No. 4002395129621



## MINI RECIPROCATING SAW

Model: US 400 XE

### Features

- Innovative design for confined spaces
- Extremely compact design
- Operational with one hand with exceptional balance
- 3500 strokes per minute and 13 mm stroke length for fast cutting applications
- FIXTEC – for fast and easy keyless blade change
- Built-in LED
- 2-Finger variable speed trigger

Standard Equipment – 4 m cable, 3 blades and contractors bag

### Specification

Power input – 400 watt  
 No load stroke rate – 0–3500 spm  
 Length of stroke – 13 mm  
 Weight – 1.7 kg



Cat No. US 400 XE Article No. 4935 4103 85 Version. 240 V EAN No. 4002395193226

## RECIPROCATING SAW

Model: US 1300 XE

### Features

- Powerful 1300 watt motor
- FIXTEC blade clamp for fast and easy blade change
- Variable speed switch for increased cutting control and efficiency
- Adjustable shoe for prolonged blade life
- Ergonomic soft-grip handle design for comfort
- Blades can be turned 180° for various applications

Standard Equipment – 4 m cable, 2 blades and kitbox

### Specification

Power input – 1300 watt  
 No load stroke rate – 0–2800 spm  
 Length of stroke – 30 mm  
 Weight – 3.8 kg



Cat No. US 1300 XE Article No. 4935 4132 40 Version. 240 V EAN No. 4002395197781



## RANDOM ORBIT SANDER

Model: EX 150 E

## Features

- Dual orbits for control of material removal
- Variable speed for optimum control
- Soft start and pad brake for a gouge free workpiece
- Through-body sealed slide switch for reliability and ease of use
- Convenient hook & loop paper fastening
- Dust extraction, with dust bag or absorption system
- Diecast construction for strength and durability



## Specification

Power input	440 watt
No load speed	4000–10,000 rpm
Oscillation rate	8000–20,000 rpm
Oscillation diameter	3.2/6.4 mm
Sanding disc size	150 mm
Weight	2.8 kg



Standard Equipment – 4 m cable, 3 x 80 grit sanding pads, dust bag and pommel handle

Cat No. EX 150 E Article No. 4935 4132 75 Version. 240 V EAN No. 4002395197743



## RANDOM ORBIT SANDER

Model: EX 125 ES

## Features

- Ergonomic & compact 300 watt random orbital sander
- Ideal for working in confined spaces and over head
- Variable speed for optimum control
- Pad brake control: Pad brake for a gauge free workpiece
- Convenient hook & loop paper fastening
- Very efficient dust extraction over 8 holes in the base plate
- Dust extraction, with dust bag or absorption system
- Soft-grip on handle

## Specification

Power input – 300 watt  
 No load speed – 7000–15,000 rpm  
 Oscillation rate – 14,000–30,000 rpm  
 Oscillation diameter – 2 mm  
 Sanding disc size – 125 mm  
 Weight – 1.5 kg

Standard Equipment – 4 m cable, 3 sheets (80, 120, 180 grit) sanding pads and dust bag

AVAILABLE JULY 2010



NEW



Cat No. EX 125 ES Article No. 4935 4107 10 Version. 240 V EAN No. 4002395129805

## PALM SANDER

Model: FS 140

## Features

- Extremely compact 270 watt sheet sander
- Ideal for working in confined spaces and over head
- Hook & loop and large release tabs for convenient paper changing
- Dust extraction with dust bag or absorption system
- Soft-grip on handle

## Specification

Power input – 270 watt  
 No load speed – 15,000 rpm  
 Oscillation rate – 20,000 rpm  
 Oscillation diameter – 2 mm  
 Sanding pad size – 115x140 mm  
 Weight – 1.5 kg

Standard Equipment – 4 m cable, 3 sheets (60, 80, 120 grit) sanding pads and dust bag



NEW



Cat No. FS 140 Article No. 4935 4107 00 Version. 240 V EAN No. 4002395129775

## BELT SANDER

Model: HBS 1000 E

## Features

- Powerful 1010 watt motor
- Electronic speed for control and optimum results
- Clamping lever for easy, tool free changing of sanding belt
- Externally accessible brushes for easy replacement
- Control wheel for precise adjustment of sanding belt
- Compact design, ideal for sanding close to edges
- Die-cast construction for high strength and durability
- Dust extraction, with dust bag or absorption system

## Specification

Power input	1010 watt
Belt length	533 mm
Belt speed	240–450 m/min
Sanding surface	75 x 145 mm
Belt width	75 mm
Weight	5.1 kg



Standard Equipment – 4 m cable, 1 x 80 grit sanding belt, dust bag, pommel handle and kitbox



Cat No. HBS 1000 E Article No. 4935 4132 10 Version. 240 V EAN No. 4002395197620



25L VAC

Model: AP 250 ECP



**AEG** **3** ANNÉES YEARS WARRANTY • GARANTIE

Standard Equipment – Tool adaptor, hand tube, 2 x extension tube, floor nozzle, crevice nozzle, hose 32 mm x 3.5 m, fleece filter bag, disposal bag

30L VAC

Model: AP 300 ELCP



**AEG** **3** ANNÉES YEARS WARRANTY • GARANTIE

Standard Equipment – Tool adaptor, hand tube, 2 x extension tube, floor nozzle, crevice nozzle, hose 32 mm x 3.5 m, fleece filter bag, disposal bag, accessory box

Product	Specification	Features	Application	Id. No. 4935-	EAN Code 4002395
AP 250 ECP	<p><b>Power input max.</b> - 1400 watt  <b>Air volume</b> - 3600 L/min  <b>Max. vacuum</b> - 190 mbar  <b>Container capacity</b> - 25 L  <b>Suction hose diameter/length</b> - 32 mm x 3.5 m  <b>Weight</b> - 6.0 kg</p>	<ul style="list-style-type: none"> <li>• CLEAR-PRESS filter cleaning system</li> <li>• Wet &amp; dry cleaning</li> <li>• Wet overflow protection</li> <li>• Click system – easy to change accessories</li> <li>• Fleece double wall filter bag and disposal bag</li> </ul>	Wet & dry dust extraction in external environments, wet cleaning, general cleaning	410478	131082
AP 300 ELCP Dust class L standard MAK-factor > 1 mg/m <sup>3</sup>	<p><b>Power input max.</b> - 1500 watt  <b>Air volume</b> - 3700 L/min  <b>Max. vacuum</b> - 250 mbar  <b>Container capacity</b> - 30 L  <b>Suction hose diameter/length</b> - 32 mm x 3.5 m  <b>Weight</b> - 10 kg</p>	<ul style="list-style-type: none"> <li>• CLEAR-PRESS filter cleaning system</li> <li>• PET filter cartridge</li> <li>• Automatic operation when used with powertools</li> <li>• Dust class L for dust rated up to 1 mg/m<sup>3</sup></li> <li>• Low noise fan for silent cleaning</li> <li>• Wet &amp; dry cleaning</li> <li>• Fleece double wall filter bag and disposal bag</li> </ul>	Wet & dry dust extraction in external environments, wet cleaning, general cleaning	410490	131709

DUST BUSTING POWER!!!

CLEAR-PRESS FILTER CLEANING SYSTEM EXPLAINED:



Accessories	AP 250 ECP	AP 300 ELCP	Id. No. 4932-	EAN Code 4002395
Filter cartridge	•		352303	369621
Filter cartridge		•	352304	369638
Filter bags: 5 pcs (4 x fleece filter bags, 1 x fleece wet filter with rubber band)	•		352306	369652
Filter bags: 5 x fleece filter bags. Capacity 30 l		•	352307	369669
Extension hose, anti static. 4 m long 36 mm diameter with tool adaptor		•	352311	369706
Extension hose. 3.5 m long 32 mm diameter with tool adaptor	•	•	352312	369713

# ACCESSORIES/SETS


## POWER SETS

	Description	Id. No. 4932-	EAN Code 4002395
	<b>Set of 19 HSS-R DIN 338 drill bits</b> with Ø 2.0 / 2.5 (2 pcs) / 3.0 (2 pcs) / 3.5 (2 pcs) / 4.0 (2 pcs) / 4.5 (2 pcs) / 5.0 (2 pcs) 6.0 (2 pcs) / 7.0 / 8.0 / 9.0 / 10.0	352241	369003
	<b>Set of 19 HSS-G DIN 338 drill bits</b> with Ø 2.0 / 2.5 (2 pcs) / 3.0 (2 pcs) / 3.5 (2 pcs) / 4.0 (2 pcs) / 4.5 (2 pcs) / 5.0 (2 pcs) 6.0 (2 pcs) / 7.0 / 8.0 / 9.0 / 10.0	352243	369027
	<b>Set of 19 HSS-G TITANIUM drill bits</b> with Ø 2.0 / 2.5 (2 pcs) / 3.0 (2 pcs) / 3.5 (2 pcs) / 4.0 (2 pcs) / 4.5 (2 pcs) 5.0 (2 pcs) / 6.0 (2 pcs) / 7.0 / 8.0 / 9.0 / 10.0	352245	369041
	<b>Set of 8 Lip &amp; Spur wood drill bits</b> with Ø 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10	352247	369065
	<b>Set of 35 Drilling &amp; Screwdriving bits</b> with 10 HSS-G drill bits Ø 2.0 / 2.5 / 3.0 / 3.2 / 3.5 / 4.0 / 4.5 / 6.0 / 8.0 / 10.0 20 Screwdriving bits 25 mm length (2 pcs each of) PH 1, PH 2, PH 3, PZ 1, PZ 2, PZ 3, TX 10, TX 15, TX 20, TX 25 4 Screwdriving bits (1 pc each of) TX 30 (25 mm), TX 40 (25 mm), PH 2 (50 mm), PZ 2 (50 mm) 1 Magnetic bit holder with 1/4" Hex reception (60 mm)	352249	369089
	<b>Set of 28 Impact resistant screwdriving bits &amp; nut drivers</b> <b>25 mm length:</b> 2 x PH 2 / 2 x PH 3 / 3 x PZ 2 / 2 x PZ 3 / 2 x Hex 4 / 2 x Hex 5 / 2 x Hex 6 / 2 x TX 15 / 2 x TX 20 / 2 x TX 25 / 2 x TX 30 / 2 x TX 40 2 Magnetic nut driver Hex 6, Hex 8 (48 mm) 1 Magnetic bit holder with 1/4" Hex reception (60 mm)	352530	371884
	<b>Coldfire</b> Cryogenically Treated Coldfire is a special hardening treatment for making metals stronger, tougher and more durable. This cryogenic process is a one-time permanent treatment affecting the entire screwdriving bit and it is not just a surface coating. The cryogenic process consists of two steps, firstly the bit is hardened by heating it up to 870° and then freezing the bit down to -148° using a dry nitrogen atmosphere. The result of this process is a bit with exceptional durability. + 40% stronger – bit tips hold their form and will accept higher torque forces + 45% longer life – over the lifetime of a bit one can expect to drive 45% more screws <b>Set of 40 Screwdriving bits</b> <b>25 mm length:</b> 1 x PH 1 / 2 x PH 2 / 1 x PH 3 / 2 x PZ 1 / 2 x PZ 2 / 2 x PZ 3 / 1 x Hex SW 3 / 1 x Hex SW 4 / 1 x Hex SW 5 / 1 x Hex SW 6 / 1 x 0.6 x 4.5 / 1 x 0.8 x 5.5 / 1 x 1.0 x 5.5 / 1 x 1.2 x 6.5 / 1 x TX 6 / 1 x TX 7 / 1 x TX 8 / 1 x TX 9 / 2 x TX 10 / 2 x TX 15 / 2 x TX 20 / 2 x TX 25 / 1 x TX 30 / 1 x TX 40 <b>50 mm length:</b> 1 x PH 1 / 1 x PH 2 / 1 x PZ 1 / 1 x PZ 2 / 1 x TX 10 / 1 x TX 15 / 1 x TX 20 Magnetic bit holder with 1/4" Hex reception (60 mm)	352255	369140
	<b>Set of 50 Jigsaw blades for wood</b> 15 x 352147, 10 x 352145, 10 x 352148, 15 x 352149	352251	369102
	<b>Set of 50 Jigsaw blades for wood and metal</b> 10 x 352147, 15 x 352150, 10 x 352148, 15 x 352151	352253	369126

## SDS-PLUS DRILL BITS – 2 CUT / 10 PIECE POWER PACKS


High quality 2 cutter carbide tip with 130° tip angle. The carbide tip is set deeper into the head for a more precise fit and better durability. 2 flute geometry for rapid material removal. Surface treated flute eliminates binding for faster drilling and high abrasion resistance. Made in Germany.

Ø mm	A mm	B mm	Quantity	Id. No. 4932-	EAN Code 4002395
5	110	50	10	352256	369157
5.5	110	50	10	352257	369164
6	110	50	10	352258	369171
6	160	100	10	352259	369188
7	160	100	10	352260	369195
8	110	50	10	352261	369201
8	160	100	10	352262	369218
8	210	150	10	352263	369225
10	160	100	10	352264	369232
10	210	150	10	352265	369249
10	260	200	10	352266	369256
12	160	100	10	352267	369263
12	210	150	10	352268	369270
Set of 8 SDS-plus drill bits with Ø 5 / 6 / 8 x 110 mm and Ø 6 (2 pcs) / 8 / 10 / 12 x 160 mm				352236	368952



## SDS-PLUS CHISELS

Description	A mm	B mm	Quantity	Id. No. 4932-	EAN Code 4002395
Point Chisel	200	-	1	352269	369287
Flat Chisel	200	20	1	352270	369294
Wide Chisel	200	35	1	352271	369300
Set of 3 SDS-plus chisels with 1 pointed, 1 flat, 1 wide chisel				352272	369317

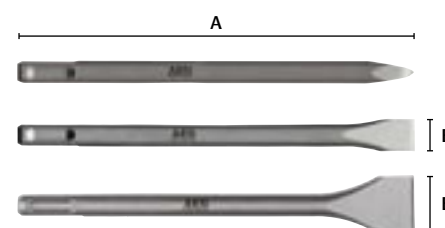

## MASONRY DRILL BITS

Carbide tip with diamond ground cutting edges with 130° angle - For drilling in brick and aerated concrete blocks

Ø mm	A mm	B mm	Quantity	Id. No. 4932-	EAN Code 4002395
4	75	40	1	363591	332410
5	85	50	1	363593	332434
5.5	85	50	1	363595	332458
6	100	60	1	363597	332472
6	150	85	1	367032	333967
7	100	60	1	363599	332496
8	120	80	1	363600	332502
8	200	135	1	363612	332366
10	120	80	1	363602	332526
10	200	135	1	363613	332373
12	150	85	1	363604	332540
Set of 10 Masonry drill bits with Ø 4 / 5 / 5.5 / 6 (2 pcs) / 7 / 8 (2 pcs) / 9 / 10 mm				352239	368983



## MEGA-BIT SET

Description	Id. No. 4932-	EAN Code 4002395
Set of 33 Screwdriving bits		
25 mm length: 1 x 0.6 x 4.5 / 1 x 0.8 x 5.5 / 1 x 1.0 x 5.5 / 1 x 1.2 x 6.5 / 1 x PH1 / 2 x PH2 / 1 x PH3 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x Hex SW 3 / 1 x Hex SW 4 / 1 x Hex SW 5 / 1 x Hex SW 6 / 1 x TX 5 / 1 x TX 6 / 1 x TX 7 / 1 x TX 8 / 1 x TX 9 / 1 x TX 10 / 1 x TX 15 / 1 x TX 20 / 1 x TX 25 / 1 x TX 27 / 1 x TX 30 / 1 x TX 40		
3 Magnetic nut driver Hex 8 / Hex 10 / Hex 13 (48 mm)		
1 Magnetic bit holder with 1/4" Hex reception (60 mm)	399501	361212
1 Magnetic Screwdriver handle with 3 stage ratchet		

## ROUTER BIT SET

Description	Id. No. 4932-	EAN Code 4002395
Router bit set 12 pcs; 8 mm shank	354236	320639



## HIGH PERFORMANCE BI-METAL HOLESAWS / SYSTEM ACCESSORIES

Ø mm	Ø Inch	Id. No. 4932-	EAN Code 4002395	Ø mm	Ø Inch	Id. No. 4932-	EAN Code 4002395	Ø mm	Ø Inch	Id. No. 4932-	EAN Code 4002395
14	9/16	367244	335947	44	1 3/4	367260	336111	98	3 7/8	367280	336319
16	5/8	367245	335954	48	1 7/8	367262	336135	102	4	367281	336326
19	3/4	367247	335978	51	2	367263	336142	105	4 1/8	367282	336333
20	25/32	367248	335985	54	2 1/8	367265	336166	114	4 1/2	367284	336357
21	13/16	367249	335992	57	2 1/4	367266	336173	121	4 3/4	367285	336364
22	7/8	367250	336005	60	2 3/8	367267	336180	127	5	367286	336371
24	15/16	367251	336012	64	2 1/2	367268	336197	152	6	367288	336395
25	1	367252	336029	65	2 9/16	367269	336203				
27	1 1/16	367253	336036	68	2 11/16	371580	345250				
29	1 1/8	367289	336043	70	2 3/4	367271	336227				
30	1 3/16	367254	336050	73	2 7/8	367272	336234				
32	1 1/4	367255	336067	76	3	367273	336241				
35	1 3/8	367256	336074	79	3 1/8	367274	336258				
38	1 1/2	367257	336081	83	3 1/4	367275	336265				
40	1 9/16	367258	336098	89	3 1/2	367277	336289				
43	1 11/16	367259	336104	92	3 5/8	367278	336296				











	Id. No. 4932-	EAN Code 4002395
<b>FIXTEC arbor</b> 5/8" x 18 → 11 mm Hex for holesaws Ø 32 – 152 mm.	367421	337422
<b>Arbor</b> 1/2" x 20 Light duty arbor 1/2" x 20 → Hex 9 for holesaws Ø 14 – 30 mm.	367422	337439
<b>Pilot drill bit long</b> For use with arbor 4932367421.	367423	337446
<b>Pilot drill bit long</b> For use with arbor 4932367421.	367424	337453

## JIGSAW BLADES FOR WOOD / PLASTICS / METAL

Blade Length (toothed) mm	Tooth pitch mm	Ref. No.	Quantity	Id. No. 4932-	EAN Code 4002395	Application	DEPTH OF CUT (mm)						
							WOOD	PLASTIC	P.V.C.	METAL	Cu/Ni/MS/Zn	ALU	
<b>3521 44</b> <b>AEG</b>													
75	3	T 111 C	5	352144	367979	Rough cutting	5 – 60	-	-	< 40	-	-	-
<b>3521 45</b> <b>AEG</b>													
50	1.35	T 101 AO	5	352145	367986	Fast, clean, curve cutting	< 20	-	< 20	< 15	-	-	-
<b>3521 46</b> <b>AEG</b>													
75	4	T 244 D	5	352146	367993	Rough, curve cutting	< 60	-	-	-	-	-	-
<b>3521 47</b> <b>AEG</b>													
75	4	T 144 D	5	352147	368006	Fast, rough cutting	< 60	-	-	-	-	-	-
<b>3521 48</b> <b>AEG</b>													
75	2.5	T 101 B	5	352148	368013	Very clean, splinter free cutting	< 30	< 60	-	< 30	-	-	-
<b>3521 49</b> <b>AEG</b>													
75	4	T 101 D	5	352149	368020	Fast, clean, splinter free cutting	< 60	< 60	-	< 45	-	-	-
<b>3521 50</b> <b>AEG</b>													
55	1.2	T 118 A	5	352150	368037	For thin sheet metal	-	-	-	-	1.5 – 4	1.5 – 4	-
<b>3521 51</b> <b>AEG</b>													
55	2	T 118 B	5	352151	368044	Rougher cuts in metal	-	-	-	-	3 – 6	3 – 6	3 – 10
							<b>12 piece set in container.</b>						
				373494	349944	Suitable for applications in wood, cutting worktops and laminat flooring and metals							



## RECIPROCATING SAW BLADES FOR WOOD / PLASTICS / METAL

Blade Length (toothed) mm	Tooth pitch mm	Ref. No.	Quantity	Id. No. 4932-	EAN Code 4002395	Application	
	150	2.5	S811H	3	318127	301959	All woods, nail embedded wood, plaster board 3 – 100 mm, non-ferrous metals, aluminium 3 – 10 mm, plastic pipes.
	150	4.2	S744D	2	323801	304240	Fast scroll cutting 6–100 mm.
	150	4	S644D	2	323800	304233	Fast cutting of wood and plastic, plunge cutting, 6–100 mm.
	240	8.5	S1542K	2	323804	304271	Special hardened teeth design, fast coarse cut, as well for green and fire wood, 20–180 mm.
	300	4.2	S1344D	2	323802	304257	Fast cutting large timbers and plastic, clean cut, 6–250 mm.
	150	1.4	S922EF	3	354792	324477	For all metals with a wall thickness between 1.5–4 mm
	150	1.8	S922BF	3	354789	324446	For all metals with a wall thickness between 3–10 mm
	230	Coarse grit	S1130R	2	373386	348817	For abrasive materials, fibreglass materials (polyesters, epoxies, melamines), cast iron pipes


## ATTACHMENTS

Description	Id. No. 4932-	EAN Code 4002395
<b>Xtractor – The ideal dust extraction solution</b> The Xtractor can be used with all household vacuum cleaners and industrial dust extraction units with a hose diameter from 26–41 mm.	373501	351862
<b>WB 1 – The solution for all screwdriving applications in confined areas.</b> Being only 30 mm high it is ideally suited to working in confined and limited spaces. Fits to all machines. The 1/4" Hex shank fits directly into the chuck preventing slippage.	344312	312085
<b>FIXTEC nut – The fastest blade changing solution ever seen.</b> Disc changing in seconds, no extra tools required. 12 seconds from removing the worn disc to fixing a new disc.	358225	325528



## VARIOBOX

Description	Id. No. 4932-	EAN Code 4002395
<b>Size 1</b> with foam insert and latches A: 475 mm B: 358 mm C: 132 mm	373214	347216
<b>Size 2</b> with foam insert and latches A: 475 mm B: 358 mm C: 192 mm	373264	348701
<b>Latches (pair)</b>	373252	347247



## INDEX

<b>CORDLESS SYSTEMS</b>	<b>06 – 25</b>	<b>BATTERIES &amp; CHARGERS</b>	<b>24 – 25</b>
<b>18 V POWER</b>	08 – 15	<b>BATTERIES</b>	25
<b>BSB 18 Li</b> 18 V Premium Hammerdrill/Driver	09	<b>L1830R</b> 18 V	25
<b>BSB 18 G Li</b> 18 V Hammerdrill/Driver	09	<b>L1815R</b> 18 V	25
<b>BS 18C Li</b> 18 V Ultra Compact Drill/Driver	10	<b>B1820R</b> 18 V	25
<b>BS 18 G Li</b> 18 V Drill/Driver	11	<b>B1814G</b> 18 V	25
<b>BSS 18C Li</b> 18 V Ultra Compact Impact Driver	11	<b>L1430R</b> 14 V	25
<b>BMS 18C Li</b> 18 V Ultra Compact Reciprocating Saw	12	<b>M1430R</b> 14 V	25
<b>BUS 18 Li</b> 18 V Pendulum Action Reciprocating Saw	13	<b>B1420R</b> 14 V	25
<b>BKS 18 Li</b> 18 V Heavy Duty Circular Saw	13	<b>B1415R</b> 14 V	25
<b>BST 18X Li</b> 18 V Heavy Duty Jigsaw	14	<b>B1414G</b> 14 V	25
<b>BHO 18 0</b> 18 V Cordless Planer	14	<b>L1215</b> 12 V	25
<b>JP 18 A5</b> Contractor Pack – 18 V 5 Piece Combo	15	<b>M1230R</b> 12 V	25
<b>JP 18 A4C</b> Contractor Pack – 18 V 4 Piece Combo	15	<b>B1220R</b> 12 V	25
		<b>B1215R</b> 12 V	25
<b>14.4 V POWER</b>	16 – 17	<b>B1214G</b> 12 V	25
<b>BSB 14 STX NiCd</b> 14.4 V Hammerdrill/Driver	16		
<b>BSB 14 G NiCd</b> 14.4 V Hammerdrill/Driver	16	<b>CHARGERS</b>	25
<b>BS 14 G NiCd</b> 14.4 V Drill/Driver	17	<b>AL 1214 G</b> 12 – 14 V	25
<b>BSS 14 Li</b> 14.4 V Compact Impact Driver	17	<b>AL 1218</b> 18 V	25
		<b>BL 1218</b> 18 V	25
<b>12 V POWER</b>	18 – 23	<b>LL 1230</b> 12 V	25
<b>BSB 12 G NiCd</b> 12 V Hammerdrill/Driver	18		
<b>BSS 12 RW NiCd</b> Right Angled Impact Driver	19	<b>HAMMER SYSTEMS</b>	<b>26 – 31</b>
<b>BS 12C2 Li</b> 12 V 2-speed Ultra Compact Drill/Driver	21	<b>ROTARY HAMMERS</b>	28
<b>BS 12C Li</b> 12 V Ultra Compact Drill/Driver	22	<b>BH 22 E</b> SDS-PLUS Rotary Hammer	28
<b>BSS 12C Li</b> 12 V Ultra Compact Drill/Driver	22		
		<b>COMBI HAMMERS</b>	29 – 30
<b>SPECIALS</b>	23	<b>KH 24 E</b> SDS-PLUS Combi Hammer	29
<b>Flashlights/Battery Lamps</b> 12/14/18 V	23	<b>KH 28 Super XE</b> SDS-PLUS Combi Hammer	30

## INDEX

<b>DRILLING SYSTEMS</b>	<b>32 – 35</b>	<b>MITRE SAW</b>	48
<b>PERCUSSION DRILLS</b>	34 – 35	<b>PS 305 DG Sliding Compound Mitresaw</b>	48
<b>SB 20 2E Percussion Drill</b>	34		
		<b>MITRE SAW LEGSTAND</b>	48
<b>METALWORKING</b>	<b>36 – 39</b>	<b>PSU 2500 Universal Mitre Saw Legstand</b>	48
<b>SMALL ANGLE GRINDERS</b>	38		
<b>WS 6-115 Small Angle Grinder</b>	38	<b>RECIPROCATING SAWS</b>	49
		<b>US 400 XE Mini Reciprocating Saw</b>	49
<b>SMALL ANGLE GRINDERS</b>	38	<b>US 1300 XE Reciprocating Saw</b>	49
<b>WS 6-115 Small Angle Grinder</b>	38		
		<b>SANDERS</b>	50 – 51
<b>METAL CHOPSAW</b>	39	<b>EX 150 E Random Orbit Sander</b>	50
<b>SMT 355 Metal Chopsaw</b>	39	<b>EX 125 ES Random Orbit Sander</b>	51
		<b>FS 140 Palm Sander</b>	51
<b>WOODWORKING</b>	<b>40 – 69</b>	<b>HBS 1000 E Belt Sander</b>	52
<b>ROUTERS</b>	42 – 43		
<b>MF 1400 KE Combo Router</b>	42	<b>DUST EXTRACTION</b>	53
<b>OF 2050 E Router</b>	43	<b>AP 250 ECP 25L Vac</b>	53
		<b>AP 300 ELCP 30L Vac</b>	53
<b>PLANER</b>	43		
<b>PL 750 Planer</b>	43	<b>ACCESSORIES</b>	<b>54 – 57</b>
		<b>ACCESSORY SETS</b>	54
<b>JIGSAWS</b>	44 – 45	<b>SDS-PLUS DRILL BITS – 2 Cut / 10 Piece Trade Packs</b>	55
<b>STEP 90 X Tophandle Jigsaw</b>	44	<b>SDS-PLUS CHISELS</b>	55
<b>STEP 1200 BX Tophandle Jigsaw</b>	55	<b>MASONRY DRILL BITS</b>	55
		<b>MEGA BIT SET</b>	55
<b>CIRCULAR SAWS</b>	46 – 47	<b>ROUTER BIT SET</b>	55
<b>MBS 30 Turbo Multi Construction Material Saw</b>	46	<b>BI-METAL HOLESAWS/SYSTEM ACCESSORIES</b>	56
<b>KS 55 C 165 mm Circular Saw</b>	47	<b>JIGSAW BLADES WOOD / PLASTICS / METAL</b>	56
<b>KS 66 C 185 mm Circular Saw</b>	47	<b>RECIPROCATING SAW BLADES WOOD / PLASTICS / METAL</b>	57
		<b>ATTACHMENTS</b>	57
		<b>VARIOBOX</b>	57

**AEG POWER TOOLS**

Medina House  
Fieldhouse Lane  
Marlow, Bucks  
SL7 1TB

Tel: +44 (0)1628 894400

Fax +44 (0)1628 894401

[www.aeg-powertools.com](http://www.aeg-powertools.com)

## CORDLESS/HAMMERS/DRILLING METALWORKING/WOODWORKING ACCESSORIES

**AEG POWERTOOLS** promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

### 3 YEAR WARRANTY

All AEG POWERTOOL products are subject to the most stringent field tests and inspections prior to manufacture to ensure the user is provided with the quality expected from AEG POWERTOOLS.



For complete piece of mind all our power tools are backed by an extended 3 year warranty. This service is available to you at no cost if you register your new AEG POWER TOOL at [www.aeg-powertools.com](http://www.aeg-powertools.com) within 30 days of purchase to extend the warranty from 1 year to 3 years.

Tools used in the hire industry, rechargeable battery packs, battery chargers and accessories supplied are not included in the extension of this warranty. Please ring +44 (0)1628 894400 for questions regarding our warranty policy in relation to hire tools.

**EPTA**

© AEG POWERTOOLS

AEG POWERTOOLS reserve the right to change all data including images, specifications and service and warranty information without notice.

AEG POWERTOOLS will hold no liability for printing errors or mistakes.