

Overview


HPE SN3000B Fibre Channel Switch

To remain competitive, IT organizations must keep pace with ever-increasing workloads without a similar increase in their budgets or resources. While virtualization has provided some relief by enabling the benefits of faster deployment and consolidation, it also tends to put additional stress on data center networks. In addition, the move toward cloud computing, which promises greater efficiency and a more service-oriented business model, means that these networks will face even greater demands.

The HPE SN3000B Fibre Channel Switch meets the demands of hyper-scale, private cloud storage environments by delivering market-leading 16 Gb Fibre Channel technology and capabilities that support highly virtualized environments. Designed to enable maximum flexibility and investment protection, the SN3000B Switch is configurable in 12 or 24 ports and supports 4, 8, or 16 Gbps speeds in an efficiently designed 1U package. It also provides a simplified deployment process and a point-and-click user interface-making it both powerful and easy to use. The SN3000B Switch offers low-cost access to industry-leading Storage Area Network (SAN) technology while providing "pay-as-you-grow" scalability to meet the needs of an evolving storage environment.

The SN3000B is available in two models:

- HPE SN3000B 16Gb 24-port/24-port Active Fibre Channel Switch
- HPE SN3000B 16Gb 24-port/12-port Active Fibre Channel Switch

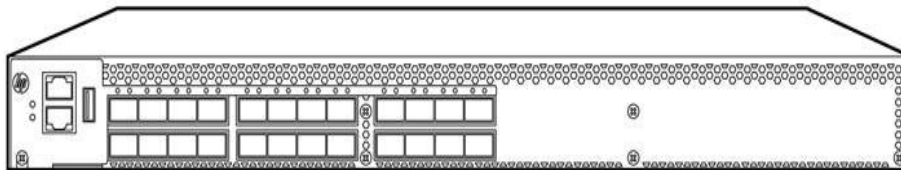

What's New

- Updated HPE B-series Network Advisor SKUs to the next suffix (A to B) and added 3 Network Advisor E-LTU SKUs (suffix AE)

Features and Benefits

Key Features and Benefits

- Delivers 16 Gbps performance with up to 24 ports in an energy-efficient, 1U form factor, providing maximum flexibility for diverse deployment and cooling strategies
- Features Ports on Demand (PoD) capabilities for fast, easy, and cost-effective scaling from 12 to 24 ports in a 12-port increment
- Provides a flexible, simple, and easy-to-use SAN solution with industry-leading technology
- Supports highly virtualized, private cloud storage with multi-tenancy and non-stop operations
- Offers best-in-class port density and scalability for entry SAN switches, along with hot-pluggable components and non-disruptive software upgrades
- Yields exceptional price/performance value, exceeding comparable Ethernet storage-based alternatives

Models

HPE SN3000B 16Gb FC Switch Models	HPE SN3000B 16Gb 24-port/24-port Active Fibre Channel Switch	QW938A
	HPE SN3000B 16Gb 24-port/12-port Active Fibre Channel Switch	QW937A

Product Highlights

SN3000B 16Gb FC Switch

- Simplifies enterprise SAN deployment by combining higher edge switch port density with exceptional scalability, performance and reliability
 - Delivers 12 or 24-ports in a 1U enclosure
 - Provides 4 Gb/s, 8 Gb/s, and 16 Gb/s* performance
 - Employs optional Inter-Switch Link (ISL) Trunking to provide a high-speed data path between switches which enables a high speed data path between 16 Gb/s switches up to 128 Gb/s
- NOTE: * 16 Gb/s performance can be obtained between two 16 Gb/s capable devices.**

Configuration Support <http://h18000.www1.hp.com/products/storageworks/san/documentation.html>

High-availability features

- Optional integrated redundant, hot swappable power supply with integrated cooling fans
- Enhanced Fault Detection Logic
- Parity protection on all data paths and system memory

Advanced Fabric Services

- Hardware Enforced Zoning
- Frame Filtering
- Built-in Web browser management tools
- Enhanced Group Management (EGM)
- HPE B-series SAN Network Advisor software (optional)

Cabinet Support

- HPE (22U, 36U, and 42U) 10000 G2 Series, the Intelligent Series racks and HPE (14U, 22U, 36U, 42U, and 47U) 11000 G2 Series racks.

NOTE: To order factory integration, add OD1 after the part number on your sales order.

Software Components, Standard, Base Models

Frame Filtering

An ASIC based capability that enables new applications and features. The switch has the ability to "view" the first 64 bytes of the Fibre Channel frame. At this time, Frame Filtering enables advanced capabilities such as Advanced Zoning and Advanced Performance Monitoring.

Advanced Zoning

WWN Zoning and Access Control are enforced by hardware that provides the same simple administration previously enforced only with software. Administrators can organize a physical fabric into logical groups and prevent unauthorized access by devices outside the Zone.

Web Tools

Web Tools is an intuitive and easy-to-use graphical interface that enables organizations to monitor and manage SAN fabrics. Tasks can be performed through a Java-capable Web browser from a standard laptop, desktop PC or workstation from any location within the enterprise.

EGM

Enhanced Group Management (EGM) is a FOS license that is included with all B-Series switches and enables multi-switch operations. It helps automate operations across multiple switches to save time and streamline repetitive operations, which are typically prone to error. EGM drives consistency across fabrics, while minimizing the risk associated with potential downtime due to configuration mismatches.

Product Highlights

EGM provides streamlined troubleshooting for more effective fabric monitoring and diagnosis.

HPE SAN Network Advisor Professional, Professional Plus, and Enterprise enable EGM functionality. Customers have EGM functionality enabled within the hardware product and need only to make the decision around which management application is right for them.

Adaptive Networking

Adaptive Networking (AN) is a family of technologies which allow flexible control of traffic movement within the fabric which deliver application aware management of fabric resources. Applications may be used with multiple protocols and multiple classes of service. It includes the following features:

Ingress Rate Limiting:

Allows the ingress bandwidth of a port to be throttled to a rate lower than negotiated with the SAN node. This could be very useful for enterprises offering stepped levels of service and enforcing SLAs.

Quality of Service (QoS):

Enables zones with high, medium, and low priorities within a fabric on a zone by zone basis. This can be very useful for prioritizing array replication over MANs and WANs over less critical traffic.

Traffic Isolation Zones:

Defines paths through a fabric for some or all nodes. Failover allows a non-preferred path to be used if the preferred fails. TIZs use failover by default but it can be disabled if traffic should stop if a preferred path fails. TIZ can be used to manually map out traffic flows within a fabric based on application, priority, and topology.

Server Application Optimization

Server Application Optimization (SAO) improves overall application performance for physical servers and virtual machines. SAO, when deployed with B-Series Fibre Channel HBAs, extends B-Series Adaptive Networking from the B-series SAN fabric to the server infrastructure. This delivers application-level, fine-grain Quality of Service (QoS) management to the HBAs and related server applications.

Solution Requirements:

- SAO requires B-series HBA installed in the server
-

Software Components, Optional

SN3000B 16Gb Switch Power Pack+ Software Upgrade

The Power Pack+ Software Upgrade LTU includes the following:

- Fabric Vision
- Fabric Watch
- Advanced Performance Monitor
- Extended Fabric
- ISL Trunking

NOTE: Power Pack+ Software titles listed above are only available as a package with the Power Pack+ Software Upgrade.

Product Highlights

Fabric Vision

Fabric Vision offers innovative diagnostic, monitoring and management capabilities to help accelerate new application deployments, address SAN problems before they impact operations and reduce operational costs. It Includes

- Monitoring and Alerting Policy Suite: A policy-based monitoring tool with pre-built rules and automation that simplifies fabric-wide threshold configuration and monitoring.
- Flow Vision: A comprehensive tool that enables administrators to identify, monitor, and analyze specific application data flows without using taps to ensure optimized performance
- Health and performance dashboard: A single customizable screen displayed in HPE SAN Network Advisor that contains all critical SAN information for convenient review and analysis

Fabric Vision will be included by default in all HPE StoreFabric B-series Fibre Channel switches and Directors bundled with Power Pack+ (with FOS 7.2.x and later*). In all other cases, Fabric Vision can be enabled on HPE StoreFabric B-series Fibre Channel switches and Directors in any one of the following ways

- Application of the Fabric Vision LTU (FOS 7.2.x and later*)
- Application of the Power Pack+ LTU (FOS 7.2.x and later*)
- Upgrading existing Switch/Director loaded with Power Pack+ to FOS 7.2.x or later*
- Upgrading existing Switch/Director loaded with both Advanced Performance Monitor (APM) and Fabric Watch (FW) licenses to FOS 7.2.x or later*

* See HPE Spock for Hewlett Packard Enterprise supported versions of FOS 7.2.x

Fabric Watch

Fabric Watch is an optional license which enables each switch to monitor the SAN for potential faults and automatically alert network managers to problems before they become failures. Fabric Watch tracks a variety of SAN fabric elements, events, and counters. Monitoring fabric-wide events, ports, SFPs, and environmental parameters permits early fault detection and isolation as well as performance measurement. Each switch in the SAN needs its own Fabric Watch license.

NOTE: Fabric Watch has been obsoleted in FOS 7.4.0 and later. Users can migrate their Fabric Watch settings to the Fabric Vision licensed Monitoring and Performance Suite (MAPS) prior to upgrading.

Advanced Performance Monitor

This optional enabling technology helps administrators monitor and watch specific fabric metrics -- from a SID (Source ID) to a DID (Destination ID) -- so they can fine-tune and scale the fabric more efficiently. Plus, Advanced Performance Monitoring includes the ability for early warning detection of hot spots within the fabric, a powerful tool for maintaining overall balanced performance.

Top Talkers is a component of Advanced Performance Monitoring and tracks the top traffic flows for hosts and targets for a switch port or a switch. Top Talkers can help identify the ports that need certain Quality of Service (QoS) attributes or it can help determine portions of the physical topology that need reconfiguration.

NOTE: Advanced Performance Monitoring has been obsoleted in FOS 7.4.0 and later. Users can utilize the Fabric Vision licensed Flow Vision features for performance monitoring.

Extended Fabric

Optional license which extends all of the scalability, reliability, and performance benefits of Fibre Channel Storage Area Networks (SANs) beyond the native 10 km distance specified by the Fibre Channel standard.

ISL Trunking

For high performance enhanced Trunking, this optional license logically groups up to eight E-ports to

Product Highlights

provide a high bandwidth trunk between two switches. Each 16Gb switch needs its own license. The switch operating system views the trunk as a single, high bandwidth resource (up to 128Gb) when routing connections between 16Gb switches. Connections are load-balanced across the individual links, which comprise the logical trunk group.

SAN Network Advisor Professional

HPE SAN Network Advisor Professional is a server based management application available at no-charge that comes with B-series SAN Switches and includes the following features:

- Allows management of two Fabric OS (FOS) fabrics (up to a 300 switch ports and 1000 devices)
- Performs group switch management beyond the scope of Web Tools
- Does not offer management of the SN8000B 8-slot or DC SAN Backbone Directors,

It is targeted for SMB customers that use FOS based SAN fabrics and require a management solution for smaller SANs based on a single fabric.

SMB customers that initially start off with SAN Network Advisor Professional and have a small SAN environment may over time feel the need for an enterprise-class product (SAN Network Advisor Professional+ or SAN Network Advisor Enterprise) as their environments start to grow in size and complexity, and as they start to uptake more enterprise-class functionality (such as Fibre Channel Routing, FCIP, etc.). A non-disruptive upgrade path is available from SAN Network Advisor Professional to SAN Network Advisor Professional+ or SAN Network Advisor Enterprise.

SAN Network Advisor Enterprise and Professional+

HPE SAN Network Advisor Enterprise and Professional+ are the enterprise-class products that support FOS products. SAN Network Advisor Enterprise provides complete B-series Directors Management including enterprise-class features/environments such as FICON, Fibre Channel Routing, FCIP, adaptive networking, etc while SAN Network Advisor Professional+ provides the same feature set except for support for the DC SAN Backbone Director, SN8000B 8-Slot Director, and FICON.

SAN Network Advisor Enterprise delivers unprecedented scalability, up to 100 fabrics and 15,000 switch ports, while SAN Network Advisor Professional+ scales to 36 SAN Fabrics and 2560 switch ports. To accommodate growth, there is an upgrade available to SAN Network Advisor Enterprise from SAN Network Advisor Professional Plus.

HPE Smart SAN for 3PAR

HPE Smart SAN, optional software for HP 3PAR, makes end-to-end SAN configuration and management simple and reduces the probability of errors through automation. It is an application embedded in SAN components (array, hosts and switches) that enables 3PAR arrays to orchestrate configuration, settings and policies across the SAN. Smart SAN is supported with B-series Switches, HPE StoreFabric Fibre Channel adapters (HBAs) and 3PAR storage. HPE Smart SAN for 3PAR through its Target Driven Peer Zoning (TDPZ) feature enables customers to automate peer zoning, resulting in the creation of fewer zones and enables configuration of zones in minutes and not in hours. Through automation, it reduces the probability of errors and potential downtime. Additional information can be found here: <http://www8.hp.com/us/en/products/storage-software/product-detail.html?oid=8295863#!tab=features>

NOTE: Supports B-series 16Gb and 8Gb FC switches with FOS 7.4.0a or later.

NOTE: A list of supported HPE FC Adapters can be found at <https://h20272.www2.hp.com/spock/>

NOTE: Supports 3PAR StoreServ storage with 3.2.2 or later with only 16Gb target ports on HPE

Product Highlights

3PAR StoreServ storage.

Service and Support

Warranty

(1-1-1) Hardware Warranty; 1-year parts; 1-year on-site (standard business hours, next business day response) and 1-year labor.

NOTE: The hardware warranty covers firmware and embedded non-saleable software. For extended hardware installation and maintenance information, click the link below:

<http://www.hp.com/hps/carepack/services/>

NOTE: Certain restrictions and exclusions apply. Consult the Customer Support Center for details. Hardware or Software product installation is not included in the warranty, but is available and highly recommended.

Service and Support

Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Our integrated portfolio of Services for storage help customers reduce costs, optimize data, streamline storage management, and improve backup and recovery. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new storage solution, giving you full entitlement for the support for need for your IT and business.

Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC

2 – HP CSC reports 2014 – 2015

Recommended Support Services

Optimized Care

HPE Proactive Care* with 6 hour call-to-repair commitment, three year Support Service

HPE Proactive Care gives customers an enhanced call experience plus helps prevent problems and maintains IT stability by utilizing tailored, proactive reports with recommendations and advice when your products are connected to Hewlett Packard Enterprise. This Service combines three years' proactive reporting and advice with our highest level of hardware support - The Hewlett Packard Enterprise 24x7, six hour hardware call-to-repair. Hewlett Packard Enterprise is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable storage systems. **<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>**

Standard Care

HPE Proactive Care* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to Hewlett Packard Enterprise. This Service combines three years' proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there

Service and Support

is a problem. <http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

NOTE: *HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

Basic Care

HPE Foundation Care 24x7, three-year Support Service

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

<http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

Related Services

HPE SAN Deployment Service

Hewlett Packard Enterprise delivers complete design and implementation services for Fibre Channel, FCoE, FCIP, SAS, and iSCSI SAN connectivity components.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-8527EN.pdf>

HPE Installation Service

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

More Information

<http://www.hpe.com/services>

Family Information

Features	8/8 SAN Switch Base and 8/8 SAN Switch	8/24 SAN Switch Base		SN3000B 16Gb FC Switch	SN6000B 16Gb FC Switch and SN6000B 16Gb FC Power Pack+
Targeted Environment	Workgroups, Departments	Workgroups, Departments		Workgroups, Departments	Workgroups, Departments
Fibre Channel Port Bandwidth	8Gbit/sec	8Gbit/sec		16Gbit/sec	16Gbit/sec
Aggregate device bandwidth	-64-192 Gbit/sec	-128-192 Gbit/sec		192-384 Gbit/sec	384-768 Gbit/sec
OS Support	NOTE: Please Refer to SAN Design Guide http://www.hp.com/go/sandesign or http://www.hp.com/go/sandesignguide				
Storage system support	3PAR StoreServ, StoreVirtual 4000, P9000/XP, P6000/EVA, P2000/MSA				
FC Ports	8 Enabled 24 Max	16 Enabled 24 Max		12 or 24 Enabled 24 Max	24 or 48 Enabled 48 Max
SFP	B-series	B-series		B-series	B-series
Advanced Trunking	Optional Upgrade	Included with Power Pack+ or Optional Upgrade		Included with Power Pack+ Upgrade	Included with Power Pack+ or Optional Upgrade
Adaptive Networking	Included	Included		Included	Included
Form factor	1U	1U		1U	1U
Zoning Software	Yes (Included)	Yes (Included)		Yes (Included)	Yes (Included)
Hot plug, redundant power supplies	No	No		Optional	Yes
Hot plug fans	No	No		Yes (integrated with power supply)	Yes (integrated with power supply)

Features	1606 Extension SAN Switch	SN4000B SAN Extension Switch
Targeted Environment	Data Centers	Data Centers
Fibre Channel Port Bandwidth	8 Gbit/sec	16 Gbit/sec
Ethernet	1Gbit/sec Ethernet	1/10/40 Gbit/sec Ethernet
FCIP/FICON	Yes, optional license required for FICON	Yes, optional license required for FICON
OS Support	NOTE: Please Refer to SAN Design Guide http://www.hp.com/go/sandesign or http://www.hp.com/go/sandesignguide	
Storage system	3PAR StoreServ, StoreVirtual 4000, P9000/XP, P6000/EVA, P2000/MSA	

Family Information

support		
FC Ports	4 or 16 Enabled 16 Max	24 Enabled 24 Max
Ethernet Ports	2 or 6 Enabled 6 Max	16 ports 1/10GbE Enabled 16 Max 2 – 40GbE ports
SFP	B-series	B-series
Advanced Trunking	Included with Power Pack+ or Optional Upgrade	Included with Power Pack+
Adaptive Networking	Included	Included
Form factor	1U	2U
Zoning Software	Yes (Included)	Yes (Included)
Hot plug, redundant power supplies	Yes	Yes
Hot plug fans	Yes	Yes

Features	SN8000B 8-Slot SAN Director Power Pack+	SN8000B 4-Slot SAN Director and 4-Slot SAN Director Power Pack+		
Targeted Environment	Cloud Optimized Data Centers	Cloud Optimized Data Centers		
Port Bandwidth	Up to 16Gbit/sec	Up to 16Gbit/sec		
Aggregate device bandwidth	10.2 Tbit/sec	5.1 Tbit/sec		
OS Support	NOTE: Please Refer to SAN Design Guide http://www.hp.com/go/sandesign or http://www.hp.com/go/sandesignguide			
Storage system support	3PAR StoreServe, StoreVirtual 4000, P9000/XP, P6000/EVA, P2000/MSA			
Ports	Up to 512 SFP	Up to 256 SFP		
SFP	B-series	B-series		
Advanced Trunking	Included with Power Pack	Included with Power Pack or Optional Upgrade		
Adaptive Networking	Included	Included		
Form factor	14U	9U		
Zoning Software	Yes (included)	Yes (included)		
Hot plug, redundant power supplies	Yes	Yes		
Hot plug fans	Yes	Yes		

Family Information

Features	Brocade 16Gb SAN Switch for HPE c-Class BladeSystem	Brocade 8Gb SAN Switch for HPE c-Class BladeSystem	Brocade 16Gb Fibre Channel SAN Switch Module for HPE Synergy	
Targeted Environment	Enterprise, Datacenters, Workgroups, Departments	Workgroups, Departments	Enterprise, Datacenters, Workgroups, Departments	
Port Bandwidth	16Gbit/sec	8Gbit/sec	16Gbit/sec	
Aggregate device bandwidth	448 Gbit/sec (24 ports x 16Gb/s)	192 Gbit/sec	576 Gbit/sec (36 ports x 16 Gb/s)	
OS Support	NOTE: Please Refer to SAN Design Guide http://www.hp.com/go/sandesign or http://www.hp.com/go/sandesignguide			
Storage system Support	3PAR StoreServ, StoreVirtual 4000, P9000/XP, P6000/EVA, P2000/MSA			
Ports	12 external /16 internal	4 or 8 external / 8 or 16 internal	8 SFP+ external, 4 QSFP external /12 internal	
SFP	B-series	B-series	B-series	
Advanced Trunking	Included with Power Pack+ or Optional Upgrade	Included with Power Pack+ or Optional Upgrade	Included with Power Pack+ or Optional Upgrade	
Adaptive Networking	Included	Included	Included	
Form factor	Embedded	Embedded	Embedded	
Zoning Software	Yes (Included)	Yes (Included)	Yes (Included)	
Hot plug, redundant power supplies	Yes, in BladeSystem Enclosure	Yes, in BladeSystem Enclosure	Yes, in Synergy Frame	
Hot plug fans	Yes, in BladeSystem Enclosure	Yes, in BladeSystem Enclosure	Yes, in Synergy Frame	

Configuration Information

Step 1 - Base Configuration

Select one:

Model	Model Description	Part Number
SN3000B 16Gb 24/24 FC Switch	HPE SN3000B 16Gb 24-port/24-port Active Fibre Channel Switch 16Gb 24/24 FC Switch with 24 active ports; rackmount kit; accessory kit (enterprise safety and regulatory information, installation guide, rack-mounting instructions), power cord, serial cable, base software of Advanced Fabric OS, Advanced Web Tools, Brocade EZ Switch, Advanced Zoning and SAN Network Advisor Professional. NOTE: Requires optical transceivers listed below.	QW938A
SN3000B 16Gb 24/12 FC Switch	HPE SN3000B 16Gb 24-port/12-port Active Fibre Channel Switch 16Gb 24/12 FC Switch with 12 active ports; rackmount kit; accessory kit (Enterprise safety and regulatory information, installation guide, rack-mounting instructions), power cord, serial cable, base software of Advanced Fabric OS, Advanced Web Tools, Brocade EZ Switch, Advanced Zoning, and SAN Network Advisor Professional. NOTE: Requires optical transceivers listed below.	QW937A
SN3000B 16Gb 24-12 12-port FC Upgrade LTU	HPE SN3000B SAN Switch 12-port Upgrade E-LTU 12 port upgrade license for SN3000B 16Gb 24/12 FC Switch (QW937A)	TC391AAE (Physical Version - TC391A)
SN3000B 16Gb FC Switch Optional Power Supply	HPE SN3000B Optional Power Supply Optional, hot-swappable power supply for SN3000B 16Gb 24/24 FC Switch (QW938A) and SN3000B 16Gb 24/12 FC Switch (QW937A) NOTE: Some HPE B-series software licenses are now available through the Electronic Delivery (E-Delivery) mechanism. The E-Delivery software licenses with new part numbers listed in this document are functionally equivalent to the corresponding physical licenses with different part numbers. Some software licenses in this document are represented by two part numbers, the first of which is the E-Delivery version (ending with AAE) and the second is the physical version.	QW939A

Step 2 - Options

Select each type of required options with quantities specified:

Fibre Channel Transceivers	Model Description	Part Number
	HPE B-series 16Gb SFP+ Short Wave Transceiver	QK724A
	HPE 8Gb Short Wave B-series FC SFP+ 1 Pack	AJ716B*
	HPE B-series 16Gb LW 25km FC SFP 1-pack Transceiver	H6Z29A
	*NOTE: AJ716A is not supported with the SN3000B 16Gb FC Switch	

Distance - Maximum	HPE Standard OM2 Cable	HPE Standard OM3 Cable	HPE PremierFlex OM3+ Cable	HPE PremierFlex OM4 Cable
16Gb performance:	35 meters	100 meters	100 meters	125 meters

Configuration Information

8Gb performance:	50 meters	150 meters	150 meters	190 meters
4Gb performance:	150 meters	380 meters	380 meters	400 meters

HPE B-series 16Gb SFP+ Long Wave 10km Transceiver QK725A

HPE 8Gb Long Wave B-series 10km Fibre Channel 1 Pack SFP+ Transceiver AJ717A

HPE B-series 8Gb Extended Long Wave 25km Fibre Channel SFP+ Transceiver 1 Pack AW538A

Accessories

HPE B-series 4G USB Drive N9Y63A

HPE StoreFabric SN3000B/SN6000B 16Gb SAN Switch Accessory Kit E7Y00A

NOTE: When any of the SN3000B Switch models is ordered, an accessory kit is included in the package by default. E7Y00A is required when the original accessory kit or Rack Mount Kit is unavailable

NOTE: The Accessory Kit contains a Rack Mount Kit including rails, rail mounting hardware and plenum and HPE product documentation including Read Me First, Safety Guides, User License, and Warranty.

Optical Cables

HPE PremierFlex OM4+ Fiber Optic Cables

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable QK732A

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable QK733A

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable QK734A

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable QK735A

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable QK736A

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable QK737A

HPE OM3 LC-LC Optical Cables

HPE LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable AJ833A

HPE LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable AJ834A

HPE LC to LC Multi-mode OM3 2-Fiber 2.0m 1-Pack Fiber Optic Cable AJ835A

HPE LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable AJ836A

HPE LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable AJ837A

HPE LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable AJ838A

HPE LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable AJ839A

Step 3 - Optional Software*

NOTE * For Fabric OS (FOS) minimum requirements, please refer to: <http://spock.corp.hp.com/>

Software for SN3000B 16Gb FC Switch	HPE SAN Network Advisor Enterprise Software E-LTU	TC352BAE (Physical License – TC352B)
	HPE SAN Network Advisor Professional Plus Software E-LTU	TC353BAE (Physical License – TC353B)
	HPE SAN Network Advisor Professional Plus Upgrade E-LTU	TC354BAE (Physical License – TC354B)

Configuration Information

	License – TC354B)
HPE B-series Entry Switch Power Pack+ E-LTU	T5521AAE (Physical License – T5521A)
<p>NOTE: The Power Pack+ Software Bundle kit includes Fabric Vision, Fabric Watch, ISL Trunking, Extended Fabric and Advanced Performance Monitor.</p> <p>NOTE: Adaptive Networking and Server Application Optimization features are included by default in the switch firmware (FOS 7.2.x or later, see HPE SPOCK for Hewlett Packard Enterprise supported versions of FOS 7.2.x) and do not require a separate license</p>	
HPE B-series Entry Switch ISLTrunking E-LTU	T5527AAE (Physical License - T5527A)
HPE SN3000B SAN Switch 12-port Upgrade E-LTU	TC391AAE (Physical Version - TC391A)
HPE 8/16Gb Entry Switch Fabric Vision E-LTU	TC509AAE (Physical License - TC509A)
Optional Software	
HPE Intelligent Infrastructure Analyzer Software v2 E-LTU	TC472AAE (Physical License - TC472A)

NOTE: Some HPE B-series software licenses are now available through the Electronic Delivery (E-Delivery) mechanism. The E-Delivery software licenses with new part numbers listed in this document are functionally equivalent to the corresponding physical licenses with different part numbers. Some software licenses in this document are represented by two part numbers, the first of which is the E-Delivery version (ending with AAE) and the second is the physical version.

NOTE: HPE SAN Network Advisor software will no longer be shipped as a DVD to customers. Instead, customers will be able to access and download the software from The HPE Product Download web site.

Technical Specifications

System Architecture	Fibre Channel ports	Switch mode (default): 12- and 24-port configurations (12-port increment through Ports on Demand [PoD] license); universal (E, F, M, EX, D) ports
	Scalability	Full fabric architecture: http://h18006.www1.hp.com/products/storageworks/san/documentation.html
	Certified maximum	Refer to SAN Design Guide for current configuration information: http://h18006.www1.hp.com/products/storageworks/san/documentation.html
	Interoperability	<ul style="list-style-type: none"> • 8/8 SAN Switch • 8/24 SAN Switch • 1606 Extension SAN Switch • SN4000B SAN Extension Switch • SN8000B 8-Slot SAN Backbone Director • SN8000B 4-Slot SAN Director • SN6500B Fibre channel Switch • SN3000B Fibre channel Switch • SN6000B 16Gb FC Switch • Brocade 8Gb SAN Switch for HPE BladeSystem c-Class • Brocade 16Gb SAN Switch for HPE BladeSystem c-Class • Brocade 16Gb Fibre Channel SAN Switch Module for HPE Synergy
	Performance	Auto-sensing of 4, 8, and 16 Gbps port speeds.
	ISL Trunking	Frame-based trunking with up to eight 16 Gbps ports per ISL trunk; up to 128 Gbps per ISL trunk. Exchange-based load balancing across ISLs with DPS included in Fabric OS. There is no limit to how many trunk groups can be configured in the switch.
	Aggregate bandwidth	384 Gbit/sec
	Fabric latency	Latency for locally switched ports is 700 ns; encryption/compression is 5.5 sec per node; Forward Error Correction (FEC) adds 400 ns between E_Ports (enabled by default).
	Maximum frame size	2112-byte payload
	Classes of service	Class 2, Class 3, Class F (inter-switch frames)
	Port types	D_Port (Diagnostic Port), E_Port, EX_Port, F_Port, M_Port (Mirror Port); self-discovery based on switch type (U_Port); optional port type control Access Gateway mode: F_Port and NPIV-enabled N_Port
	Data traffic types	Fabric switches supporting unicast
	Media types	Hot-pluggable, B-Series Branded Small Form Factor Pluggable (SFP), LC connector; Short-Wave Laser (SWL), Long-Wave Laser (LWL); distance depends on fiber-optic cable and port speed. Supports SFP+ (16/8 Gbit/sec) optical transceivers.
	USB	One USB port for system log file downloads or firmware upgrades

Technical Specifications

	Fabric services	Simple Name Server (SNS); Registered State Change Notification (RSCN), NTP, RADIUS, RCS (Reliable Commit Service), Dynamic Path Selection (DPS), Brocade Advanced Zoning, WEB TOOLS™. Optional Fabric Services include: Fabric Watch™, Extended Fabrics, ISL Trunking, End-to-End Performance Monitoring (APM) and Adaptive Networking with QoS.
	Options	SFP media, USB Device
Management	Management software supported	SSH v2, HTTP/HTTPS, SNMP v1/v3, Telnet; SNMP; WEBTOOLS, B-series SAN Network Advisor, SMI-S, RADIUS, LDAP.
	Management access	10/100 Mbps Ethernet (RJ-45), in-band over Fibre Channel, serial port (RJ-45), and one USB port
	Diagnostics	POST and embedded online/offline diagnostics including FCPing, Pathinfo (FCTraceroute), Forward Error Correction (FEC), etc. Diagnostic Port (D-Port) diagnostic features for physical link trouble shooting
Mechanicals	Enclosure	Port Side exhaust airflow; power from back; 1U
	Size	Width: 438 mm (17.23 in.) Height: 43 mm (1.7 in.) Depth: 443 mm (17.45 in.)
	System Weight	7.82 kg (17.25 lb) with one power supply, without transceivers
Environment	Temperature	Operating: 0° to 40° C (32° to 104° F) Non-operating: -25° to 70° C (-13° to 158° F)
	Humidity	Operating: 10 to 85 percent non-condensing
	Altitude	Operating: Up to 3000 meters (9,842 feet) Storage: Up to 12 kilometers (39,370 feet)
	Shock	Operating: 20 g, 6 ms half-sine Non-operating: Half sine, 33G 11ms. 3/eg Axis
	Vibration	Operating: 0.5 g sine, 0.4 grms random, 5 to 500 Hz Non-operating: 2.0 g sine, 1.1 grms random, 5 to 500 Hz
Power	Power Supply	Single power supply with integrated system cooling fan; Optional hot-swappable dual redundant power supply
	AC input	85 V to 264 V ~5 A to 2.5 A
	Input line frequency	47 Hz to 63 Hz
	Power Consumption	80 watts with all 24 ports populated with 16 Gbps SWL optics 60 watts for empty chassis with no optics

Summary of Changes

Date	Version History	Action	Description of Change
07-Jun-2016	From Version 12 to 13	Changed	Changes made to the Overview, Product Highlights, and Configuration Info sections.
10-Jun-2014	From Version 11 to 12	Changed	Text formatted in Configuration Information section.
31-Mar-2014	From Version 10 to 11	Changed	Minor edits made throughout
20-Dec-2013	From Version 9 to 10	Added	HPE B-series 16b Long Wave 25km Fibre Channel SFP+ 1 Pack was added to Fibre Channel Switches.
09-Dec-2013	From Version 8 to 9	Changed	Product descriptions were revised throughout Configuration Information HPE 8/40 SAN Switch and 8/40 SAN Switch Power Pack+ was removed from Family Information
15-Oct-2013	From Version 7 to 8	Changed	Fabric Vision was added to Product Highlights 2408 FCoE CN Switch and 2408 FCoE CN Switch Power Pack+ was removed from Family Information chart
30-Sep-2013	From Version 6 to 7	Changed	Optional Software was revised.
25-Mar-2013	From Version 5 to 6	Changed	Service and Support: Updated Hyperlink in Basic Care section.
22-Mar-2013	From Version 4 to 5	Changed	Service and Support: Updated Hyperlink in Basic Care section. Configuration Information deleted part numbers under Step 2
08-Mar-2013	From Version 3 to 4	Changed	Service and Support: Updated Hyperlink in Basic Care section. Family Information Updated Storage system support.
15-Feb-2013	From Version 2 to 3	Changed	Changes made to the Service and Support Section and Family Information Section.
13-Aug-2012	From Version 1 to 2	Changed	Changes were made in Product Highlight, Service and Support, and Configuration Information sections.

Summary of Changes



Sign up for updates



© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

c04111465 - 14277 - Worldwide - V13 - 7-June-2016