

Installation Guide

PUBLIC

2018-07-04

Installation Guide for SAP S/4HANA 1709

Feature Package Stack 01



Content

1	Getting Started.	5
2	SAP S/4HANA System Landscape Information.	6
3	Installation Documentation.	8
4	Product Information.	11
5	Maintenance Planner.	15
6	Installation Process.	16
7	Installation Follow-Up Activities.	17
7.1	Applying the Latest Kernel and Support Package Stacks.	17
7.2	Importing Data to SAP S/4HANA.	18
	SAP S/4HANA Migration Cockpit.	18
	SAP Data Services.	19
7.3	System Configuration for SAP S/4HANA.	20
7.4	User Assistance Settings.	20
	Enable User Assistance for the Back-End System.	20
	Enable Context-Sensitive User Assistance for SAP Fiori Launchpad.	22
7.5	Follow-Up Activities for Advanced Variant Configuration.	26
7.6	Follow-Up Activities for Predictive Analytics Integrator.	27
7.7	Follow-Up Activities for Analytics.	27
7.8	Installation of SAP Fiori.	27
7.9	Installation of the PI Adapters for Elster and Swift.	28
7.10	Creating RFC Destinations for liveCache Applications.	28
7.11	Follow Up Activities in Master Data Governance.	30
7.12	Follow-Up Activities for Environment, Health, and Safety.	31
7.13	Follow-Up Activities for Enterprise Portfolio and Project Management.	32
	Follow-Up Activities for SAP Portfolio and Project Management.	32
	Follow-Up Activities for Commercial Project Management.	33
7.14	Follow-Up Activities for Product Safety and Stewardship.	42
	Follow-Up Activities for Product Compliance.	42
	Follow-Up Activities for Product Safety and Stewardship for Process Industries.	43
7.15	Follow-Up Activities for Supplier and Category Management.	43
7.16	Follow-Up Activities for Human Resources (Compatibility Packs).	44
	Integration in SAP S/4HANA.	44
	Integration Scenarios.	45

	Conversion from SAP ERP to SAP S/4HANA.	58
	Employee-Business Partner Synchronization.	61
	FAQ.	71
	Related Notes.	71
7.17	Follow-Up Activities for SAP S/4HANA for Extended Procurement.	72
	Integration in SAP S/4HANA.	72
	Integration Scenarios.	72
7.18	Follow-Up Activities for the SAP S/4HANA Financial Closing Cockpit.	74
	Setting Up the BI Content.	74
7.19	Follow-Up Activities for Agricultural Contract Management.	77
	Integration with Oil & Gas and Commodity Management.	77
7.20	Troubleshooting.	78

Document History

Version	Date	Description
1.0	January 31, 2018	First published version.
1.0	May 03, 2018	Minor corrections and update of section SAP S/4HANA Migration Cockpit [page 18] .
1.0	July 04	Minor corrections.






1 Getting Started

This guide provides you with the following information about SAP S/4HANA:

- A system landscape and product overview
- A list of the tools and documentation you need for the installation
- Important follow-up activities you need to consider after the installation

i Note

This guide cannot be used on its own, you need to use it together with the installation guides describing the installation of SAP Application Server Systems Based on SAP NetWeaver using the Software Provisioning Manager 1.0 tool.

You find these guides (as well as a link to the SPM tool) on the SAP Support Portal at <https://support.sap.com/sltoolset>  [System Provisioning](#)  [Installation Option](#)  [Installation Guides - Application Server Systems](#)  [SAP Application Server Systems Based on SAP NetWeaver](#) .


These installation guides are sorted by database, technology (ABAP and Java), and SAP NetWeaver product release. For the installation of SAP S/4HANA, choose the SAP HANA Database guide for your operating system (UNIX, IBM, or Windows) and SAP NetWeaver 7.X-based.

2 SAP S/4HANA System Landscape Information

There are various ways of deploying SAP S/4HANA in your new or already existing system landscape. This section describes some examples.

Example: SAP S/4HANA New Installation

A new installation of SAP S/4HANA needs to run on the SAP HANA database. It is recommended to use the SAP Solution Manager, which can run on any database. This very simple landscape can be enhanced with the SAP cloud solutions and SAP Business Suite products.

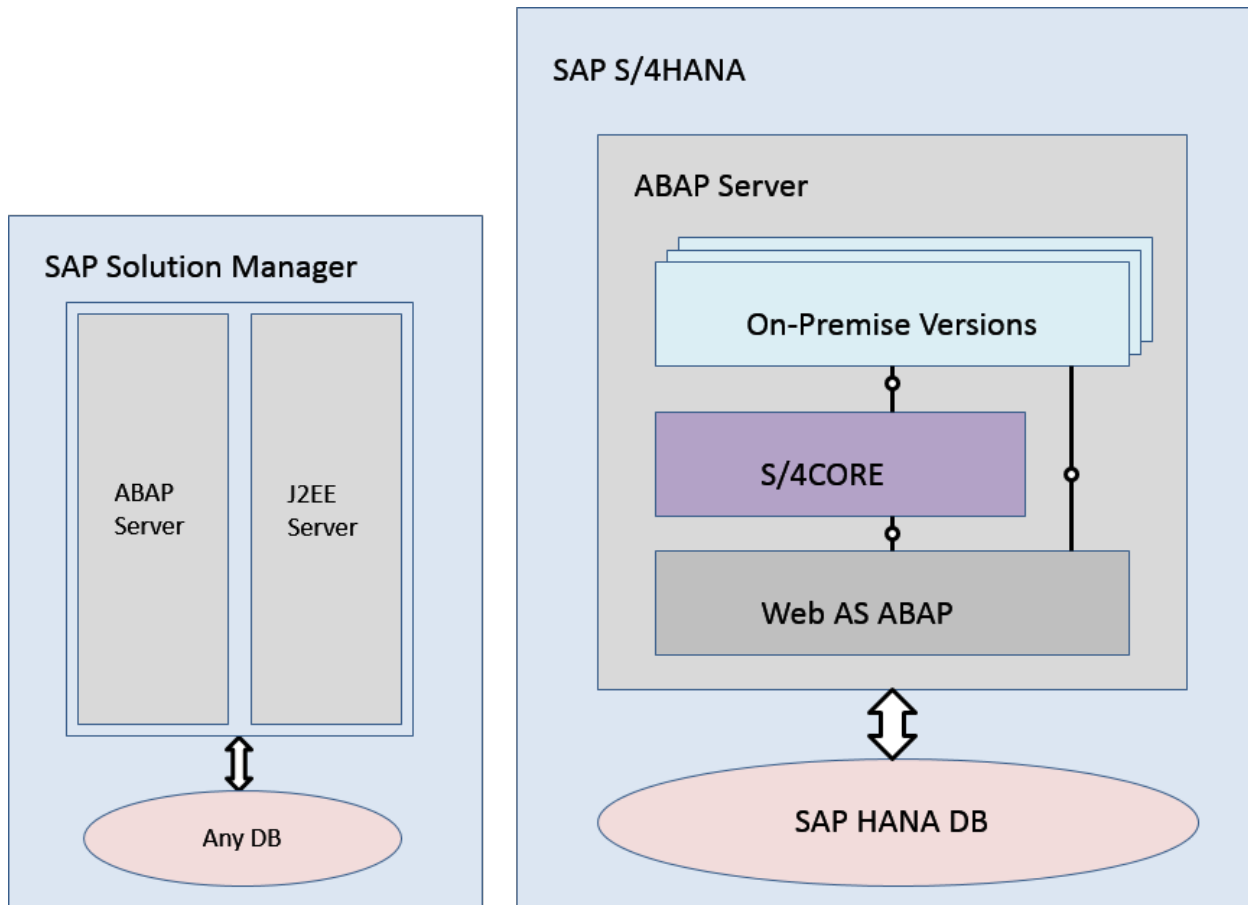


Simple SAP S/4HANA Deployment

Example: SAP S/4HANA in an SAP Business Suite Landscape

It is possible to integrate SAP S/4HANA into an existing SAP Business Suite landscape by replacing the SAP ERP enhancement package product with SAP S/4HANA. When performing this conversion in your system landscape,

you need to do some adaptations, for example you need to convert some of your existing business processes to the simplified SAP S/4HANA processes. Some of the SAP Business Suite processes are no longer supported, some have been changed, and there are also new processes. How to convert your existing processes to the SAP S/4HANA processes is described in the *Simplification Item Catalog*.

For more information about the *Simplification Item Catalog*, see the *Conversion Guide for SAP S/4HANA* at http://help.sap.com/s4hana_op_1709_001 ► *Product Documentation* >.

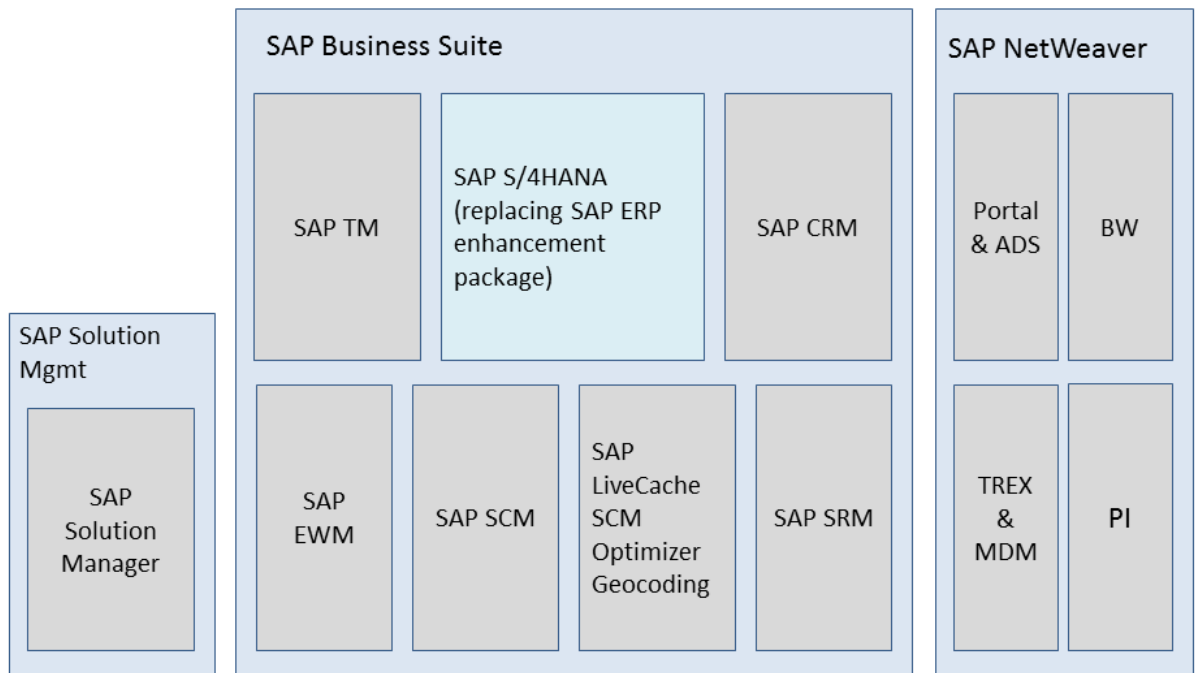

Example SAP Business Suite landscape with an embedded SAP S/4HANA system

More Information

For more information about SAP Fiori for SAP S/4HANA in a hub deployment, see [Landscape Deployment Recommendations for SAP Fiori Front-End Server](#).

3 Installation Documentation





SAP S/4HANA 1709 FPS01 Required Installation Documentation

Documents	Comments and Links										
<p><i>Installation Guide for SAP S/4HANA 1709 Feature Package Stack 01</i> (this guide)</p>	<p>This document contains information relevant for the installation of SAP S/4HANA, but it does not describe the process or the installation tool. They are described in the Software Provisioning Manager guides listed below.</p> <p>Always find the latest version of this guide at the SAP Help Portal at http://help.sap.com/s4hana_op_1709_001 ► <i>Product Documentation</i> ►</p>										
<p>Installation guides describing the installation of SAP systems based on SAP NetWeaver 7.1 and higher using the Software Provisioning Manager 1.0 which is part of SL Toolset 1.0. Make sure that you always use the latest SP version of the tool and guides available on the SAP Support Portal at http://help.sap.com/sitoolset ►.</p> <p>These installation guides are sorted by database technology. For the installation of SAP S/4HANA, choose the SAP HANA Database guide for your operating system (UNIX, IBM, or Windows) in the ABAP and Java technology versions.</p>	<p>You find these guides on the SAP Support Portal at http://help.sap.com/sitoolset ► ► <i>System Provisioning</i> ► <i>Installation Option of Software Provisioning Manager</i> ► <i>Installation Guides - Application Server Systems</i> ►.</p> <ol style="list-style-type: none"> 1. On the <i>Installation Guides - Application Server Systems</i> page go to section <i>SAP Application Server Systems Based on SAP NetWeaver</i>. 2. In the table, select the following values: <p>Value Selection</p> <table border="1" data-bbox="775 1263 1361 1576"> <thead> <tr> <th data-bbox="775 1263 1066 1323">Attribute</th> <th data-bbox="1066 1263 1361 1323">Value</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 1323 1066 1388">Database</td> <td data-bbox="1066 1323 1361 1388">Select your database</td> </tr> <tr> <td data-bbox="775 1388 1066 1451">Product Release</td> <td data-bbox="1066 1388 1361 1451"><i>SAP NetWeaver 7.X-based</i></td> </tr> <tr> <td data-bbox="775 1451 1066 1514">Operating System Platform</td> <td data-bbox="1066 1451 1361 1514">Select your OS</td> </tr> <tr> <td data-bbox="775 1514 1066 1576">Technical Stack</td> <td data-bbox="1066 1514 1361 1576">ABAP and JAVA</td> </tr> </tbody> </table>	Attribute	Value	Database	Select your database	Product Release	<i>SAP NetWeaver 7.X-based</i>	Operating System Platform	Select your OS	Technical Stack	ABAP and JAVA
Attribute	Value										
Database	Select your database										
Product Release	<i>SAP NetWeaver 7.X-based</i>										
Operating System Platform	Select your OS										
Technical Stack	ABAP and JAVA										

Documents	Comments and Links
<i>SAP HANA Server Installation and Update Guide</i>	<p>You need the <i>SAP HANA Server Installation and Update Guide</i> for the installation of the following components:</p> <ul style="list-style-type: none"> • SAP LiveCache on SAP HANA If you plan to use the SAP S/4HANA Production Planning & Detailed Scheduling (PP/DS) application, it is important that you install HANA integrated liveCache, which is the HANA component SAP LCA (also called LCAPPS- or liveCache Applications plugin). • VCH AFL (SAP VCH AFL 1709.01) See also SAP Note 1898497. <div style="background-color: #fff9c4; padding: 5px;"> <p>i Note</p> <p>For each SAP HANA revision, there exists one corresponding version of these SAP HANA system components.</p> </div> <p>You find this guide on the SAP Help Portal at http://help.sap.com/hana_platform ▶▶ <i>Installation and Upgrade</i> ▶▶ <i>SAP HANA Server Installation and Update Guide</i> ▶▶ For information about how to install or update these components, see the section <i>Managing SAP HANA System Components</i> in the guide.</p>
<i>UI Technology Guide for SAP S/4HANA 1</i>	You find this guide at the SAP Help Portal at http://help.sap.com/s4hana_op_1709_001 ▶▶ <i>Product Documentation</i> ▶▶
<i>SAP S/4HANA 1709: Release Information Note</i>	SAP Note 2482453
<i>SAP S/4HANA 1709: Restriction Note</i>	SAP Note 2491467
<i>SAP Fiori for SAP S/4HANA 1709: Release Information Note</i>	SAP Note 2482461
<i>SAP S/4HANA Add-on Note</i>	SAP Note 2214409

Additional Documentation

Documents	Comments
<i>Getting Started with SAP S/4HANA</i>	You find this guide at the SAP Help Portal at http://help.sap.com/s4hana_op_1709_001 ▶▶ <i>Product Documentation</i> ▶▶

Documents	Comments
System copy guides describing the system copy of SAP systems based on SAP NetWeaver using the Software Provisioning Manager 1.0 tool.	You find these guides on the SAP Help Portal at https://support.sap.com/sltoolset  <i>System Provisioning</i>  <i>System Copy Option of Software Provisioning Manager</i>  <i>Guide for Systems Based on SAP NetWeaver 7.1 and Higher</i>  .

4 Product Information

This section gives an overview of the components of SAP S/4HANA 1709 FPS01.

SAP S/4HANA Components

Component Name	Comment
SAP S/4HANA Server	Based on SAP NetWeaver 7.52 for SAP S/4HANA 1709; SAP S/4HANA back-end system
SAP Predictive Integrator	<ul style="list-style-type: none">• PRED ANALYTICS APL 3 FOR HANA 2• UMML4HANA 1
SAP HANA Rules Framework	HANA RULES FRAMEWORK 1.0
SAP S/4HANA AFL	SAP VCH AFL 1709.01 and alternative SCV
SAP LiveCache on SAP HANA	SAP HANA LCAPPS 1.00
SAP Optimizer	SAP SCM Optimizer 13.0
Integration for Elster	<ul style="list-style-type: none">• Elster 2.1• NW 7.52 for S/4HANA 1709 - Advanced Adapter Engine Extnd• UTELSTER 730
Integration for Swift	<ul style="list-style-type: none">• NW 7.52 for S/4HANA 1709 - Advanced Adapter Engine Extnd• SWIFT 622• UTSWIFT 730
ESR Content	SAP S/4HANA 1709 ESR Content (XI CONTENT)
SAP EHS Expert Server	EH&S EXPERT 3.2
SAP EHS WWI Server	EH&S WWI 3.2

i Note

SAP S/4HANA 1709 FPS01 is based on SAP NetWeaver 7.52; but Elster and Swift can run on SAP NetWeaver 7.3 EHP1 and higher releases.

SAP NetWeaver 7.52 for SAP S/4HANA 1709 (SPS 01)

Component Name	Comment
Application Server ABAP	<ul style="list-style-type: none"> • SAP ABA 7.5C • SAP BASIS 7.52 • SAP BW 7.52 • SAP HOST AGENT 7.21 • SAP IGS 7.53 • SAP IGS HELPER • SAP KERNEL 7.53 64-BIT UNICODE • SAP NW GATEWAY FOUNDATION 7.52 • ST-PI 740 • USER INTERFACE TECHNOLOGY 7.52
Basis Apps	<ul style="list-style-type: none"> • NW 7.52 FOR S/4HANA 1709 - Application Server ABAP • UI FOR BASIS APPLICATIONS 300
Business Intelligence	<ul style="list-style-type: none"> • NW 7.52 FOR S/4HANA 1709 - Application Server ABAP • SAP NW 7.40 BI CONT ADDON 7.57
BI Content Extension	<ul style="list-style-type: none"> • NW 7.52 FOR S/4HANA 1709 - Application Server ABAP • BI CONT EXT FOR BI CONT 7.57
TMC Content	TMC CONTENT 01
SAP S/4HANA Java	
Adobe Document Services	<ul style="list-style-type: none"> • ADOBE DOCUMENT SERVICES 7.50 • NW 7.52 FOR S/4HANA 1709 - Application Server ABAP
Enterprise Services Repository	<ul style="list-style-type: none"> • ESR 7.50 • NW 7.52 FOR S/4HANA 1709 - SAP S/4HANA Java • PI GUI LIBRARY 7.50 • XI CONTENT SAP_BASIS 7.50
Advanced Adapter Engine Extnd	
Content Server	SAP CONTENT SERVER 6.50
Frontend	<ul style="list-style-type: none"> • ADOBE LIFECYCLE DESIGNER 11.0 • SAP BUSINESS CLIENT 6.5 • SAP GUI FOR JAVA 7.50 • SAP GUI FOR WINDOWS 7.50 CORE • SAP SCREENREADER EXTENSIONS
SAP Web Dispatcher	SAP WEB DISPATCHER 7.53
SAPUI5 Dev Toolkit: IDE Plugins	SAPUI5 TEAM PROV IDE 3.00

SAP Fiori for SAP S/4HANA 1709 FPS01

Component Name	Comment
<p>i Note</p> <p>SAP Fiori UIs can be installed as addons to the SAP S/4HANA back end or, in a hub installation, on the SAP NetWeaver AS for ABAP 7.52 for SAP S/4HANA 1709 standalone front-end server.</p>	
UI for SAP S/4HANA	<ul style="list-style-type: none"> • UIAPFI70 500 • UIS4HOP1 300 • UIX01CA1 200
UI for Approve Requests	UIX01CA1 200
UI for HCM (Human Capital Management) (old)	<ul style="list-style-type: none"> • UIHR001 100 • UIX01CA1 200
UI for HCM (Fiori 2.0)	<ul style="list-style-type: none"> • UIHR002 100 • UIX01CA1 200
UI for MDG	UIMDG001 200
UI for MDG (Master Data Governance) (old)	UIMDC001 200
UI for TVR	<ul style="list-style-type: none"> • UITRV001 200 • UIX01CA1 200
UI for ILM (old)	UIILM001 100

SAP Multichannel Foundation for Utilities and Public Sector, UI add-on for SAP S/4HANA 1709

Component Name	Comment
MCF UI FOR SAP S/4HANA 1709+	UIS4MCF 100

Database for SAP S/4HANA Backend

Database for SAP S/4HANA Backend	Comments
SAP HANA (SAP HANA DATABASE 2.0)	<p>Used as database for SAP S/4HANA backend; can also be used by SAP Fiori for SAP S/4HANA in an embedded and in a hub deployment (see table below).</p> <p>When configuring your SAP S/4HANA installation package through Software Provisioning Manager (SWPM), you get a screen named <i>Configuration of SAP liveCache with SAP HANA</i>. Here, choose to install liveCache for SAP System.</p> <ul style="list-style-type: none"> • For SAP S/4HANA you can only choose the SAP HANA integrated liveCache. • You need the liveCache installation only when at least one of your applications use it. • Client 000 is not a production client.

Databases for SAP Fiori for SAP S/4HANA (Frontend)

Databases for SAP Fiori for SAP S/4HANA Frontend	Comments
SAP HANA (SAP HANA DATABASE 1.0 and SAP HANA DATABASE 2.0)	<p>The SAP Fiori frontend for SAP S/4HANA can run on SAP HANA, SAP MaxDB, and SAP ASE in a hub deployment, but the database for the SAP S/4HANA backend must be SAP HANA (see table above).</p> <p>For more information about SAP Fiori for SAP S/4HANA in a hub deployment, see Landscape Deployment Recommendations for SAP Fiori Front-End Server</p>
SAP MaxDB (MAXDB 7.9 64-BIT)	
SAP Adaptive Server Enterprise (SAP ASE) (SAP ASE 16.0 FOR BUS. SUITE)	

i Note


Databases other than the ones mentioned in the tables above are **not supported** for SAP S/4HANA.

5 Maintenance Planner

We recommend that you use the Maintenance Planner to plan your installation. The Maintenance Planner creates a stack XML file with the support package stack information that you then hand over to the Software Provisioning Manager (the installer).

Note

The Maintenance Optimizer (MOPZ) cannot be used with SAP S/4HANA. It has been replaced by the Maintenance Planner.

You access the Maintenance Planner tool and its *User Guide* on the SAP Support Portal at <http://help.sap.com/maintenanceplanner> .

6 Installation Process

The installation process for SAP S/4HANA and its components is described in the Software Provisioning tool guides referenced in the section [Installation Documentation \[page 8\]](#).

7 Installation Follow-Up Activities

Note

We recommend to use the ABAP Task Manager for Lifecycle Management Automation for the initial configuration of SAP NetWeaver-based systems.

For more information, see http://help.sap.com/s4hana_op_1709_001 ► [SAP NetWeaver for SAP S/4HANA](#) ► [Technical Operations for SAP NetWeaver](#) ► [Solution Life Cycle Management](#) ► [SAP NetWeaver Configuration](#) ►.

7.1 Applying the Latest Kernel and Support Package Stacks

If you are already on SAP S/4HANA 1709, you can do an update to SAP S/4HANA 1709 FPS01.


Note

Support package stack (SPS) is equivalent to feature package stack (FPS). The term **feature** indicates that new features are delivered with the FPS, not just bug fixes as with support package stacks.

Recommendation

Although it is possible to do the update manually, we recommend that you do this using the Software Update Manager (SUM), as described in the guide *Software Update Manager (SUM) 2.0 <latest sp>* found at <https://support.sap.com/sltoolset> ► [Software Logistics Toolset](#) ► [System Maintenance](#) ►.

If you do want to update the kernel manually, proceed as follows:

1. Log on as user **<SAP System ID>adm** to the hosts of the SAP system instances to be updated.
2. Download the latest kernel for your operating system and database platform as described in SAP Note [19466](#) .
3. Back up the kernel directory that is specified by the profile parameter `DIR_CT_RUN`.
4. Extract the SAR files of the kernel support packages of the target support package level to a temporary directory using the SAPCAR tool.
5. Copy or move the extracted programs from the temporary directory to the local kernel directory.
6. Adjust the ownership and permissions of the kernel binaries by entering the following command sequence (Run the `saproot.sh` script that is located in the kernel directory):

```
su - root
cd <kernel_directory>
./saproot.sh <SAP system ID>
exit
```

7.2 Importing Data to SAP S/4HANA

The following sections explain possible ways of migrating data to SAP S/4HANA:

- [SAP S/4HANA Migration Cockpit \[page 18\]](#)
- [SAP Data Services \[page 19\]](#)

7.2.1 SAP S/4HANA Migration Cockpit

For the migration of legacy data to SAP S/4HANA, SAP provides the SAP S/4HANA migration cockpit. It helps you to transfer your master data and business data from SAP systems and non-SAP systems to SAP S/4HANA 1610 and 1709. The cockpit is available as part of SAP S/4HANA and is included in the SAP S/4HANA license.

Preconfigured SAP S/4HANA-Specific Content

For the data migration, the SAP S/4HANA migration cockpit uses predefined migration content, that is, standard migration objects such as customer, supplier or purchase order objects to identify and transfer the relevant data. These migration objects contain pre-defined mappings to support the migration.

There are two options for transferring data to SAP S/4HANA:

1. **Template file upload**

For each migration object, the migration cockpit provides Microsoft Excel XML files that contain the necessary fields for the SAP S/4HANA target structure. You download the file for the migration object, fill it with the source data, upload it to the cockpit, and then migrate the data to the SAP S/4HANA target system.

2. **Staging tables**

As of SAP S/4HANA 1709 FPS01, the data transfer option using staging tables is available in the migration cockpit. This option allows you to handle large data volumes more easily. You can fill in the staging tables either manually or by using your preferred tools (SAP or third-party tools). The migration cockpit reads the data from the staging tables and migrates them into the SAP S/4HANA target system.

As a prerequisite for this option, you need a remote system that acts as the staging system, and this system must be running an SAP HANA database.

Integration of Custom Data

In addition, the SAP S/4HANA migration cockpit allows you to integrate your custom data into the migration using the migration object modeler. For example, you can adjust the predefined standard migration objects by adding fields to them. As of SAP S/4HANA 1610 FPS02, you can create your own custom-specific migration objects or SAP standard objects that have not yet been included in the scope of the migration cockpit.

Migration Objects

For a list of the available migration objects, see

http://help.sap.com/s4hana_op_1709_001 and search for **Migration Cockpit**. Then navigate ► *SAP S/4HANA Migration Cockpit* ► *Transferring Data to SAP S/4HANA Using Files* ► *Working with Migration Objects* ► *Available Migration Objects* ▾.

Required Roles

For direct access to the SAP S/4HANA migration cockpit, use transaction `LTMCM`. To work with the migration cockpit, you need the role `SAP_CA_DMC_MC_USER`.

To access the migration object modeler, use transaction `LTMOM`. As prerequisite for using the modeler, you first need to create a migration project in the migration cockpit and assign the role `SAP_CA_DMC_MC_DEVELOPER` to the respective user.

Additional Information

For more information, see:

- http://help.sap.com/s4hana_op_1709_001 and search for **Migration Cockpit**.
- SAP Note [2481235](#) 📄: SAP S/4HANA Migration Cockpit (on-premise) - restrictions and extensibility of pre-delivered migration objects

7.2.2 SAP Data Services

SAP provides SAP Data Services with Rapid Data Migration content to assist you with importing your data into your SAP S/4HANA system after installation.

For additional information, see:

- SAP Notes [2239701](#) 📄 and [2287723](#) 📄
- SAP Data Services at the SAP Help Portal <http://help.sap.com/bods> 📄
- SAP Best Practice content for data migration: http://rapid.sap.com/bp/RDM_S4H_OP 📄

7.3 System Configuration for SAP S/4HANA

After you have installed SAP S/4HANA, you have a number of options how to proceed with the system configuration:

1. You follow SAP Activate and SAP Best Practices to guide you through your system configuration.

i Note

We strongly recommend that you use SAP Activate and SAP Best Practices as this will simplify both the initial implementation process and future updates of your software.

SAP Activate is the innovation adoption framework that helps you to implement your SAP S/4HANA system. It provides ready-to-run business and technology processes and guided configurations. For ordering information see SAP Note [2041140](#) for partners and SAP Note [2202234](#) for customers.

For additional information about SAP Activate and SAP Best Practices, see:

- <http://scn.sap.com/community/rapid-deployment/blog/2015/11/18/sap-activate-for-sap-s4hana-in-a-nutshell>
 - SAP S/4HANA Cookbook at <https://wiki.scn.sap.com/wiki/x/HDC7Gg>
 - http://rapid.sap.com/bp/BP_OP_ENTPR
2. You use SAP Activate and SAP Best Practices as templates for your system configuration and make changes using the Implementation Guide (IMG). This allows you to adapt the SAP-delivered configuration settings to your specific requirements.
 3. You use only the Implementation Guide (IMG) to configure your system.

i Note

In case of a conversion of an existing SAP Business Suite system, you proceed as described in the *Conversion Guide for SAP S/4HANA* at the SAP Help Portal under http://help.sap.com/s4hana_op_1709_001.

7.4 User Assistance Settings

The following sections describe how to enable context-sensitive user assistance for SAP S/4HANA.

7.4.1 Enable User Assistance for the Back-End System

Enable Context-Sensitive User Assistance

You need to do these settings in the back-end system which you use to create your system configuration setting. After you have done the settings, you save them, create a transport for them and transport them to your productive system(s).

Proceed as follows:

1. Open transaction `sr13`.
2. Select the tab *PlainHtmlHttp*.
3. Choose *New Entries*.

You have to create new entries for both documentation and XML documentation areas. To create entries for the **documentation** area, enter the following values:

Name	Value to be entered
<i>Variant</i>	Enter a name for the variant (any name).
<i>Platform</i>	Select the platform relevant for your implementation, for example, WN32.
<i>Area</i>	Select Documentation. This will display as IWBHELP in the table.
<i>Server Names</i>	https://cp.hana.ondemand.com
<i>Path</i>	dps/d/ahp/1709%20001
<i>Language</i>	Select the language you need.

To create entries for the **XML documentation** area, enter the following values:

Name	Value to be entered
<i>Variant</i>	Enter a name for the variant (any name).
<i>Platform</i>	Select the platform relevant for your implementation, for example, WN32.
<i>Area</i>	Select XML Documentation. This will display as XML_DOCU in the table.
<i>Server Names</i>	https://cp.hana.ondemand.com
<i>Path</i>	dps/d/ahp/1709%20001
<i>Language</i>	Select the language you need.

4. Repeat step 3 for each relevant platform and language.
5. Select **one** entry as default per platform.
6. Save your changes and create a transport.

Enable Product-Specific User Assistance

After you have done the settings in transaction `sr13` described above, you need to enable the product-specific User Assistance with the program `rsiwbh04` in transaction `se38`:

1. Open transaction `se38`.
2. Enter the program name `rsiwbh04` in the *Program* field and open the program.
3. Under *Product-Specific SAP Library* enter the ID `2c0e7c571fbeb576e1000000a4450e5` in the *Structure/DITA Map ID* field.
 - Class must be `XDP_STRUCT`.
 - The radio button *Change* must be selected.
4. Run the program.

7.4.2 Enable Context-Sensitive User Assistance for SAP Fiori Launchpad

To make context-sensitive user assistance available in the SAP Fiori launchpad, you need to do the settings described in the following sections:

- [Configure the SAP Web Dispatcher \[page 22\]](#)
- [Set Up the User Assistance Plugin \[page 24\]](#)

7.4.2.1 Configure the SAP Web Dispatcher

Use

If you want to make context-sensitive user assistance available in the SAP Fiori launchpad, you must configure SAP Web Dispatcher.

Prerequisites

You have installed SAP Web Dispatcher 7.5 as the reverse proxy. For more information, go to http://help.sap.com/s4hana_op_1709_001, enter *Operating SAP Web Dispatcher* into the search bar, press , open the search result with that title and navigate to the section *Installing SAP Web Dispatcher*.

Activities

1. Adjust the SAP Web Dispatcher profile file.

In the `sapwebdisp_pf.txt` file, add the following parameters:

- For the User Assistance Content Platform
`wdisp/system_<number> = SID=<SID1>, EXTSRV=https://cp.hana.ondemand.com:443,
SRCURL=/sap/dfa/help/, SRCSRV=*:*, PROXY=<your proxy>:<your proxy port>,
STANDARD_COOKIE_FILTER=OFF`
- For the script server in your production system
`wdisp/system_<number> = SID=<SID2>, EXTSRV=https://xray.hana.ondemand.com:443,
SRCURL=/resources/sap/dfa/help/, SRCSRV=*:*, PROXY=<your proxy>:<your proxy
port>, STANDARD_COOKIE_FILTER=OFF`

i Note

- Make sure that the numbers following `wdisp/system_` are smaller than the numbers that you use for all your application server. The rules for the context-sensitive user assistance need to come before the rules for the application servers.
- Make sure that the SIDs are not the same as your system IDs.

2. Activate the usage of the modification handler:

```
icm/HTTP/mod_0 = PREFIX=/, FILE=$(DIR_PROFILE)/redirect.txt
```

For more information, go to http://help.sap.com/s4hana_op_1709_001, enter *SAP Web Dispatcher Parameter References* into the search bar, press , open the search result with that title and navigate to the section `icm/HTTP/mod_<xx>`.

3. Adjust the SAP Web Dispatcher redirect file.

In the `redirect.txt` file, add the following parameters:

```
# User Assistance Content Platform - rewrite rule
if %{SID} = <SID1>
begin
SetHeader HOST cp.hana.ondemand.com:443
RegRewriteRawUrl ^/sap/dfa/help/(.*) /dps/$1
end
# Script Server - rewrite rule
if %{SID} = <SID2>
begin
SetHeader HOST xray.hana.ondemand.com:443
RegRewriteRawUrl ^/resources/sap/dfa/help/(.*) /xRayControls/resources/sap/dfa/
help/$1
end
```

i Note

Make sure that the SIDs in the `redirect.txt` file are the same as in the `sapwebdisp_cf.txt` file.

4. You can check if the content platform is working properly through the proxy connection by accessing:

```
https://<your server>:<your port>/sap/dfa/help/odata.svc/?$format=json
```

Example

If the content platform is connected correctly, you can see on your screen the following output, for example:

```
{"d":{"EntitySets":
["Transport","DeliverableForReplication","Tile","Project","Deliverable","Transpor
tHistory","TourIssue","ReplicationTourIssue","Hotspot","Product","Context"]}}
```

5. You can check if the help script server is working properly through the proxy connection by accessing:
`https://<yourserver>:<yourport>/resources/sap/dfa/help/sap/cfg/XrayBootstrapHelpConfig.json`

Example

If the help script server is connected correctly, you can see on your screen the following output, for example:

```
{
  "description": "This configuration registers the Xray bootstrap plug-in",
  "modulePaths": {
    "sap.dfa.help": "/resources/sap/dfa/help/~201509221536~"
  },
  "bootstrapPlugins": {
    "BootstrapXrayPlugin": {
      "module": "sap.dfa.help.utils.adapters.fiori.BootstrapXrayHelpPlugin"
    }
  }
}
```

Result

You can access SAP Fiori launchpad with context-sensitive user assistance.

7.4.2.2 Set Up the User Assistance Plugin

To make context-sensitive user assistance available in the SAP Fiori Launchpad, you set up the user assistance plugin in the following way:

1. You create a catalog.
For more information about creating catalogs, see the documentation on *SAP Fiori Launchpad* at the SAP Help Portal under http://help.sap.com/s4hana_op_1709_001 ► *SAP NetWeaver for SAP S/4HANA* ► *View All* ► *Function-Oriented View* ► *UI Technologies in SAP NetWeaver* ► *SAP Fiori Launchpad* ► *Administration Guide* ► *Initial Setup of the Launchpad* ►.
2. You create a role that references the catalog.
For more information about creating roles for tile catalogs, see the documentation on *SAP Fiori Launchpad* at the SAP Help Portal under http://help.sap.com/s4hana_op_1709_001 ► *SAP NetWeaver for SAP S/4HANA* ► *View All* ► *Function-Oriented View* ► *UI Technologies in SAP NetWeaver* ► *SAP Fiori Launchpad* ► *Administration Guide* ► *Initial Setup of the Launchpad* ►.
3. You assign the role to every user that needs to access the context-sensitive user assistance.

4. In the catalog, you create a target mapping with the following values:

Field Label	Value
Semantic Object	Shell
Action	plugin
Application Type	SAPUI5 Fiori App
Title	User Assistance Plugin
URL	<p>/resources/sap/dfa/help/utils/adapters/fiori</p> <p>This requires that the SAP Web Dispatcher is set up accordingly so that this URL is routed to the script server.</p>
Component	sap.dfa.help.utils.adapters.fiori
Information	User Assistance Plugin, relevant for all app users
Device Types	<p>Select your required devices:</p> <ul style="list-style-type: none"> ○ Desktop ○ Tablet ○ Phone
Parameters	<p>Enter the following parameters in the table:</p> <ul style="list-style-type: none"> ○ Name: product; Default Value: SAP_S4HANA_ON-PREMISE ○ Name: version; Default Value: 1709 001 ○ Name: editor; Default Value: false <p>Optional parameters</p> <ul style="list-style-type: none"> ○ Name: buttonLocation; Default Value: head You can decide where the user assistance button should appear by entering one of the following values: head: The user assistance button appears in the SAP Fiori header in the top right corner. me: The user assistance button appears in the Me Area. ○ Name: showWhatsNew ; Default Value: false You can decide whether "What's New" information should be displayed on app level, if available. (No: false / Yes: true).

After you have made these setting, the user assistance icon is available for the SAP Fiori Launchpad.

7.5 Follow-Up Activities for Advanced Variant Configuration

Integration of the Fiori UI into SAP GUI

You enable the integration of the Advanced Variant Configuration SAP Fiori UI in SAP GUI as described in the product assistance on the SAP Help Portal:

- https://help.sap.com/viewer/p/FIORI_IMPLEMENTATION ▶ *Installation and Upgrade* ▶ *SAP Fiori: Setup and Configuration* ▶ *Configuration of SAP Fiori Infrastructure* ▶ *Communication Channels* ▶ *ABAP Servers: Setup of Communication* ▶ *Creating System Alias for Applications* ▶
Steps 1 to 3 in the documentation describe how to enable OData calls for the Fiori UI. Step 4 describes the settings required for enabling SAP GUI transactions in the SAP Fiori Launchpad and also contains important information about whitelisting.
- http://help.sap.com/s4hana_op_1709_001 ▶ *SAP NetWeaver for SAP S/4HANA* ▶ *Function-Oriented View* ▶ *UI Technologies in SAP NetWeaver* ▶ *SAP Fiori Launchpad* ▶ *Administration Guide* ▶ *Setting Up Launchpad Content* ▶ *Integrating Remote Content* ▶ *Configuring Remote Systems* ▶ *Establish a Connection from Back-End System to Front-End Server* ▶
This documentation describes how to set up a connection between the back-end system with a front-end server. This is necessary for activating the integrated SAP Fiori UI.
- In addition, you have to activate the following OData services on the front-end server:
 - LO_VCHCLF
 - LO_VCHCLF_INTEGRATION_LEGACY_SRVFor information about how to activate services, see https://help.sap.com/viewer/p/FIORI_IMPLEMENTATION ▶ *Implementation* ▶ *SAP Fiori: App Implementation* ▶ *Implementation Tasks on Front-End Server* ▶ *Activating OData Services* ▶.

Execute the report VCH_MASS_MAINTENANCE

You use this report for the initial preparation of your variant configuration data for SAP S/4HANA Advanced Variant Configuration. For information about how to use the report, see the system documentation in transaction SE38 or SE80, click on the *Goto* menu, and select *Documentation*.

Post-Installation Steps for VCH AFL

An Application Function Library (AFL) extends the SAP HANA Database with functions required for business applications - specifically, the VCH AFL (Variant Configuration on SAP HANA) extends the SAP HANA Database with functions to run SAP S/4HANA Advanced Variant Configuration. After you have installed VCH AFL (SAP VCH AFL 1709.01), you need to do some post-installation steps for the VCH AFL described in SAP Note [2527105](#).

i Note

For information about the installation of this component, see [Installation Documentation \[page 8\]: SAP HANA Server Installation and Update Guide](#).

7.6 Follow-Up Activities for Predictive Analytics Integrator

To enable the use of Predictive Analytics integrator, perform the following steps:

- Install SAP HANA Automated Predictive Library 3.3. For information, go to <https://help.sap.com/viewer/product/apl/3.2.0.8/en-US> ► [SAP HANA Automated Predictive Library Reference Guide](#) ► [Getting Started with SAP HANA APL](#) ► [Installing SAP HANA APL](#) ►
- Import the Predictive Analytics integrator Delivery Unit. For more information, go to https://help.sap.com/viewer/p/SAP_HANA_PLATFORM ► [Development](#) ► [SAP HANA Developer Guide \(How to develop applications for SAP HANA Extended Application Services classic model using the SAP HANA studio, including modeling data and analytic views, and building application logic\)](#) ► [SAP HANA Application Lifecycle Management](#) ► [Maintaining Delivery Units](#) ► [Import a Delivery Unit](#) ►

For information on configuring the roles required for Predictive Analytics integrator, go to https://help.sap.com/viewer/p/SAP_S4HANA_ON-PREMISE ► [Product Assistance](#) ► [English](#) ► [Cross Components](#) ► [Analytics](#) ► [Predictive Models](#) ► [Configuration Information](#) ►

7.7 Follow-Up Activities for Analytics

To enable the use of Analytics with SAP S/4HANA, you need to set up the Analytic Engine. For information how to do so, see SAP Note [2289865](#).

7.8 Installation of SAP Fiori

The SAP Fiori UIs need to be installed for SAP S/4HANA. You have the following two installation options for SAP Fiori:

- As add-on
This is the embedded installation option, that is, the installation of Fiori UIs on the SAP S/4HANA 1709 FPS01 back-end system.
- As standalone server on a SAP NetWeaver system
This is the hub installation option, with the SAP Fiori UIs installed on the SAP NetWeaver AS for ABAP 7.52 for SAP S/4HANA 1709 FPS01 front-end server.

For more information about the installation and configuration of SAP Fiori, see the SAP Help Portal at https://help.sap.com/fiori_implementation.

7.9 Installation of the PI Adapters for Elster and Swift

The Advanced Adapter Engine Extended (AEX) is required for the installation of the Process Integration Adapters for Elster and Swift. AEX is part of SAP NetWeaver 7.52 for SAP S/4HANA 1709 FPS01 as described in the section [Product Information \[page 11\]](#). For more information about Elster and Swift, see also SAP Notes [1802839](#) and [1064419](#).

You have the following two options how to install the Elster/Swift adapters:

1 Installation from DVD

With this option, you copy the archives from the DVD location `\S4HANA10JAVA\DATA_UNITS\S4_JAVA` to the directory `/usr/sap/trans/EP5/` and use the Software Update Manager (SUM) to deploy the files using the option *Manually prepared directory*.

For more information how to use the SUM tool, see SUM guides at <https://support.sap.com/sltoolset>

► [Software Logistics Toolset 1.0](#) ► [System Maintenance](#) . Select the guide according to your operating systems and database.

2 Installation with Maintenance Planner

With this option, you use Maintenance Planner to generate a stack XML file with the Elster and Swift support package stack information that you then hand over to the Software Update Manager (SUM) tool.

You access the Maintenance Planner tool and its *User Guide* on the SAP Support Portal at <http://help.sap.com/maintenanceplanner>.

7.10 Creating RFC Destinations for liveCache Applications

You use this procedure to use liveCache across clients, for example, to initialize liveCache correctly.

1. Create a user with the following authorizations in all production clients:
 - Cross-application AAAB authorization objects
Authorization object: S_TCODE Value: SE38
Authorization object: S_RFC Activity: 16
Name of RFC object to be protected : /SAPAPO/DM_LC_SYNC, SYST
Type of RFC object to be protected : FUGR

- Basis development environment BC_C
Authorization object: S_DEVELOP Value: 03, 16
Authorization object: S_PROGRAM
User action ABAP/4 program : *
Authorization gr.ABAP/4 program : (no input necessary)
- Basis administration BC_A
Authorization object: 'S_BTCH_JOB'
User action: 'RELE'

i Note

Ensure that the user no longer has the initial password in any of the clients.

2. In each client, create a RFC destination by performing the following substeps:
 1. Start transaction SM59.
 2. Choose *Create*.
3. Add a **CLNT** string and the client number (for example, "678") to your system ID (for example, "XYZ") to determine the connection name.

i Note

This constitutes the connection name (for example, "XYZCLNT678"). You must adhere to this naming convention as ABAP does not recognize other names, for example, "XYZMAND678", and causes errors. If there is already a connection with the same destination but a different name, you must still create the connection as described. "

4. Enter the connection name in RFC destination.
5. As a connection type, choose "3" (= SAP S/4HANA backend system destination or connection to the ABAP system).
6. Enter a description for the destination.
7. In the *Logon* section, enter the user credentials of the user created in this client in step 1.

i Note

Ensure that the password is no longer initial, and do not select **Current User**.

8. Save the changes.

Verifying the Above Steps

To check that you have carried out all the steps correctly, choose *Remote Login*.

The system should display an SAP S/4HANA backend system window, but not an SAP S/4HANA backend system logon screen. If the system displays an SAP S/4HANA backend system logon screen, check if all steps above were performed correctly, you should check whether or not the user is actually available in this client (in particular). This test is not possible with an RFC destination with a CPIC user.

i Note

You create the same user in each client only once. You must, however, ensure that the clients of the destination and user match. The user may also be a CPIC user. The authorization "Authorization object: S_TCODE Value:

SE38" and similar should be assigned here also. You should also check if you can implement SAP Note [536291](#)




7.11 Follow Up Activities in Master Data Governance

Gateway Buffering in Test Systems

To avoid very slow performance, the metadata cache and usage of shared memory for caching options need to be activated. In productive systems, metadata caching is active by default. However, if you are working in test systems you have to activate the Gateway metadata caching (buffering) manually. These settings have to be performed on the frontend system where the Gateway server is installed.

To manually activate these settings, in a test system, you do the following:

1. Go to the Gateway system with transaction `/IWFND/MED_ACTIVATE`, or in Customizing by the IMG path
▶ [SAP NetWeaver](#) ▶ [SAP Gateway](#) ▶ [OData Channel](#) ▶ [Administration](#) ▶ [Cache Settings](#) ▶ [Metadata](#) ▶ [Activate or Deactivate Cache](#). ▶
2. Select the [Activate Metadata Cache](#) check box
3. Select the [Use Shared Memory for Caching](#) check box

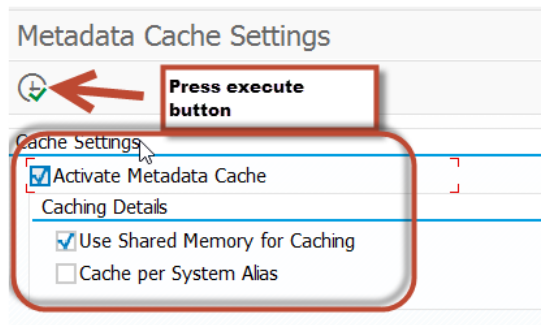

Manually Applying Settings

7.12 Follow-Up Activities for Environment, Health, and Safety

After the installation, you need to carry out the following activities for *Environment, Health, and Safety*:

- In transaction SICE, activate the following WebDynpro services below the node `/default_host/sap/bc/webdynpro/sap/`:
 - All EHFND* and EHHSS* services
 - POWL
 - IBO_WDA_INBOX
 - WDR_CHIP_PAGE
- Also activate the following services
 - NWBC runtime node on the path `/default_host/sap/bc/nwbc`.
 - SAPUI5 application handler on the path `/default_host/sap/bc/ui5_ui5` and on the path `/default_host/sap/public/bc/ui5_ui5`.
- Copy the delivery Customizing from client 000 into your other clients.
- Make the relevant settings in the Customizing activities for *Environment, Health, and Safety* under *Foundation for EHS* and under *Incident Management*, under *Health and Safety Management*, or under *Environment Management*.

7.13 Follow-Up Activities for Enterprise Portfolio and Project Management

7.13.1 Follow-Up Activities for SAP Portfolio and Project Management

Navigation

To enable the navigation, carry out the following manual steps:

1. Maintain the Customizing settings in SAP Portfolio and Project Management under [Portfolio Management](#) [Global Customizing](#) [Process and Service Settings](#) [Navigation Settings](#). SAP delivers the Customizing entries as standard in the Customizing client.
2. From the delivery client, copy the data from the Customizing tables mentioned below using transaction `/n/RPM/CUST_COPY`:
 - `/RPM/DASH_PERS`: Dashboard Customization
 - `/RPM/DASH_ROLE`: Dashboard Attributes Override Table
 - `INM_NAV_CTX`: INM Navigation Context
 - `INM_NAV_CTX_W`: INM Navigation Context Workcenter
 - `INM_NAV_INF_W`: INM Navigation Information
3. Manually adjust and compare the Customizing data with the delivery client using transaction `SCU0`.
4. Initially all dashboard fields are displayed as standard fields. With this, it is not possible to navigate to the object windows. To activate the links to the object windows, select the [Link](#) checkbox in Customizing for SAP Portfolio and Project Management under [Portfolio Management](#) [Global Customizing](#) [Global Field Settings](#) [Dashboard Settings](#) [Define Fields for Dashboards](#).
You can also copy the Customizing for the dashboards by copying `/RPM/DASHBOARD` using transaction `/n/RPM/CUST_COPY`.

Caution

This transaction copies the standard Customizing for all dashboards and invalidates all customer-specific Customizing for the dashboards. Object-type-specific copying is not supported by transaction `/n/RPM/CUST_COPY`.

7.13.2 Follow-Up Activities for Commercial Project Management

7.13.2.1 Overall Implementation Sequence

This section describes the implementation sequence for Project Workspace, Project Cost and Revenue Planning, and Project Issue and Change Management.

The Release Information Note (SAP Note [2507203](#)) contains important information and references related to Commercial Project Management. Based on your business needs, you can choose one of the following component combinations as a deployment option:

Deployment Option	Project Workspace	Project Cost and Revenue Planning	Project Issue and Change Management	SAP BusinessObjects Analysis for Microsoft Office (Analysis Office)
Option 1	x	x	x	x
Option 2	x	x		x
Option 3	x		x	x
Option 4	x			x

Option 1

Install Project Workspace, Project Cost and Revenue Planning, and Project Issue and Change Management with Analysis Office (AO):

1. Activate the `/CPD/CA_CPD_PWS_1` business function (see transaction SFW5 ► [Enterprise Business Functions](#) ► [/CPD/CA_CPD_PWS_1](#) ►).

i Note

The activation of the business function `OPS_PS_CI_1` is a prerequisite for working with Project System (PS) projects.

2. Activate the `/CPD/CA_CPD_PFP_1` business function (see transaction SFW5 ► [Enterprise Business Functions](#) ► [/CPD/CA_CPD_PFP_1](#) ►).
3. Activate the `/PICM/CA_CPD_PICM_1` business function (see transaction SFW5 ► [Enterprise Business Functions](#) ► [/PICM/CA_CPD_PICM_1](#) ►).
4. Install NWBC for Desktop (optional).
5. Install Analysis Office (see SAP note 2188859).
6. Enable [Planning Application Kit](#) (PAK). PAK allows you to use the workbooks of SAP BusinessObjects Analysis, edition for Microsoft Office as part of the Commercial Project Management content.

Procedure

1. Get the latest information posted in SAP note 1637199.
2. In the back-end system, launch table/view maintenance (transaction SM30).
3. Enter `RSPLS_HDB_ACT` in the table/view field and choose [Maintain](#).
4. Choose [New Entries](#).
5. In the [HANA Integratn. Active](#) column, select [Deep HANA Integration Active](#); and in the [Functn. Active](#) column, mark the checkbox.

7. Commercial Project Management uses the BW layer that is available in each NetWeaver stack.

Caution

Project Cost and Revenue Planning uses BW Integrated Planning (BW-IP), which uses real-time InfoCubes to capture data generated through input-ready queries and planning functions. Therefore, only a configuration of the local BI client is required (and not an additional BI system).

For setting up Project Cost and Revenue Planning, see SAP note 2363617.

8. You must activate the analytics content under info-areas /CPD/AVR and /PICM/AVR. For information about setting up Analytics, see SAP Note 1999149.
9. You must follow these steps to enable delivery customizing in the relevant clients:
 1. Go to transaction `SFW_BROWSER`
 2. Expand the business function /CPD/CA_CPD_PWS_1
 3. Double-click on switch /CPD/CA_CPD_SFWS_PWS_1 to implement BC set activation.
 4. Choose the *Activate Dependent BC Sets* button.
 5. In the dialog box, select *Activate Switch BC Sets* and choose *Continue*.
 6. In the next dialog box, select the following:
 1. *Only Logon client for Cascading BC Sets*
 2. *Activate in logon client for Non-Cascading BC sets*
 3. *Activate for Cross-Client BC sets*
 4. Mark the checkboxes to ignore previous activations and ignore table delivery class for a new installation
 7. Repeat the BC set activation steps for the switch /CPD/CA_CPD_SFWS_PWS_S4_1.
 8. Expand the business function /CPD/CA_CPD_PFP_1.
 9. Repeat the BC set activation steps for the switch /CPD/CA_CPD_SFWS_PFP_1.
 10. Expand the business function /PICM/CA_CPD_PICM_1.
 11. Repeat the BC set activation steps for the switch /PICM/CA_CPD_SFWS_PICM_1.
10. Check and activate SICF services as follows:
 1. Go to transaction `SICF`.
 2. Choose *Execute*.
 3. Go to `default host > sap > bc > webdynpro`.
 4. Ensure that all services under the `cpd` node are active.
 5. Ensure that all services under the `picm` node are active.
11. BRF+ framework is used within analytics and the processing of change requests in Project Issue and Change Management. Import the BRF+ customizing application as follows:
 - **Client 000**
 1. Run the report `FDT_TRANS`
 2. Provide the relevant customizing request
 3. Enter the object ID as `7C63E6507DA2A220E10000000A428544`
 4. Enter the object ID as `38EAA71741841EE59EFAD4B491883514`
 5. Enter the object ID as `F0D5105146757029E10000000A42852B`
 6. Select the *Transport Whole Application(s)* radio button
 - **Productive Client**
 1. Launch the transaction `SCC1`

2. Enter the source client as **000**
3. Provide the transport request in which you have transported the application (from client 000)
4. Mark the checkbox *Include Tasks in Requests*
5. Execute the transaction

Option 2

Install Project Workspace and Project Cost and Revenue Planning with Analysis Office (AO):

1. Activate the `/CPD/CA_CPD_PWS_1` business function (see transaction SFW5 ► *Enterprise Business Functions* ► `/CPD/CA_CPD_PWS_1` ►).

Note

The activation of the business function `OPS_PS_CI_1` is a prerequisite for working with Project System (PS) projects.

2. Activate the `/CPD/CA_CPD_PFP_1` business function (see transaction SFW5 ► *Enterprise Business Functions* ► `/CPD/CA_CPD_PFP_1` ►).
3. Install NWBC for Desktop (optional).
4. Install Analysis Office (see SAP note 2188859).
5. Enable *Planning Application Kit* (PAK). PAK allows you to use the workbooks of SAP BusinessObjects Analysis, edition for Microsoft Office as part of the Commercial Project Management content.

Procedure

1. Get the latest information posted in SAP note 1637199.
2. In the back-end system, launch table/view maintenance (transaction SM30).
3. Enter `RSPLS_HDB_ACT` in the table/view field and choose *Maintain*.
4. Choose *New Entries*.
5. In the *HANA Integratn. Active* column, select *Deep HANA Integration Active*; and in the *Functn. Active* column, mark the checkbox.
6. Commercial Project Management uses the BW layer that is available in each NetWeaver stack.

Caution

Project Cost and Revenue Planning uses BW Integrated Planning (BW-IP), which uses real-time InfoCubes to capture data generated through input-ready queries and planning functions. Therefore, only a configuration of the local BI client is required (and not an additional BI system).

For setting up Project Cost and Revenue Planning, see SAP note 2363617.

7. You must activate the analytics content under info-area `/CPD/AVR`. For information about setting up Analytics, see SAP Note 1999149.
8. You must follow these steps to enable delivery customizing in the relevant clients:
 1. Go to transaction `SFW_BROWSER`
 2. Expand the business function `/CPD/CA_CPD_PWS_1`
 3. Double-click on switch `/CPD/CA_CPD_SFWS_PWS_1` to implement BC set activation.
 4. Choose the *Activate Dependent BC Sets* button.
 5. In the dialog box, select *Activate Switch BC Sets* and choose *Continue*.
 6. In the next dialog box, select the following:
 1. *Only Logon client for Cascading BC Sets*

2. *Activate in logon client for Non-Cascading BC sets*
3. *Activate for Cross-Client BC sets*
4. Mark the checkboxes to ignore previous activations and ignore table delivery class for a new installation
7. Repeat the BC set activation steps for the switch `/CPD/CA_CPD_SFWS_PWS_S4_1`.
8. Expand the business function `/CPD/CA_CPD_PFP_1`.
9. Repeat the BC set activation steps for the switch `/CPD/CA_CPD_SFWS_PFP_1`.
9. Check and activate SICF services as follows:
 1. Go to transaction `SICF`.
 2. Choose *Execute*.
 3. Go to `▶ default host ▶ sap ▶ bc ▶ webdynpro ▶`.
 4. Ensure that all services under the `cpd` node are active.
10. BRF+ framework is used within analytics. Import the BRF+ customizing application as follows:
 - **Client 000**
 1. Run the report `FDT_TRANS`
 2. Provide the relevant customizing request
 3. Enter the object ID as `7C63E6507DA2A220E10000000A428544`
 4. Enter the object ID as `38EAA71741841EE59EFAD4B491883514`
 5. Select the *Transport Whole Application(s)* radio button
 - **Productive Client**
 1. Launch the transaction `SCC1`
 2. Enter the source client as `000`
 3. Provide the transport request in which you have transported the application (from client 000)
 4. Mark the checkbox *Include Tasks in Requests*
 5. Execute the transaction

Option 3

Install Project Workspace and Project Issue and Change Management with Analysis Office (AO):

1. Activate the `/CPD/CA_CPD_PWS_1` business function (see transaction `SFW5 ▶ Enterprise Business Functions ▶ /CPD/CA_CPD_PWS_1 ▶`).

i Note

The activation of the business function `OPS_PS_CI_1` is a prerequisite for working with Project System (PS) projects.

2. Activate the `/PICM/CA_CPD_PICM_1` business function (see transaction `SFW5 ▶ Enterprise Business Functions ▶ /PICM/CA_CPD_PICM_1 ▶`).
3. Install NWBC for Desktop (optional).
4. Install Analysis Office (see SAP note 2188859).
5. You must activate the analytics content under info-areas `/CPD/AVR` and `/PICM/AVR`. For information about setting up Analytics, see SAP Note 1999149.
6. You must follow these steps to enable delivery customizing in the relevant clients:
 1. Go to transaction `SFW_BROWSER`
 2. Expand the business function `/CPD/CA_CPD_PWS_1`

3. Double-click on switch `/CPD/CA_CPD_SFWS_PWS_1` to implement BC set activation.
4. Choose the *Activate Dependent BC Sets* button.
5. In the dialog box, select *Activate Switch BC Sets* and choose *Continue*.
6. In the next dialog box, select the following:
 1. *Only Logon client for Cascading BC Sets*
 2. *Activate in logon client for Non-Cascading BC sets*
 3. *Activate for Cross-Client BC sets*
 4. Mark the checkboxes to ignore previous activations and ignore table delivery class for a new installation
7. Repeat the BC set activation steps for the switch `/CPD/CA_CPD_SFWS_PWS_S4_1`.
8. Expand the business function `/PICM/CA_CPD_PICM_1`.
9. Repeat the BC set activation steps for the switch `/PICM/CA_CPD_SFWS_PICM_1`.
7. Check and activate SICF services as follows:
 1. Go to transaction `SICF`.
 2. Choose *Execute*.
 3. Go to `▶ default host ▶ sap ▶ bc ▶ webdynpro ▶`.
 4. Ensure that all services under the `cpd` node are active.
 5. Ensure that all services under the `picm` node are active.
8. BRF+ framework is used within analytics and the processing of change requests in Project Issue and Change Management. Import the BRF+ customizing application as follows:
 - **Client 000**
 1. Run the report `FDT_TRANS`
 2. Provide the relevant customizing request
 3. Enter the object ID as `7C63E6507DA2A220E10000000A428544`
 4. Enter the object ID as `38EAA71741841EE59EFAD4B491883514`
 5. Enter the object ID as `F0D5105146757029E10000000A42852B`
 6. Select the *Transport Whole Application(s)* radio button
 - **Productive Client**
 1. Launch the transaction `SCC1`
 2. Enter the source client as `000`
 3. Provide the transport request in which you have transported the application (from client 000)
 4. Mark the checkbox *Include Tasks in Requests*
 5. Execute the transaction

Option 4

Install Project Workspace with Analysis Office (AO):

1. Activate the `/CPD/CA_CPD_PWS_1` business function (see transaction `SFW5` `▶ Enterprise Business Functions ▶ /CPD/CA_CPD_PWS_1 ▶`).

i Note

The activation of the business function `OPS_PS_CI_1` is a prerequisite for working with Project System (PS) projects.

2. Install NWBC for Desktop (optional).

3. Install Analysis Office (see SAP note 2188859).
4. You must activate the analytics content under the info-area/CPD/AVR. For information about setting up Analytics, see SAP Note 1999149.
5. You must follow these steps to enable delivery customizing in the relevant clients:
 1. Go to transaction `SFW_BROWSER`
 2. Expand the business function `/CPD/CA_CPD_PWS_1`
 3. Double-click on switch `/CPD/CA_CPD_SFWS_PWS_1` to implement BC set activation.
 4. Choose the *Activate Dependent BC Sets* button.
 5. In the dialog box, select *Activate Switch BC Sets* and choose *Continue*.
 6. In the next dialog box, select the following:
 1. *Only Logon client for Cascading BC Sets*
 2. *Activate in logon client for Non-Cascading BC sets*
 3. *Activate for Cross-Client BC sets*
 4. Mark the checkboxes to ignore previous activations and ignore table delivery class for a new installation
 7. Repeat the BC set activation steps for the switch `/CPD/CA_CPD_SFWS_PWS_S4_1`.
6. Check and activate SICF services as follows:
 1. Go to transaction `SICF`.
 2. Choose *Execute*.
 3. Go to `default host > sap > bc > webdynpro`.
 4. Ensure that all services under the `cpd` node are active.
7. BRF+ framework is used within analytics. Import the BRF+ customizing application as follows:
 - **Client 000**
 1. Run the report `FDT_TRANS`
 2. Provide the relevant customizing request
 3. Enter the object ID as `7C63E6507DA2A220E10000000A428544`
 4. Enter the object ID as `38EAA71741841EE59EFAD4B491883514`
 5. Select the *Transport Whole Application(s)* radio button
 - **Productive Client**
 1. Launch the transaction `SCC1`
 2. Enter the source client as `000`
 3. Provide the transport request in which you have transported the application (from client 000)
 4. Mark the checkbox *Include Tasks in Requests*
 5. Execute the transaction

7.13.2.2 Settings for Project Workspace

Schema Mapping

For the HANA content of Commercial Project Management, you must map the `SAP_ECC` schema to the `SAP <SID>` schema.

Configuration of Display Options for Analytical Reports

Analytical UIBBs are used in Project Workspace to display reports such as Progress Analysis, Work in Progress, and Project Cost Status. By default, these reports are displayed in a SAP List Viewer (ALV) table. However, you can

also choose to view these reports as a graphic, or a table and graphic, or using Crystal Reports. To enable additional options for displaying reports, it is necessary to make the following Customizing settings:

To configure options for Graphic and Table and Graphic displays, follow these steps:

1. In Customizing for SAP NetWeaver, choose ► [UI Technologies](#) ► [SAP List Viewer \(ALV\)](#) ► [Maintain Web Dynpro ABAP-Specific Settings](#) ►.
2. Mark the [Java Server Available](#) checkbox.

i Note

The display options are available in the frontend only if you also have enabled a Java server.

To configure options for Crystal Reports, follow these steps:

1. In Customizing for SAP NetWeaver, choose ► [UI Technologies](#) ► [SAP List Viewer \(ALV\)](#) ► [Maintain SAP GUI-Specific Settings](#) ►.
2. Mark the [Allow Crystal Reports](#) checkbox.

i Note

- Commercial Project Management does not deliver any Crystal Report template for viewing reports.
- Crystal reporting requires a special viewer in the frontend. This setting is only meaningful if this viewer has been installed. For more information, see SAP note [1353044](#) ➤.

Set-Up for Launching Native Transactions in Project Workspace

To launch native SAP transactions using the launchpad in Project Workspace, you must activate the MIME Repository service in the following way:

1. On the [SAP Easy Access](#) screen, choose ► [Tools](#) ► [Administration](#) ► [Administration](#) ► [Network](#) ► [HTTP Service Hierarchy Maintenance](#) ►.
2. On the [Maintain Services](#) screen, select the hierarchy type [Service](#) and choose [Execute](#).
3. In the [Virtual Hosts / Services](#) hierarchy, navigate to the MIME Repository service by choosing ► [default_host](#) ► [sap](#) ► [public](#) ► [bc](#) ► [its](#) ► [mimes](#) ►.
4. Right-click and choose [Activate Service](#).

Definition of RFC Destinations for Charts

The Fiori-themed analytics content of Commercial Project Management uses charts based on WebDynpro ABAP technology. To connect the IGS (Internet Graphics Server) to the SAP system, you have to create an RFC destination in the SAP system. For more information, see SAP note [454042](#) ➤.

Activation of Relevant OData Services

In Commercial Project Management, the following OData service must be activated:

CPD_MASTERPROJECT_OVERVIEW_SRV

Installation and Upgrade of BW

For information about the new and changed objects in this release, see SAP note [2526289](#) ➤.

Enabling Enterprise Search

In Commercial Project Management, the following search connectors must be set up:

- Commercial Project
 - Model Name: MASTERPROJECT_H
 - Connector Name: Commercial Project
- Financial Plan
 - Model Name: FINANCIALPLAN_H
 - Connector Name: Financial Plan
- Change Request
 - Model Name: CHANGEREQUEST_H
 - Connector Name: Change Request (Commercial Project)
- Issue
 - ISSUECHANGEREQ_H
 - Connector Name: Issue (Commercial Project)

The connector ID is generated automatically when the connector is created and the name of the connector can be edited. For more information, see SAP note [2382734](#).

Role for Adding Fiori Apps in the Fiori Launchpad

To add the Fiori apps of Commercial Project Management in the Fiori launchpad, the following role is required: SAP_BR_PROJECTMGR_COMMPRJ (Project Manager (CPM)).

Set-Up for Linking Commercial Projects to CRM Opportunities

To be able to link commercial projects to CRM opportunities, you must provide the HTTP connection to the CRM system (by defining the RFC destination (CPD_CRM) (connection type H)).

Predefinition of Project Workspace Views

For the predefinition of Project Workspace views for the personalization for end users, see SAP note [2011052](#).

7.13.2.3 Settings for Project Cost and Revenue Planning

Schema Mapping

For the HANA content of Commercial Project Management, you must map the SAP_ECC schema to the SAP <SID> schema.

Set-Up of the Planning Group

After installing the latest SP of SAP BusinessObjects Analysis, edition for Microsoft Office, follow these steps to activate the default planning options in workbooks:

1. Launch a planning workbook and navigate to **File** > **Commercial Project** > **Settings**.
2. In the **Settings** dialog box, choose the **Advanced** tab, select **Show Planning Group**.
3. Close and relaunch the planning workbook.

Set-Up of SAP Multiresource Scheduling (MRS)

Project Cost and Revenue Planning allows you to update staffing information in SAP Multiresource Scheduling. For more information about the compatibility of Commercial Project Management with SAP Multiresource Scheduling, see SAP Note [2363617](#).

Enhancing Workbooks for SAP BusinessObjects Analysis, edition for Microsoft Office

The delivered workbooks contain input-ready queries and planning objects, launched in a Microsoft Excel-based frontend for planning. We recommend that you use the delivered workbooks as templates and create your own workbooks to suit individual requirements. To know more about creating planning workbooks, see the relevant guides in https://help.sap.com/viewer/p/SAP_BUSINESSOBJECTS_ANALYSIS_OFFICE. We also recommend that you use the delivered input-ready queries as templates and create your own queries to suit your requirements.

Disabling the Intelligent Double-Click Function in SAP BusinessObjects Analysis, edition for Microsoft Office

i Note

This setting is available only in SAP BusinessObjects Analysis, edition for Microsoft Office 1.4 SP02 and above.

When you double-click a cell, the intelligent double-click function (if enabled) automatically executes the first command in the context menu of the cell.

To disable the intelligent double-click function, do the following:

1. Launch *Registry Editor*. To know more about maintaining registry settings for SAP BusinessObjects Analysis, edition for Microsoft Office, see the relevant guides in https://help.sap.com/viewer/p/SAP_BUSINESSOBJECTS_ANALYSIS_OFFICE.
2. Depending on the type of installation, do one of the following:
 - If you are using a 32-bit operating system, locate the `AdvancedAnalysis` folder either under `HKEY_CURRENT_USER\Software\SAP` or `HKEY_LOCAL_MACHINE\Software\SAP`.
 - If you are using a 64-bit operating system, locate the `Wow6432Node` either under `HKEY_CURRENT_USER\Software\SAP` or `HKEY_LOCAL_MACHINE\Software\SAP`.
3. In the identified path, create nested keys to form the path `*\Software\SAP\AdvancedAnalysis\Settings\ExcelGrid`.
4. Under *ExcelGrid*, create the string `EnableDoubleClick`, and enter the value **False**.

Installation and Upgrade of BW

For information about the new and changed objects in this release, see SAP note [2522216](#).

Enhancing HANA Views to Add New Resources

For more information about enhancing HANA views to add new resources, see SAP note [2560000](#).

Data Consistency of Forecasting Method Descriptions During Upgrade

If you upgrade to Commercial Project Management 1709 onwards from the lower add-on releases SAP Commercial Project Management for S/4HANA 2.0 SP01 and SP02, you must execute the following report to ensure data consistency of forecasting method descriptions: `/CPD/PFP_FORECAST_DATA_TRANS`

Clean-Up of Invalid FBI Structures

To clean up invalid FPM BOPF Integration (FBI) structures, you must run the `/BOFU/R_FBI_VIEW_CLEANUP_DDIC` report.

1. In transaction SE38, run `/BOFU/R_FBI_VIEW_CLEANUP_DDIC`
2. In the selection screen, remove the checks in the following checkboxes:
 - *Inactive Only*
 - *Deleted Objects Only*
 - *Test Mode*
3. Choose Execute

4. The system lists inconsistent objects (from the following list). Select the objects that are listed by the system.

- Business Object
 - /BOBF/ATTACHMENT_FOLDER
- FBI View
 - /CPD/PWS_MP_STEXT
 - /CPD/PWS_MP_LIST
 - /BOFU/VIEW_ATF_DOC
 - /BOFU/VIEW_ATF
 - /CPD/WDC_PFP_HEADER_TEXT_FBIVIEW
 - /CPD/WDC_PFP_HEADER_FBIVIEW
 - /CPD/WDC_PFP_VERSION_FBIVIEW
 - /CPD/WDC_PFP_STRUCTURE_FBI_VIEW
 - /CPD/PWS_MP_PROJ_MEMBER
 - /CPD/PWS_PM
 - /CPD/PWS_TEAM_ROLES
 - /CPD/PFP_DETAIL_MAPPING_FBIVIEW

5. Choose *Cleanup*.

7.14 Follow-Up Activities for Product Safety and Stewardship

7.14.1 Follow-Up Activities for Product Compliance

For successful installation, always check the release information note [2278589](#) for the most current implementation details.

After the installation, carry out the following activities for *Product Compliance for Discrete Industries*:

- Verify and activate the following BC sets depending on the processes you need.
For the process *Managing Product Compliance*:
 - EHPRC_SPECIAL *Critical PRC Customizing from other components*
 - EHPRC_BASIC *Customizing for Product and REACH Compliance*
 - EHPRC_DI_PRODUCT_COMPLIANCE *Managing Product Compliance*For the process *Managing IMDS Compliance*:
 - EHPRC_SPECIAL *Critical PRC Customizing from other components*
 - EHPRC_BASIC *Customizing for Product and REACH Compliance*
 - EHPRC_DI_IMDS_COMP *Managing IMDS Compliance*For both above mentioned processes:
 - EHPRC_SPECIAL *Critical PRC Customizing from other components*
 - EHPRC_BASIC *Customizing for Product and REACH Compliance*
 - EHPRC_DI *Customizing for Product Compliance*
- Verify and carry out all Customizing steps under ► [SAP Customizing Implementation Guide](#) ► [Product Safety and Stewardship](#) ► [Product Compliance for Discrete Industries](#) ►.

- In transaction SICE, activate the following WebDynpro services below the node `/default_host/sap/bc/webdynpro/sap/`:
 - All EHFND* and EHPRC* services
 - POWL
 - IBO_WDA_INBOX
 - WDR_CHIP_PAGE
- Also activate the following services:
 - NWBC runtime node on the path `/default_host/sap/bc/nwbc`.
 - SAPUI5 application handler on the path `/default_host/sap/bc/ui5_ui5`.

7.14.2 Follow-Up Activities for Product Safety and Stewardship for Process Industries

For successful installation, always check the release information note [2278589](#) for the most current implementation details.

After the installation, you need to carry out follow-up activities as described in the following SAP Notes:

- For information regarding installation instructions for *Windows Wordprocessor Integration (WWI)* and *Expert / Open Content Connector (OCC)*, see SAP Note [568302](#).
- For information regarding installation instructions for the *WWI* server, see SAP Note [1394553](#).

7.15 Follow-Up Activities for Supplier and Category Management

After the installation, you need to carry out the following activities for Supplier and Category Management:

Delivery Customizing

You have to copy the delivery Customizing for Supplier and Category Management from client 000 to your relevant clients. You can run transaction *Customizing Cross-System Viewer* (SCU0) to compare Customizing contents in the 000 client and in the client in your system. For Supplier and Category Management, the following application components are relevant:

- SLC-EVL, SLC-ACT, SLC-CAT for Supplier and Category Management Customizing
- BC-SRV-NUM for number range intervals required for purchasing categories, activities, tasks, and for the objects used in Supplier Evaluation
- CA-GTF-SGF for Web Dynpro launchpad and OBN Customizing
- CA-GTF-SGF-POW for POWL Customizing
- BC-SEC-AUT-PFC for PFCG role Customizing

In addition, you must copy alert texts with text ID 'ALRT ' and text names EVAL_REMINDER* and TASK* to the productive client. For more information, see SAP Note [601619](#).

Important SAP Notes

Define the system characteristic as described in SAP Note [2224695](#).

Activate Internet Communication Framework (ICF) Services

For information about the ICF services that you have to activate for Supplier and Category Management, see the configuration information for Supplier and Category Management. This documentation is included in the product assistance for SAP S/4HANA that is available on SAP Help Portal at http://help.sap.com/s4hana_op_1709_001.

i Note

This documentation also contains further information about the implementation of Supplier and Category Management, such as jobs that must be scheduled and roles that need to be assigned.

7.16 Follow-Up Activities for Human Resources (Compatibility Packs)

7.16.1 Integration in SAP S/4HANA


Introduction

The recommended HCM solution for SAP S/4HANA is the SAP SuccessFactors HCM Suite. You can use the existing integration based on HANA Cloud Integration (HCI) to connect SAP SuccessFactors to the SAP S/4HANA system.

i Note

No integration is required if the SAP S/4HANA system is used to store the data. This information is only relevant if you want to replicate data from your HR master system to the SAP S/4HANA system.

To transition into SAP S/4HANA system, it is important that at least the basic employee master data related infotypes (that is, infotypes 0,1,2,3,6,7,9,17, 32, 105, 315) are moved into the PA table and then this data is synchronized with BP in SAP S/4HANA system. Currently, the following transition options are available:

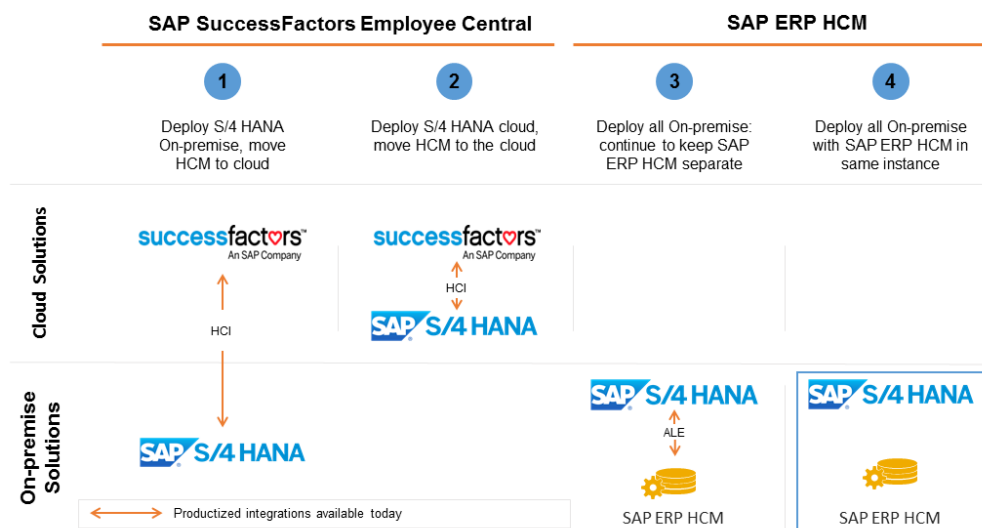

Transition Options in SAP S/4HANA

This document is only relevant if you are using integration options for SAP S/4HANA, that is, options 1, 3 and 4.

1. The following integration option is available for new customers:
 - If you are a new SAP HR or SAP S/4HANA (without a legacy SAP HCM system) customer, then you can implement SAP SuccessFactors and connect EC with SAP S/4HANA (Option 1 from the diagram)
2. The following integration options are available for existing customers.

If you are an SAP S/4HANA customer also using SAP ERP HCM and are not able to make the move to SAP SuccessFactors in the near term, you can continue to use SAP ERP HCM. You have 2 options:

 - Running SAP ERP HCM on a separate instance, integrated via ALE with SAP S/4HANA (Option 3 in diagram)
 - Running SAP ERP HCM on same instance with SAP S/4HANA (co-deployed) (Option 4 in diagram)

This integration helps minimize disruption in your HR processes during the SAP S/4HANA migration and enables the ability to migrate your HR processes to SAP SuccessFactors whenever you are ready.

7.16.2 Integration Scenarios

7.16.2.1 Implementing SAP SuccessFactors

You can use this prepackaged integration to replicate employee master data and organizational data from SAP SuccessFactor Employee Central to the SAP S/4HANA system and cost center data from SAP S/4HANA to SAP SuccessFactor Employee Central, if you are using SAP SuccessFactors Employee Central as your HR master data system.

Based on your business requirements, you can:

- Replicate the employee mini master (basic infotypes) for using employee data in processes that are not HR specific.
- Replicate the employee global infotypes for using employee data in HR specific processes such as payroll.

Prerequisites

- In SAP S/4HANA system there has to be the Integration Add-On software component `PA_SE_IN` installed which does the inbound processing of the receiving Employee and Organizational data from SAP SuccessFactors via HCI.
- You need to install the following notes before you start replicating employee master data and organizational data:
 - [2539457](#): Business Person is created in Person category during Vendor creation or conversion when CVI is active.
 - [2542175](#): Employee Business Person is reused during Vendor creation or conversion when CVI is active.
 - [2517507](#): Reference Vendor data, company code, and bank account is created based on HR master data.
 - [2568251](#): Deleting the invalid business partner assignments.

Steps for Execution

Implementing HR Mini Master Data

You can replicate the basic PA infotypes and exclude the payroll infotypes from the integration. In this case, you can filter out the payroll specific infotypes during configuration and can skip the payroll related steps from the integration document.

For more information regarding the integration using HR mini master, download the documents from the Employee Integration: S/4HANA on-premise with Employee Central (1HW): [Employee Integration: S/4HANA on-premise with Employee Central \(1HW\)](#). Download the documents listed under Configuration:

- SuccessFactors: Integration of Employee Central and SAP S/4HANA (CSP)
- Integration of Employee Central to SAP S/4HANA(Employee, Org Data) with HCI (DSN)
- Integration of SAP S/4HANA to Employee Central (Cost Center Data) with HCI (DSI)

Full Implementation

If you want to replicate employee data to use the full scope of integration, (for example, payroll) you can refer to the following documents for detailed information:

- Employee data replication
Refer to the SAP help portal under [Enterprise Management](#) > [SAP S/4HANA](#) > [SAP S/4HANA, on-premise edition](#) > [Additional Information](#) > [Integration Information](#) > [Replicating Employee Master Data from Employee Central to SAP S/4HANA Using SAP HANA Cloud Integration as the Middleware](#)
- Organizational data replication

Refer to the SAP help portal under [Enterprise Management](#) > [SAP S/4HANA](#) > [SAP S/4HANA, on-premise edition](#) > [Additional Information](#) > [Integration Information](#) > [Replicating Organizational Data from Employee Central to SAP S/4HANA HR Using SAP HANA Cloud Integration as the Middleware](#) >

- Cost center data replication

Refer to the SAP help portal under [Enterprise Management](#) > [SAP S/4HANA](#) > [SAP S/4HANA, on-premise edition](#) > [Additional Information](#) > [Integration Information](#) > [Replicating Cost Centers from SAP S/4HANA to Employee Central Using SAP HANA Cloud Integration as the Middleware](#) >

Employee-Business Partner Synchronization

Execute the employee synchronization after employee replication. For more details, refer to section [Employee-Business Partner Synchronization \[page 61\]](#).

Change in the customizing

Set the following switch in the table T77S0: Set HRALX PBPON to OFF: Integration Employee or BP Activated.

i Note

From 1709 SPS1 or after applying note [2535438](#) and note [2549563](#) in 1709, set *HRALX HRAC* to 'x' and *HRALX PBPON* to 'ON' to synchronize Employee information.

Notes

- The cost center and company code are owned by SAP S/4HANA Finance. The cost centers defined in financials need to replicate into SAP SuccessFactors Employee Central to enable the assignment of employee to the Cost Center, for example, during the Hiring Process. This integration is supported through HCI Middleware iFlow.
- Company Codes are not replicated and have to be manually created in SAP SuccessFactors Employee Central (SFSF EC) because the definition of Companies in SFSF EC requires some additional information.
- SAP SuccessFactors Employee Central is responsible for the employee administration including the organizational assignment of employees to a Cost Center. This employment information is replicated into SAP S/4HANA via HCI.
- The Inbound processing within SAP S/4HANA maps existing Users with the corresponding Employee, Business Partner, and Employment.

7.16.2.2 Running SAP ERP HCM on a Separate Instance, Integrated via ALE with SAP S/4HANA

The purpose of this section is to enable the integration of employee data in the SAP S/4HANA system for running the employee-related processes in SAP S/4HANA. The HR master system is the SAP ERP HCM system, which is the source of the employee data.

For this integration, the Application Link Enabling (ALE) from the SAP ERP HCM system is reused and no specific changes required for SAP S/4HANA. This section describes the steps involved in ALE configuration.

Prerequisite

The Application Link Enabling (ALE) HR master data replication for employees is a 1:1 replication of the values. To ensure that the ALE replication works successfully both the systems must have the same HCM configuration.

Steps for Execution

ALE Configuration Steps

1. Create Users for ALE transfer in both receiving and sending systems.
Create users in both systems. Provide the same user name and relevant authorizations in both systems. These user IDs are used to logon through the remote connection and to perform IDoc transfers.
Make the necessary Customizing settings under ► [IDOC Interface/ Application Link Enabling](#) ► [Basic Settings](#) ► [Logical Systems](#) ►.
2. Make entries in [ALE: Original System Active for HR Data](#).
 1. Call up transaction `SALE` in the SAP ERP HCM (SSP Client 105) system.
 2. In Customizing, go to ► [IDOC Interface/ Application Link Enabling](#) ► [Modelling and Implementing Business Processes](#) ► [Configure Predefined ALE Business Processes](#) ► [Human Resources](#) ► [Master Data Distribution](#) ► [Distributed HR Master Data](#) ►.
 3. Choose [ALE: Original System Active for HR Data](#).
 4. Make the following entries:

Field Name	Value
Group	ALE
Sem.abbr.	REPPA
Value abbr.	

5. Save your changes.
6. Choose [Continue](#).

3. Define the logical systems.

Create logical systems for both the SAP ERP HCM system and the SAP S/4HANA, on-premise edition system if system management has not yet done so.

1. Call up transaction `SALE` in the SAP ERP HCM (SSP Client 105) system.
2. In Customizing, go to [IDOC Interface/ Application Link Enabling](#) > [Basic Settings](#) > [Logical Systems](#) > [Define Logical System](#).
3. Choose *New Entries*.
4. Make the following entries:

Logical System	Name
Enter Logical Systems with the naming convention ' system name +' CLNT +' client no. , for example, SSPCLNT105 for the sending system.	Enter a name to identify your SAP ERP HCM system.
Enter Logical Systems with naming convention ' system name +' CLNT +' client no. , for example, SEDCLNT800 for the receiving system.	Enter a name to identify your S/4HANA, on-premise edition system.

i Note

The distribution of data between systems requires that each system in the network has a unique identification. The logical system is used for this purpose.

5. Save your entries and choose *Continue*.
 6. In the SAP S/4HANA, on-premise edition system (SED client 800) repeat steps **1** through **5** to create the logical systems for the Sending and Receiving system (for example, SEDCLNT800 and SSPCLNT105) if system management has not yet done so.
4. Assign the logical system to the client.

Assign the logical system for SAP ERP HCM system and the SAP S/4HANA, on-premise edition system to the corresponding client if system management has not yet done so.

1. Call up transaction `SALE` in the SAP ERP HCM (SSP Client 105) system.
2. In Customizing, go to [IDOC Interface/ Application Link Enabling](#) > [Basic Settings](#) > [Logical Systems](#) > [Define Logical System](#).
3. Search for the client you are currently logged in on (in this example 105) and choose the entry to display the details.
4. Check the following entry:

Field Name	Value
Logical System	Logical system: name of the system and client that you are logged in on, for example, SSPCLNT105

5. Save your entry and choose *Continue*.

6. In the SAP S/4HANA, on-premise edition system (SED client 800): repeat steps **1** through **5** and check the logical system for the SAP S/4HANA, on-premise edition system/client (for example SEDCLNT800).
5. Create RFC connections.
 1. Call up transaction `SM59` in the SAP ERP HCM system (SSP Client 105).
 2. Choose *Create* in the *Configuration of RFC Connections* view.
 3. Make the following entries in the *RFC Destination* view:

Tabs	Field Name	User Action	Comments
	RFC Destination	Enter a destination name, for example, SEDCLNT800	<S/4HANA System ID>CLNT<Client>
	Connection Type	3 ABAP Connection	
	Description	Enter a description for the RFC	
Technical Settings	Load Balancing Status	Select 'NO'	
	Target Host	Enter the S/4HANA, on-premise edition host – fully qualified with domain	
	Instance No.	Enter the Instance number, for example, 45	
	Save to Database as	Host or IP Address	Save the target host or message server internally in the database either as the host name or as its IP address.
Logon & Security Tab	Client	Enter the Receiver System client, for example 800	
	User	User ID	Created in "Create Users for ALE transfer ..."
	Password	Enter user password	
	Current User	Not checked	
	Trust Relationship	"No" Checked	
Special Options Tab	Special Flags	Not checked	
	Activate RFC Trace	Not checked	
	Trace Export Methods	Default Gateway Value	

Tab	Field Name	User Action	Comments
	Keep- Alive Timeout	Default Gateway Value	
	Transfer Protocol	Select "Classic with tRFC"	

4. Save your changes.
 5. Choose *Remote Logon* to test the RFC.
 6. In the SAP S/4HANA, on-premise edition system (SED client 800): repeat steps **1** through **5** and create an ABAP connection *SSPCLNT105* pointing to the SAP ERP HCM system giving logon credentials to client 105.
6. Maintain the distribution model.
- The distribution model is created in the original system (sending system) and then distributed to other systems.
- You can create a distribution model using the following steps:
1. Call up transaction *BD64*, in the SAP ERP HCM system (SSP client 105).
 2. Choose *Create Model view* (CTRL + F4) in the *Distribution Model* view (in change mode).
 3. In the **Create Model View** dialog box, enter a short text (for example, SAP HCM to SAP S/4) and a technical name (for example, <ZSSP_SED>).
 4. Choose *Continue* and save your entries.
 5. Select the newly created model and choose *Add Message Type*.
 6. In the **Add Message Type** dialog box, enter the logical system of the SAP ERP HCM system in the *Sender* field (SSPCLNT105) and the logical system of the SAP S/4HANA, on-premise edition system in the *Receiver* field (SEDCLNT800). As message type, select *HRMD_A*.
 7. Expand the model view and double-click *No filter set*.
 8. Select *Create Filter Group* in the **Change Filter** view and restrict the replication to the required objects.

Field name	Value
Type of related objects	CP P

Field name	Value
Infotype	0000
	0001
	0002
	0003
	0006
	0007
	0009
	0105
	1000
	1001
Object Type	CP
	P

9. Choose *Enter*.
 10. Save your entry.
 11. Select the model view that you have created and go to **Environment** > *Generate Partner Profiles*.
 12. Select *Transfer IDOC Immediately* and *Trigger Immediately* in the **Generate Partner Profile** view.
 13. Choose *Execute*. Go back to the main view.
If it has been executed successfully, a green list is displayed.
 14. Select the model view again and choose **Edit** > *Model view* > *Distribute*.
 15. Choose *Continue*.
A list is displayed with a message to inform you that the model view has been successfully distributed.
7. Activate the change pointer.
 1. Call up transaction `SALE` in the SAP ERP HCM (SSP Client 105) system.
 2. In Customizing, go to **IDOC Interface/ Application Link Enabling** > *Modelling and Implementing Business Process* > *Master Data Distribution* > *Replication of Modified Data* > *Activate Change Pointers for Message Types*.
 3. In the change view **Activate Change pointers for Message Type**, verify that the activation is set for message type `HRMD_A`.
 8. Maintain the port.
 1. Call up transaction `WE21` in the SAP ERP HCM (SSP Client 105) system.
Alternatively, you can go to Customizing under **SAP Menu** > *Tools* > *ALE* > *ALE Administration* > *Runtime Settings* > *Port Maintenance*.
 2. Select *Transactional RFC* in the navigation panel of the **Ports in IDOC processing** view.
 3. Choose *Create*.
 4. In the **Ports in IDoc processing** view, select *own port name* and enter a technical name, for example `<SEDCLNT800>`.

5. Choose *Enter*.
6. Make the following entries on the **Creating a tRFC port** view:

Field name	Value
Description	Enter a description for your port name.
Version	
IDoc record types SAP Release 4.x	X
RFC destination	Enter the technical name of your RFC destination for the receiving SAP S/4HANA, on-premise edition system, for example, SEDCLNT800.

7. Save your entries.
9. Create partner profiles
 1. Call up transaction `WE20` in the SAP ERP HCM (SSP Client 105) system.
 2. Select *Partner Type LS* in the navigation panel of the **Partner profiles** view.
 3. Choose *Create* and make the following entries:

Field name	Value
Partner No.	Enter the ID for your partner no. Your ALE partner is an SAP system that is addressed by your system (using RFC), in this case the SAP S/4HANA, on-premise edition system, for example, SEDCLNT800
Partn. Type	LS

4. On the **Post processing: permitted agent** tab, specify the job (person or group of people) to be notified if processing errors occur.
5. In the *Outbound parmtrs.* section, choose *Create outbound Parameter*.
6. In the **Partner profiles: Outbound parameters** view, make the following entries:

Field name	Value
Message Type	HRMD_A
Receiver Port	Enter the technical Name of the created port, for example, SEDCLNT800
Pack. Size	For example, 100 (for the first testing use 1)
Output Mode	
Transfer IDoc Immed.	X

Field name	Value
Basic Type	HRMD_A07
Cancel Processing After Syntax Error	X

Field Name	Value
Message Type	SYNCH
Receiver Port	Enter the technical Name of the created port, for example, SEDCLNT800
Pack. Size	For example, 100
Output Mode	
Transfer IDoc Immed.	X
Basic Type	SYNCHRON
Cancel Processing After Syntax Error	X

7. Save your entries.
8. Call up transaction `WE20` in the SAP S/4HANA, on-premise edition system (SED client 800).
9. Select *Partner Type LS* in the navigation panel of the **Partner profiles** view.
10. Choose *Create* and make the following entries:

Field name	Value
Partner No.	Enter the ID for your partner no. Your ALE partner is an SAP system that is addressed by your system (using RFC), in this case the SAP ERP HCM system, for example SSPCLNT105
Partn. Type	LS

11. On the **Post processing: permitted agent** tab, specify the job (person or group of people) to be notified if processing errors occur.
12. In the *Inbound parmtrs.* section, choose *Create inbound Parameter.*
13. In the **Partner profiles: Inbound parameters** view in the *Inbound options* section, make the following entries:

Field name	Value
Message Type	HRMD_A
Process Code	HRMD

Field name	Value
Cancel Processing After Syntax Error	X
Processing by Function Module	
Trigger Immediately	X

14. Save your entries.

i Note

By default, in the receiving system IDocs are grouped together and received.

10. Run the initial distribution.

1. Call up transaction `PFAL` in the SAP ERP HCM system (SSP client 105)
2. On the **HR: ALE Distribution of HR Master Data** view, specify the required Object Type, Object ID, and so on, before executing and choose the following option:

Field Name	Value
Insert (complete distribution: delete in target system, re-create)	X

3. Choose *Execute*.

11. Check IDocs.

In the receiving system (SED client 800) check the inbound IDocs (transaction: `WE02/WE05`). Some inbound IDocs may have errors. This may be due to some HR specific Data and configuration issues in the receiving system. In this case, contact an HR functional consultant.

12. Define a background job for delta distribution.

To schedule the background job in the sending system (SSP client 105), create a variant of ABAP program `RBDMIDOC`.

1. Create a variant.

1. Go to transaction `SE38` in the SAP ERP HCM (SSP Client 105) system.

Alternatively, you can go to customizing under **SAP Menu > Tools > ABAP Workbench Development > ABAP Editor**.

2. On the **ABAP Editor: Initial Screen**, enter `RBDMIDOC` in the Program field.

3. Choose *Execute*.

4. In the **Creating IDoc Type from Change Pointers** view, enter the following value:

Field Name	Value
Message Type	HRMD_A

5. Choose *Save as Variant* to create a new variant.

- On the **Variant Attributes** view, enter the following values:

Field Name	Value
Variant Name	YK_HRMD_A
Description	Enter a description for the variant

- Save your entries.

i Note

A system notification confirms the creation.

- Schedule a job

- Call up transaction `SM36` in the SAP ERP HCM (SSP Client 105) system.
Alternatively, you can go to Customizing under **SAP Menu > System > Services > Jobs > Define Job**.
- In the **Define Background Job** view, choose *Define Job using Wizard* (Ctrl+F1).
- In the **Create a Job** dialog box, choose *Continue*.
- In the **General Job Information** dialog box, make the following entries:

Field Name	Value
Job Name	YK_ALE_DELTA_HRMD_A
Job Class	C – Low priority
Job Status	Scheduled
Target Server	

- Choose *Continue*.
- In the **Job-Definition: Job step** dialog box, select *ABAP program step* and choose *Continue*.
- In the **ABAP program step** dialog box, make the following entries:

Field Name	Value
ABAP program name	RBDMIDOC
Variant	YK_HRMD_A
Execution language	EN

- Choose *Continue*.
- In the **Multi-step option** dialog box, choose *Continue*.
- In the **Job Definition: Start conditions** view, choose *Immediately*. Choose *Continue*.

11. In the **Def. of start immediately** dialog box, select the *Period* checkbox in the **Periodic jobs** section and choose *Continue*.
12. In the **Period definition** dialog box, choose *None of the Above*.
13. Choose *Other Periods*.
14. In the **Other Period** dialog box, schedule the service for a convenient time interval.
15. Choose *Create*.
16. Choose *Continue*.
17. In the **Set job** dialog box, choose *Complete* to finish the setup.

Employee-Business Partner Synchronization

After employee replication, you must execute the employee synchronization. For more details, refer to section [Employee-Business Partner Synchronization \[page 61\]](#).

7.16.2.3 Running SAP ERP HCM on the Same Instance with SAP S/4HANA (Co-deployed)

The purpose of this section is to enable you to run SAP S/4HANA HCM on the same instance with SAP S/4HANA. All the required steps to implement this integration are listed in the Customizing documentation under

► [Personnel Management](#) ► [SAP S/4HANA for Human Resources](#) ► [Synchronization of Business Partner for SAP HCM Employee Role](#) ►.

All the existing employees have to be synchronized during business downtime. For more information, refer to the section [Employee-Business Partner Synchronization \[page 61\]](#).

Prerequisites

You must have an existing SAP ERP HCM solution as your HR master data system.

Notes

Report like HRALXSYNC (report)

You cannot use this sync report for employee synchronization in SAP S/4HANA. For any other (organizational unit) object synchronization, you can use this report.

Transaction PRAA

This transaction was used for employee vendor creation in the SAP ERP system for travel expenses. You cannot create employee vendors using this transaction and it is no longer valid in the SAP S/4HANA system.

7.16.3 Conversion from SAP ERP to SAP S/4HANA


This section is relevant only if you are converting from SAP ERP to SAP S/4HANA.

There are 2 processes involved in the conversion to SAP S/4HANA:

- CVI Conversion in the SAP ERP system
This can be considered as a pre-conversion process which has to be performed in the SAP ERP system. This is relevant only if you are using employee vendor in the SAP ERP system. For more information about the CVI conversion process, refer to the SAP Note [2265093](#).
- Employee-BP Synchronization in the SAP S/4HANA System
This is the post conversion process that has to be performed in the SAP S/4HANA system during business downtime. For more information, refer to section [Employee-Business Partner Synchronization \[page 61\]](#).

BP Synchronization Data Models for SAP ERP and SAP S/4HANA

Source Data Model (SAP ERP)

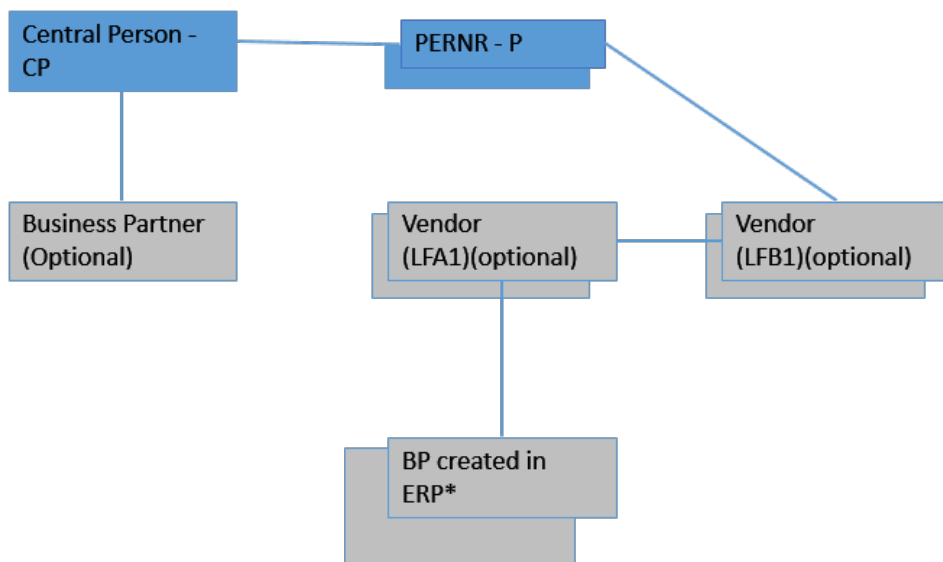

- Systems have embedded HCM in ERP or data is replicated via ALE into the SAP S/4HANA system.
- Processes that depend on the customer system settings
- Multiple records are created
- * BP Created in ERP for the vendor if CVI is active during Vendor creation

Diagram 1

In the above data model, each central person can have a single or multiple PERNR associated with it. A vendor can be created for a PERNR. This is an optional step. In case of concurrent employment, multiple vendors can be created for a PERNR.

Example: If a record 100(CP) exists and a PERNR 500 (P) exists for the CP, a business partner BP1 is created for this CP. You can create vendors for this PERNR, For example, V1, V2. Another business partner is created for each

of these associated vendors, for example, BPV1, BPV2 (if CVI is active during Vendor creation). Hence in the SAP ERP model, each CP can have 2 or more BP associated, depending on the number of vendors and configuration.

Note

To reuse the BP or to create a new BP in Person category in the CVI for vendor you can apply the following SAP notes:

- [2539457](#): if CVI is active, during Vendor creation or conversion BP is created in Person category.
- [2542175](#): if CVI is active, during Vendor creation or conversion Employee-BP is reused (instead of creating new BP for the Vendor).

Target Data Model (SAP S/4HANA)

Compatible Data Model (S/4)

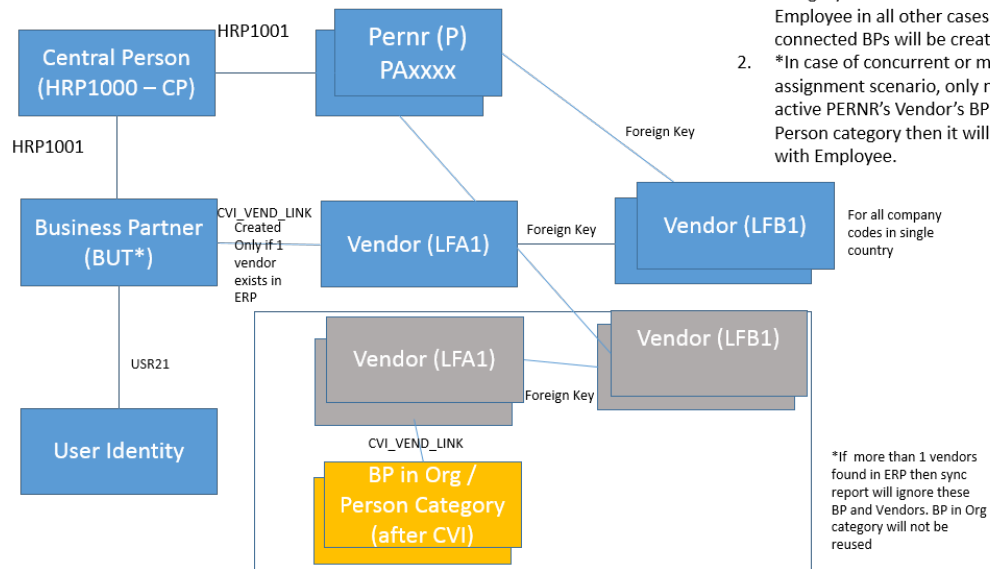


Diagram 2


In the new data model, each Central Person (CP) is associated with PERNRs. If a BP is already associated with the CP, then information is synchronized to this BP and BP is linked to the user identity (if user is maintained in infotype 105 subtype 0001 for the employee).

If no BP exists for the Employee (CP-BP relationship) then the system checks for associated vendor. If one vendor exists for the employee with BP of Person category then the BP (of category Person) associated with the vendor is linked with the CP and user identity. If no vendor exists, a new vendor is created for PERNR if Permanent address (subtype 1 of infotype 6) and Payment (Main Bank or Travel Expense – subtype 0 or 2 of Infotype 9) is assigned for the employee. This is a mandatory step.

If Employee-BP (HRP1001 table, CP-P, and CP-BP relationship exist) also Vendor-BP (of type Person category) exist, then sync report does not update the Employee BP with Vendor roles. Vendor BP will be reported in the application log. It is a warning or a conflicting scenario, as which BP to be linked with Employee and Vendor is not known (as it depends on business scenario). In such scenario, customer need to remove one of the BP or relationships.

i Note

In case of concurrent employment or multiple assignment in ERP system vendor exists for each assignment, then during employee synchronization:

- Employee-BP will be linked with minimum-active PERNR's vendor. In case minimum active PERNR's vendor has different BP (Case 1: HRP1001 CP-BP exist in ERP and vendor also has BP & Case 2: Vendor has BP of category Organization) then Employee-BP will not be linked with the vendor.
- Only loosely coupled BPs exist. Loosely coupled BP will be created for additional assignment (PERNRs). For more information refer to [2517507](#) .

i Note


Vendor has BP of type Organization category, then it will NOT be deleted, but a warning message is displayed in the application log so that BP of type Organization category is found. Customer can remove the BP or retain it as standalone BP in case it is still consumed in business processes

Example: If a record 100(CP) exists, then a PERNR 500 (P) is associated with it. After the integration, if a BP1 is found that is associated with this CP, then this data is used for synchronization. The user identity is also linked to this BP1. If vendors are associated with this PERNR, for example, V1. Vendor has BPV1. In case, the BP1 already exists for the CP 100, then a warning message is displayed that multiple BPs found. In case, no BP exists for CP 100, then the Vendor BP, BPV1 is used for synchronization in case BPV1 is of category Person. Otherwise this BP will be reported in the warning message and new BP of category Person will be created and linked with the objects.

Differences Between SAP ERP and SAP S/4HANA Data model

- Synchronization
This process was optional and base on switch setting in the SAP ERP system, but it is a mandatory step in the SAP S/4HANA system.
- Vendor and BP relation
An employee could have multiple vendors and BPs associated with his PERNR in the SAP ERP system. In SAP S/4HANA a single BP and Vendor is created for an employee. Multiple company segments (LFB1) based on employment (Company Code changes) is still relevant in both systems.

i Note

In case of concurrent employment or multiple assignment loosely coupled BP will be created for additional assignment (PERNRs). Refer note [2517507](#)  for more information.

- User Identity
 - In SAP S/4HANA, User identity is connected to BP only it is maintained in Infotype 105.
 - In the SAP ERP system, workplace address was modeled using the BP (Organization) -> BP (Employee) relationship. In SAP S/4HANA, Workplace Address information (business phone, e-mail) is stored in workplace address connected to BP.

i Note

You can only maintain one workplace address for an employee.

- In SAP S/4HANA, if a BP and user relationship exists then it's always modeled as 1:1. Hence, it is recommended to use only single user (SY-UNAME) across all employment (P) of employee(CP).

- Address Types and Identification
In SAP ERP, employees were linked BP through Personnel Number field in BP. In SAP S/4HANA, New Address types (HCM001, private address of employee) and New Identification (HCM001) are created for BP employee.

i Note

In S/4HANA it is recommended to use HRP1001 table (relationship P-CP and CP-BP) to determine the BP for an Personnel Number (PERNR).

Conversion Scenarios for Employee Vendors in SAP S/4HANA

In SAP S/4HANA, each employee will have a corresponding business partner and vendor (if address, bank, and configurations exist) for the employee. So any vendors created manually in the SAP ERP system (using the transaction PRAA or other transactions) have to be migrated consistently into the SAP S/4HANA system. The following scenarios might exist:

- No business partner or vendor exists for an employee
After the synchronization business partner is created. Vendor will be created if the appropriate configurations and information is maintained like Permanent address (subtype 1 of infotype 6) and Payment (Main Bank or Travel Expense – subtype 0 or 2 of Infotype 9) is assigned for the employee.

i Note

In case of Concurrent Employment or multiple assignment loosely coupled BP will created for additional assignment (PERNRs). Refer note [2517507](#) for more information.

- Only a business partner exists
In this case the business partner has to be enriched. For the BP vendor role and the vendor has to be created (if appropriate configurations and information are maintained) in case Vendor and payment information is maintained for the employee (LFB1-PERNR as to be filled).
- A vendor for an employee exists with LFB1-PERNR but is assigned to a different business partner of category Person than the business partner related to the Central Person of PERNR. This will be error scenario, customer need to correct one of the BusinessPartner and need to adjust the relationships.

The first two scenarios are transformed using the Employee-Business partner Synchronization. This is triggered by any change made on Employee side effecting integration relevant infotypes (0, 1, 2, 6, 9, 17, 32, 105). In addition, a report `/SHCM/RH_SYNC_BUFA_FROM_EMPL` scheduled in batch every 24 hours transfers time-dependent employee data into the business partner persistency.

7.16.4 Employee-Business Partner Synchronization

The following steps enable you to synchronize employee information to the business partners. This synchronization is a mandatory activity for SAP S/4HANA to make sure the follow-up activities and the CDS views work.

For more information, you can also refer to the Customizing under [Personnel Management](#) [SAP S/4HANA for Human Resources](#) [Synchronization of Business Partner for SAP HCM Employee Role](#).

i Note

- The following activity must be set during the initial business downtime before production starts.
- In case of large volume of employee data, standard report /SHCM/RH_SYNC_BUPA_FROM_EMPL will take lot of time to synchronize the employees. You could try the recommendations in FAQ note for [2409229](#) regarding process the employees in parallel jobs.

Notes (SAP S/4HANA)

HRALXSYNC (report)

You cannot use this sync report for employee synchronization in SAP S/4HANA. For any other (organizational unit) object synchronization, you can use this report.

Transaction PRAA

This transaction was used for employee vendor creation in the SAP ERP system for travel expenses. You cannot create employee vendors using this transaction and it is no longer valid in the SAP S/4HANA system.

Prerequisites

- Set the following switches in the table T77S0:
 - Set HRALX_PBPON to **OFF**: Integration Employee or BP Activated.

i Note

From 1709 SPS1 or after applying the SAP note [2535438](#) and [2549563](#) in 1709, set HRALX_HRAC to 'X' and HRALX_PBPON to 'ON' to synchronize Employee information.

- HRALX_PNUMB Business Partner Number Assignment (Employee) and HRALX_PSUBG Business Partner Subgroup (Employees): use this to provide to different number range to BP. Refer to the T77S0 switch documentation.
- PLOGI_PLOGI Integration Plan Version / Active Plan Version: determines the active integrated plan version.

i Note

All other switches under HRALX are not relevant in SAP S/4HANA for Employee BP Synchronization.

- Set up the BP customizing for CVI and vendor account
- CP (central person) should exist for all the employee records (HRP1001 table should have CP-P relationship record for all the employees).
- All the employee's should have atleast infotype 0-Actions, 1-Organizational Assignment, and 2-Personal Data maintained.

For more information regarding the customizing, see [Requirement](#) section in the Customizing document under [Personnel Management](#) > [SAP S/4HANA for Human Resources](#) > [Synchronization of Business Partner for SAP HCM Employee Role](#).

7.16.4.1 SAP S/4HANA BUPA Synchronization Report

You can use the BUPA Synchronization Report (technical name: /SHCM/RH_SYNC_BUPA_FROM_EMPL) to synchronize employee data stored in HCM master data persistence (infotypes) with the business partner, vendor, and linking BP to User (if Infotype 105 subtype 0001 is maintained) and Workplace Address.

Employee synchronization report (technical name: /SHCM/RH_SYNC_BUPA_FROM_EMPL) processes employees:

- Employee(s) HCM infotypes are modified from last synchronization
- Employee(s) failed during previous synchronization processing
- Employee(s) has split records (records which were delimited like the begin date of the split record is on the synchronization date or end date of the split record was yesterday) were synchronized

For more information, you can also refer to the Customizing under:

- [Personnel Management](#) > [SAP S/4HANA for Human Resources](#) > [Synchronization of Business Partner for SAP HCM Employee Role](#)
- [Personnel Management](#) > [SAP S/4HANA for Human Resources](#) > [Define Default Vendor Data for Employees in Role FI Supplier](#)

Data is synchronized if employee data is created or changed in the following ways:

- Inbound processing from Employee Central
The synchronization is triggered using the following BAdI implementations:HRPAD00INFTYDB: /SHCM/TRIGGER_BUPA_SYNCHRPAD00INFTY: /SHCM/TRIG_BUPA_SYNC
- Inbound processing using ALE
The synchronization is triggered using the following BAdI implementation:HRALE00INBOUND_IDOC: /SHCM/BUPA_SYNC_TRIG

i Note

This implementation is not active (by default).

- Personnel master data maintenance (for example, transaction PA30)
The synchronization is triggered using the following BAdI implementations:
 - HRPAD00INFTYDB: /SHCM/TRIGGER_BUPA_SYNC
 - HRPAD00INFTY: /SHCM/TRIG_BUPA_SYNC

i Note

- HCM master data is time-independent, but some business partner data is not. Therefore, schedule this report to run on a daily basis to update the business partner and receive up-to-date employee data. You can customize and use the standard job defined in SJOBREPO.
- If a synchronization is unsuccessful, all the employee data is updated in the next synchronization run.

Field mapping used for employee synchronization

BP Fields:

- BP Grouping: If BP grouping is created with BPEE then it will be considered for BP creation otherwise:
 1. In case switch `HRALX_PNUMB` is 1 and internal number range scenario, then set true value to XINST (Standard Grouping for Internal Number Assignment) for the BP Grouping, that is, BP group of internal number range type and field XINST is set is considered.
 2. In case `HRALX_PNUMB` is 2 or 3 then BP grouping should be same as switch `HRALX_PSUBG` in T77S0.
- BP category: 1 (Person)
- Identification Category:
 - Employee: HCM001
- Identification ID: minimum PERNR in case of CE or single assignment the same PERNR or 105-ECUS in case of SAP SuccessFactors Integration is used.
- Roles:
 - Employee: BUP003, 1511- till SP1: FLVN01, 1511 SP2 & higher releases FLVN00.

	Field description	Infotype	Field Name	Comments	BP Field name
Employee	First Name	2	VORNA		BUT000 - NAME_FIRST
	Last Name	2	NACHN		BUT000 - NAME_LAST
	Middle Name	2	MIDNM		BUT000 - NAME-MIDDLE
	Second Name	2	NACH2		BUT000 - NAME_LST2
	Initials	2	INITS		BUT000 - INITIALS
	Academic Title 1	2	TITEL	TSAD2	BUT000-TITLE_ACA1
	Title	2	Based on ANRED and GESCH	BBP_TSAD3HR or TSAD3HR	BUT000 - TITLE
	Academic Title 2	2	TITL2	TSAD2	BUT000- TITLE_ACA2
	Name Supplement	2	NAMZU	TSAD5	BUT000- TITLE_ROYL
	Name Affix 1	2	VORSW	TSAD4	BUT000- PREFIX1
	Name Affix 2	2	VORS2	TSAD4	BUT000- PREFIX2

	Field description	Infotype	Field Name	Comments	BP Field name
	Gender	2	GESCH	Value 1 is mapped to 2 and vice versa because of domain value differences	BUT000 - XSEXF or XSEXM
	Preferred Language	2	SPRSL		BUT000 - LANGU_CORR BUT000- BU_LANGU
	Nationality	2	NATIO		BUT000 - NATIO
	Date of Birth	2	GBDAT		BUT000 - BIRTHDT
	Name at Birth	2	NAME2		BUT000- NAME_LAST2
	Nick name	2	RUFNM		BUT000- NICK-NAME
	Place of Birth	2	GBORT		BUT000- BIRTHPL
	Marital Status	2	FAMST	BBP_TSAD3HR or TB027HR	BUT000- MARST
	Search term 1	2	NCHMC		BUT000- BU_SORT1
	Search term 2	2	VNAMC		BUT000- BU_SORT2
	Full Name	2		CNAME or ENAME or Concatenation of VORNA MIDNM NACHN	BUT000- NAME1_TEXT
Address	From Date	6	BEGDA	Permanent Address (subtype 1) is synchronized	BUT020 - ADDR_VALID_FROM
	End Date	6	ENDDA		BUT020 - ADDR_VALID_TO
	Country	6	LAND1		ADRC - COUNTRY
	Region	6	STATE		ADRC - REGION

	Field description	Infotype	Field Name	Comments	BP Field name
	City	6	ORT01		ADRC -CITY1
	District	6	ORT02		ADRC -CITY2
	Postal Code	6	PSTLZ		ADRC – POST_CODE1
	Street	6	STRAS		ADRC – STREET
	Street 2	6	ADRO3		ADRC – STR_SUPPL1
	Street 3	6	ADRO4		ADRC - STR_SUPPL2
	Street 4	6	LOCAT		ADRC - STR_SUPPL3
	House number supplement	6	POSTA		ADRC – HOUSE_NUM2
	c/o	6	NAME2		ADRC – NAME_CO
	Building Code	6	BLDNG		ADRC –BUILDING
	Floor	6	FLOOR		ADRC –FLOOR
	House Number	6	HSNMR		ADRC – HOUSE_NUM1
	telephone	6	TLNR		ADCP - TEL NUM- BER
Payment	Account Holder Name	1	EMFTX	If infotype 9-EMFTX is not present then map infotype 1 ENAME	BUTOBK-KOINH
	Bank	9	BANKS	If Travel Expenses (subtype 2) Bank information exists then it is synchronized to Business	BUTOBK - BANKS
	Bank Account	9	BANKN		BUTOBK - BANKN
	Control Key	9	BKONT	Partner or Vendor else Main Bank (subtype 0) is synchronized. If both do not exist	BUTOBK - BKONT
	Bank Key	9	BANKL		BUTOBK - BANKL
	Reference specifications for bank details	9	BKREF		BUTOBK - BKREF

	Field description	Infotype	Field Name	Comments	BP Field name
	IBAN No.	9	IBAN	then vendor will not be created.	BUTOBK - IBAN
	Valid From	9	BEGDA		BUTOBK - BK_VALID_FROM
	Valid To	9	ENDDA		BUTOBK - BK_VALID_TO
Vendor Company Code	BUKRS	1	BUKRS		LFB1 -BUKRS
	ZLSCH	9	ZLSCH		LFB1 -ZWELS
	PERNR	1	PERNR		LFB1 -PERNR
	Reconciliation account		(see comment)	Read from /SHCM/ RECON based on Employee's company code (IT0001-BUKRS)	LFB1 -AKONT

i Note

You can implement note [2517507](#) to map additional fields during Vendor synchronization and also using the concept like reference Vendor concept the fields mentioned above (in field mapping) are copied from reference Vendor. Refer [2517507](#) documentation for more information.

Field mapping for Workplace Address:

- In case User (infotype 105, subtype 0001) is maintained for the Employee. During employee synchronization, if the user is of type 00 (user's old Type 3 Address, that is, USR21-IDADTYPE: 00), then the existing workplace address data is retained and only the following information is updated or overwritten if present in the infotypes.
- In case no user is maintained then following information is updated as workplace address.

Field Description	Infotype	Field Name	Comments	BP Field Name
Department	1	ORGEH		ADCP - DEPARTMENT
Function	1	PLANS		ADCP - FUNCTION
Room Number	32	ZIMNR		ADCP - roomnumber
Building Number	32	GEBNR		ADCP - building

Field Description	Infotype	Field Name	Comments	BP Field Name
Telephone	105		In case SAP Success Factors integration is used Infotype 105, Subtype ECPB is used else Infotype 105, subtype 0020 is used.	ADR2 - telnr_long i Note Additional condition that r3_user = '1'
Cell Phone	105		In case SAP Success Factors integration is used, Infotype 105, Subtype ECPC is used else Infotype 105, subtype CELL is used.	ADR2 - telnr_long i Note Additional condition that r3_user = '3'
E-Mail Address	105		infotype 105, subtype 10	ADR6 - flgdefault = 'X' ADR6- SMTP_ADDR

7.16.4.1.1 Authorizations

Human Resources uses the authorization concept provided by the SAP NetWeaver AS for ABAP or AS Java. Therefore, the recommendations and guidelines for authorizations as described in the SAP NetWeaver AS Security Guide ABAP and SAP NetWeaver AS Security Guide Java also apply.

The SAP NetWeaver authorization concept is based on assigning authorizations to users based on roles. For role maintenance, use the profile generator (transaction PFCG) on the AS ABAP and the User Management Engine's user administration console on the AS Java.

i Note

For more information about how to create roles, see the information on user administration and authentication in the *SAP NetWeaver Security Guide* under the relevant release of SAP S/4HANA ► [SAP NetWeaver for SAP S/4HANA ► Security Guide](#) ►.

Standard Roles

The table below shows the standard roles that are used.

Role	Front-end Role	Back-end Role	Both (Front-end + Back-end)	Description
SAP_BR_ADMINISTRATOR_HRINFO	Yes	-	-	Administrator App (For example, Monitoring Employee Synchronization)
SAP_COM_CSR_1001_OP	-	Yes	-	Monitoring Employee Synchronization App

Standard Authorization Objects

The table below shows the security-relevant authorization objects that are used.

Authorization Object	Field	Value	Description
B_BUPA_RLT (Business Partner: BP Roles)	ACTVT		Activity
	RLTYP		BP Role
B_BUPA_GRP	BEGRU		Authorization Group
	ACTVT		Activity
B_BUP_PCPT	ACTVT		Activity
F_LFA1_APP (Vendor: Application Authorization)	ACTVT		Activity
	APPKZ		Customer and Vendor Master Data Application Authorization
F_LFA1_BUK (Vendor: Authorization for Company Codes)	BUKRS		Company Code
	ACTVT		Activity
F_LFA1_GEN (Vendor: Central Data)	ACTVT		Activity
F_LFA1_GRP (Vendor: Account Group Authorization)	KTOKK		Vendor account group
	ACTVT		Activity
P_ORGIN (HR: Master Data)	INFTY		Infotype
	SUBTY		Subtype

Authorization Object	Field	Value	Description
	AUTHC		Authorization level
	PERSA		Personnel Area
	PERSG		Employee Group
	PERSK		Employee Subgroup
	VDSK1		Organizational Key
PLOG (Personnel Planning)	PLVAR		Plan Version
	OTYPE		Object Type
	INFOTYP		Infotype
	SUBTYP		Subtype
	ISTAT		Planning Status
	PPFCODE		Function Code
S_USER_GRP (User Master Maintenance: User Groups)	CLASS		User group in user master maintenance
	ACTVT		Activity

Business Partner End of Purpose (EoP) Check in Human Resources

Human Resources provides an (EoP) check to determine whether employee business partner is still relevant for business activities in the application or can be blocked.

Application Name	Application Description
BUCP	Central Business Partner: Employee

i Note

For more information, refer [2142308](#).

7.16.4.2 Design Constraints

Workplace Address Data

If the infotype 105, system User Name (SY-Uname) 0001 is maintained for the employee and workplace address is synchronized then User will be converted to type 04 (Identity with Workplace Address).

In case User assignment is removed (infotype 105, subtype 0001 is removed for the employee) then after the employee synchronization report execution, then user need to be unassigned from the business partner by running the report RSUID_REMOVE_FALSE_BP_ASGN. Refer note [2568251](#) for more information.

In case User is converted to 02 or 04 -IDADTYPE then Workplace address or address section will not be editable in User Administration transaction like SU01.

Support of Other employment scenarios in Employee-Business Partner Synchronization

The synchronization is able to handle employees with single employment and single vendor assignment only, other scenarios are not supported (like Concurrent Employment, Global Employment, Country Transfer).

Implement note [2535438](#) to synchronize Multiple Employment (Concurrent Employment, Global Employment, Country Transfer) scenarios. Followed by note [2517507](#).

7.16.5 FAQ

For more information about the FAQs, refer to the SAP Note [2409229](#).

7.16.6 Related Notes

- [2265093](#) - S4TWL - Business Partner Approach
- [2570961](#) - Simplification item S4TWL - Business User Management
- [2383837](#) - S4TWL - SAP Learning Solution not available in Compatibility Mode
- [2340095](#) - S4TWL - Conversion of Employees to Business Partners
- [2273108](#) - S4TWL - General HCM Approach within SAP S/4HANA
- [2383888](#) - S4TWL - SAP E-Recruiting not available in Compatibility Mode
- [2383879](#) - S4TWL - Java-based ESS and MSS not available in Compatibility Mode
- [2393462](#) – All changes in 1610
- [2241838](#) – Limitations to PRAA transaction in S/4HANA
- [2399801](#) - Workplace Address synchronization corrections

7.17 Follow-Up Activities for SAP S/4HANA for Extended Procurement

7.17.1 Integration in SAP S/4HANA

This section describes the integration of SAP S/4HANA for extended procurement.

SAP S/4HANA for extended procurement enables you to manage the procurement processes of back-end systems from a single-source system. In SAP S/4HANA for extended procurement, you have the option of integrating the SAP S/4HANA hub system with one or more SAP S/4HANA or SAP ERP systems as back-end systems.

The SAP S/4HANA hub system can be operated centrally by the company headquarters, whereas the respective SAP S/4HANA back-end systems are operated by the subsidiaries. Using this approach, you can simplify certain aspects of your procurement processes. For example, employees from different subsidiaries raise requests to procure materials by creating self-service purchase requisitions (PR) in the hub system of the company headquarters. When employees create purchase requisitions, they are only able to select materials from the subsidiary that they belong to. They are also provided with information about available sources of supply, for example, contracts and purchasing info records, for the selected material. After an employee has completed and saved the PR, it goes to the approval process. After the approval process is completed, the PR is replicated to the respective back-end system of the subsidiary that the employee belongs to. After successful replication, a purchase order is created automatically to procure the material, and the number of the purchase order is updated back to the self-service PR.

If you want to use the SAP S/4HANA system that you have installed as one of the back-end systems for SAP S/4HANA for extended procurement, then the following information is relevant to you.

The integration of the SAP S/4HANA hub system with SAP S/4HANA as the back-end system is supported in on-premise and cloud integration scenarios. If you want to integrate the SAP S/4HANA hub system with the SAP S/4HANA back-end system, you must install the `HUBS4IC` add-on.

i Note

You only need to install this add-on if your SAP S/4HANA back-end system is an on-premise system.

7.17.2 Integration Scenarios

The integration scenarios using SAP S/4HANA as a back-end system in SAP S/4HANA for extended procurement are described.

This document is only relevant if you are using SAP S/4HANA as a back-end system in SAP S/4HANA for extended procurement. If you consider your current SAP S/4HANA installation to be the back-end system, continue reading.

You can use your current integration based on SAP S/4HANA to implement SAP S/4HANA for extended procurement. If you are an SAP S/4HANA customer also using SAP ERP, you can continue to use SAP ERP.

Prerequisites

To open the connectivity of the hub system and the back-end systems, an integration add-on must be installed for each of the back-end systems. The add-ons for SAP ERP and SAP S/4HANA back-end system are as follows:

- **HUBS4IC**
This add-on is used to integrate the SAP S/4HANA hub with SAP S/4HANA back-end systems and is available for support pack SP00.
- **HUBERPI**
This add-on is used to integrate the SAP S/4HANA hub with SAP ERP and is available for support packs SP00, SP01, and SP02.

Integration Scenarios

The following integration scenarios are available:


On Premise (OP)

This scenario is relevant if you want to connect one or more SAP ERP or SAP S/4HANA back-end systems to the SAP S/4HANA hub system to carry out procurement processes in an OP environment.

i Note


Depending on the support pack that you install, you get different functionalities. For example, if you install SP02 of HUBERPI, it includes the functionality for central contracts and central requisitioning but if you install SP00, you get the functionality for central requisitioning only.

For more information, see release information note [2491065](#)

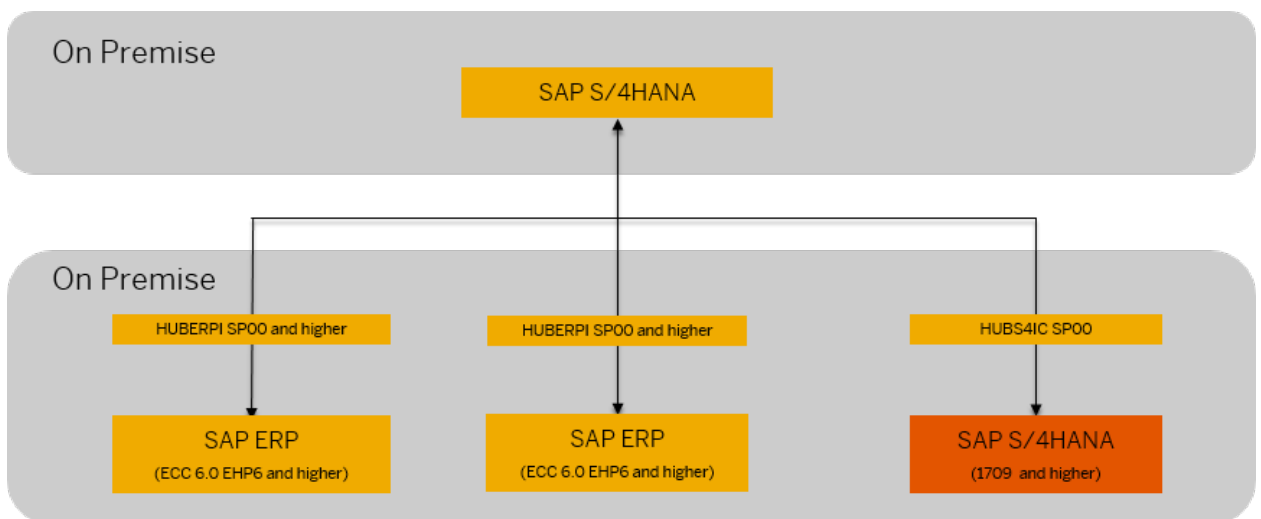

Hybrid - SAP S/4HANA Cloud and SAP S/4HANA back-end (OP)

This scenario is relevant if you want to address your strategic procurement needs in the cloud and at the same time continue to maintain OP investments for operational procurement.

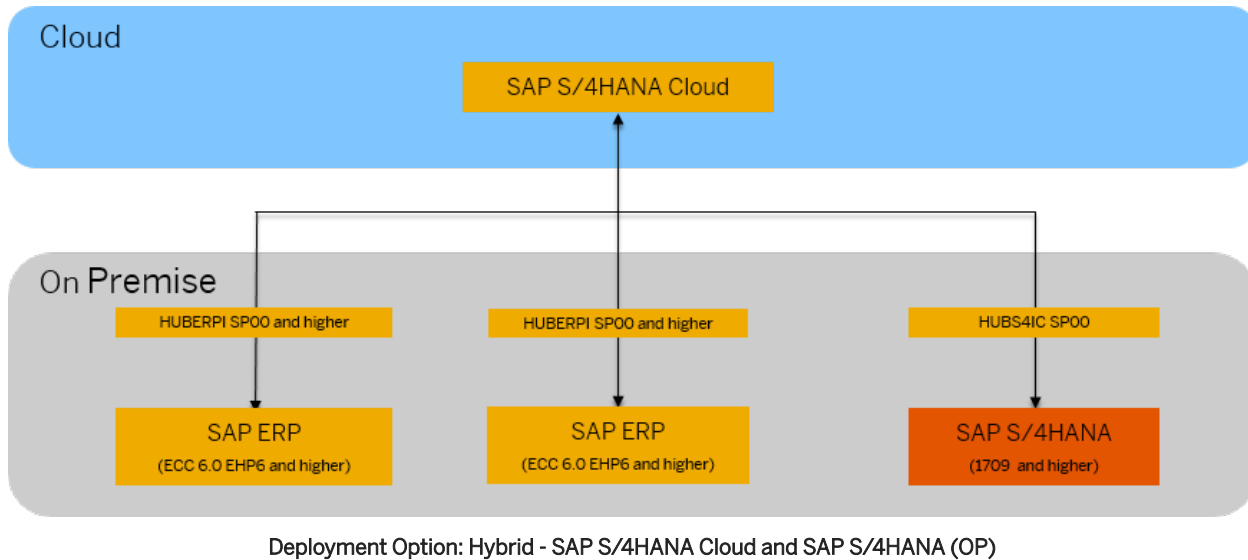

More Information

For more information, see release information note [2573672](#)

7.18 Follow-Up Activities for the SAP S/4HANA Financial Closing Cockpit

7.18.1 Setting Up the BI Content

This section includes information on how to set up the Business Intelligence (BI) content for the *SAP S/4HANA Financial Closing cockpit*. You can find the BI content at the following locations:

- Data Sources: Search for *SAP S/4HANA Financial Closing Cockpit* in your version of SAP S/4HANA on SAP Help Portal at <http://help.sap.com/s4hana>.
- Other objects: On the *SAP Help Portal*, search for *BI Content*. Open the latest version of the BI content (for example, BI Content 7.57). Under *Application Help*, open *SAP Library*. There, go to chapter **▶ SAP ERP Central Component** **▶ Financials** **▶ SAP Financials Closing cockpit** **▶**

Prerequisites

- The SAP ERP Central Component (ECC) system where the *SAP S/4HANA* is installed is connected as a source system. To achieve this, complete the following steps:
 1. Run transaction `RSA1` on the SAP Business Warehouse (BW) system.
 2. Click *Source Systems* on the *Modeling* tab.
 3. Right-click a folder and choose *Create* from the context menu to add a new system.
- BI Content 7.57 for SAP NetWeaver 7.5 is installed on the BW system.

Procedure

Configuring the BW System

Installing the BI Content

To install the BI content for the SAP S/4HANA Financial Closing cockpit, complete the following steps:

1. Replicate the DataSources for the SAP S/4HANA Financial Closing cockpit from the source system to the BW system:
 1. Run transaction `RSA1`.
 2. Click *DataSources* on the *Modeling* tab.
 3. Choose the *Replicate Tree Metadata* pushbutton to get the list of the DataSources from the source system. If the list does not appear, run transaction `RSA9` on the source system to enable the hierarchy.
 4. Right-click *Financial Closing Cockpit* and choose *Replicate Metadata* from the context menu. Choose *As a DataSource* when prompted for non-hierarchy DataSources and *As a 3.x DataSource* when prompted for hierarchy DataSources.
2. Activate the DataSources:
 1. Run transaction `RSA1`.
 2. Click *DataSources* on the *Modeling* tab.
 3. Double-click each DataSource under *Financial Closing Cockpit* and activate it. After a DataSource is activated, an entry *Data Flow Upwards* appears under it.

i Note

Before you activate hierarchy DataSources, for both segment *Hierarchy Header* and *Hierarchy Node*, you also need to copy the relevant InfoObjects from the table on the left to the one on the right on the *Transfer Rules* tab.

3. Install the BI content for the SAP S/4HANA Financial Closing cockpit:
 1. Run transaction `RSA1`.
 2. Click *Object Types* on the *BI Content* tab.
 3. Choose the *Source System Assignment* pushbutton and then select the source system in the dialog box that appears.
 4. Expand **► Query Elements ► Query ►** and then double-click *Select Objects*.
 5. Select the queries for the Financial Closing cockpit. You find all the queries for the Financial Closing cockpit by entering `0FCC` and then choosing the *Find* pushbutton.

6. For each query, choose ► *Grouping* ► *In Dataflow Before and Afterwards* ►, and then choose ► *Install* ► *Install* ►.

Extracting Data from the BI Content

To extract data from the BI content you have installed, complete the following steps:

1. Create InfoPackage for each DataSource:
 1. Run transaction RSA1.
 2. Click *InfoProvider* on the *Modeling* tab.
 3. Expand ► *Financial Management & Controlling* ► *Financial Closing Cockpit* ►.
 4. Right-click each Datasource and choose *Create InfoPackage* from the context menu.
2. Define data selection for each InfoPackage to extract data:
 1. Run transaction RSA1.
 2. Click on the *Modeling* tab.
 3. Double-click each DataSource.
 4. On the *Data Selection* tab, enter the parameters for data extraction.
3. Extract data:
 1. Run transaction RSA1.
 2. Click *InfoProvider* on the *Modeling* tab.
 3. Double-click each DataSource.
 4. On the *Schedule* tab, click *Start* to extract data.
4. Run Data Transfer Processes:
 1. Run transaction RSA1.
 2. Click *InfoProvider* on the *Modeling* tab.
 3. Double-click each Data Transfer Process.
 4. On the *Execute* tab, click *Execute*.
5. (Optional) Set up Process Chains for data extraction.

Configuring the ECC System (for Viewing the Reports via NWBC)

Configuring Roles

To configure roles, complete the following steps:

1. Run transaction PFCG.
2. Enter role SAP_FCC_MENU and choose the *Change* pushbutton.
3. On the *User* tab, add IDs for the users who shall view the reports via SAP NetWeaver Business Client (NWBC).

Changing the System Alias

To change the system alias, complete the following steps:

1. Run transaction LPD_CUST.
2. Double-click the line that specifies FCC as the role and FCC_REP as the instance.
3. Double-click each query and change the system alias to the one connected to the BW system.

7.19 Follow-Up Activities for Agricultural Contract Management

Once the installation is complete, you need to perform the following activities for Agricultural Contract Management (ACM):

Delivery Customizing

You must copy the delivery customizing for ACM from client 000 to your system-relevant clients. To compare the customizing content contained in these clients, you can execute the transaction *Customizing Cross-System Viewer* (SCU0). For ACM, the following application components are relevant:

- LO-AGR-LDC
- LO-AGR-APP
- LO-AGR-STL
- LO-AGR-CC

Important SAP Notes

You can copy missing delivery customizing in your relevant client, by activating all the switch BC sets associated with the ACM switch.

For more information, refer to SAP Note [1909425](#) (SFW- Activation error in Dictionary: clear up the inconsistencies).

7.19.1 Integration with Oil & Gas and Commodity Management

Agricultural Contract Management (ACM) is delivered as part of Oil & Gas (IS-OIL) and is integrated with Commodity Management (CM). This integration enables the user to use various CM functions for the commodities processed based on the ACM scenarios.

Integration

To activate the ACM business function (`/ACCGO/BF_ECC`), either the IS-OIL or the I-TSW business functions must be activated as a prerequisite:

- IS-OIL business functions:
 - BUSINESS_FUNCTION_BASIS_COM

- COMMODITY_MGMT_&_BULK_LOGISTIC
- LOG_COMMODITY_TRANSPORT_MGMT_8
- I-TSW business functions:
 - LOG_TSW_ECC

The integration with CM has been achieved through incorporation of various CM switches in the ACM business function /ACCGO/BF_ECC.

7.20 Troubleshooting

Unable to Create New Clients



If you are unable to create new clients in transaction SCC4 or SM30 (table T000) because the *New Entries* button is missing, see SAP Note [2140167](#).

Important Disclaimers and Legal Information

Hyperlinks

Some links are classified by an icon and/or a mouseover text. These links provide additional information.

About the icons:

- Links with the icon : You are entering a Web site that is not hosted by SAP. By using such links, you agree (unless expressly stated otherwise in your agreements with SAP) to this:
 - The content of the linked-to site is not SAP documentation. You may not infer any product claims against SAP based on this information.
 - SAP does not agree or disagree with the content on the linked-to site, nor does SAP warrant the availability and correctness. SAP shall not be liable for any damages caused by the use of such content unless damages have been caused by SAP's gross negligence or willful misconduct.
- Links with the icon : You are leaving the documentation for that particular SAP product or service and are entering a SAP-hosted Web site. By using such links, you agree that (unless expressly stated otherwise in your agreements with SAP) you may not infer any product claims against SAP based on this information.

Beta and Other Experimental Features

Experimental features are not part of the officially delivered scope that SAP guarantees for future releases. This means that experimental features may be changed by SAP at any time for any reason without notice. Experimental features are not for productive use. You may not demonstrate, test, examine, evaluate or otherwise use the experimental features in a live operating environment or with data that has not been sufficiently backed up.

The purpose of experimental features is to get feedback early on, allowing customers and partners to influence the future product accordingly. By providing your feedback (e.g. in the SAP Community), you accept that intellectual property rights of the contributions or derivative works shall remain the exclusive property of SAP.

Example Code

Any software coding and/or code snippets are examples. They are not for productive use. The example code is only intended to better explain and visualize the syntax and phrasing rules. SAP does not warrant the correctness and completeness of the example code. SAP shall not be liable for errors or damages caused by the use of example code unless damages have been caused by SAP's gross negligence or willful misconduct.

Gender-Related Language

We try not to use gender-specific word forms and formulations. As appropriate for context and readability, SAP may use masculine word forms to refer to all genders.



**go.sap.com/registration/
contact.html**

© 2018 SAP SE or an SAP affiliate company. All rights reserved.
No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company. The information contained herein may be changed without prior notice.
Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.
These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.
SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies.
Please see <https://www.sap.com/about/legal/trademark.html> for additional trademark information and notices.