



SHERWIN-WILLIAMS®

Equipment Reference Guide

2023

THE SINGLE SOURCE FOR ALL
YOUR EQUIPMENT NEEDS.

SPRAY EQUIPMENT
HANDHELD SPRAYERS
PRESSURE WASHERS
SPRAY ACCESSORIES
GENERATORS
CLIMBING EQUIPMENT
SPECIALIZED EQUIPMENT
SURFACE PREP EQUIPMENT



FESTOOL



TOOLPRO

Your Equipment Is an Important Investment.

Improve your results, increase your productivity and help expand your business with the right equipment.

If you need guidance on choosing your equipment...

Check out our selection guides on pages 5, 9-11, 31, 37-38, 49, 55, 63-64, 71-72 and 79-81.

Already know what you need?

Use the equipment charts on pages 16-29, 32-35, 39-47, 50-53, 56-61, 65-69, 73-74 and 82-87 to compare features and make your selection.

Think ahead.

Be sure to choose equipment that will support your future growth goals as well as your current needs.

Table of Contents

- Which Sprayer Is Right for You? 4-5
- Anatomy of a Sprayer 6-7
- Airless Sprayers 8-27
- Spray Guns, Tips and Accessories 28-29
- HVLP and Fine Finishing 30-35
- Striping Equipment 36-47
- Pressure Washers 48-53
- Texture Sprayers 54-60
- Air Compressors 61
- Ladders 62-69
- Generators and Portable Heaters 70-74
- Spray Source Service Centers 75-77
- Sanding, Abrasives and Dust Extractors 78-87



Sherwin-Williams also offers specialty units.

Ask your local store or sales representative for more information.

Which Sprayer Is Right for You?

Find the right equipment for your business — whether you're purchasing your first sprayer or looking to expand your capabilities.

If you do this type of work...

Choose this type of sprayer



I paint houses and commercial buildings where efficiency is key.

Airless

See pages 8 – 27.



I tackle smaller jobs — like doors and cabinets — that require more coverage and control.

HVLP and Fine Finishing

See pages 30 – 35.



I complete line striping and removal.

Line Stripers and Pavement Specialty

See pages 36 – 47.



I create wall and exterior texture.

Texture

See pages 54 – 60.

Anatomy of a Sprayer



+ Pump

The pump, or fluid section, is the heart of an airless sprayer. Piston pumps are very popular and contain valves and packings that work with the piston to pressurize paint. These only run when needed, and can handle thicker materials. Diaphragm pumps also use a piston, which moves hydraulic fluid in order to make a diaphragm to pull in paint and push it out the gun — eliminating the need for packings that can need replacement over the sprayer's lifetime.

+ Spray Gun

Every sprayer needs a spray gun, and options range from basic to premium. More advanced spray guns weigh less, require less trigger pressure, and can be adjusted for user comfort to significantly reduce fatigue.

+ Hose

Hose length options range from 50' to 300'. Longer hoses provide excellent flexibility on new residential and commercial jobsites, but take much more material to fill before spraying. Balancing the number of guns, hose length and motor size is an important part of productivity.

+ Motor and Drive System

Electric airless pump motors come in AC, DC and Universal, with DC being the most common and the most forgiving of power fluctuations on the jobsite. As motor size increases, so do the maximum PSI and GPM. Gas engines vary based on volume, measured in cubic centimeters.

+ Tip

Tips have the most impact on the finish. Picking a tip that works with your coating and sprayer is imperative. Using a worn tip causes an uneven finish and lost profit in increased overspray.

+ Chassis

Sprayer configuration impacts its portability and storage requirements. Many pumps come in both high (vertical) and low (horizontal) configurations, both with wheels to make it easy to move. Some smaller pumps are also available in a stand configuration, which is small enough to be carried by hand.

Airless Sprayers



Choosing an Airless Sprayer

Use your answers to the following questions to help narrow your selection as you look through this guide.

What are your power source requirements?



If you have this requirement...	Consider this power source	
I prefer battery-powered technology.	Battery	See Pages 16 – 17
My jobs require quiet operation.	Electric	See Pages 16 – 22
I work indoor jobs so I can't have emissions.	Electric	See Pages 16 – 22
Some of my jobs do not have access to electricity.	Gas	See Pages 23 – 27
My jobs require portability.	Gas	See Pages 23 – 27
I need a sprayer capable of very high output.	Gas	See Pages 23 – 27
I need the versatility of both power sources.	Convertible	See Pages 23 – 27

How much paint do you spray per week?



The airless sprayers in this guide are organized by gallons per week. Look for your desired productivity to start narrowing your selection.

It's a good idea to allow your business room to grow when you begin considering sprayer capability options.

Consider this:

- What material types will you spray? Now and in the future?
- How many gallons do you currently spray apply per week?
- How much do you spray on your busiest weeks?
- Do you expect this amount to grow in the near future?

What is your maximum crew size?



Choose adequate gun support for your crew size now — and in the near future.

Airless sprayers can support from 1-6 guns, depending on motor size, hose length and paint viscosity. Make sure you account for tip size when thinking through how you'll use multiple guns.

What are your mobility requirements?



Sprayer hose length can range from 50' to 300'. Be sure your hose length can accommodate the way you work.

- If you want to keep the sprayer nearby while you work, a 50' hose will work.
- If you want to move within a building while keeping your sprayer stationary, choose a longer option.

Choosing the Right Spray Tip

The type of paint you are spraying determines your tip size. Choosing the right tip for the job will affect the quality of your finish – and help you save time and money.

Here's how you can easily find the right tip size for the type of paint you plan to spray:

1. By the specific paint you use:

Tip sizes for all Sherwin-Williams paints can be found on their Material Data Sheet. This is true for most paints and coatings.

2. By using the generally recommended tip size:

Refer to the chart below to find the ideal tip.



+ Tip Size

The numbers represent the tip size and indicate how much paint will flow through the tip.

- 5** The first digit represents half the fan width (5 x 2 = 10-inch fan width).
- 17** The last two digits represent the size of the tip opening in thousandths of an inch.

Type of Paint	Tip Size
Stains	.009 - .015
Lacquers	.011 - .017
Latex-based	.013 - .021
Oil-based	.013 - .017
Block fillers	.019 - .031
Smooth elastomerics	.019 - .035+

Good rules of thumb:

Light viscosity coatings


When applying light viscosity coatings, like stains and lacquers, use spray tips with smaller orifice sizes.

Heavy viscosity coatings

For heavier viscosity coatings, like latex, use spray tips with larger orifices.

Count the cost of worn tips

- Worn tips use more paint.
- Worn tips produce uneven and inconsistent coverage.
- Worn tips require more passes and reduce production.
- Worn tips result in a poor-quality finish.

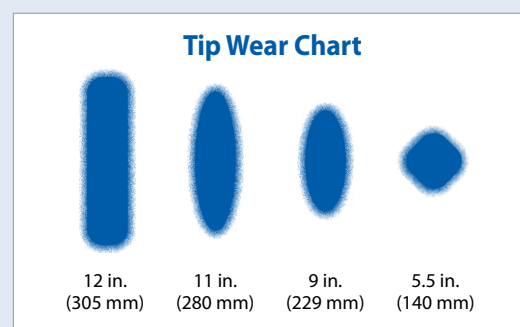

Graco Tip Technology

Example: RAC X LP517



GOOD	BETTER		BEST		
RAC® 5	RAC X™		RAC X™ LOW PRESSURE		
RAC 5	LTX	WIDERAC	FINE FINISH LOW PRESSURE	LOW PRESSURE	WIDERAC LOW PRESSURE
Tip - 286xxx Guard - 243161	Tip - LTXxxx Guard - 246215	Tip - WRxxx Guard - 246215	Tip - FFLPxxx Guard - 246215	Tip - LPxxx Guard - 246215	Tip - WRLPxxx Guard - 246215
Tip Range - .007 - .065	Tip Range - .007 - .071	Tip Range - .021 - .039	Tip Range - .006 - .016	Tip Range - .013 - .031	Tip Range - .021 - .031
OneSeal: Latex - 243281 Solvent - 224081	OneSeal: Latex - 246453 / Solvent - 248936		OneSeal: Latex - 17P501 Solvent - 17P502	OneSeal: Latex - 17P501 / Solvent - 17P502	
Precision spray tip provides excellent fan pattern life and high-quality finish	Longest-lasting standard pressure tip on the market	Produces a 24" fan pattern to finish the job in half the time	Atomize fine finish materials at half the pressure for an HVLP-like finish	Dial down the pressure for less overspray, longer tip life, and a perfect airless finish	All the benefits of RAC X Low Pressure Tips, now in a 24" fan pattern
Residential, commercial, interior and exterior applications	Residential, commercial, interior and exterior applications	New construction and high production with large surfaces	Trim, molding, cabinets, woodwork, metal	Residential, commercial, interior and exterior applications	New construction and high production with large surfaces
Latex, oil-based paints, elastomeric, block filler	Latex, oil-based paints, elastomeric, block filler		Lacquer, varnish, stain, enamel paint	Latex, oil-based paints, elastomeric, block filler	



Titan Tip Technology

	HEA™ High Efficiency Airless Tip	SC-6+ Reversible Airless Tip	SC-6+ Fine Finish Airless Tip
Typical Applications	Commercial / Residential Interior / Exterior	Commercial / Residential Interior / Exterior	Fine Finishing
Recommended Pressure	800–1200 PSI	1500–5000 PSI	1200–1800 PSI



PROVEN CHOICE OF PROFESSIONAL CONTRACTORS

GRACO-ONLY INNOVATIONS

GRACO OFFERS THE MOST COMPLETE, HIGHEST PERFORMING PRODUCT LINE

THE CHOICE IS CLEAR

- ✓ **HIGHEST PERFORMANCE** – Sprays the widest range of coatings
- ✓ **LONGEST LIFE** – Proven through head-to-head life testing
- ✓ **PROVEN QUALITY** – #1 choice of professional contractors



Airless Sprayers

Fine Finish Sprayers

Texture Sprayers

Pavement Strippers



MADE IN THE USA
FOR OVER 60 YEARS

DESIGNED MANUFACTURED ASSEMBLED SUPPORTED



MADE IN THE USA WITH SELECT GLOBAL COMPONENTS



graco.com/SellingTools

TOOLS THAT HELP YOU SELL MORE PAINT
DOWNLOAD NOW!



Basics of Airless Video Series



Graco Sales Book



Key Questions to Ask



Graco Parts Book

MAXIMUM PRODUCTIVITY

FINISH MORE JOBS



BLUELINK™
Sprayer Management System
Measure productivity from anywhere with a breakthrough mobile app



QUIKREEL™
Easy Hose Management
Fast and easy setup—deploy and rewind up to 300 ft hose in seconds



FASTFLUSH™
More Spraying and Less Cleaning
Clean the pump 4X faster with 1/2 the amount of waste water

LONGEST LIFE

SPRAY LONGER WITH LOWEST COST OF OWNERSHIP



ENDURANCE VORTEX MAXLIFE™
Longest Lasting Pumps Ever Built
Up to 6X more gallons sprayed between repacks



PROCONNECT™ 2
Maximize Uptime on the Job
Eliminate downtime—swap your pump in minutes with no tools



MAXPOWER™ MOTOR AND ADVANTAGE DRIVE™
Longest Lasting Motor and Drive
Maintenance-free performance delivered with lifetime warranty

PROVEN RESULTS

INDUSTRY'S BEST SPRAY FINISH



SMARTCONTROL™
Precision Spraying Control
Precision spray control without pressure fluctuations



CONTRACTOR PC™
Airless Spray Guns
Spray longer with the lightest and most comfortable guns ever built



RAC X™ LOW PRESSURE SWITCHTIPS™
Industry's Best Finish
Spray at half the pressure for 2X longer tip life, 50% less overspray and a superior finish



BETTER TOOLS. BETTER SUPPORT. BETTER RESULTS.

YOU HAVE A TITAN IN YOUR CORNER. Titan supports your business with a relentless commitment to building sprayers and tools that lead to better work, improved ROI and increased profits.


INNOVATIONS THAT TAKE PRODUCTIVITY TO A NEW LEVEL.



QUAD+ PACKINGS™ / PERMALIFE™ CYLINDER
Self-adjusting and self-compensating packings and no wearable cylinder deliver the longest life and lowest repair costs in the industry.
Available on Impact® Series.



QUICK REMOVAL FLUID SECTION
Easy-access fluid section allows for fast, convenient service anywhere, anytime, without the need for tools.

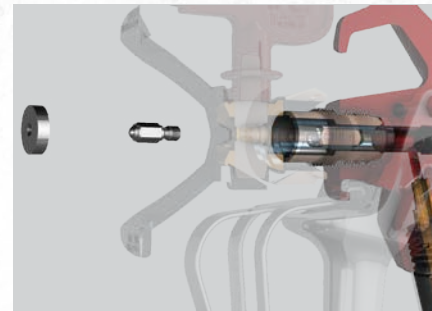

INFINITY PACKING® SYSTEM
Get two times the life by reversing the seat and changing the ball. The spring and needle assembly is isolated from the fluid path, increasing flow and reducing wear.
Available on RX-Pro & RX-Apex.



SUREFLO™ PUSHER VALVE
Primes the first time, every time. Unstick the lower ball valve with a push of a button. No need for a hammer.
Available on Impact® 440, 540 & 640, Elite® 3000 & 3500.



MYTITAN™ DIGITAL TOOLBOX
MyTitan gives you everything you need to get the most out of your sprayers, all in one place, no matter where the workday takes you.



INTELLISYNC™ TECHNOLOGY
Titan's first Bluetooth® connected pumps combine smart sprayer technology with the MyTitan app to give you ultimate control with features like InCommand Dashboard, TipAware, and ActivGuard™ Theft Protection.

WEAR GUARD

INDUSTRY'S BEST AND LONGEST WARRANTY.

We have confidence in our craftsmanship and are proud to stand behind every product we make.

NEW INNOVATION FOR 2023

Available
Spring
2023



IMPACT® X 440

X-TRA POWER X-TRA PERFORMANCE

FEATURING

Logix™ Adaptive Controller

Tip learning technology boosts efficiency

Vertical Filter Housing

No-spill vertical filter cleans 3X faster

Quick Removal Fluid Section

Extremely durable and maximizes uptime

DuraLife™ Brushless HE Motor

Enhanced performance and efficiency

Smart Design

Lightweight compact design with ergonomic adjustable carrying handle



Scan for product details, videos, and resources

GROUNDBREAKING SPRAY TECHNOLOGY FOR ANY APPLICATION



IMPACT® SERIES
Electric Airless Sprayers



ELITE® SERIES
Sealed Hydraulic Airless Sprayers



POWRTWIN™ SERIES
Convertible Electric or Gas Sprayers



CAPSPRAY™
Efficient HVLP Systems



RED SERIES®
Max Comfort, Performance and ROI



SPRAY TIPS
A Tip for Every Application



CA TECHNOLOGIES
Pneumatic and Conventional Spray Equipment



POWRLINER™ SERIES
Sealed Hydraulic Line Stripping Sprayers







ROLLER TECHNOLOGY
High Speed Rolling

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.



Gallons Per Week	Occasional Use		
			
MODEL	GRACO Ultimate™ Airless Handheld – Corded	GRACO Ultimate™ Airless Handheld – Cordless	GRACO Ultimate MX™ Airless Handheld – Cordless
Gallons Per Minute (GPM)	.20	.20	.20
Supports Tip Size*	.016	.016	.016
Maximum Fluid Pressure (PSI)	2000	2000	2000
Weight	4.6 Lbs.	5.3 Lbs.	5.5 Lbs.
Pump Type	Triax™ Piston Pump with ProConnect™	Triax™ Piston Pump with ProConnect™	Triax™ Piston Pump with ProConnect™
Motor Size/Type	1/4 HP AC	1/4 HP DC	1/4 HP Brushless DC
Available Models** (See below for model description)	A	B, C	B, C
Frame Mount - High	—	—	—
Frame Mount - Low	—	—	—
Frame Mount - Stand	—	—	—
Guns Supported	—	—	—
CETL Certified	 6509-90054	 1012-94726	 1012-94734

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description A Standard

B Includes (2) DEWALT® 20V Max Compact Lithium Ion Batteries, charger, tool bag, RAC X FFLP SwitchTips™ and FlexLiner™ Bags

C Tool only model includes RAC X FFLP SwitchTip and FlexLiner Bags; DEWALT batteries and charger not included

	1-5 Gallons	1-10 Gallons		
				
MODEL	GRACO Ultimate™ QuickShot	GRACO MAGNUM® X5	GRACO MAGNUM® ProX17	GRACO MAGNUM® ProX19
Gallons Per Minute (GPM)	.20	.27	.34	.38
Supports Tip Size*	.016	.015	.017	.019
Maximum Fluid Pressure (PSI)	2000	3000	3000	3000
Weight	6.4 Lbs.	13 Lbs.	27 Lbs.	38 Lbs.
Pump Type	QuickShot ProConnect Piston Pump	Piston	Power-Piston Pump with ProXchange™	Power-Piston Pump with ProXchange™
Motor Size/Type	1/4 HP Brushless DC	1/2 HP Universal	3/4 HP DC	7/8 HP DC
Available Models** (See below for model description)	D	A	A	A
Frame Mount - High	—	—	—	 6509-47484
Frame Mount - Low	—	—	—	—
Frame Mount - Stand	—	 6509-47468	 6509-47476	—
Guns Supported	—	1	1	1
CETL Certified	 6513-13256			

D Includes QuickShot Belt & Holster, (2) DEWALT 20V Compact Lithium Ion Batteries, charger, tool bag and (2) RAC X FFLP SwitchTips

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Electric Airless Sprayers


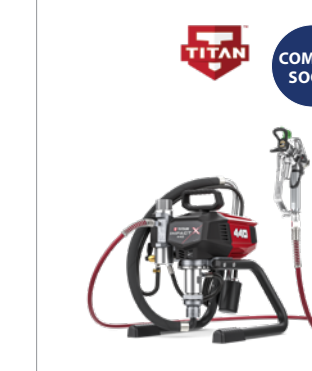

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	11-50 Gallons		
			
MODEL	GRACO NOVA™ 390 PC	GRACO NOVA™ 390 PC Cordless	TITAN IMPACT® 410
Gallons Per Minute (GPM)	.47	.47	.47
Supports Tip Size*	.021	.021	.021
Maximum Fluid Pressure (PSI)	3300	3300	3100
Weight	33 Lbs.	31 Lbs.	34 Lbs. (Stand)
Pump Type	Endurance Piston Pump with ProConnect	Endurance Piston Pump with ProConnect	Piston
Motor Size/Type	5/8 HP DC	5/8 HP Brushless DC	3/4 HP DCX
Available Models** (See below for model description)	A	B	A
Frame Mount - High	☑ 1005-55648	☑ 1023-40981	☑ 1018-05935
Frame Mount - Low	—	—	—
Frame Mount - Stand	☑ 6508-71536	☑ 1023-29935	☑ 6510-97636
Guns Supported	1	1	1
CETL Certified	☑	☑	☑

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description A Standard

B Includes (2) DEWALT® 20V Max Compact Lithium Ion Batteries, charger, tool bag, RACX FFLP SwitchTips™ and FlexLiner™ Bags

51-75 Gallons			
			
MODEL	TITAN IMPACT® X 440	TITAN IMPACT® 440	GRACO Ultimate MX II™ 490 PC Pro
Gallons Per Minute (GPM)	.54	.54	.54
Supports Tip Size*	.023	.023	.023
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	42 Lbs. (Stand)	30 Lbs. (Stand)	37 Lbs. (Stand)
Pump Type	Endurance Piston Pump with ProConnect	Piston	Piston
Motor Size/Type	7/8 HP TEFC DC	1.2 HP DuraLife Brushless DC	7/8 HP DCX
Available Models** (See below for model description)	A	A	C
Frame Mount - High	☑ 1017-97850	—	☑ 957-6927
Frame Mount - Low	☑ 1017-97744	—	☑ 588-0489
Frame Mount - Stand	☑ 6510-97644	☑ 6513-05658	☑ 957-7123
Guns Supported	1	1	1
CETL Certified	☑	☑	☑











C Select PC Pro models include MaxPower Motor, ProConnect, SmartControl with digital display, FastFlush, and Contractor PC gun, hose and tip

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.













Gallons Per Week	51-75 Gallons		76-100 Gallons		
					
					
MODEL	GRACO Ultimate MX II™ 495 PC Pro	TITAN Elite® 3000	GRACO Ultimate MX II™ 595 PC Pro	TITAN IMPACT® 640I	TITAN IMPACT® 640IA
Gallons Per Minute (GPM)	.60	.60	.70	.70	.70
Supports Tip Size*	.025	.025	.027	.027	.027
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300	3300
Weight	34 Lbs. (Stand)	103 Lbs. (High & Low)	72 Lbs. (Hi-Boy)	69 Lbs. (High)	69 Lbs. (High)
Pump Type	Endurance Piston Pump with ProConnect	Sealed Hydraulic	Endurance Piston Pump with ProConnect	Piston	Piston
Motor Size/Type	1.2 HP MaxPower Brushless DC	1.2 HP DCX	1.6 HP MaxPower Brushless DC	1.55 HP DuraLife Brushless DC	1.55 HP DuraLife Brushless DC
Available Models** (See below for model description)	C	A	C	A	A
Frame Mount - High	☑ 1017-97215	☑ 1019-89309	☑ 1017-97231	☑ 1027-12684	☑ 1027-12718
Frame Mount - Low	☑ 1017-97207	☑ 1019-89309	☑ 1017-97223	☑ 1027-12692	☑ 1027-12726
Frame Mount - Stand	☑ 1017-97934	—	—	☑ 1027-12668	☑ 1027-12700
Guns Supported	1	1	1	1	1
CETL Certified	☑	☑	☑	☑	☑

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description A Standard

B ProContractor™ Series includes Endurance Vortex MaxLife Pump, BlueLink, QuikReel, ProConnect 2, Smart Control, Fast Flush, WatchDog, Contractor PC gun, hose and tip

C Select PC Pro models include MaxPower Motor, ProConnect, SmartControl with digital display, FastFlush, and Contractor PC gun, hose and tip






101-150 Gallons		151-200 Gallons				
						
						
MODEL	TITAN IMPACT® 740	GRACO Ultimate MX II™ 650	GRACO Ultimate MX II™ 695	TITAN IMPACT® 840I	TITAN IMPACT® 840IA	GRACO Ultimate MX II™ 795
Gallons Per Minute (GPM)	.80	.80	.95	1.00	1.00	1.10
Supports Tip Size*	.029	.029	.031	.032	.032	.033
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300	3300	3300
Weight	87 Lbs. (High)	77 Lbs.	93 Lbs. (Hi-Boy)	87 Lbs. (High)	87 Lbs. (High)	98 Lbs. (Hi-Boy)
Pump Type	Piston	Endurance Piston Pump with ProConnect	Endurance Piston Pump	Piston	Piston	Endurance Piston Pump
Motor Size/Type	2.0 HP DuraLife Brushless DC	1.8 HP MaxPower Brushless DC	2.0 HP MaxPower Brushless DC	2.3 HP DuraLife Brushless DC	2.3 HP DuraLife Brushless DC	2.2 HP MaxPower Brushless DC
Available Models** (See below for model description)	A	A	A, B	A	D, E	A, B
Frame Mount - High	☑ 957-6976	1020-08729	☑ Standard 6510-99046 ProContractor™ 1017-97256	☑ 1027-12734	☑ 1027-12759	☑ Standard 1017-97264 ProContractor™ 1017-97272
Frame Mount - Low	—	1020-08737	☑ Standard 6510-99053	☑ 1027-12742	☑ 1027-12676	—
Frame Mount - Stand	—	—	—	—	—	—
Guns Supported	2 (.017 Tip)	2 (.019 Tip)	2 (.023 Tip)	2 (.021 Tip)	2 (.021 Tip)	2 (.025 Tip)
CETL Certified	☑	☑	☑	☑	☑	☑

D IntelliSync Models include TipAware®, ProStart® and the InCommand™ Dashboard

E IntelliSync with ActivGuard™ Models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	151-200 Gallons			201-500 Gallons	
					
MODEL	TITAN IMPACT® 1040	TITAN IMPACT® 1140I	TITAN IMPACT® 1140IA	GRACO Ultimate MX II™ 1095	GRACO Ultimate MX II™ 1595
Gallons Per Minute (GPM)	1.15	1.20	1.20	1.20	1.35
Supports Tip Size*	.033	.034	.034	.035	.039
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300	3300
Weight	98 Lbs.	102 Lbs.	102 Lbs.	120 Lbs. (Hi-Boy)	125 Lbs. (Hi-Boy)
Pump Type	Piston	Piston	Piston	Endurance Piston Pump	Endurance Piston Pump
Motor Size/Type	2.5 HP DuraLife Brushless DC	2.6 HP DuraLife Brushless DC	2.6 HP DuraLife Brushless DC	2.4 HP MaxPower Brushless DC	2.8 HP MaxPower Brushless DC
Available Models** (See below for model description)	A	D, E	D, E	A, B, C	A, B, C
Frame Mount - High	✓ 1002-45752	✓ 1025-19196	✓ Plus 1025-19196 Premium 1025-19204	✓ Standard 1017-97280 ProContractor 1017-97298	✓ Standard 1017-97322 ProContractor 1017-97348
Frame Mount - Low	—	—	—	✓ IronMan™ 1017-97314	✓ IronMan 1017-97363
Frame Mount - Stand	—	—	—	—	—
Guns Supported	2 (.022 Tip)	2 (.023 Tip)	2 (.023 Tip)	3 (.021 Tip)	3 (.023 Tip)
CETL Certified	✓	✓	✓	✓	✓

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

B ProContractor Series includes Endurance Vortex MaxLife Pump, BlueLink, QuikReel, ProConnect 2, Smart Control, Fast Flush, WatchDog, Contractor PC gun, hose and tip






D IntelliSync Models include TipAware®, ProStart® and the InCommand™ Dashboard

C IronMan Series includes Endurance Vortex MaxLife EXTREME Pump, BlueLink, Flat Proof Tires, ProConnect 2, Fast Flush, Crush Proof Rock Catcher, Contractor PC gun, hose and tip

E IntelliSync with ActivGuard™ Models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

Gas Mechanical Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	50-100 Gallons	76-100 Gallons	101-150 Gallons	500+ Gallons	
					
MODEL	GRACO GMAX™ 3400	TITAN Elite® 3500	GRACO GMAX™ II 3900	GRACO GMAX™ II 5900	GRACO GMAX™ II 7900
Gallons Per Minute (GPM)	.75	.75	1.25	1.60	2.20
Supports Tip Size*	.027	.027	.036	.043	.048
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300	3300
Weight	89 Lbs.	103 Lbs.	109 Lbs. (Hi-Boy)	139 Lbs. (Hi-Boy)	146 Lbs. (Hi-Boy)
Pump Type	Endurance Piston Pump	Sealed Hydraulic	Endurance Piston Pump	Endurance Piston Pump	Endurance Piston Pump
Motor Size/Type	120cc Honda or 177cc Kohler	120cc Honda	120cc Honda or 177cc Kohler	200cc Honda or 208cc Kohler	200cc Honda or 208cc Kohler
Electric Conversion Kit	—	—	—	Option	—
Available Models** (See below for model description)	A	A	A, B	A, B, C	A, B, C
Frame Mount - High	✓ Honda 1017-97470 Kohler 1024-95611	✓ 1013-13526	✓ Standard Honda 1017-97496 Kohler 1024-95629 ProContractor™ Honda 1017-97504	✓ Standard Honda 1017-97546 Kohler 1024-95637 ProContractor Honda 1017-97553 IronMan™ Honda 1017-97561	✓ Standard Honda 1017-97595 Kohler 1024-80985 ProContractor Honda 1017-97603 IronMan Honda 1017-97611
Frame Mount - Low	—	✓ 1013-13534	✓ Standard Honda 1017-97488	✓ Standard Honda 1017-97512	✓ Standard Honda 1017-97579
Frame Mount - Stand	—	—	—	—	—
Guns Supported	1	1	2 (.023 Tip)	3 (.023 Tip)	4 (.023 Tip)
CETL Certified	—	—	—	✓ Gas/Electric Convertible 1017-97538	—

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

B ProContractor Series includes Endurance Vortex MaxLife Pump, ProConnect 2, QuikReel Hose Management System, LED Display, WatchDog Pump Protection System, Crushproof Rock Catcher, Contractor PC gun, hose and tip

C IronMan Series includes Endurance Vortex MaxLife EXTREME Pump, ProConnect 2, Flatproof Tires, LED Display, WatchDog Pump Protection System, Crushproof Rock Catcher, Contractor PC gun, hose and tip




D IntelliSync with ActivGuard™ Models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.





Gallons Per Week	200-500 Gallons		501+ Gallons
			
MODEL	GRACO GH 130	TITAN PowrTwin™ 4900 Plus	GRACO GH 200
Gallons Per Minute (GPM)	1.30	1.50	2.15
Supports Tip Size*	.037	.044	.047
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	150 Lbs.	132 Lbs.	160 Lbs.
Pump Type	Endurance Piston Pump	Hydraulic Piston	Endurance Piston Pump
Motor Size/Type	120cc Honda	160cc Honda	160cc Honda
Electric Conversion Kit	Option	Option	Option
Available Models** (See below for model description)	A	A	A, B
Frame Mount - High	—	—	—
Frame Mount - Low	✔ 1005-55747	✔ 599-4116	✔ Standard 1005-55762 ProContractor™ 1005-55770
Frame Mount - Stand	—	—	—
Guns Supported	2 (.023 Tip)	3 (.025 Tip)	4 (.023 Tip)
CETL Certified	✔ With Optional Electric Conversion Kit	—	✔ With Optional Electric Conversion Kit

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

**Model description

A Complete units include gun, hose and tip

B ProContractor Series includes Endurance MaxLife Pump, ProConnect, QuikReel, CrushProof Rock Catcher, gun, hose and tip




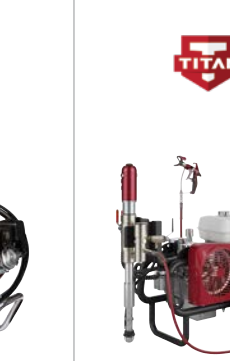
501+ Gallons			
			
TITAN PowrTwin™ 6900 Plus	TITAN PowrTwin™ 6900 Plus DI	GRACO GH 230	TITAN PowrTwin™ 8900 Plus
2.25	2.25	2.35	2.50
.050	.050	.053	.054
3300	3300	3300	3300
139 Lbs.	190 Lbs.	168 Lbs.	154 Lbs.
Hydraulic Piston	Hydraulic Piston	Endurance Piston Pump	Hydraulic Piston
160cc Honda	160cc Honda	200cc Honda	200cc Honda
Option	Option	Option	Option
A	A	A, B	A
—	—	—	—
✔ 599-4124	✔ 117-3137	✔ Standard 1005-55788 ProContractor™ 1005-55796	✔ 100-1965
—	—	—	—
4 (.025 Tip)	4 (.025 Tip)	5 (.024 Tip)	5 (.024 Tip)
✔ With Optional Electric Conversion Kit	—	✔ With Optional Electric Conversion Kit	✔

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	501+ Gallons			
				
MODEL	GRACO DutyMax GH 675 DI	GRACO GH 933	GRACO GH 300	TITAN PowrTwin™ 12000 Plus DI
Gallons Per Minute (GPM)	1.50	2.50	3.00	3.15
Supports Tip Size*	.041	.053	.057	.058
Maximum Fluid Pressure (PSI)	6750	7250	3300	3600
Weight	218 Lbs.	385 Lbs.	195 Lbs.	194 Lbs.
Pump Type	Endurance Piston Quick Change	Xtreme Piston Quick Change	Endurance Piston Pump	Hydraulic Piston
Motor Size/Type	270cc Honda	390cc Honda	270cc Honda or 305cc Vanguard	270cc Honda
Electric Conversion Kit	—	—	Option	Option
Available Models** (See below for model description)	A	A, C	A, B	A
Frame Mount - High	—	—	—	—
Frame Mount - Low	1015-61710	✓ Bare 1000-22177 Complete 1000-19884	✓ Standard 1005-55804 ProContractor™ 1005-55812	✓ 119-6799
Frame Mount - Stand	—	—	—	—
Guns Supported	5 (.025 Tip)	5 (.023 Tip)	5 (.025 Tip)	6 (.024 Tip)
CETL Certified	—	—	✓ With Optional Electric Conversion Kit	—


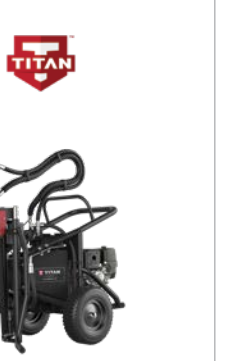

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Complete units include gun, hose and tip

B ProContractor Series includes Endurance MaxLife Pump, ProConnect, QuikReel, CrushProof Rock Catcher, gun, hose and tip

C Bare

501+ Gallons				
				
MODEL	TITAN PowrTwin™ 12000 Plus	TITAN Hydra™ X 4540	GRACO GH 833	TITAN Hydra™ X 7230
Gallons Per Minute (GPM)	3.15	4.00	4.00	3.00
Supports Tip Size*	.058	.067	.065	.057
Maximum Fluid Pressure (PSI)	3600	4500	4000	7250
Weight	183 Lbs.	385 Lbs.	350 Lbs.	385 Lbs.
Pump Type	Hydraulic Piston	Hydraulic Piston	Endurance MaxLife Piston Quick Change	Hydraulic Piston
Motor Size/Type	270cc Honda	390cc Honda with Electric Start	390cc Honda	390cc Honda with Electric Start
Electric Conversion Kit	Option	—	Option	—
Available Models** (See below for model description)	A	C	A, C	C
Frame Mount - High	—	—	—	—
Frame Mount - Low	✓ 599-4157	1024-44841	✓ Bare 1000-22151 Complete 1000-22169	1024-44932
Frame Mount - Stand	—	—	—	—
Guns Supported	6 (.024 Tip)	6 (.021 Tip)	6 (.026 Tip)	5 (.021 Tip)
CETL Certified	✓ With Optional Electric Conversion Kit	—	—	—

We carry a full line of accessories, including gun, hose and tip kits, gun extensions, filters and hoses.



Graco Contractor PC™ Airless Spray Guns

- Lightest, most comfortable spray guns ever built
- Lightest trigger pull, lightest trigger hold force
- E-Z trigger length adjustment; 2-, 3- or 4-finger length (Contractor PC only)
- Complete gun rebuild in seconds with ProConnect™ replacement cartridge (part# 17Y297)



Titan RX-Apex™ Spray Gun

- “All-Day” trigger has 30% lighter trigger pull force and over 60% lighter hold force
- Fingerprint+ Grip™ — adjustable grip delivers maximum customization
- Infinity Packing® System means fluid passages contain reversible seat and replaceable ball
- Filtered and non-filtered versions



Titan RX-Pro® Airless Spray Gun

- 2- and 4- finger trigger
- Unique Infinity Packing® offers 2x the life
- Customize the size and fit of the handle with FingerPrint Grip®
- Ultra-light trigger pull decreases fatigue



Graco Contractor FTx® Airless Spray Gun

- Lightweight, smooth trigger pull
- Exclusive FlexSeal design — 70% longer life
- Available in 2- or 4-finger trigger



Titan RX-80™ Spray Gun

- Balanced ergonomic design delivers added comfort
- Convenient built-in filter wrench
- Newly designed packing kit improves performance and increases life



Graco Contractor® Airless Spray Gun

- Industry standard for performance and durability
- Exclusive FlexSeal design — 70% longer life
- Premium nickel finish for easy cleaning
- Available in 2- or 4-finger trigger
- American made, industry proven Graco quality



Graco JetRoller™ System

- Combines rolling and spraying into one action, saving time and labor costs
- Ideal for applications that require a backroll finish
- Minimum overspray; minimum prep and cleanup required
- Easily detachable handle for use as pole gun/extension gun
- Uses standard roller covers (not included)



Titan SprayGuide™

- Allows you to effectively cut in while using a spray gun
- Eliminates the need to use a spray shield
- Minimizes cutting in with a brush
- Connects to most airless spray guns



Titan Pro V75 Heat Gun

- Used for paint stripping, paint drying, softening caulk and adhesives, and more
- Versatile, handheld and flameless
- 125–1300 degree temperature range/6-speed fan
- 117 temperature settings



ProConnect™ Pump Removal and Installation Systems

- Ability to remove sprayer pump and replace it in seconds
- Eliminates costly jobsite downtime
- Ability to have a spare pump at all times
- One pump fits all small and mid-sized Graco electric sprayers
- Replacement pump sold individually at any Sherwin-Williams store



Pressure Washer Accessories

- At Sherwin-Williams, you'll find a wide assortment of tips, connectors, non-marking hoses and extra guns for pressure washers



Graco RAC X™ Low Pressure (LP and FFLP) SwitchTips

- Spray at up to 50% lower spray pressure, resulting in:
 - Up to 2X longer tip life
 - Up to 50% less overspray
 - Easiest pattern overlap
 - Reduced prep and cleanup time
- 46 tip sizes for all applications
- Small sizes for fine finishing applications
- Large sizes for high-volume and heavy-coating applications



Graco RAC X™ SwitchTips

- Premium quality tip
- Tip line includes 107 sizes for every application
- Longest-lasting fan pattern



Graco RAC X™ Wide RAC™ SwitchTips

- Spray double the area in half the time
- Wider fan pattern results in fewer passes
- Ideal for high production and new construction applications



Titan SC-6+ Reversible Tips

- Produces sharper lines with minimal edge feathering so you can spray with fewer passes
- Proprietary carbide formula guarantees highest quality and maximum tip life
- Flow indicator shows if the tip is in spray position or cleaning position. Insertion and knockout tool for simple assembly
- Ergonomic design assures comfort when rotating to spray or reverse position for cleaning
- The SC-6+ fits the universal base size so you do not need to change base assembly



Titan HEA Tips

- Ideal for new residential, residential repaint and commercial applications
- Optimized to atomize paints and coatings at 1000 PSI with no loss in production
- Up to 55% less overspray
- Two times the life of a standard reversible tip
- Longer sprayer life — pump more gallons before repack is needed
- Ideal for all contractors — new to spraying or master painters
- Lower particle velocity but same flow and production rate as higher pressure systems



Titan SC-6+ Fine Finish Tips

- Ideal for lacquers, stains, sealers and clear coats
- Particle size is up to 27% finer than a standard tip
- Fits all industry standard tip guards

HVLP and Fine Finishing

Choosing an HVLP or Fine Finish Sprayer

Answer the following questions to help find the sprayer that's right for your work — whether you're painting a room or finishing furniture.

What are your productivity needs?



Sprayers in this category range from light duty to high production work.

- **High Volume Low Pressure (HVLP) sprayers** are designed for small detailed work that requires the highest-quality finish.
- **Air-Assisted Fine Finishing sprayers** are designed for larger jobs that demand a high-quality finish.


Light Duty	▶	HVLP
Medium Duty	▶	HVLP
Heavy Duty	▶	HVLP
High Production	▶	Air-Assisted Fine Finishing

What type of paint do you spray?



Not all HVLP sprayers are equipped to handle thick latex paint because of their lower pressure.

ALL HVLP/Fine Finishing sprayers can be used

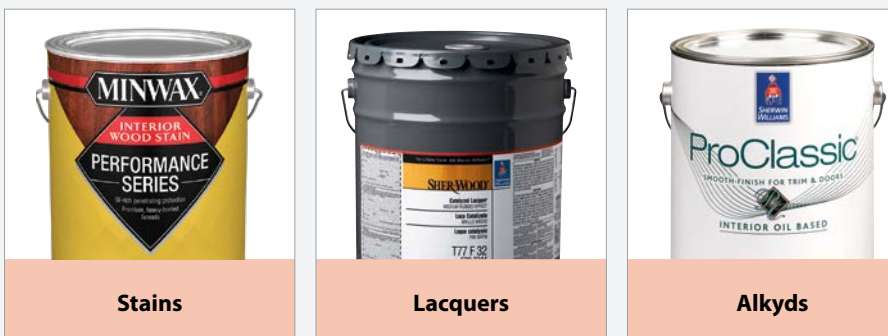

SOME HVLP/Fine Finishing sprayers can be used






Verify the capabilities of your model



HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

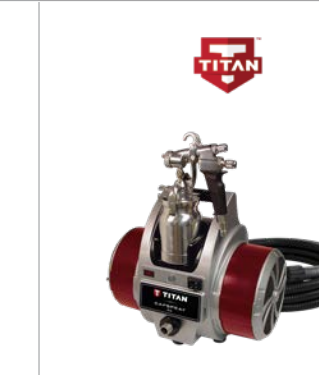Application	Medium		Heavy
			
MODEL	TITAN Capspray™ 75	GRACO FinishPro™ HVLV 7.0	TITAN Capspray™ 95
Motor	3 Stage Turbine	3 Stage Turbine	4 Stage Turbine
Maximum Atomization Pressure (PSI)	7.50	7.00	9.50
CFM	N/A	N/A	N/A
Weight	21 Lbs.	18 Lbs. (Standard Series)	22.5 Lbs.
Cart	Power Cart Accessory	N/A	Power Cart Accessory
Available Models* (See below for model description)	A	A, B	A
Cup/Pot Capacity	1 Qt. Cup with Rotating Pick-Up Tube	1 Qt. FlexLiner™ Cup	1 Qt. Cup with Rotating Pick-Up Tube
Compressor	Not Required for 2 Qt. Remote	N/A	Not Required for 2 Qt. Remote
Stains, Lacquers	☑	☑	☑
Alkyd-Based Paints	☑	☑	☑
Latex-Based Paints	☑	☑	☑
Sales Number	572-7235	Standard 1012-94643 ProContractor™ 1012-94684	572-7243
CETL Certified	☑	☑	☑

* Model description


A Complete units include gun, hose and cup/pot

B ProContractor Series includes Edge® II Plus Gun, Smart Start™, TurboControl, Dual Air Filtration, Utility Box, Super-Flex™ Hose and FlexLiner Bag System

C ProComp Series includes all ProContractor Series features plus: 2-Quart Remote Cup, On-Board Air Compressor, Air Hose and Material Hose

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.



High Production		
		
GRACO FinishPro™ HVLV 9.0	GRACO FinishPro™ HVLV 9.5	TITAN Capspray™ 105
4 Stage Turbine	5 Stage Turbine	5 Stage Turbine
9.00	9.50	10.50
N/A	N/A	N/A
19 Lbs. (Standard Series)	26 Lbs. (ProContractor™ Series)	23.5 Lbs.
N/A	N/A	Power Cart Accessory
A,B	A, B, C	A
1 Qt. FlexLiner™ Cup	1 Qt. FlexLiner Cup	1 Qt. Cup with Rotating Pick-Up Tube
N/A	ProComp – Yes	Not Required for 2 Qt. Remote
☑	☑	☑
☑	☑	☑
☑	☑	☑
Standard 1012-94676 ProContractor 1012-94692	ProContractor 1012-94700 ProComp 1012-94718	Maxum Elite Gun 1005-44089
☑	☑	☑

HVLP and Fine Finishing





Sherwin-Williams carries a complete line of accessories. See store for details.

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	High Production			
				
MODEL	TITAN Capspray™ 115	TITAN ED655 Plus	GRACO FinishPro™ GX 19 Airless	GRACO FinishPro™ GX 19 Airless Cordless
Motor	6 Stage Turbine (2 Speed)	1/2 HP, TEFC	1/2 HP DC	1/2 HP Brushless DC
Maximum Atomization Pressure (PSI)	11.50	2800 .33 GPM/.017 Airless Tip Size	3000 .38 GPM/.019 Airless Tip Size	3000 .38 GPM/.019 Airless Tip Size
CFM	N/A	N/A	N/A	N/A
Weight	24 Lbs.	27 Lbs.	31 Lbs.	29 Lbs.
Cart	Power Cart Accessory	N/A	Stand	Stand
Available Models* (See below for model description)	A	A	B	C
Cup/Pot Capacity	1 Qt. Cup with Rotating Pick-Up Tube	1.5 Gal. Hopper	1.5 Gal. Hopper	1.5 Gal. Hopper
Compressor	Not Required for 2 Qt. Remote	N/A	N/A	N/A
Stains, Lacquers	☑	☑	☑	☑
Alkyd-Based Paints	☑	☑	☑	☑
Latex-Based Paints	☑	☑	☑	☑
Sales Number	Maxum Elite Gun 1005-44097	868-8244	1006-65009	1025-32686
CETL Certified	☑	☑	☑	☑

*Model description
 A Complete units include gun, hose and cup/pot
 B Complete unit includes gun, hose and Fine Finish Low Pressure SwitchTip
 C Complete unit includes Contractor™ PC Compact gun, hose, Fine Finish Low Pressure SwitchTip™, (2) DEWALT® 60VMAX FlexVolt 6.0 ah Batteries and Fan-Cooled Fast Charger

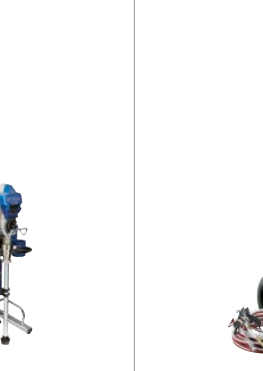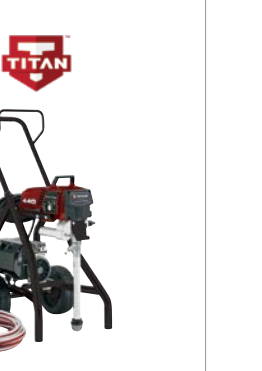Air-Assisted Fine Finishing				
				
MODEL	TITAN AirCoat	GRACO FinishPro™ 395 PC	TITAN MultiFinish™ 440	GRACO FinishPro™ 595 PC
Motor	1/2 HP, TEFC	7/8 HP TEFC DC	7/8 HP DCX	1.6 HP MaxPower™ Brushless DC
Maximum Atomization Pressure (PSI)	2800 .35 GPM/.017 Airless/.017 Air-Assisted Tip Size	3300 .47 GPM/.023 Airless	3300 .54 GPM/.023 Airless/.023 Air-Assisted Tip Size	3300 0.7 GPM/.027 Airless
CFM	3.2 @ 35 PSI	3.2 @ 35 PSI	3.2 @ 35 PSI	3.2 @ 35 PSI
Weight	56 Lbs.	107 Lbs.	92 Lbs.	108 Lbs.
Cart	N/A	Hi-Boy	High Rider	Hi-Boy
Available Models* (See below for model description)	A	B	A	B
Cup/Pot Capacity	1.5 Gal. Hopper	1 or 5 Gal. Direct Immersion	1 and 5 Gal. Suction Set	1 or 5 Gal. Direct Immersion
Compressor	5/8 HP	1 HP SmartComp	7/8 HP DCX	1 HP SmartComp
Stains, Lacquers	☑	☑	☑	☑
Alkyd-Based Paints	☑	☑	☑	☑
Latex-Based Paints	☑	☑	☑	☑
Sales Number	220-7660	1005-55622	573-4066	1017-97249
CETL Certified	☑	☑	☑	☑

Striping Equipment

Selecting the Right Striping Equipment

Line strippers produce precise lines on surfaces like parking lots, roads and athletic fields. Use this guide to choose equipment to complete your striping job quickly and efficiently.

What application do you need it for?



If you do this type of work...	Choose this type of striping equipment	
Spraying standard materials, like waterborne paint	Line Strippers	See Pages 39 – 43
Removing lines from roads and parking lots	Pavement Specialty Products	See Pages 44, 47
Thermoplastic “hot” applied striping	Specialty Thermoplastic Strippers	See Page 45
Traffic tape applications	Traffic Tape Applicator	See Page 46

Here's why thermoplastic and traffic tapes are becoming the preferred line striping methods for DOTs all around the USA:



Long-lasting lines:
Up to 5 times longer than alternatives



Safe: Retroreflectivity is built into the material



Profit: More profit per foot than most alternative methods



Simple to use:
Short learning curve = long-lasting knowledge for operators

Sherwin-Williams carries a complete line of accessories. See store for details.

What is the size of your typical striping job?



Stripers in this category range from light duty to heavy duty. Choose the right capability to help ensure your machine has enough flow to complete your projects quickly.



Light Duty

Small parking lots (20–30 lines), athletic fields



Medium Duty

Medium parking lots (40–100 lines)



Heavy Duty

Large parking lots (airports, shopping centers), highways

Do you need a striper for indoor use?




When you need your line striper for indoor use, the power source is an important element.

There are two types of engines that can power a line striper: a gasoline engine and an electrical engine.



For **indoor** environments, use an **electrical or battery-powered unit**.

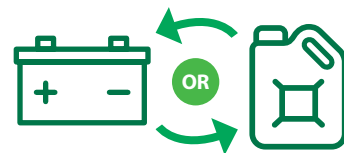

For **outdoor** environments, use **gasoline OR electrical** engines.

Application	Light				
MODEL	GRACO FieldLazer™ ES100	GRACO FieldLazer™ S100	GRACO ES500 Stencil	TITAN PowrLiner™ 850	GRACO LineLazer® ES500
Motor	DEWALT® 6.0 Ah FlexVolt® Battery Electric Motor	35cc Honda	DEWALT 6.0 Ah FlexVolt Battery Electric Motor	37.7cc 4-Stroke Gas Engine	DEWALT 9.0 Ah FlexVolt Battery Electric Motor
Gallons Per Minute (GPM)	.50	.50	.47	.33	.47
Supports Tip Size*	.021	.021	.021	.021	.021
Maximum Fluid Pressure (PSI)	900	900	3300	3000	3300
Weight	75 Lbs.	80 Lbs.	31 Lbs.	65 Lbs.	120 Lbs.
Pump Type	ProXChange™ Power-Piston Pump	Piston	Endurance Piston Pump with ProConnect	Piston	Endurance Piston Pump with ProConnect
Guns Supported	1	1	1	1	1
Sales Number	1025-33676	993-7855	1025-37388	100-1981	1025-34633

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.




Application	Light			Medium
MODEL	GRACO LineLazer® ES 1000 Lithium	GRACO LineLazer® 3400	TITAN PowrLiner™ 3500	GRACO LineLazer® V ES 2000 Lithium
Motor	1.2 HP Brushless DC	120cc Honda	120cc Honda	2.2 HP Brushless DC
Gallons Per Minute (GPM)	.60	.75	.75	1.10
Supports Tip Size*	.025	.027	.027	.033
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	300 Lbs.	160 Lbs.	192 Lbs.	350 Lbs.
Pump Type	Endurance Piston Pump with ProConnect	Clutch Piston	Sealed Hydraulic	Endurance Piston Pump
Guns Supported	1	1	1	2 (.025 Tip)
Sales Number	1-Battery, 1-Gun 1025-33676	1012-94742	1-Gun 1013-13542	2-Gun (Mechanical) 1025-37412 HP Automatic Series Available 2-Gun (2 Automatic) 1025-35341

Medium				Heavy
MODEL	TITAN PowrLiner™ 4500	TITAN PowrLiner™ 4955	GRACO LineLazer® V 3900	GRACO LineLazer® V 5900
Motor	160cc Honda	120cc Honda	120cc Honda GX	120cc Honda GX
Gallons Per Minute (GPM)	1.25	1.25	1.25	1.60
Supports Tip Size*	.036	.034	.036	.043
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	222 Lbs.	324 Lbs.	230 Lbs.	250 Lbs.
Pump Type	Sealed Hydraulic	Hydraulic Piston	Clutch Piston	Endurance Piston Pump
Guns Supported	2 (.025 Tip)	2 (.025 Tip)	2 (.025 Tip)	2 (.027 Tip)
Sales Number	2-Gun 599-4066	2-Gun 1005-56190	2-Gun (Mechanical) 1006-64812 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64820 2-Gun (2 Automatic) 1006-64838 LineDriver Models Available LDHD-160-6110 LD-160-6102	2-Gun (Mechanical) 1006-64846 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64853 2-Gun (2 Automatic) 1006-64861 LineDriver Models Available LDHD-160-6110 LD-160-6102

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers




Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy		
			
MODEL	GRACO LineLazer™ V 200HS	GRACO LineLazer™ V 200DC	GRACO LineLazer™ V 250SPS
Motor	200cc Honda GX	200cc Honda GX	390cc Honda GX
Gallons Per Minute (GPM)	2.15	2.15	2.50
Supports Tip Size*	.047	.047	.055
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	277 Lbs.	340 Lbs.	600 Lbs.
Pump Type	Endurance Piston Pump	Endurance Piston Pump	Endurance Piston Pump
Guns Supported	2 (.034 Tip)	2 (.034 Tip)	2 (.039 Tip)
Sales Number	Standard Series 1006-64879 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64887 2-Gun (2 Automatic) 1006-64895 LineDriver Models Available LDHD-160-6110 LD-160-6102 HP Reflective Series Available 2-Gun (2 Automatic) 1 Pressurized Bead Tank Installed 1006-64903	Standard Series 1017-97751 HP Automatic Series Available 2-Gun (Automatic) 1017-97769 HP Reflective Series Available 2-Gun 1 Pressurized Bead Tank Installed 1017-97777	HP Automatic Series Available 1006-64911 HP Reflective Series Available 2-Gun (2 Automatic) 1 Pressurized Bead Tank Installed 1006-64937 2-Gun (2 Automatic) 2 Pressurized Bead Tanks Installed 1006-64929













*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Heavy			
			
GRACO LineLazer™ V 250DC	TITAN PowrLiner™ 6955	TITAN PowrLiner™ 8955	
Motor	390cc Honda GX	160cc Honda Electric Start	200cc Honda Electric Start
Gallons Per Minute (GPM)	2.50	2.10	2.50
Supports Tip Size*	.055	.047	.054
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	864 Lbs.	339 Lbs.	339 Lbs.
Pump Type	Endurance Piston Pump	Hydraulic Piston	Hydraulic Piston
Guns Supported	5 (.021 Tip)	2 (.031 Tip)	2 (.038 Tip)
Sales Number	HP Automatic Series Available 2-Gun (2 Automatic) 1006-64945 3-Gun (3 Automatic) 1006-64952 HP Reflective Series Available 2-Gun (2 Automatic) 2 Pressurized Bead Tanks Installed 1006-64960 3-Gun (3 Automatic) 2 Pressurized Bead Tanks Installed 1006-64978	2-Gun 1005-56208	2-Gun 1005-56216


Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Ride-On Attachment					
						
						
MODEL	GRACO LineDriver®	TITAN LazyLiner™ Pro	TITAN LazyLiner Elite	GRACO LineDriver HD	GRACO LineDriver HD with Electric Start	GRACO LineDriver ES Lithium
Operating Speed	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 12 mph (19 km/h); Reverse up to 7 mph (11 km/h)	Forward up to 12 mph (19 km/h); Reverse up to 7 mph (11 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)
Fuel Capacity	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	3 Lithium Batteries (10-Hour Run Time)
Motor	160cc Honda GX	160cc Honda	200cc Honda	200cc Honda GX	203cc Vanguard	Electric Lithium Powered Battery
Engine Starting System	Manual Pull	Manual Start	Electric Start	ProStart System	Electric Start	Auto Start
Tires	Tubeless Pneumatic 16" L x 4" W	16" L x 4.5" W	16" L x 6.5" W	Tubeless Pneumatic 16" L x 5.5" W	Tubeless Pneumatic 16" L x 5.5" W	Tubeless Pneumatic 16" L x 5.5" W
Weight	265 Lbs.	260 Lbs.	280 Lbs.	275 Lbs.	280 Lbs.	355 Lbs.
Sales Number	160-6102	1001-78177	1001-78169	160-6110	1025-33510	1025-37057


Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Thermoplastic Striper		
			
			
MODEL	GRACO ThermoLazer™ 200TC	GRACO ThermoLazer™ 300TC	GRACO ThermoLazer™ ProMelt™
Exterior Construction	Steel	Aluminum	Aluminum
Fuel Source	LP Gas, 20 Lbs.	LP Gas, 20 Lbs.	LP Gas, 20 Lbs.
Main Burners	Single Burner/ 30,000 BTU	Twin Burner/ 30,000 BTU	Twin Burner/ 100,000 BTU
Temperature Control	Thermostat	Thermostat	Thermostat
Die Heater	Direct Burners	Direct Burners	Direct Burners
Direction Control	Locking Rear Caster	Locking Front Swivel Wheel	Locking Front Swivel Wheel
Bead Dispenser	No-Tool Variable Width and Flow Rate Double Drop Kit Available	No-Tool Variable Width and Flow Rate Double Drop Kit Available	No-Tool Variable Width and Flow Rate Double Drop Kit Available
Bead Reservoir	40 Lbs. (18 kg)	90 Lbs. (40 kg)	90 Lbs. (40 kg)
Weight	260 Lbs. (118 kg)	295 Lbs. (133 kg)	345 Lbs. (157 kg)
Material Capacity	200 Lbs. (91 kg)	300 Lbs. (136 kg)	300 Lbs. (136 kg)
Melt Time (300 Lbs.)	Up to 2.5 Hours	Up to 4.5 Hours	1 to 1.5 Hours
Temperature Limit Control	N/A	N/A	475° Switch
Sales Number	1004-30073	569-6307	938-9909

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Traffic Tape Applicator
	
MODEL	GRACO TapeLazer™ HP Automatic
Motor	160cc Honda
Operating Speed	6 mph (10 km/h)
Max. Tape Width	14"
Tape Type	Permanent & Temporary
Cutting	Push Button
Weight	500 Lbs.
Sales Number	1023-51897

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Line Removal			
				
MODEL	GRACO GrindLazer™ Standard DC89 G	GRACO GrindLazer™ PRO DC89 G	GRACO GrindLazer™ HP DC1013 G	GRACO GrindLazer™ HP DC1021 G DCS
Max Working Width	8" (20 cm)	8" (20 cm)	10" (25 cm)	10" (25 cm)
Engine	270cc Honda GX	270cc Honda GX	390cc Honda GX	21 HP Vanguard
Engine Start	Pull Start	Pull Start	Pull Start	Electric Start
Rear Tires	Solid Rubber	Solid Rubber	Pneumatic Air Filled	Pneumatic Air Filled
Front Tire	Solid Rubber	Solid Rubber	Pneumatic Air Filled, Swivel	Pneumatic Air Filled, Swivel
Drive Belt	Triple Drive Belt	Heavy-Duty HTD Belt	3-Cog Belt	3-Cog Belt
Cut Direction	Forward	Forward	Forward	Reverse
Cut Depth Adjustment	Manual Lever	Manual Dial	Manual Dial	Electronic
Weight	160 Lbs. (73 kg)	190 Lbs. (86 kg)	310 Lbs. (141 kg)	360 Lbs. (163 kg)
LineDriver	No	No	Option	Required
Applications	Light Traffic Marking Removal, Trip Hazards	Traffic Paint, Thermoplastic, Epoxy, Trip Hazards	Traffic Paint, Thermoplastic, Epoxy, Trip Hazards	Inlay Grooving, Traffic Paint, Thermoplastic, Epoxy
Removal Rate	Walking – 400 Sq. Ft./Hr.	Walking – 400 Sq. Ft./Hr.	Walking – 800 Sq. Ft./Hr. LineDriver – 1,700 Sq. Ft./Hr.	LineDriver – 2,100 Sq. Ft./Hr.
Sales Number	1016-98157	1017-97785	1017-97819	1017-97827

Pressure Washers

Choosing a Pressure Washer

Whether you're preparing a surface to be painted or giving it a serious cleaning, a pressure washer will get the job done. Consider the following questions to help select the washer that best meets your needs.

How many hours per week will you use it?




There are two types of pressure washer pumps: belt drive and direct drive pumps. Your choice will largely depend on your weekly usage.

If your usage is...	Consider this type of pressure washer	
Less than 30 hours per week	Direct drive	See Pages 50 – 51
30+ hours per week	Belt drive	See Pages 52 – 53

How much cleaning power will you need?





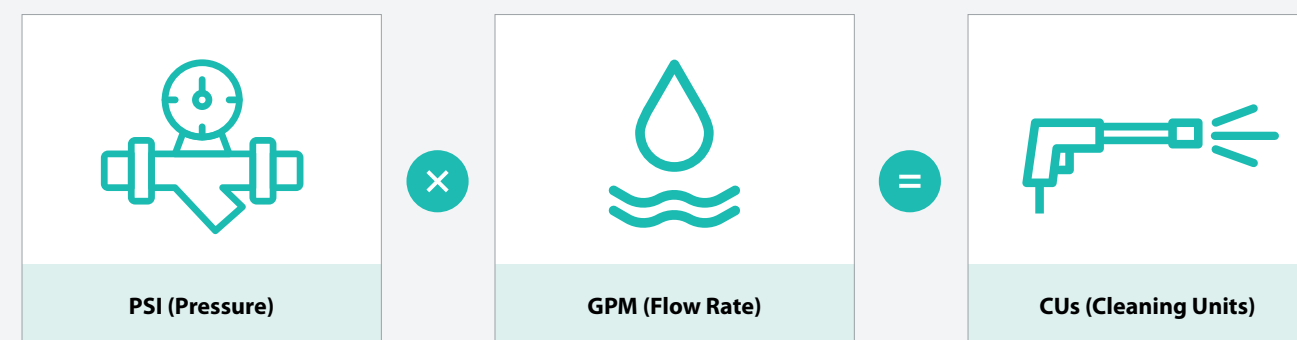








CUs are a useful measurement for comparing models. The higher the number of cleaning units, the more cleaning power your pressure washer has — which ultimately means less cleaning time.



Direct Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Water Temperature and Usage	Cold (10–30 Hrs./Week)					Cold (20–30 Hrs./Week)
						
						
MODEL	MI-T-M ChoreMaster® 3200	MI-T-M Work Pro® 3200	MI-T-M ChoreMaster® 4200	MI-T-M Work Pro® 4200	MI-T-M Job Pro® 3000	
Maximum (PSI)	3200	3200	4200	4200	3000	
Gallons Per Minute (GPM)	2.40	2.40	3.40	3.40	3.00	
Usage	10–15 Hrs./Week	15–20 Hrs./Week	10-15 Hrs./Week	15-20 Hrs./Week	20–30 Hrs./Week	
Pump Manufacturer	Mi-T-M Pump	Mi-T-M Pump	Mi-T-M Pump	Mi-T-M Pump	AR Pump	
Engine	212cc Mi-T-M OHV	196cc Honda OHV	420cc Mi-T-M OHV	389cc Honda OHV	270cc Honda OHV	
Cleaning Units (CUs) (PSI x GPM)	7680 CUs	7680 CUs	14280 CUs	14280 CUs	9000 CUs	
Net Weight	85 Lbs.	85 Lbs.	142 Lbs.	142 Lbs.	105 Lbs.	
Frame	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Lightweight Aluminum	
Pressure Relief Start	☑	☑	☑	☑	☑	
Sales Number	6509-90369	6509-90450	6509-90435	6509-90468	1000-79094	

Pressure Washer Rental Program

Sherwin-Williams offers a pressure washer rental program in select stores. The rental unit is a Mi-T-M cold water, direct drive 2700 PSI pressure washer powered by a 196cc Honda engine. The pressure washer can be rented for a half day or full day at competitive rates.









Direct Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Cold (20–30 Hrs./Week)					Hot (20–30 Hrs./Week)
					
					
MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M HSP 3500
4000	4000	4000	4000	4000	3500
3.50	4.00	4.00	4.00	4.00	3.30
20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week
AR Pump with Bolt-on Unloader	General Pump with External Bypass Unloader	AR Pump with Bolt-on Unloader	General Pump with External Bypass Unloader	CAT Pump with External Bypass Unloader	AR Pump with External Bypass
420cc Mi-T-M OHV	420cc Mi-T-M OHV	389cc Honda OHV	389cc Honda OHV	389cc Honda OHV	389cc Honda OHV
14000 CUs	16000 CUs	16000 CUs	16000 CUs	16000 CUs	11550 CUs
125 Lbs.	125 Lbs.	125 Lbs.	125 Lbs.	125 Lbs.	428 Lbs.
Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Powder Coated Steel
☑	☑	☑	☑	☑	—
6512-64087	1024-97492	6511-57224	1000-76728	1020-51133	906-9782

Belt Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.











Water Temperature and Usage	Hot (40+ Hrs./Week)	Cold (10-15 Hrs./Week)	Cold (30-40 Hrs./Week)	
				
				
MODEL	MI-T-M HS 3500	MI-T-M ChoreMaster® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000
Maximum (PSI)	3500	4000	4000	4000
Gallons Per Minute (GPM)	5.60	3.40	3.40	4.00
Usage	40+ Hrs./Week	10-15 Hrs./Week	30-40 Hrs./Week	30-40 Hrs./Week
Pump Manufacturer	General Pump with External Bypass	AR Pump	AR Pump with Bolt-On Unloader	General Pump with External Bypass
Engine	688cc Honda OHV Electric Start	420cc Mi-T-M OHV	389cc Honda OHV	389cc Honda OHV
Cleaning Units (CUs) (PSI x GPM)	19600 CUs	13600 CUs	13600 CUs	16000 CUs
Net Weight	760 Lbs.	195 Lbs.	165 Lbs.	165 Lbs.
Frame	Powder Coated Steel	Powder Coated Steel	Lightweight Aluminum	Lightweight Aluminum
Pressure Relief Start	—	☑	☑	☑
Sales Number	599-4983	916-2157	1005-54674	1000-76751

Pressure Washer Rental Program

Sherwin-Williams offers a pressure washer rental program in select stores. The rental unit is a Mi-T-M cold water, direct drive 2700 PSI pressure washer powered by a 196cc Honda engine. The pressure washer can be rented for a half day or full day at competitive rates.

Belt Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Cold (40+ Hrs./Week)				
				
				
MI-T-M Job Pro® 4000	MI-T-M Premium 5000	MI-T-M Premium 5000	MI-T-M Premium 6000	MI-T-M Premium 7000
4000	5000	5000	6000	7000
3.70	4.00	4.00	3.7	3.80
30-40 Hrs./Week	40+ Hrs./Week	40+ Hrs./Week	40+ Hrs./Week	40+ Hrs./Week
CAT Pump with External Bypass Unloader	AR Pump with External Bypass	General Pump with External Bypass	General Pump with External Bypass	General Pump with External Bypass
389cc Honda OHV	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start
14800 CUs	20000 CUs	20000 CUs	22200 CUs	26600 CUs
156 Lbs.	433 Lbs.	449 Lbs.	449 Lbs.	449 Lbs.
Lightweight Aluminum	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel
☑	—	—	—	—
1020-51141	1000-76777	1000-76785	1000-76801	1007-14286

Texture Sprayers and Air Compressors

Choosing a Texture Sprayer

Texture finishing continues to grow in popularity. From interior knock-down to exterior finishing, the right equipment will make you more productive.

What materials are you spraying?




Texture sprayers are a great example of the amazing things you can accomplish with a coating. From simulated acoustics to textured elastomerics, the material you are spraying will play a large part in the equipment you choose.



Decorative Interior Texture



Exterior Textured Acrylics and Elastomerics

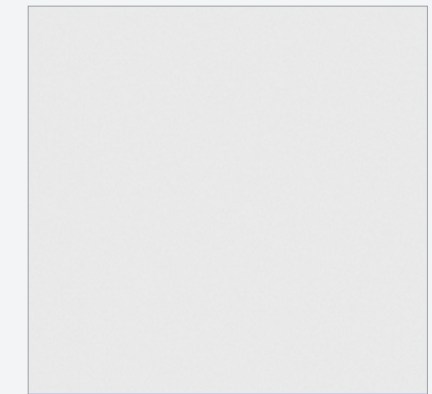

Skim Coat and Level 5

What are your productivity requirements?



Find equipment for everything from small touch-ups to large commercial jobs. Once you've chosen the appropriate material, narrow your selection based on light, medium and heavy-duty production needs.



- Light Duty** ▶ Small touch-ups
- Medium Duty** ▶ Regular use over larger areas
- Heavy Duty** ▶ Heavy-duty production jobs

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light			
				
MODEL	WAGNER PowerTex®	WAL-BOARD TOOLS Spray-Pro® Hopper Gun	GRACO TexSpray™ FastFinish Pro Texture Spray System	GRACO TexSpray™ FastFinish Standard Texture Spray System
Maximum (PSI)	4	Based on External Compressor	60	60
Gallons Per Minute (GPM)	Based on Material	Based on External Compressor	Based on Material	Based on Material
Maximum Hose Length	N/A	N/A	150 Ft.	150 Ft.
Motor	1 Stage Turbine	N/A	120V 9 SCFM @ 40 PSI Integrated Air Compressor	120V 9 SCFM @ 40 PSI Integrated Air Compressor
Weight	5.5 Lbs.	4.0 Lbs.	68 Lbs.	68 Lbs.
Materials Sprayed	Simulated Acoustics and Drywall Mud	Simulated Acoustics and Drywall Mud	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings
Typical Applications	Small Area and Touch-up Applications	Small Area and Touch-up Applications	Residential, Commercial Interiors and Exteriors	Residential, Commercial Interiors and Exteriors
Sales Number	120-0336	125-0679	1015-61660	1015-61678
CETL Certified	☑	—	☑	☑





Light			Medium
			
GRACO TexSpray™ FastFinish Pressurized Hopper Gun	GRACO TexSpray™ G-Tex Gravity Fed Hopper Gun	GRACO TexSpray™ RTX™ 1400SI	GRACO TexSpray™ RTX™ 2000PI
100	100	70	70
Based on Material	Based on Material	1.40	2.0
N/A	N/A	25 Ft.	50 Ft.
N/A	N/A	1.7 HP AC	1.7 HP AC
4 Lbs.	4 Lbs.	63 Lbs.	70 Lbs.
Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Acrylics and Drywall Mud	Simulated Acoustics, Acrylics and Drywall Mud
Residential, Commercial Interiors and Exteriors	Residential, Commercial Interiors and Exteriors	Residential and Light Commercial Interiors	Residential and Light Commercial Interiors
1015-61694	1015-61702	1006-65017	1006-65025
—	—	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Texture Sprayers






Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy			
				
MODEL	GRACO Mark IV HD 3-in-1	TITAN IMPACT® 1040T	GRACO Mark V HD 3-in-1	GRACO TexSpray™ RTX™ 2500PI
Maximum (PSI)	3300	3300	3300	100
Gallons Per Minute (GPM)	1.10	1.15	1.35	2.50
Maximum Hose Length	300 Ft.	300 Ft.	300 Ft.	75 Ft.
Motor	2.2 HP Brushless DC	2.5 HP Duralife Brushless DC	2.8 HP MaxPower Brushless DC	1.7 HP AC
Weight	108 Lbs.	107 Lbs.	135 Lbs.	72 Lbs.
Materials Sprayed	Oil Base Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Oil Base Coatings, Enamels, Latex, Block Fillers, Elastomers, Drywall Mud and Other High Build Materials	Oil Base Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Simulated Acoustics, Acrylics and Drywall Mud
Typical Applications	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Residential and Light Commercial Interiors
Sales Number	Standard 1017-97389 ProContractor™ 1017-97397	1020-62668	Standard 1017-97405 ProContractor 1017-97439 IronMan™ 1017-97447	1015-60290
CETL Certified	☑	☑	☑	☑

Heavy					
					
MODEL	GRACO TexSpray™ RTX™ 5000PI	GRACO TexSpray™ RTX™ 5000PX	GRACO TexSpray™ RTX™ 5500PX	GRACO GMAX II 5900 HD 3-in-1	GRACO Mark X HD 3-in-1
Maximum (PSI)	100	100	100	3300	3300
Gallons Per Minute (GPM)	5.00	5.00	5.50	1.60	2.10
Maximum Hose Length	100 Ft.	100 Ft.	100 Ft.	300 Ft.	300 Ft.
Motor	2.0 HP Brushless DC	2.0 HP Brushless DC	2.0 HP Brushless DC 240 Volts	200cc Honda	4.0 HP Brushless DC 240 Volts
Weight	159 Lbs.	163 Lbs.	163 Lbs.	147 Lbs.	142 Lbs.
Materials Sprayed	Simulated Acoustics, Acrylics and Drywall Mud, Elastomers, Deck Coatings, Synthetic Stuccos	Simulated Acoustics, Acrylics and Drywall Mud, Elastomers, Deck Coatings, Synthetic Stuccos	Simulated Acoustics, Acrylics and Drywall Mud, Elastomers, Deck Coatings, Synthetic Stuccos	Oil Base Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Oil Base Coatings, Enamels, Latex Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials
Typical Applications	Residential and Commercial Interiors	Residential and Commercial Interiors and Exteriors	Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors
Sales Number	1006-65033	1006-65041	1006-65058	Standard 1017-97629 ProContractor™ 1017-97645	Standard 1017-97454 ProContractor 1017-97462
CETL Certified	☑	☑	☑	—	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy				
					
MODEL	GRACO GMAX II 7900 HD 3-in-1	GRACO DutyMax GH 230 HD 3-in-1	GRACO TexSpray™ HTX™ 2030	GRACO DutyMax GH 300 HD 3-in-1	GRACO TexSpray™ T-MAX 6912
Maximum (PSI)	3300	3300	1000	3300	1000
Gallons Per Minute (GPM)	2.20	2.35	3.00	3.00	3.2
Maximum Hose Length	300 Ft.	300 Ft.	300 Ft.	300 Ft.	200 Ft.
Motor	200cc Honda	200cc Honda	200cc Honda	270cc Honda	2.0 HP Brushless DC
Weight	159 Lbs.	168 Lbs.	150 Lbs.	218 Lbs.	156 Lbs.
Materials Sprayed	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High Build Materials	Smooth to Heavily Aggregated Textures with Silica Sand, Perlite, Vermiculite, Polystyrene, in Smooth, Medium and Extra Coarse Grades	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomers, Epoxies, Drywall Mud and Other High-Build Materials	Simulated Acoustic, Orange Peel, Splatter, Knockdown, Smooth, Level 5, Skim Coat, Textured Acrylics and Elastomers, EIFS, Synthetic Stucco Finish Coats, Deck Coatings
Typical Applications	Medium to Large Residential, Commercial Interiors, Exteriors and Industrial	Medium to Large Residential, Commercial Interiors, Exteriors and Industrial	Heavy-Duty Residential and Commercial Interiors and Exteriors	Heavy-Duty Residential and Commercial Interiors and Exteriors	Residential, Commercial and Industrial Interiors and Exteriors
Sales Number	Standard 1017-97652 ProContractor™ 1017-97660 IronMan™ 1017-97678	Standard 1005-55861 ProContractor 1005-55879 —	570-9472 573-1971 with High Pressure 3300 PSI Paint Pump Kit	Standard 1005-55887 ProContractor 1005-55895	1018-93949 50 Ft. Assisted w/ STX Gun and Hopper 1018-92115 50 Ft. Airless w/ Lance Gun and Hopper 1019-34990 100 Ft. Air-Assisted w/ STX Gun and Hopper 1019-35096 100 Ft. Air-Assisted w/ STX Gun, Mixer and Hopper
CETL Certified	—	—	—	With Optional Electric Conversion Kit	—


Standard Series Sprayers include:
Complete gun, hose and tip

ProContractor Series Sprayers include:
Endurance MaxLife EXTREME pump, ProConnect, QuikReel, Crushproof Rock Catcher, gun, hose and tip

IronMan Series Sprayers include:
Endurance MaxLife EXTREME pump, ProConnect, Flatproof Tires, Crushproof Rock Catcher, gun, hose and tip

Air Compressors

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Air Compressors			
				
MODEL	MI-T-M AM1-PE15-08M	MI-T-M AM1-PH65-08M	MI-T-M AM2-PH09-08M	MI-T-M ACS-23105-80VM
CFM	7.3 @ 90 PSI	13.9 @ 90 PSI	17.2 @ 175 PSI	18 @ 175 PSI
Horsepower	1.50	6.50	9.00	5.00
Motor & Engine	120V/13.2 Electric	196cc Honda OHV	270cc Honda OHV	230V/23.0A Single Phase
Receiving Tank	8 Gallon Twin Tank	8 Gallon Twin Tank	8 Gallon Twin Tank	80 Gallon Stationary
Stage	Single	Single	Two	Two
Net Weight	170 Lbs.	175 Lbs.	260 Lbs.	544 Lbs.
Sales Number	569-7453	964-4246	158-7765	924-3734

Ladders

Choosing a Ladder




Werner has simplified the ladder selection process. This new system links product, packaging and merchandising, making ladder selection as easy as 1, 2, 3.


Step 1: Select Height



To ensure you choose the ladder best suited to your needs, follow the Werner height safety chart as shown below:

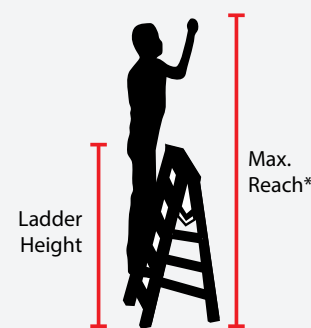


Ladder Height	Max. Reach*
4'	8'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'
14'	18'
16'	20'

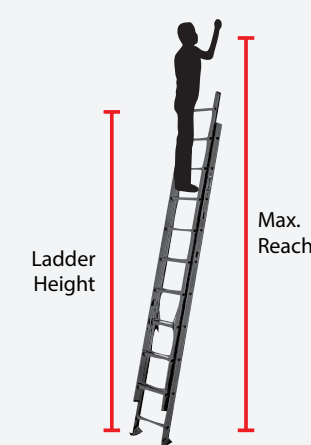

Ladder Height	Max. Reach*	Height to Gutter or Top Support Point†
16'	15'	9' max.
20'	19'	9' to 13'
24'	23'	13' to 17'
28'	27'	17' to 21'
32'	31'	21' to 25'
36'	34'	25' to 28'
40'	37'	28' to 31'

Average Home Heights

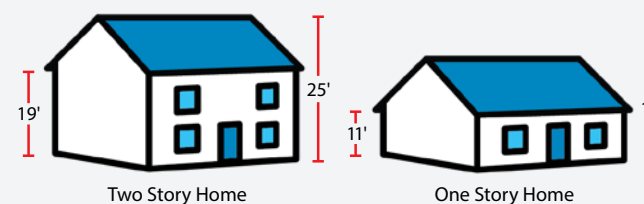


Support Points



*Assumes a 5'6" person with a vertical 12" reach.
 †Support points for extension ladders reflect section overlap, ladder angle, and 3' extension above roof line.

Step 2: Select Performance

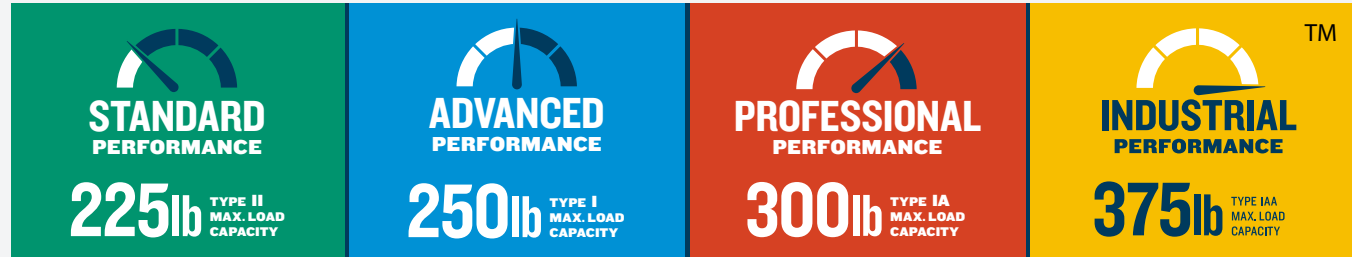



Combined Weight of User and Materials.

Approximate Material Weights

Bundle of shingles	70 Lbs.	3 x 4 window	80 Lbs.
5 gallons of roof coating	70 Lbs.	Garage door opener	40 Lbs.
5 gallons of paint	60 Lbs.	Basketball hoop	60 Lbs.
Tool box with tools	35 Lbs.	Sheet of plywood	80 Lbs.
Portable sprayer	20 Lbs.	(3) 4 x 4s	80 Lbs.
Ceiling fan	30 Lbs.		

Step 3: Select Type



<p>Fiberglass</p>  <ul style="list-style-type: none"> • Strength – 7-layer construction • Safety – For use around electricity • Durability – Corrosion resistant • Pro preferred • Non-conductive side rails 	<p>Aluminum</p>  <ul style="list-style-type: none"> • Lightweight • Not for use around electricity • Corrosion resistant
--	---

Sherwin-Williams carries a complete line of accessories. See store for details.



Model 6006

Model 5904



Model D6224-2



Model SMS-48PL



Model VR401-W



Model I-CISC



Model I-MCNT

SW Sales Number	Model Number	Description
FIBERGLASS LADDERS		
Load Capacity 225 Lbs. Type II		
400-2473	5904	4' Stepladder
Load Capacity 250 Lbs. Type I		
610-9870	6004	4' Stepladder
610-9979	6006	6' Stepladder
447-7121	6008	8' Stepladder
Load Capacity 300 Lbs. Type IA		
455-7781	6204	4' Stepladder
403-5101	6206	6' Stepladder
611-7923	6208	8' Stepladder
611-7816	6210	10' Stepladder
400-2440	6212	12' Stepladder
1004-35106	PD6203	3' Podium Ladder
280-2783	D6224-2	24' Extension Ladder
400-0477	D6228-2	28' Extension Ladder
400-2317	D6232-2	32' Extension Ladder
PLANK, SCAFFOLDS, OUTRIGGERS		
282-4431	PA208	Aluminum Ext. Plank 8'
611-7840	PA210	Aluminum Ext. Plank 10'
593-1662	SRS-72	6' Steel Rolling Scaffold
594-0309	SMS-48PL	4' Portable Scaffold
597-4266	SRO-72-4	Outriggers
597-4282	SRG-72	Guard Rail & Toeboard Kit
1017-71244	I-CISC	6' Baker Utility Scaffold
1017-71137	I-MCNT	4' Mini Folding Platform
TRUCK AND VAN RACKS		
916-1936	TR401-S	Removable Steel Truck Rack
916-1944	VR401-W	Steel Van Rack
MERCHANDISING DISPLAY		
164-4616	37	Werner Small Ladder Rack #37 Order Through ORDER EXPRESS
ACCESSORIES		
282-5479	AC10-20-02	Long Body Ladder Jack
796-8381	AC19-2	Extension Ladder Cover Kit
468-8081	AC78	Quickclick Stabilizer
151-4090	PK80-2	Level Master
435-9022	76-2	Pail Shelf

Sherwin-Williams carries a complete line of accessories. See store for details.



SW Sales Number	Werner Model Number	Description
ALUMINUM LADDERS		
Load Capacity 225 Lbs. Type II		
611-7998	D1216-2	16' Extension Ladder
282-2286	D1220-2	20' Extension Ladder
139-1309	D1224-2AC96	24' Ext. Ladder w/Stabilizer
282-2302	D1228-2	28' Extension Ladder
611-8012	D1232-2	32' Extension Ladder
611-8020	D1240-2	40' Extension Ladder
3-Section 225 Lbs. Type II		
116-6917	D1224-3	24' 3-section Ext. Ladder
Load Capacity 225 Lbs. Type II w/Leveler		
234-7805	D1716-2EQ	16' Ext. Ladder w/Leveler
165-0704	D1724-2EQ	24' Ext. Ladder w/Leveler
Load Capacity 250 Lbs. Type I		
282-2195	366	6' Stepladder
403-7966	D1316-2	16' Extension Ladder
403-7784	D1320-2	20' Extension Ladder
403-7917	D1324-2	24' Extension Ladder
403-7867	D1328-2	28' Extension Ladder
403-7941	D1332-2	32' Extension Ladder
404-5795	D1340-2	40' Extension Ladder
Load Capacity 300 Lbs. Type IA		
163-9087	150B	2' Stepladder
400-4107	374	4' Stepladder
282-2211	376	6' Stepladder
282-2229	378	8' Stepladder
400-2424	310	10' Stepladder
403-4849	D1516-2	16' Extension Ladder
611-8038	D1520-2	20' Extension Ladder
282-5123	D1524-2	24' Extension Ladder
611-8046	D1528-2	28' Extension Ladder
282-2310	D1532-2	32' Extension Ladder
282-2336	D1540-2	40' Extension Ladder



Model D1224-3 Model D1520-2 Model D1716-2EQ



Model 366 Model 150B Model 150BCA



Model 6004CA Model 6005CA



Model 374CA Model 150BCA



Model SRS-72CA Model 6006CA

Sherwin-Williams carries a complete line of accessories. See store for details.



SW Sales Number	Model Number	Description
ALUMINUM LADDERS		
Load Capacity 300 Lbs. Grade 1A		
6508-77483	150BCA	2' Step Stool
1000-83849	374CA	4' Stepladder
1000-83856	376CA	6' Stepladder
FIBREGLASS LADDERS		
Load Capacity 250 Lbs. Grade 1		
1000-83880	6004CA	4' Stepladder
1015-02771	6005CA	5' Stepladder
1016-45802	6006CA	6' Stepladder
1016-45794	6008CA	8' Stepladder
SCAFFOLDS		
1000-84144	SRS-72CA	Steel Rolling Scaffold 6'
1017-71244	I-CISC	6' Baker Utility Scaffold
1017-71137	I-IMCNT	4' Mini Folding Platform





Model I-CISC





Model I-IMCNT

Sherwin-Williams carries a complete line of accessories. See store for details.

Type	Scaffolding	
		
MODEL	METALTECH 3-Unit Scaffold Tower I-T3CISC	METALTECH Saferstack 2-Story Fixed Scaffold Tower M-MFT5710-A
Material	Steel	Steel
Load Capacity	1,000 Lbs.	2,500 Lbs.
Features	<ul style="list-style-type: none"> Rugged 1-1/2' square tube steel construction with a yellow powder-coat finish 5' double locking casters and a spring-loaded locking mechanism Platform adjusts in 2' increments for versatility Meets OSHA standards Includes: 3 6' Baker style scaffolds, 3 platforms, 12 heavy-duty casters, 1 guardrail set, 1 set of 46" outriggers 	<ul style="list-style-type: none"> Interlocking frames for safer storage and transport and takes up 30% less space than regular frames Anti-slip, blue textured powder-coat finish for superior grip and secure footing Fully adjustable to level scaffolding on uneven terrain Meets OSHA standards Includes: Guardrails, 3 aluminum platforms with 5/8" plywood deck, 8" casters or 24" leveling jacks
Height	18'	10'
Sales Number	1017-71384	Leveling Jacks 1017-71335 Casters 1017-71327

Sherwin-Williams carries a complete line of accessories. See store for details.

Type	Stilts	
		
MODEL	TOOLPRO Aluminum Stilts	TOOLPRO Magnesium Alloy Stilts
Material	Aluminum	Magnesium Alloy
Load Capacity	225 Lbs.	225 Lbs.
Features	<ul style="list-style-type: none"> Aircraft-grade aluminum stilts are adjustable (24" - 40") Thick soles offer excellent traction and are resistant to wear and tear Webbed straps and padded calf braces for secure, all-day comfort Part and repair kits available 	<ul style="list-style-type: none"> Premium adjustable (24" - 40") magnesium alloy stilts are lightweight without sacrificing strength Thick soles offer excellent traction and are resistant to wear and tear Webbed straps and padded calf braces for secure, all-day comfort. Part and repair kits available
Sales Number	1005-46647	111-9692

Generators and Portable Heaters

Choosing a Generator


Selecting the right generator size depends on what you want to power.

Is your generator large enough to handle the job?



Add up the total watts of all lights, appliances, tools and other equipment to be connected to the generator. Be sure you select a generator that is large enough to handle both your current requirements and future needs.

Note: Check nameplates to determine wattage. If wattage is not shown but amps and voltage are given, use the formula below.

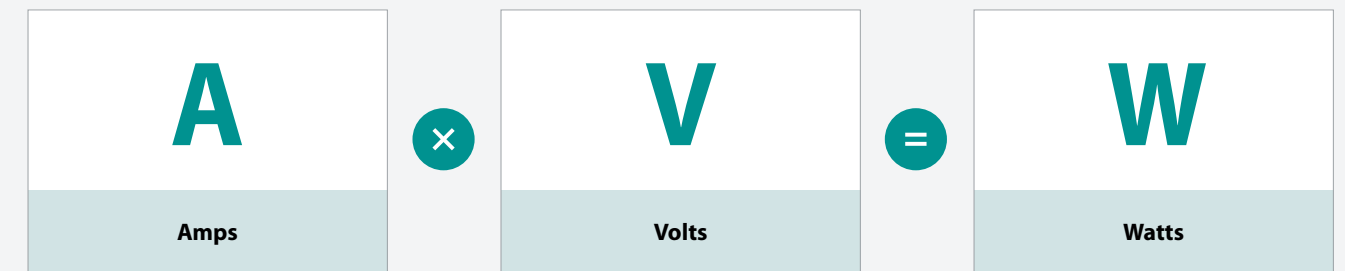

Example: 12.5 Amps x 120 Volts = 1500 Watts

Here are some examples of common wattage requirements:

Equipment	Wattage (approximate)
Space heater	200 – 1500
Compressor	200 – 2200
Drain cleaners	250
Drills (1/4" – 1")	250 – 1000
Electric blower	400 – 2200
Portable grinder	1000 – 2500


Choosing a Heater

Selecting the right heater depends on the size of the space you want to warm.

Is your heater large enough to handle the job?



In general:

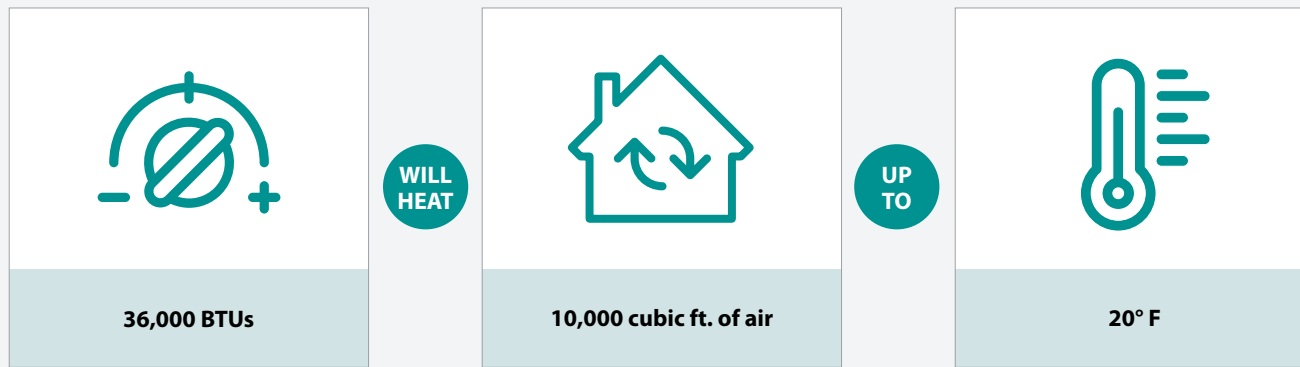

It is also important to choose the correct fuel for your heater. Kerosene is an inexpensive option that provides consistent heat, perfect for warming everything from workshops to construction sites.





Note: Proper ventilation is required during operation.

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Generators	
	 	 
MODEL	MI-T-M ChoreMaster® 6000	MI-T-M ChoreMaster® 8000
Max. AC Output	6000 Watts	8000 Watts
Rated AC Output	5500 Watts	7000 Watts
Engine	389cc Mi-T-M OHV	420cc Mi-T-M OHV with Electric Start
Alternator Type	Brushed	Brushed
Frequency (Hertz)	60	60
Receptacles	(2) 120V, 20A GFCI Duplex; 120V, 30A Twist Lock; (1) 120V/240V, 30A Twist Lock	(2) 120V, 20A GFCI Duplex; 120V, 30A Twist Lock; (1) 120V/240V, 30A Twist Lock
Max. Amps (120V/240V)	50.0/25.0	66.6/33.3
Continuous Amps (120V/240V)	45.8/22.9	58.3/29.2
Fuel Capacity	6.6 Gallons	6.6 Gallons
Run Time @ Full Load	6.5 Hrs.	6.0 Hrs.
Weight	180 Lbs.	195 Lbs.
Sales Number	125-0273	125-0315

Portable Heaters

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Portable Heaters	
	 	 
MODEL	MI-T-M MH-0135-0M10	MI-T-M MH-0190-0M10
Heat Output (BTU)	135,000	190,000
Hot Air Flow	540 CFM	630 CFM
AC Power	120V, 60Hz, 2.3 Amps	120V, 60Hz, 2.7 Amps
Motor Size	1/5 HP	1/4 HP
Fuel Tank Capacity	10 Gallons	13 Gallons
Fuel Consumption	1.00 Gal./Hr.	1.42 Gal./Hr.
Max. Operating Hours	10 Hrs.	9.1 Hrs.
Heating Area	3,100 Sq. Ft.	4,300 Sq. Ft.
Weight (Net)	51 Lbs.	60 Lbs.
Sales Number	1005-22960	1005-22978

Service Centers



Offering the Finest Spray Equipment Repair Service

At Sherwin-Williams, you'll get the most complete line of quality paints, stains, masonry coatings and painting supplies, backed by expert technical advice and more than 4,000 locations. Call (800) 524-5979 to have a professional representative contact you.

Below you will find your local Sherwin-Williams paint sprayer equipment repair and maintenance locations.

State/Province	City	Address	Phone
AK	Anchorage	245 Post Rd	(907) 272-5550
AL	Birmingham	1501 3rd Ave S	(205) 251-4125
AL	Huntsville	621 Meridian St N	(256) 533-2292
AL	Theodore	5250 Kooiman Rd	(251) 443-6572
AR	Springdale	3855 Treat Lane	(479) 751-2721
AZ	Phoenix	2135 E Jones Ave	(602) 254-7310
AZ	Tucson	1311 E Ajo Way Ste 121	(520) 617-0324
AZ	Tucson	1311 E Ajo Way Ste 121	(520) 617-0326
BC	Vancouver	1250 Venables St	(604) 254-4788
BC	Victoria	2141 Government St	(250) 382-8049
CA	Chico	2412 Cohasset Rd Ste A	(530) 342-0147
CA	Fresno	5459 E Lamona Ave	(559) 252-3371
CA	Gardena	17500 South Main St	(310) 329-0831
CA	Sacramento	1015 N Market Blvd Ste 1	(916) 574-9560
CA	San Diego	4925 Convoy St	(858) 292-5391
CA	San Diego	6625 Miramar Rd	(858) 453-6260
CA	Van Nuys	15725 Saticoy St	(818) 785-3003
CO	Colorado Springs	1370 N Newport Rd	(719) 597-6556
CO	Denver	1441 W Bayaud Ave Ste 2B	(303) 777-3434
CO	Grand Junction	845 North Ave	(970) 242-6515
CT	North Haven	2 Montowese Ave	(203) 745-5238
DE	New Castle	70 Southgate Blvd Ste A	(302) 328-7660
FL	Fort Myers	12215 S Cleveland Ave	(239) 936-8558
FL	Jacksonville	6192 Townsend Rd	(904) 771-3511
FL	Orlando	4206 N Orange Blossom Trl	(407) 291-8952
FL	Pensacola	3117 N Palafox St	(850) 432-4173
GA	Augusta	2709 Peach Orchard Rd	(706) 796-3865
GA	Columbus	141 Challenger Ct	(706) 322-1553
GA	Lawrenceville	524 Lyle Cir	(770) 963-8174
GA	Savannah	1851 Chatham Pkwy	(912) 239-9795
GA	Warner Robins	351 S Houston Lake Rd	(478) 971-1402
IA	Bettendorf	3548 State St	(563) 441-0144
IA	Cedar Rapids	3501 J St SW	(319) 364-5036
IA	Des Moines	920 Morgan St Ste T	(515) 280-3365
ID	Meridian	3500 E Commercial Ct Ste 102	(208) 887-9550
IL	Decatur	796 E Wood St	(217) 429-4205
IL	Lisle	2950 Ogden Ave Ste 105	(630) 778-6396
IL	Peoria	1022 W Pioneer Pky	(309) 691-4058
IL	South Holland	510 W Armory Dr	(708) 339-8110

Locations subject to change.

State/Province	City	Address	Phone
IN	Fort Wayne	3425 N Clinton St	(260) 484-8508
IN	Indianapolis	221 S Franklin Rd Ste 7-G	(317) 898-9261
KS	Wichita	1705 N Wabash Ave	(316) 265-6291
KY	Lexington	915 Murray Dr Ste 329	(859) 255-7736
KY	Louisville	4702A Poplar Level Rd	(502) 969-1125
LA	Baton Rouge	5740 Jones Creek Rd	(225) 751-6202
LA	Baton Rouge	5807 Siegen Lane	(225) 293-0203
LA	Jefferson	4925 Jefferson Hwy Ste C	(504) 733-9051
LA	Shreveport	3204 W 70th Street	(318) 686-7341
MA	Medford	59 Hicks Ave	(781) 396-5544
MB	Winnipeg	1045 St James St	(204) 982-6300
MD	Baltimore	11 S Central Ave	(410) 732-4887
MD	Beltsville	6401 Virginia Manor Rd 2	(301) 902-3090
ME	Westbrook	100 Larrabee Rd Ste 300	(207) 856-6766
MI	Byron Center	6030 Clyde Park Ave SW Ste E	(616) 551-2644
MI	Canton	8675 Ronda Dr	(734) 414-9300
MI	Detroit	13415 Lyndon St	(313) 491-5650
MI	Grand Rapids	440 Grandville Ave SW	(616) 456-1438
MN	Saint Paul	284 E Lafayette Frontage Rd	(651) 224-5337
MO	N Kansas City	1737 Macon St	(816) 283-0444
MO	Springfield	535 E Saint Louis St	(417) 862-7483
MO	St Louis	2145 Schuetz Rd	(314) 567-1111
MS	Richland	700 Highway 49 S #B	(601) 939-4537
MS	Tupelo	526 W Main St	(662) 842-4882
MT	Billings	2051 Rosebud Dr	(406) 655-9801
NC	Charlotte	4601 Equipment Dr	(704) 596-4705
NC	Greensboro	1415 E Bessemer Ave	(336) 275-3331
NC	Raleigh	6601 Hillsborough St Ste 119	(919) 854-7701
NC	Winston-Salem	651 Peters Creek Pkwy	(336) 722-1311
NE	Lincoln	208 NW 20th St Ste B	(402) 476-3100
NE	Omaha	9317 J St	(402) 592-0770
NJ	Hainesport	1451 Route 38	(609) 267-8666
NJ	Moonachie	185 Moonachie Rd	(201) 440-2660
NV	Las Vegas	6285 S Valley View Blvd Ste I	(702) 382-4994
NY	Albany	130 Wolf Road	(518) 459-1050
NY	Cheektowaga	2578 Walden Ave	(716) 685-1444
NY	Rochester	830 Emerson St	(585) 458-3120
NY	Syracuse	2380 Erie Blvd East	(315) 446-1762
OH	Brunswick	2872 Center Rd	(330) 225-9729
OH	Cincinnati	1150 W 8th St Ste 112	(513) 621-1630
OH	Columbus	4028 E Broad St	(614) 235-4453
OH	Dayton	2390 Arbor Blvd	(937) 298-8691
OH	Toledo	3062 Monroe St	(419) 243-8121

Locations subject to change.

State/Province	City	Address	Phone
OK	Oklahoma City	300 S Western Ave	(405) 236-8621
OK	Tulsa	3699 S 73rd East Ave	(918) 664-5694
OK	Tulsa	3699 S 73rd East Ave	(918) 660-0997
ON	Cambridge	15 Sheldon Dr	(519) 622-7882
ON	Kingston	101 Binnington Crt Unit 1	(613) 544-0005
ON	Woodbridge	4140 Steeles Ave W	(905) 264-6616
OR	Eugene	3390 W 11th Ave Ste B	(541) 345-5130
PA	Allentown	1512 E Columbia St	(610) 435-9210
PA	Pittsburgh	1100 Western Ave	(412) 322-2923
PA	Scranton	811 S Washington Ave	(570) 342-9276
PA	Springfield	37 Baltimore Pike	(610) 328-0788
PR	Carolina	Carr 190KM 0.8 Marginal Vistamar	(787) 752-1400
QC	Anjou	7870 rue Jarry E	(514) 356-1684
QC	Saint-Léonard	8150 rue du Creusot	(514) 328-8852
QC	Sainte-Julie	1133 Armand-Frappier Blvd Ste103	(450) 922-6982
RI	Warwick	77 Walnut St	(401) 781-6615
SC	Columbia	2529 Forest Dr	(803) 256-3427
SC	Greenville	1139 White Horse Rd	(864) 236-9116
SC	Myrtle Beach	1626 Plaza Place	(843) 448-6128
SC	N Charleston	5350 Rivers Ave	(843) 740-1363
SK	Saskatoon	2723 Faithfull Ave Unit 114	(306) 242-0099
TN	Chattanooga	1315 E 23rd St	(423) 624-1055
TN	Knoxville	6201 Baum Dr	(865) 584-8624
TN	Memphis	3850 Lamar Ave Ste 1	(901) 368-6001
TN	Nashville	701 Lea Ave	(615) 256-1157
TX	Dallas	11233 Leo Lane	(972) 241-0902
TX	El Paso	1015 Eastside Rd	(915) 772-1704
TX	Houston	6448 Long Point Rd	(713) 263-9029
TX	Houston	11375 S Sam Houston Pkwy W	(281) 530-2895
TX	Odessa	5001 John Ben Shepperd Pkwy	(432) 366-1203
TX	San Antonio	4243 Industrial Center	(210) 653-7125
TX	Tyler	305 S Beckham Ave	(903) 592-6537
TX	Waco	525 Lake Air Dr	(254) 776-0720
UT	West Valley City	3171 W 2100 S	(801) 975-1726
VA	Chantilly	14510 Lee Rd Ste M-R	(703) 968-7324
VA	Lynchburg	2100 Fort Avenue	(434) 847-4722
VA	Norfolk	1373 Ingleside Rd	(757) 853-4371
VA	Richmond	6564 W Broad St	(804) 285-8231
VA	Roanoke	6707 Williamson Rd	(540) 366-3467
WA	Spokane	3200 E Trent Ave Bldg 2	(509) 536-9700
WI	Ashwaubenon	1053 Waube Ln	(920) 339-6150
WI	Eau Claire	1427 S Hastings Way	(715) 835-4323
WI	Holmen	3902 Circle Dr	(608) 781-1009
WI	Madison	2030 S Stoughton Rd	(608) 226-0602
WI	Oshkosh	130 N Koeller St Ste A	(920) 231-8030
WI	Wauwatosa	6634 W North Ave	(414) 259-5116

Locations subject to change.

*Sanding,
Abrasives
and Dust
Extractors*

Choosing the Right Festool® Sander

All Festool® sanders are performance-tuned for excellent results, less vibration, and with optimum dust management design for cleaner surfaces and cleaner work environments in the shop or on the jobsite.

What are your productivity needs?



If you need...	Choose the following sander
More flexibility for less fatigue	ETS EC 125/3 EQ
A great sander for drywall and ceiling texture removal	PLANEX Easy LHS-E 225
A sander for tight corners and fine finishes	DTS 400 REQ-Plus
Exceptional performance for flat and vertical spaces	RTS 400 REQ-Plus
A versatile sander from heavy removal to finishing	ROTEX RO 90 FEQ-Plus
All-around performance for general purpose spaces	ROTEX RO 125 FEQ-Plus
Heavy-duty, powerful performance for aggressive removal	ROTEX RO 150 FEQ-Plus
Organization and compact storage for ease of mobility	Assortment Abrasive Systemer ³

Choosing the Right Festool® Abrasives

Granat is Festool's most long-lasting and highest-performing abrasive. It is well suited for nearly all applications, including:

- ✔ **Solid wood**
- ✔ **Composite wood**
- ✔ **Varnish**
- ✔ **Paint**
- ✔ **Drywall/filler**
- ✔ **Metal**
- ✔ **Solid surface**
- ✔ **Fiberglass**
- ✔ **Plastic**

What sander model are you using?



For these sander models...	Use these Granat abrasives
RO 90	P40 – P1500 Grit
RO125, ETS 125, ETS EC 125, RO150	P40 – P1500 Grit
DTS 400, RTS 400	P40 – P400 Grit
PLANEX LHS	P40 – P320 Grit

Choosing the Right Festool® Dust Extractor

Stay clean and efficient with Festool's Dust Extraction systems. They provide quicker cleanup and smoother finishes while helping to protect the air you breathe.

What is your jobsite environment like?



When choosing a Festool Dust Extraction system, consider:

1. Types of work at your jobsite:

2. Volume and forms of debris:

Sawing	Sanding	Minimal	Fine/drywall
Routing	Drilling	Moderate	Wet
Planing	Cleaning	Large	

Additional features:

On-site cleanup

Bluetooth® integration

Mobility/portability

Capacity

Performance Needs	Flexible, Less Fatigue	Drywall Sander, Wall Cleaner & Texture Removal	Corner & Edge Ranged Performance
			
MODEL	ETS EC 125/3 EQ	PLANEX EASY LHS-E 225	DTS 400 REQ-PLUS
Standard Package Includes	StickFix Soft Sander Backing Pad Plug-It Power Cord Systainer SYS3 M 187	StickFix Sanding Pad — Extra Soft Plug-It Power Cord LHS-E 225 Carrying Bag	StickFix Soft Sander Backing Pad 100x150 Plug-It Power Cord Edge Protector Long-life Dust Bag Systainer SYS3 M 187
Power Consumption	400 Watts	400 Watts	250 Watts
Speed	Eccentric Motion Speed 6,000 – 10,000 RPM	Idle Engine Speed 400 – 920 RPM	Idle Engine Speed 6,000 – 12,000 RPM
Sanding Pad Dia.	Interchangeable 5" (125 mm)	Interchangeable 8.5" (220 mm) Abrasive dia. 8.9" (225 mm)	Interchangeable 3-15/16" x 5-29/32" (100 x 150 mm)
Sanding Stroke	1/8" (3 mm)	—	1/16" (2 mm)
Dust Extraction Connection Dia.	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)
Weight	2.65 Lbs. (1.2 kg)	8.8 Lbs. (4 kg)	2.65 Lbs. (1.2 kg)
Sales Number	1022-29267	1014-88302	1020-66024

Flat & Vertical Ranged Performance	Versatile Performance	All-Around Performance	Heavy-Duty Performance	
				
RTS 400 REQ-PLUS	ROTEX RO 90 FEQ-PLUS	ROTEX RO 125 FEQ-PLUS	ROTEX RO 150 FEQ-PLUS	
Standard Package Includes	StickFix Soft Sander Backing Pad 80x133 Plug-It Power Cord Edge Protector Long-life Dust Bag Systainer SYS3 M 187	FastFix Round Soft Sander Backing Pad Delta Sanding Pad & Edge Protector Plug-It Power Cord Systainer SYS3 M 187	FastFix Round Soft Sander Backing Pad Edge Protector Plug-It Power Cord Systainer SYS3 M 187	FastFix Round Soft Sander Backing Pad Edge Protector Plug-It Power Cord Systainer SYS3M 237
Power Consumption	250 Watts	400 Watts	500 Watts	720 Watts
Speed	Idle Engine Speed 6,000 – 12,000 RPM	Rotex Rotary 260 – 520 RPM Eccentric 3,500 – 7,000 RPM	Rotex Rotary 300 – 600 RPM Eccentric 3,000 – 6,000 RPM	Rotex Rotary 320 – 660 RPM Eccentric 3,300 – 6,800 RPM
Sanding Pad Dia.	Interchangeable 3-5/32" x 5-1/4" (80 x 133 mm)	FastFix 3.5" (90 mm)	FastFix 5" (125 mm)	FastFix 6" (150 mm)
Sanding Stroke	1/16" (2 mm)	1/8" (3 mm)	9/64" (3.6 mm)	3/16" (5 mm)
Dust Extraction Connection Dia.	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)
Weight	2.65 Lbs. (1.2 kg)	3.31 Lbs. (1.5 kg)	4.19 Lbs. (1.9 kg)	5.07 Lbs. (2.3 kg)
Sales Number	1020-66016	1023-34554	1015-84795	1021-25523

Backing Pads/Accessories

Sherwin-Williams carries a complete line of accessories. See store for details.

For use with sander model:

RO 90 FEQ – 3.5" (90 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1014-30825

Interface Sander Backing Pad

- For profiles and contours

1014-30833



Sander Backing Pads 2x

- Hard – Snap Stud

1014-30247



For use with sander model:

RO 125 FEQ – 5" (125 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1014-30577

For use with sander model:

RO 150 FEQ – 6" (150 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1015-85750

For use with sander model:

ETS EC 125/3 - 5" (125 mm)



Sander Backing Pad – Soft

- Regular density for most general-purpose applications

1014-30023



Assortment Abrasive Systainer³ 90 SYS-STF D90/93V GR

1023-34471

Includes:

V93	P60	10 qty
V93	P80	10 qty
V93	P120	10 qty
V93	P180	10 qty
D90	P60	10 qty
D90	P80	20 qty
D90	P120	20 qty
D90	P180	10 qty
D90	Interface Pad	1 qty

Abrasives

Sherwin-Williams carries a complete line of accessories. See store for details.

Granat abrasives compatible with sander model:

RO 90

Grit	Qty.	Sales Number
P80 (triangular)	50	1014-30593
P120 (triangular)	100	1014-30601
P180 (triangular)	100	1014-30619
P220 (triangular)	100	1014-45344
P60 (orbital)	50	1014-30528
P80 (orbital)	50	1014-30536
P120 (orbital)	100	1014-30544
P180 (orbital)	100	1014-30551
P220 (orbital)	100	1014-45435

Granat abrasives compatible with sander models:

RO 125, ETS 125, ETSC 125, ETS EC 125

Grit	Qty.	Sales Number
P60	50	1014-30478
P80	50	1014-30486
P120	100	1014-30494
P180	100	1014-30502
P220	100	1014-45468

Granat abrasives compatible with sander models:

RO 150, ETS EC 150, ETS 150

Grit	Qty.	Sales Number
P80	50	1015-85305
P120	100	1015-85321
P180	100	1015-85354
P220	100	1015-85362

Granat abrasives compatible with sander models:

RTS 400, RTSC 400, LS 130

Grit	Qty.	Sales Number
P80	50	1014-30221
P120	100	1014-30239
P180	100	1014-30254
P220	100	1014-45336

Granat abrasives compatible with sander models:

DTS 400, DTSC 400

Grit	Qty.	Sales Number
P80	50	1014-30338
P120	100	1014-30346
P180	100	1014-30254
P220	100	1014-45336



Assortment Abrasive Systainer³ 125 SYS-STF D125 GR

1023-34463

Includes:

D125	P60	10 qty
D125	P80	25 qty
D125	P120	25 qty
D125	P180	20 qty
D125	P220	20 qty
D125	Interface Pad	1 qty

Dust Extractors

Sherwin-Williams carries a complete line of accessories. See store for details.

Performance Needs	Medium Debris, Excellent Dust Capture, Medium Capacity	Fine Dust Debris, High-Performance Capture, XI Capacity
		
MODEL	CT MIDI I *Can be used with most sanders	CT 36 E AC HEPA *For use with Planex sanders
Standard Package Includes	Anti-Static Suction Hose 1-1/16" x 11.5' (27 mm x 3.5 m) Filters HEPA (1 piece) Disposable Filter Bag (1 piece)	Anti-Static Suction Hose 1-7/16" x 11.5' (36 mm x 3.5 m) Filters HEPA (1 piece) Disposable Filter Bag (1 piece) Plastic Liner (1 piece)
Power Consumption	400 – 1,200 Watts	350 – 1,200 Watts
Container Capacity	4 Gal. (15 L)	9.5 Gal. (36 L)
Filter Bag Capacity	3.3 Gal. (12.5 L)	9.0 Gal. (34 L)
Dimensions (L x W x H)	18-1/2" x 12-19/32" x 19-1/2" (470 mm x 320 mm x 495 mm)	25" x 14-3/8" x 23-1/2" (635 mm x 365 mm x 597 mm)
Max Suction Capacity	130 CFM (3,700 L/min)	137 CFM (3,900 L/min)
Weight	24.91 Lbs. (11.3 kg)	33.51 Lbs. (15.2 kg)
Sales Number	6511-30379	1015-84712

Dust Extractor Accessories

Sherwin-Williams carries a complete line of accessories. See store for details.



Standard Cleaning Set

- Compact and lightweight set for quick cleanup in confined spaces.
1025-37867

Includes:

Dust extractor tube	Suction brush
Extension tube (3x)	Floor nozzle
Crevice nozzle	SYS3 M 137



Suction Brush D 36 SP

- Dia. 2-13/16" (71 mm). Accepts D 27 mm and D 36 mm hoses and tubes.

1014-30692



SELF CLEAN Filter Bag – CT MIDI (5 pieces)

- For CT MIDI units manufactured prior to 2019.

1014-30932



SHERWIN-WILLIAMS®

**THE SINGLE SOURCE FOR ALL
YOUR EQUIPMENT NEEDS.**