







•Fall Protection •Training •Netting •PPE

CC GROUP L.L.G.



Rope and Cordages.....4

3-Strand Polypropylene Rope Monofilan	nent2
3-Strand Polypropylene Rope Film	
3-Strand Nylon Plus Rope	
3-Strand Poly Dacron Combo Rope	
Manila Rope	
Sisal Rope	
Hollow Braid Polypro Rope	
Bulwark Safety X Kernmantle Static Rop	
3-Strand Mega Rope]2
12-Strand	16
Endura 12	16
Bexco 12	17
HYPER-XII™	18
Performance HMPE	19
Fabricated Products	20
Mooring Lines/Tails	2
8-Strand Blue Danline	
w/6' Canvas Covered Eyes Both Ends.	2
8-Strand X2 Blue Danline	
w/6' Canvas Covered Eyes Both Ends.	2
8-Strand Maxiflex Gold	
w/6' Canvas Covered Eyes Both Ends.	22
8-Braid X2 Ultima	
w/6' Canvas Covered Eyes Both Ends.	22
12-Strand MaxiFlex-12	
w/6' Canvas Covered Eyes Both Ends.	2
Maxiflex Mooring Tail	24
Nylon Plus Mooring Tail	24
8-Braid Nylon Plus Rope	25
3-Strand Poly Dacron Black Battle Rope.	25
Solid Braid	26
Double Braid Nylon	28
Cotton Sash Cord	29
3-Strand Cotton Rope	30
Pull Tape	3
Bungee Cord	32
Twine	33
Tree Rope	33
Sisal Twine	33
Braided and Twisted Mason Seine Twine	
Baler Twine	35
Tying Twine	35
Tying Tape	36

Adhesive Tape	36
PE Tape	36
Duct Tape	37
Clear Tape	38
Filament/Strapping Tape	38
Electrical Tape	39
Painters Tape	39
Masking Tape	40
Thread Seal Tape	41
Barrier / Marking Tape	42
Caution Tape	42
Danger Tape	42
Flagging Tape	43
Woven Tape	43
Tarps	44
Stretch Film	45
Strapping / Seals / Tools	46
Steel Banding	46
Pre-Cut Strapping	46
Open Seals	47
Closed Seals	47
Crimpers	48
Tensioner	48
Sealless Tensioner	49
Banding Cart	49
Tie Wire	50
Sorbents	50
Oil Pads	50
Oil Booms	51
Oil Spill Rolls	51
Buckets and Lids	52
Nails	53
Bright Common	53
Duplex	53
Fluted Nail	
Phosphate Coated (PC) Drywall	54
Rubber Bands	55
Printed	
Crepe	
Ceramic	
Dellat Deveda	50





	Personal	Protective
E	quipment	60
,	Clayes	60

Gloves	60
Cut And Impact Resistant	60
PS360 Series	60
PS933 Series	61
Gulf Grip Series	62
G-Flex/Core Series	64
Leather	66
Cotton	68
Welder	69
PVC	
Dish Washing Glove	72
Coveralls	73
Disposable Coveralls	73
FR Coveralls	74
Eyewear	76
CORE Eyewear	76
AEGIS Eyewear	76
RIVAL Eyewear	77
Safety Vests	78
Palmer SV2184FR Class 2 Vest (5 Pocket Vest)	78
Palmer SV2187FR Two-Tone Vest (6 Pocket Vest)	79
Palmer SV2301 and SV2302 Class 2 Type R Vest	80
Palmer SV2313 Two-Tone with Black Bottom Vest	81
Palmer SV2327 Six Pocket Surveyors Vest	82
Palmer SV2339	83
Class 2 Type R Safety Vests	84
Chem Suits	85
Hydroblasting	86
Rainwear	87
30 mil LF 100% PVC 3 pc. Jacket w/Hood & Bib	87
35 mil LF PVC/Polyester 3 pc. Jacket, Hood, & Bib	88
35 mil PVC/Polyester 3 pc. Jacket, Hood, & Bib	
35 mil PVC/ Polyester 48" Rain Coat	92
35 mil PVC/ Polyester 60" Rain Coat – Yellow	93
35 mil PVC/ Polyester 60" Rain Coat – Black	94
35 mil LF PVC/ Polyester 60" Rain Coat – Black	95
PVC Boots	
Safety Fencing and Netting	
called it critising aria rectifig	

Fall Protection	100
Harness Sizing Chart	101
Full Body Harnesses	102
Tool Lanyard	114
Lanyards	115
Positioning / Restraint	122
Accessories	123
Self-Retracting Devices (SRD)	125
Palmer Service Center	130
Anchorage	131
Horizontal Lifelines	138
Vertical Lifelines	141
Roofer's Kit	141
Carabiners	143
Confined Space	145
Training Classes	146
Palmer Safety Test Tower	147



3-Strand Polypropylene Rope Monofilament

Polypropylene is a lightweight and strong general purpose rope. It is rot proof and unaffected by water, oil, gasoline, and most chemicals. Polypropylene floats yet it is twice as strong as manila. Our regular monofilament polypropylene rope is made with a medium lay, allowing for easy splicing. Harder lay pot warp which is ideal for fishing applications is also available.

Categories: Ropes and Cordages, 3-Strand Polypropylene Rope Monofilament

Key Features

Yellow, Black, Tan, International Orange, Red, Red with Orange Tracer, White, Blue, Blue/ White, Black with Orange Tracer

Additional sizes and colors available to special order

Standard reels of 300 ft., 600 ft., 1,200 ft. and 2,400 ft.

Part #	Special Type	Diameter Length		Color	Working Load Limits Range (WLL) (lbs.)		
					Min	Max	
PPM1/83		1/8"	3,000'	Yellow	41	98	
PPM3/16250		3/16"	250'	Yellow	54	130	
PPM3/16		3/16"	600'	Yellow	54	130	
PPM3/1612		3/16"	1,200'	Yellow	54	130	
PPM3/163		3/16"	3,000'	Yellow	54	130	
PPM3/1636		3/16"	3,600'	Yellow	54	130	
PPM1/41C		1/4"	100'	Yellow	94	225	
PPM1/4300		1/4"	300'	Yellow	94	225	
PPM1/4		1/4"	600'	Yellow	94	225	
PPM1/412		1/4"	1,200'	Yellow	94	225	
PPM1/424		1/4"	2,400'	Yellow	94	225	
PPM1/43		1/4"	3,000'	Yellow	94	225	
PPM1/44		1/4"	4,000'	Yellow	94	225	
PPM5/16		5/16"	600'	Yellow	143	342	
PPM5/1612		5/16"	1,200'	Yellow	143	342	
PPM3/850C		3/8"	50'	Yellow	203	486	
PPM3/8300		3/8"	300'	Yellow	203	486	
PPM3/8		3/8"	600'	Yellow	203	486	
PPM3/812		3/8"	1,200'	Yellow	203	486	

Part #	Special Type	Diameter	Length	Color	Limits	Range (lbs.)
					Min	Max
PPM3/824		3/8"	2,400'	Yellow	203	486
PPM7/16		7/16"	600'	Yellow	263	630
PPM1/23		1/2"	300'	Yellow	315	756
PPM1/2		1/2"	600'	Yellow	315	756
PPM1/212		1/2"	1,200'	Yellow	315	756
PPM1/224		1/2"	2,400'	Yellow	315	756
PPM5/8		5/8"	600'	Yellow	465	1,116
PPM5/824		5/8"	2,400'	Yellow	465	1,116
PPM3/4		3/4"	600'	Yellow	638	1,530
PPMTR1/4	Tiger Rope	1/4"	600'	Yellow/ Yellow/ Black	94	225
PPMTR5/16	Tiger Rope	5/16"	600'	Yellow/ Yellow/ Black	143	342
PPMTR3/8	Tiger Rope	3/8"	600'	Yellow/ Yellow/ Black	203	486
PPMTR7/16	Tiger Rope	7/16"	600'	Yellow/ Yellow/ Black	263	630
PPMTR1/2	Tiger Rope	1/2"	600'	Yellow/ Yellow/ Black	315	756
PPMTR5/8	Tiger Rope	5/8"	600'	Yellow/ Yellow/ Black	465	1,116
PPMTR3/4	Tiger Rope	3/4"	600'	Yellow/ Yellow/ Black	638	1,530
PPMB3/16		3/16"	600'	Black	54	130
PPMB3/1612		3/16"	1,200'	Black	54	130
РРМВ1/4		1/4"	600'	Black	94	225





3-Strand Polypropylene Rope Monofilament

Part #	Special Type	Diameter	Length Color		Working Loa Limits Range (WLL) (lbs.) Min Ma	
PPMB1/412		1/4"	1,200'	Black	94	225
PPMB5/16		5/16"	600'	Black	143	342
PPMB5/1612		5/16"	1,200'	Black	143	342
РРМВЗ/8		3/8"	600'	Black	203	486
PPMB3/812		3/8"	1,200'	Black	203	486
PPMB3/824		3/8"	2,400'	Black	203	486
PPMB7/16C		7/16"	600'	Black	263	630
РРМВ1/2		1/2"	600'	Black	315	756
РРМВ5/8		5/8"	600'	Black	465	1,116
РРМВЗ/4		3/4"	600'	Black	638	1,530
РРМВ7/8		7/8"	600'	Black	863	2,070
PPMB7/815		7/8"	1,500'	Black	863	2,070
РРМВ1		יין"	600'	Black	1,069	2,565
РРМТ5/8		5/8"	600'	Tan	465	1,116
РРМТЗ/4		3/4"	600'	Tan	638	1,530
РРМТІ		יין"	600'	Tan	1,069	2,565
PPMT1-1/4		1-1/4"	600'	Tan	1,613	3,870
PPMT1-1/2		1-1/2"	600'	Tan	2,279	5,470
РРМТ2		2"	600'	Tan	3,900	9,360
РРМІО1/4		1/4"	600'	International Orange	94	225
PPMIO5/16		5/16"	600'	International Orange	143	342
РРМІОЗ/8		3/8"	600'	International Orange	203	486
РРМІО1/2		1/2"	600'	International Orange	315	756
РРМІО5/8		5/8"	600'	International Orange	465	1,116
РРМІОЗ/4		3/4"	600'	International Orange	638	1,530
РРМІО1		1"	600'	International Orange	1,069	2,565
PPM1/4R		1/4"	600'	Red	94	225
PPMR3/8		3/8"	600'	Red	286	686
PPM1/2R		1/2"	600'	Red	315	756
PPMR5/8		5/8"	600'	Red	465	1,116
PPMRCT1/2	California Truck Rope	1/2"	600'	Red with Orange Tracer	315	756

Part #	Special Type	Diameter	Length	Color	Limits	Vorking Load Limits Range (WLL) (lbs.)	
					Min	Max	
PPMW3/1612		3/16"	1,200'	White	54	130	
PPMW1/4		1/4"	600'	White	94	225	
PPMW1/412		1/4"	1,200'	White	94	225	
PPMW5/16		5/16"	600'	White	143	342	
PPMW3/8		3/8"	600'	White	203	486	
PPMW3/812		3/8"	1,200'	White	203	486	
PPMW1/2		1/2"	600'	White	315	756	
PPMW5/8		5/8"	600'	White	465	1,116	
PPMW3/4		3/4"	600'	White	638	1,530	
PPMBLU1/4		1/4"	600'	Blue	94	225	
PPMBLU3/8		3/8"	600'	Blue	203	486	
PPMBLU1/2		1/2" 600' Blue		Blue	315	756	
PPMBL5/8		5/8"	600'	Blue	465	1,116	
PPMBLU3/4		3/4"	600'	Blue	638	1,530	
PPMBLUI		1"	600'	Blue	1,069	2,565	
PPM1/2G		1/2"	600'	Green	315	756	
PPMBW1/2	Pool Rope	1/2"	600'	Blue/ White	315	756	
PPM3/43BWW	Pool Rope	3/4"	300'	Blue/ White	638	1,530	
PPM3/4BWW	Pool Rope	3/4"	600'	Blue/ White	638	1,530	
PPMCT1/450	California Truck Rope	1/4"	50'	Black with Orange Tracer	94	225	
PPMCT1/4100	California Truck Rope	1/4"	100'	Black with Orange Tracer	94	225	
PPMCT3/8100	California Truck Rope	3/8"	100'	Black with Orange Tracer	203	486	
РРМСТЗ/8	California Truck Rope	3/8"	600'	Black with Orange Tracer	203	486	
PPMCT3/812	California Truck Rope	3/8"	1,200'	Black with Orange Tracer	203	486	
РРМСТ7/16	California Truck Rope	7/16"	600'	Black with Orange Tracer	263	630	
РРМСТ1/2	California Truck Rope	1/2"	600'	Black with Orange Tracer	315	756	
PPMCT1/212	California Truck Rope	1/2"	1,200'	Black with Orange Tracer	315	756	
РРМСТ5/8	California Truck Rope	5/8"	600'	Black with Orange Tracer	465	1,116	
РРМСТЗ/4	California Truck Rope	3/4"	600'	Black with Orange Tracer	638	1,530	
РРМСТІ	California Truck Rope	ן"	600'	Black with Orange Tracer	1,069	2,565	



3-Strand Polypropylene Rope Film

Polypropylene is a lightweight and strong general purpose rope. It is rot proof and unaffected by water, oil, gasoline, and most chemicals. Polypropylene floats yet it is twice as strong as manila. Our regular film polypropylene rope is made with a medium lay, allowing for easy splicing. Harder lay pot warp which is ideal for fishing applications is also available.

Categories: Ropes and Cordages, 3-Strand Polypropylene Rope Film

Key Features

Available colors: Yellow, Yellow/Yellow/Black, Black, Red/White/Blue, White, Tan

Additional sizes and colors available to special order

Standard reels of 300 ft., 600 ft., and 1,200 ft.

3/16" through 3/4" on reels

Part #	Diameter	neter Length Color			Load Limits (WLL) (lbs.)	
				Min	Max	
PPF3/16	3/16"	600'	Yellow	54	130	
PPF3/1612	3/16"	1,200'	Yellow	54	130	
PPF3/1636	3/16"	3,600'	Yellow	54	130	
PPF1/4	1/4"	600'	Yellow	94	225	
PPF1/412	1/4"	1,200'	Yellow	94	225	
PPF5/16	5/16"	600'	Yellow	143	342	
PPF3/8	3/8"	600'	Yellow	203	486	
PPF3/825	3/8"	2,500'	Yellow	203	486	
PPF3/836	3/8"	3,600'	Yellow	203	486	
PPF1/2	1/2"	600'	Yellow	315	756	
PPF5/8	5/8"	600'	Yellow	465	1,116	
PPF3/4	3/4"	600'	Yellow	638	1,530	
PPFY13	ן"	300'	Yellow	1,069	2,565	
PPF1-1/4Y	1-1/4"	600'	Yellow	1,613	3,870	
PPF7/8	7/8"	600'	Yellow/ Yellow/ Black	863	2,070	
PPF13	ן"	300'	Yellow/ Yellow/ Black	1,069	2,565	
PPFI	ן"	600'	Yellow/ Yellow/ Black	1,069	2,565	
PPF1-1/8	1-1/8"	600'	Yellow/ Yellow/ Black	1,333	3,200	
PPF1-1/4	1-1/4"	600'	Yellow/ Yellow/ Black	1,613	3,870	
PPF1-1/2	1-1/2"	600'	Yellow/ Yellow/ Black	2,279	5,470	
PPF1-5/8	1-5/8"	600'	Yellow/ Yellow/ Black	2,663	6,390	

Part #	Diameter	Length	Color	Working Lo Range (W	
				Min	Max
PPF1-3/4	1-3/4"	600'	Yellow/ Yellow/ Black	3,075	7,380
PPF23	2"	300'	Yellow/ Yellow/ Black	3,900	9,360
PPF2	2"	600'	Yellow/ Yellow/ Black	3,900	9,360
PPF2-1/4	2-1/4"	600'	Yellow/ Yellow/ Black	4,950	11,880
PPF2-1/23	2-1/2"	300'	Yellow/ Yellow/ Black	6,000	14,400
PPF2-1/2	2-1/2"	600'	Yellow/ Yellow/ Black	6,000	14,400
PPF2-5/8	2-5/8"	600'	Yellow/ Yellow/ Black	6,708	16,100
PPF33	3"	300'	Yellow/ Yellow/ Black	8,550	20,520
PPF3	3"	600'	Yellow/ Yellow/ Black	8,550	20,520
PPFB1-1/2	1-1/2"	600'	Black	2,279	5,470
PPFB2	2"	600'	Black	3,900	9,360
PPF2RWB	2"	600'	Red/ White/ Blue	3,900	9,360
PPF7/16W	7/16"	600'	White	263	630
PPFT1/4	1/4"	600'	Tan	94	225
PPFT1/412	1/4"	1,200'	Tan	94	225
PPFT5/16	5/16"	600'	Tan	143	342
PPFT3/8	3/8"	600'	Tan	203	486
PPFT1/2	1/2"	600'	Tan	315	756
PPFT5/8	5/8"	600'	Tan	465	1,116
PPFT3/412	3/4"	1,200'	Tan	638	1,530





3-Strand Nylon Plus Rope

3-strand twisted nylon plus is a nylon/polyester blend known for its elasticity and tremendous shock absorbing qualities. When new, nylon plus ropes can stretch up to 20 - 25% of their length before breaking. Stretch characteristics will reduce relative to the amount of use and can lose 10% of its tensile strength when wet. It has good abrasion resistance, is rot proof, resists oil, gasoline, and most chemicals. It has good resistance to UV rays. Nylon plus will last 4-5 times longer than natural fibers.

Categories: Ropes and Cordages, 3-Strand Nylon Plus Rope

Key Features

Available Colors: White and Black

Additional sizes and colors available to special order

Standard reels of 300 ft., 600 ft. and 1,200 ft.

Excellent for shock load and high energy absorption applications.

Specific Gravity 1.14.



Part # Diameter Length Color		Color	Working L Range (V	oad Limits VLL) (Ibs.)	
				Min	Max
N3/16	3/16"	600'	White	73	176
N1/4	1/4"	600'	White	122	294
N1/412	1/4"	1,200'	White	122	294
N5/16	5/16"	600'	White	191	459
N3/83	3/8"	300'	White	270	648
N3/8	3/8"	600'	White	270	648
N3/812	3/8"	1,200'	White	270	648
N1/23	1/2"	300'	White	473	1,134
N1/2	1/2"	600'	White	473	1,134
N1/212	1/2"	1,200'	White	473	1,134
N5/83	5/8"	300'	White	743	1,782
N5/8	5/8"	600'	White	743	1,782
N5/812	5/8"	1,200'	White	743	1,782
N3/41	3/4"	100'	White	1,065	2,556
N3/43	3/4"	300'	White	1,065	2,556
N3/4	3/4"	600'	White	1,065	2,556
N3/412	3/4"	1,200'	White	1,065	2,556
N7/8	7/8"	600'	White	1,440	3,456
N7/812	7/8"	1,200'	White	1,440	3,456
N13	ן"	300'	White	1,853	4,446
N16	ן"	600'	White	1,853	4,446
N112	ן"	1,200'	White	1,853	4,446
N1-1/8	1-1/8"	600'	White	2,355	5,652
N1-1/43	1-1/4"	300'	White	2,903	6,966

Part #	Diameter	Length	Color	Working Lo Range (W	
				Min	Max
N1-1/4	1-1/4"	600'	White	2,903	6,966
N1-1/49	1-1/4"	900'	White	2,903	6,966
N1-5/16	1-5/16"	600'	White	3,188	7,650
N1-1/23	1-1/2"	300'	White	4,050	9,720
N1-1/2	1-1/2"	600'	White	4,050	9,720
N1-1/29	1-1/2"	900'	White	4,050	9,720
N1-5/8	1-5/8"	600'	White	4,781	11,475
N1-3/4	1-3/4"	600'	White	5,513	13,230
N23	2"	300'	White	7,050	16,920
N26	2"	600'	White	7,050	16,920
N2-1/4	2-1/4"	600'	White	8,925	21,420
N2-1/23	2-1/2"	300'	White	10,950	26,280
N2-1/2	2-1/2"	600'	White	10,950	26,280
N2-5/8	2-5/8"	600'	White	12,000	28,800
N33	3"	300'	White	15,450	37,080
N36	3"	600'	White	15,450	37,080
N3/16B	3/16"	600'	Black	73	176
N1/4B	1/4"	600'	Black	122	294
N5/16B	5/16"	600'	Black	191	459
N3/8B	3/8"	600'	Black	270	648
N1/2B	1/2"	600'	Black	473	1,134
N5/8B	5/8"	600'	Black	743	1,782
N3/4B	3/4"	600'	Black	1,065	2,556
N16B	1"	600'	Black	1,853	4,446



3-Strand Poly Dacron Combo Rope

Polydac rope is made from a combination of polyester and polypropylene fibers and is an excellent, low cost, general utility rope. This economical, high strength rope has very low stretch properties, high abrasion resistance and is easily spliced. Additionally polydac has good dielectric properties. Used in construction and fishing industries.

Categories: Ropes and Cordages, 3-Strand Poly Dacron Combo Rope

Key Features

White with a colored tracer, White, Black, and Tan

Additional sizes and colors available to special order

Standard reels of 600 ft. and 1200 ft.

1/4" to 1-1/4" on reels.

1-1/2" to 3" in coils.

Part #	Special Type	Diameter	Length	Color	Workin Limits (WLL) Min	Range	Part #	Special Type	Diameter	Length	Color		ng Load Range) (Ibs.) Max
PD1/4100		1/4"	100'	White with Red Tracer	100	240	PD1-1/8		1-1/8"	600'	White with Red Tracer	1,360	3,265
PD1/4		1/4"	600'	White with Red Tracer	100	240	PD1-1/4		1-1/4"	600'	White with Red Tracer	1,658	3,980
PD5/16		5/16"	600'	White with Red Tracer	156	374	PD1-1/23		1-1/2"	300'	White with Red Tracer	2,354	5,650
PD3/8		3/8"	600'	White with Red Tracer	225	540	PD1-1/2		1-1/2"	600'	White with Red Tracer	2,354	5,650
PD7/16		7/16"	600'	White with Red Tracer	292	700	PD1-5/8		1-5/8"	600'	White with Red Tracer	2,746	6,590
PD1/2		1/2"	600'	White with Red Tracer	367	880	PD1-3/4		1-3/4"	600'	White with Red Tracer	3,071	7,370
PD1/212		1/2"	1,200'	White with Red Tracer	367	880	PD23		2"	300'	White with Red Tracer	4,004	9,610
PD9/16		9/16"	600'	White with Red Tracer	433	1,040	PD2		2"	600'	White with Red Tracer	4,004	9,610
PD5/8		5/8"	600'	White with Red Tracer	508	1,220	PD2-1/4		2-1/4"	600'	White with Red Tracer	4,996	11,990
PD5/812		5/8"	1,200'	White with Red Tracer	508	1,220	PD2-1/2		2-1/2"	600'	White with Red Tracer	6,129	14,710
PD5/824		5/8"	2,400'	White with Red Tracer	508	1,220	PD2-5/8		2-5/8"	600'	White with Red Tracer	6,721	16,130
PD3/4		3/4"	600'	White with Red Tracer	700	1,680	PD33		3"	300'	White with Red Tracer	8,575	20,580
PD7/8		7/8"	600'	White with Red Tracer	927	2,225	PD3		3"	600'	White with Red Tracer	8,575	20,580
PDI		1"	600'	White with Red Tracer	1,098	2,635	PD5/16SL	Stageline	5/16"	600'	White with Orange Tracer	156	374
PD112		1"	1,200'	White with Red Tracer	1,098	2,635	PD3/8SL	Stageline	3/8"	600'	White with Orange Tracer	225	540





3-Strand Poly Dacron Combo Rope

Part #	Special Type	Diameter	Length	Color	Workin Limits (WLL)		Part #	Special Type	Diameter	Length	Color		g Load Range) (lbs.)
DD TASS	G: "	The.	5001	White with	Min	Max			5 /O#	5001	24.00	Min	Max
PD7/16SL	Stageline	7/16"	600'	Orange Tracer	292	700	PD5/8W		5/8"	600'	White	508	1,220
PD1/2SL	Stageline	1/2"	600'	White with Orange Tracer	367	880	PD3/4W		3/4"	600'	White	700	1,680
PD5/8SL	Stageline	5/8"	600'	White with Orange Tracer	508	1,220	PDIW		1"	600'	White	1,098	2,635
PDCT1/4	California Combo	1/4"	600'	White with Orange Tracer	100	240	PDB1/4		1/4"	600'	Black	100	240
PDCT5/16	California Combo	5/16"	600'	White with Orange Tracer	156	374	PDB3/8		3/8"	600'	Black	225	540
PDCT3/8	California Combo	3/8"	600'	White with Orange Tracer	225	540	PDB1/2		1/2"	600'	Black	367	880
PDCT7/16	California Combo	7/16"	600'	White with Orange Tracer	292	700	PDB5/8		5/8"	600'	Black	508	1,220
PDCT1/2	California Combo	1/2"	600'	White with Orange Tracer	367	880	PDB3/4		3/4"	600'	Black	700	1,680
PDCT1/212	California Combo	1/2"	1,200'	White with Orange Tracer	367	880	PDB7/8		7/8"	600'	Black	927	2,225
PDCT9/16	California Combo	9/16"	600'	White with Orange Tracer	433	1,040	PDB1		1"	600'	Black	1,098	2,635
PDCT5/8	California Combo	5/8"	600'	White with Orange Tracer	508	1,220	PDB1-1/4		1-1/4"	600'	Black	1,658	3,980
PDCT5/812	California Combo	5/8"	1,200'	White with Orange Tracer	508	1,220	PD1/4LT		1/4"	600'	Light Tan	100	240
PDCT3/4	California Combo	3/4"	600'	White with Orange Tracer	700	1,680	PD3/8LT		3/8"	600'	Light Tan	225	540
PDCT7/8	California Combo	7/8"	600'	White with Orange Tracer	927	2,225	PD1/2LT		1/2"	600'	Light Tan	367	880
PDCTI	California Combo	ן"	600'	White with Orange Tracer	1,098	2,635	PD5/8LT		5/8"	600'	Light Tan	508	1,220
PDCT1-1/8	California Combo	1-1/8"	600'	White with Orange Tracer	1,360	3,265	PD3/4LT		3/4"	600'	Light Tan	700	1,680
PDCT1-1/4	California Combo	1-1/4"	600'	White with Orange Tracer	1,658	3,980	PDILT		1"	600'	Light Tan	1,098	2,635
PDCT1-1/2	California Combo	1-1/2"	600'	White with Orange Tracer	2,354	5,650	PD1-1/4LT		1-1/4"	600'	Light Tan	1,658	3,980
PDCT1-3/4	California Combo	1-3/4"	600'	White with Orange Tracer	3,071	7,370	PD1-1/2LT		1-1/2"	600'	Light Tan	2,354	5,650
PDCT2	California Combo	2"	600'	White with Orange Tracer	4,004	9,610	PD2LT		2"	600'	Light Tan	4,004	9,610
PD1/212BTR		1/2"	1,200'	White with Black Tracer	367	880	PD5/8TF		5/8"	600'	White with Green Tracer	666	1,599
PD1/4W		1/4"	600'	White	100	240	PD5/836TF		5/8"	3,600'	White with Green Tracer	666	1,599
PD3/8W		3/8"	600'	White	225	540	PD3/4TF		3/4"	600'	White with Green Tracer	1,015	2,436
PD1/2W		1/2"	600'	White	367	880	PDITF		1"	600'	White with Green Tracer	1,374	3,298

Manila Rope

Manila rope is made from natural abaca fiber and has some advantages over synthetic fibers. It is not affected by heat, and has an excellent resistance to the sun's UV rays. Manila rope has low stretch and good abrasion resistance, but poor chemical resistance, and is subject to rot. Ideal for a low-cost general-purpose rope. Used in shipping, construction, agriculture and many other areas.

Categories: Ropes and Cordages, Manila Rope



Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.) Min Max	
MAN1/450		1/4"	50'	Natural	45	108
MAN1/4		1/4"	600'	Natural	45	108
MAN1/412		1/4"	1,200'	Natural	45	108
MAN1/41250		1/4"	1,250'	Natural	45	108
MAN5/16		5/16"	600'	Natural	75	180
MAN5/16850		5/16"	850'	Natural	75	180
MAN3/8		3/8"	600'	Natural	101	243
MAN3/812		3/8"	1,200'	Natural	101	243
MAN1/2		1/2"	600'	Natural	199	477
MAN1/212		1/2"	1,200'	Natural	199	477
MAN5/8100		5/8"	100'	Natural	330	792
MAN5/8		5/8"	600'	Natural	330	792
MAN5/812		5/8"	1,200'	Natural	330	792
MAN3/450		3/4"	50'	Natural	405	972
MAN3/41		3/4"	100'	Natural	405	972
MAN3/43		3/4"	300'	Natural	405	972
MAN3/4		3/4"	600'	Natural	405	972
MAN3/412		3/4"	1,200'	Natural	405	972

Part #	Special Type	Diameter	Length	Color	Limits	ng Load s Range L) (lbs.)	
					Min	Max	
MAN7/8		7/8"	600'	Natural	578	1,386	
MAN150		1"	50'	Natural	675	1,620	
MANII		1"	100'	Natural	675	1,620	
MAN13		1"	300'	Natural	675	1,620	
MAN1		יין"	600'	Natural	675	1,620	
MAN112		ן"	1,200'	Natural	675	1,620	
MAN1-1/8		1-1/8"	600'	Natural	900	2,160	
MAN1-1/4125		1-1/4"	125'	Natural	1,013	2,430	
MAN1-1/4		1-1/4"	600'	Natural	1,013	2,430	
MAN1-1/412		1-1/4"	1,200'	Natural	1,013	2,430	
MAN1-1/2125		1-1/2"	125'	Natural	1,388	3,330	
MAN1-1/2		1-1/2"	600'	Natural	1,388	3,330	
MAN250		2"	50'	Natural	2,325	5,580	
MAN21		2"	100'	Natural	2,325	5,580	
MAN2		2"	600'	Natural	2,325	5,580	
MAN3		3"	600'	Natural	4,792	11,500	
MAN1-1/41254S	4-Strand	1-1/4"	125'	Natural	1,013	2,430	







Sisal Rope

Our sisal rope is biodegradable, knots well, and low chemical resistance. Sisal rope is commonly used in the shipping industry for mooring small craft, lashing, and handling cargo. The strength and length make this choice popular.

Categories: Ropes and Cordages, Sisal Rope

Key Features

100% sisal

Biodegradable and recyclable

Bundling rope for home farming and shipping

Special unoiled option is animal friendly

Part #	Special Type	Diameter	Length	Color
SRC1/450		1/4"	50'	Natural
SRC1/41		1/4"	100'	Natural
SR1/415		1/4"	1,500'	Natural
SR1/415OU	UNOILED	1/4"	1,500'	Natural
SR1/425		1/4"	2,500'	Natural
SR1/425OU	UNOILED	1/4"	2,500'	Natural
SR5/1617		5/16"	1,725'	Natural
SRC3/850		3/8"	50'	Natural
SRC3/8100		3/8"	100'	Natural
SR3/85		3/8"	500'	Natural
SR3/812		3/8"	1,200'	Natural
SR3/812OU	UNOILED	3/8"	1,200'	Natural
SR3/824OU	UNOILED	3/8"	2,400'	Natural
SRC1/250		1/2"	50'	Natural
SRC1/2100		1/2"	100'	Natural
SR1/26		1/2"	600'	Natural
SR1/2OU	UNOILED	1/2"	600'	Natural
SR3/4		3/4"	600'	Natural
SR1370		ייך	370'	Natural
SR16		ן"	600'	Natural



Hollow Braid Polypro Rope

Hollow braid polypropylene rope is a strong lightweight rope that floats in water, great abrasion resistance, spliceable and will not kink. This rope is great for pulling wires, life ring throw ropes, buoys, floating lines, tie-downs, and crowd control barriers.

- · Standard Colors: Yellow and Black (additional colors available)
- · Standard reels of 500 ft. and 1000 ft.

Categories: Ropes and Cordages, Hollow Braid Polypro Rope





Part #	Size	Diameter	Length	Color	Part #	Size	Diameter	Length	Color
r dre n	3120	Biarrieter	Length	20101	T die n	3120	Biameter	Zengur	20101
HBPP3/16250	#6	3/16"	250'	Yellow	НВРРВЗ/8	#12	3/8"	500'	Black
HBPP3/161	#6	3/16"	1,000'	Yellow	нвррвз/81	#12	3/8"	1,000'	Black
НВРР1/4	#8	1/4"	500'	Yellow	нвррві/2	#16	1/2"	500'	Black
НВРР1/41	#8	1/4"	1,000'	Yellow	НВРРВ1/21	#16	1/2"	1,000'	Black
HBPP5/16	#10	5/16"	500'	Yellow	HBPPR3/81	#12	3/8"	1,000'	Red
HBPP5/161	#10	5/16"	1,000'	Yellow	HBPPW1/41	#8	1/4"	1,000'	White
НВРР3/8	#12	3/8"	500'	Yellow	HBPPBW1/43	#8	1/4"	300'	Blue/Wh
HBPP3/81	#12	3/8"	1,000'	Yellow	HBPPGW1/41	#8	1/4"	1,000'	Aqua Gre White
HBPP1/21	#16	1/2"	1,000'	Yellow	HBPPHGW1/41	#8	1/4"	1,000'	Hunter Gre White
НВРРВ1/4	#8	1/4"	500'	Black	HBPPG1/41	#8	1/4"	1,000'	Light Aq Green
НВРРВ1/41	#8	1/4"	1,000'	Black	нвррнсі/41	#8	1/4"	1,000'	Hunter Gr
HBPPB5/16	#10	5/16"	500'	Black	HBPPG1/21	#16	1/2"	1,000'	Gold
HBPPB5/161	#10	5/16"	1,000'	Black	HBPPG1-3/4		1-3/4"	500'	Gold







Bulwark Safety X Kernmantle Static Rope

Our Bulwark Safety X Kernmantle Static Rope is a superior strength rope with low elongation and rotation. This smooth rope is commonly used for mountain climbing, cave exploration, arborist, rescue applications, and horizontal lifeline.

Categories: Ropes and Cordages, Bulwark Safety X Kernmantle Static Rope

Key Features
Excellent grip cover
Low Elasticity
NAFTA parallel twisted nylon core for superior strength
Soft and supple with excellent abrasion elements.
Balanced-Ply non-rotational inner core and outer sheath
Excellent UV and abrasion resistance
Good resistance to chemical
Specific gravity: 1.38 (sinks in water)
5:1 recommended working load
UL certified to NEPA 1983-2017 Technical Use

Part #	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Recommended Working Load (lbs.)
KMIII5/163	5/16"	300'	White with Blue Tracer	4,800	960
KMIII5/166	5/16"	600'	White with Blue Tracer	4,800	960
кмііі3/83	3/8"	300'	White with Blue Tracer	5,781	1,156
кмііі3/86	3/8"	600'	White with Blue Tracer	5,781	1,156
кмііі7/163	7/16"	300'	White with Blue Tracer	6,676	1,335
кмііі7/166	7/16"	600'	White with Blue Tracer	6,676	1,335
кмііі1/23	1/2"	300'	White with Blue Tracer	8,621	1,724
кмііі1/26	1/2"	600'	White with Blue Tracer	8,621	1,724
КМІІІ1/212	1/2"	1,200'	White with Blue Tracer	8,621	1,724





3-Strand Mega Rope

General Work Products registered trademark Mega Blue-3S™ is one of the strongest co-polymer ropes in the market today. The Sky-Blue fiber with two Red tracers have become the industry standard for high performance marine rope. Manufactured from high tenacity polyolefin yarns, Mega Blue-3S™ offers easy handling, high strength, excellent abrasion resistance and excellent UV characteristics. Custom order is available to match boat fleet colors per request.

Categories: Ropes and Cordages, Mega Rope

Key Features

Super strength and easy handling

Excellent UV and abrasion resistance

High-performance marine rope

No loss of strength when wet; and floats in water.

Specific gravity 0.91.


Available in a variety of put-ups, 3-strand, 8 braid and 12-strand

Part #	Special Type	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)		
						Min	Max	
MR5/1612		5/16"	1,200'	Blue with Red Tracer	2,820	235	564	
MR3/8		3/8"	600'	Blue with Red Tracer	4,330	361	866	
MR3/812		3/8"	1,200'	Blue with Red Tracer	4,330	361	866	
MR7/16		7/16"	600'	Blue with Red Tracer	4,700	392	940	
MR1/2		1/2"	600'	Blue with Red Tracer	6,240	520	1,248	
MR5/8		5/8"	600'	Blue with Red Tracer	10,640	887	2,128	
MR3/4		3/4"	600'	Blue with Red Tracer	12,200	1,017	2,440	
MR3/412		3/4"	1,200'	Blue with Red Tracer	12,200	1,017	2,440	
MR7/8		7/8"	600'	Blue with Red Tracer	18,780	1,565	3,756	
MRI		1"	600'	Blue with Red Tracer	23,000	1,917	4,600	
MR1-1/2		1-1/2"	600'	Blue with Red Tracer	44,400	3,700	8,880	
MR1-3/4		1-3/4"	600'	Blue with Red Tracer	68,000	5,667	13,600	
MR23		2"	300'	Blue with Red Tracer	83,500	6,958	16,700	





3-Strand Mega Rope

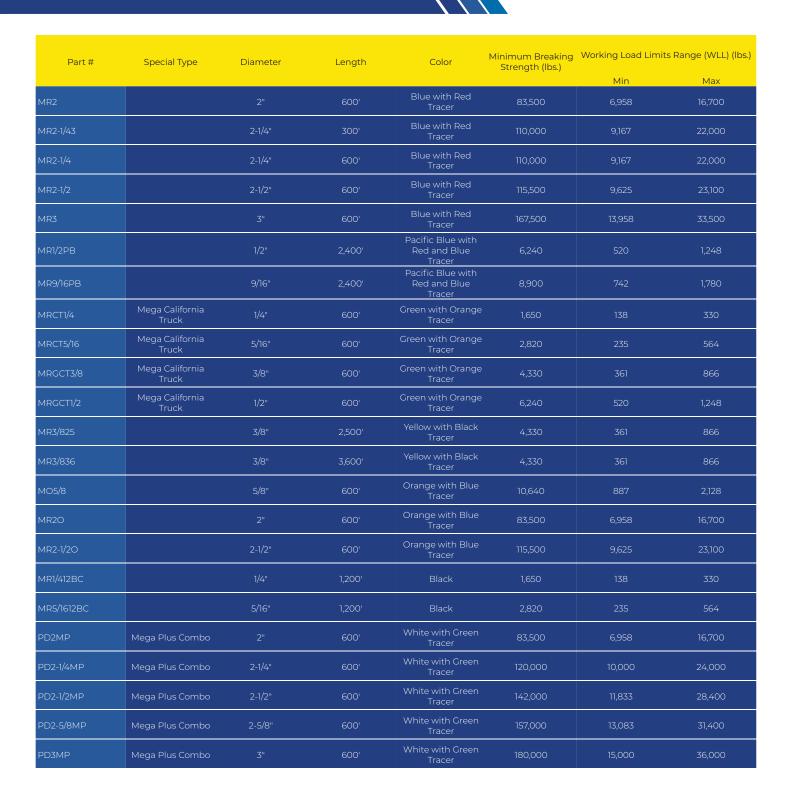







Endura 12 is very high strength, low stretch, and has low creep. It utilizes the latest ultra-high molecular weight polyethylene fiber in a 12-strand construction. This high-tech fiber and construction provide an extremely high strength, lightweight rope that is non-rotational and easily spliced. Endura 12 is ideally suited for wire rope replacement applications where size, strength, and stretch are the main design considerations. Applications include tug boat towlines, winch lines, tug pendant and mainline, helicopter lifting lines, trawl line, underground pulling lines and slings.

Categories: Ropes and Cordages, 12-Strand

Key Features

Excellent abrasion resistance

Easy to inspect

Maximum strength to weight ratio

Extremely low stretch

Part #	Special Type	Diameter	Circumference	Length	Color	Minimum Breaking Strength (lbs.)
endurafoot1/8		1/8"	3/8"		Blue	2,800
ENDURAFOOT3/16		3/16"	9/16"		Blue	6,050
ENDURA3/1612		3/16"	9/16"	1,200'	Blue	6,050
ENDURAFOOT1/4		1/4"	3/4"		Blue	7,700
ENDURA1/46		1/4"	3/4"	600'	Blue	7,700
ENDURAFOOT5/16		5/16"	יין"		Blue	13,300
ENDURA5/166		5/16"	יין"	600'	Blue	13,300
ENDURAFOOT3/8		3/8"	1-1/8"		Blue	16,800
ENDURA3/86		3/8"	1-1/8"	600'	Blue	16,800
ENDURAFOOT7/16		7/16"	1-1/4"		Blue	22,200
ENDURAFOOT1/2		1/2"	1-1/2"		Blue	32,100
ENDURAFOOT9/16		9/16"	1-3/4"		Blue	39,500
ENDURAFOOT5/8		5/8"	2"		Blue	50,800
ENDURAFOOT3/4		3/4"	2-1/4"		Blue	58,000
ENDURAFOOT7/8		7/8"	2-3/4"		Blue	85,000
ENDURAFOOT1		יין"	3"		Blue	98,100
ENDURAFOOT1-1/8		1-1/8"	3-1/2"		Blue	133,000
ENDURAFOOT1-1/4		1-1/4"	3-3/4"		Blue	149,000
ENDURAFOOT1-1/2		1-1/2"	4-1/8"		Blue	205,000
ENDURAFOOT1-5/8		1-5/8"	5"		Blue	255,000
ENDURAFOOT2		2"	6"		Blue	343,000





Endura 12

Part #	Special Type	Diameter	Circumference	Length	Color	Minimum Breaking Strength (lbs.)
ENDURAFOOT2-1/4		2-1/4"	7"		Blue	483,000
ENDURAFOOT2-1/2		2-1/2"	7-1/2"		Blue	529,000
ENDURAFOOT2-5/8		2-5/8"	8		Blue	596,000
ENDURAFOOT3		3"	9"		Blue	749,000
ENDURAFOOTIR	SK78 - DYNEEMA]"	3"		Red/Blue	98,100
ENDURAFOOT1-1/8R	SK78 - DYNEEMA	1-1/8"	3-1/2"		Red/Blue	133,000
ENDURAFOOT1-1/4R	SK78 - DYNEEMA	1-1/4"	3-3/4"		Red/Blue	149,000
ENDURAFOOT1-5/16	SK78 - DYNEEMA	1-5/16"	4"		Red/Blue	166,000
ENDURAFOOT1-1/2R	SK78 - DYNEEMA	1-1/2"	4-1/2"		Red/Blue	205,000
ENDURAFOOT2R	SK78 - DYNEEMA	2"	6"		Red/Blue	343,000
ENDURAFOOT2-1/4R	SK78 - DYNEEMA	2-1/4"	7"		Red/Blue	483,000
ENDURAFOOT1-1/40		1-1/4"	3-3/4"		Orange	149,000
ENDURABRAIDI]"	3"		White with tracer	98,100





Bexco 12

Bexco 12 strand braided ropes are made of HMPE with improved abrasion resistance, very high strength, and low weight to diameter ratio. This 12 strand HMPE is easy to handle and operate with comparable to steel wire rope characteristics. Common sectors are bulk carriers, container ships, fishing vessels (nets), and passenger ships.

Categories: Ropes and Cordages, 12-Strand

Key Features

Good abrasion resistance

Temperature Resistance: 70°C max continuous

Dry and Wet Conditions: Wet strength equals dry strength

Master Reels

Made in Belgium

Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)	
BEXCO12FOOT1-1/8	1-1/8"	3-1/2"	Blue	133,000	
BEXCO12FOOT1-1/4	1-1/4"	3-3/4"	Blue	149,000	

HYPER-XII™

HYPER-XII™ is our high strength, low creep, and low weight to diameter 12 strand HMPE. By strategically combining small diameters with high breaking strength our proprietary HMPE, HYPER-XII™, rope is ABS certified to provide the best performance. HYPER-XII™ is commonly used in sectors like passenger and container ships, bulk carriers, LNG and LPG carrier barges, tugs, harbor towing, dredgers, and fishing vessels and nets. Additionally, a specific gravity of 0.975 allows it to float making it very useful in a marine environment.

Categories: Ropes and Cordages, 12-Strand

Key Features

12-Strand Braided Rope Made of HMPE

Excellent Chemical Resistance

Commonly Known as HMPE: High Modulus PolyEthylene

Superior Abrasion Resistance

Very High Strength with Low Weight to Diameter Ratio

Easy in Handling and Operation

Comparable to Steel Wire Characteristics

Made in Belgium





Minimum

Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)
HYPER12FOOT3/16	3/16"	9/16"	Blue	4,900
HYPER12FOOT1/4	1/4"	3/4"	Blue	7,700
HYPER12FOOT5/16	5/16"	1"	Blue	12,300
HYPER12FOOT3/8	3/8"	1-1/8"	Blue	17,600
HYPER12FOOT1/2	1/2"	1-1/2"	Blue	30,600
HYPER12FOOT9/16	9/16"	1-3/4"	Blue	36,500
HYPER12FOOT5/8	5/8"	2"	Blue	47,500
HYPER12FOOT3/4	3/4"	2-1/4"	Blue	58,000
HYPER12FOOT7/8	7/8"	2-3/4"	Blue	81,700
HYPER12FOOT1	ן"	3"	Blue	98,100
HYPER12FOOT1-1/8	1-1/8"	3-1/2"	Blue	133,000
HYPER12FOOT1-1/4	1-1/4"	3-3/4"	Blue	149,000
HYPER12FOOT15/16	1-5/16"	4"	Blue	166,000
HYPER12FOOT1-3/8	1-3/8"	4-1/8"	Blue	185,000
HYPER12FOOT1-1/2	1-1/2"	4-1/2"	Blue	205,000

Part #	Diameter	Circumference	Color	Breaking Strength (lbs.)
HYPER12FOOT1-5/8	1-5/8"	5"	Blue	255,000
HYPER12FOOT1-3/4	1-3/4"	5-1/2"	Blue	302,000
HYPER12FOOT2	2"	6"	Blue	343,000
HYPER12FOOT2-1/4	2-1/4"	7"	Blue	484,000
HYPER12FOOT2-1/2	2-1/2"	7-1/2"	Blue	529,000
HYPER12FOOT2-5/8	2-5/8"	8"	Blue	595,000
HYPER12FOOT3	3"	9"	Blue	749,000
HYPER12FOOT1/20	1/2"	1-1/2"	Orange	30,600
HYPER12FOOT5/80	5/8"	2"	Orange	47,500
HYPER12FOOT3/40	3/4"	2-1/4"	Orange	58,000
HYPER12FOOT7/80	7/8"	2-3/4"	Orange	81,700
HYPER12FOOT1O	ן"	3"	Orange	98,100
HYPER12FOOT11/80	1-1/8"	3-1/2"	Orange	133,000
HYPER12FOOT11/40	1-1/4"	3-3/4"	Orange	149,000
HYPER12FOOT11/20	1-1/2"	4 -1/2"	Orange	205,000







Performance HMPE

Our heat-treated 12 strand rope with polyurethane coating is torque-free that yields a maximum strength to weight ratio, with the same strength as steel wire rope of similar diameter. This HMPE rope is an excellent replacement for wire rope. Additionally, a specific gravity of 0.98 makes it very useful in a marine environment.

Categories: Ropes and Cordages, 12-Strand

Key Features

12-Strand Braided Rope Made of HMPE

Commonly Known as HMPE: High Modulus PolyEthylene

Superior Abrasion Resistance

Very High Strength with Low Weight to Diameter Ratio


Easy in Handling and Operation

Comparable to Steel Wire Characteristics

Made in China

Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)
нмрегоотз/16	3/16"	9/16"	Blue	4,900
HMPE3/166	3/16"	9/16"	Blue	4,900
НМРЕГООТ1/4	1/4"	3/4"	Blue	7,700
HMPE1/46	1/4"	3/4"	Blue	7,700
НМРЕГООТ5/16	5/16"	"	Blue	12,300
HMPE5/166	5/16"	"	Blue	12,300
нмрегоотз/8	3/8"	1-1/8"	Blue	17,600
НМРЕГООТ7/16	7/16"	1-1/4"	Blue	21,500
HMPEFOOT1/2	1/2"	1-1/2"	Blue	30,600
нмрегоот9/16	9/16"	1-3/4"	Blue	36,500
HMPEFOOT5/8	5/8"	2"	Blue	47,500
нмрегоотз/4	3/4"	2-1/4"	Blue	58,000
нмрегооті-1/4	1-1/4"	3-3/4"	Blue	149,000
HMPEFOOT1-5/16	1-5/16"	4"	Blue	166,000


Fabricated Products







Custom synthetic rope fabrication and fittings Standard industry assemblies Soft eyes Hard eyes Hand dipped eyes Taglines Face lines Double braid pull-line Tethered Tools Coated chafe gear



Hardware	
Blue line thimbles	
Stainless thimbles	
Hawser thimbles	
Composite thimbles	



Ropes	
12-strand HMPE ropes	
12-strand polyester ropes	
8-strand Mooring ropes	
12-strand Mooring ropes	
Double braid ropes	
3-strand ropes	







8-Strand Blue Danline w/6' Canvas Covered Eyes Both Ends

8-strand high strength danline mooring lines, used for mooring larger vessels. These ropes have a high strength to weight ratio, float and do not absorb water. Additionally, they have high resistance to abrasion and chemicals. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: Blue

Standard coils of 720 ft.

Part #	Circumference	Diameter Length	Color		Working Load Limits Range (WLL) (lbs.)		
					Strength (lbs.)	Min	Max
ML5	5"	1-5/8"	720'	Blue	43,477	3,623	8,695
ML6	6"	2"	720'	Blue	63,580	5,298	12,716
ML7PP	7"	2-1/4"	720'	Blue	73,865	6,155	14,773
ML7-1/2	7-1/2"	2-1/2"	720'	Blue	85,085	7,090	17,017
ML8PP	8"	2-5/8"	720'	Blue	97,240	8,103	19,448
ML9PP	9"	3"	720'	Blue	126,310	10,526	25,262
ML10PP	10"	3-1/4"	720'	Blue	158,015	13,168	31,603
ML12	12"	4"	720'	Blue	233,750	19,479	46,750



High Strength

8-Strand X2 Blue Danline w/6' Canvas Covered Eyes Both Ends

8-strand high strength danline mooring lines, used for mooring larger vessels. These ropes have a high strength to weight ratio, float and do not absorb water. Additionally, they have high resistance to abrasion and chemicals. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: Blue

Standard coils of 720 ft.

Part #	Circumference Diameter		Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
ML6X2	6"	2"	720'	Blue	101,853	8,488	20,371
ML7X2	7"	2-1/4"	720'	Blue	133,650	11,138	26,730
ML7-1/2X2	7-1/2"	2-1/2"	720'	Blue	152,700	12,725	30,540
ML8X2	8"	2-5/8"	720'	Blue	173,800	14,483	34,760
ML9X2	9"	3"	720'	Blue	217,360	18,113	43,472
ML10X2	10"	3-1/4"	720'	Blue	266,860	22,238	53,372

8-Strand Maxiflex Gold w/6' Canvas Covered Eyes Both Ends

8-strand high strength polyester/polypropylene blended mooring lines, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring lines and they float. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails



Available colors: White

Standard coils of 720 ft.



Part #	Circumference	Diameter Length	Length	Color	rinimiriani Broaking	Working Load Limits Range (WLL) (lbs.)		
					Strength (lbs.)	Min	Max	
ML5MFG	5"	1-5/8"	720'	White with Gold Tracer	79,380	6,615	15,876	
ML6MFG	6"	2"	720'	White with Gold Tracer	116,800	9,733	23,360	
ML7MFG	7"	2-1/4"	720'	White with Gold Tracer	160,900	13,408	32,180	
ML7-1/2MFG	7-1/2"	2-1/2"	720'	White with Gold Tracer	176,000	14,667	35,200	
ML8MFG	8"	2-5/8"	720'	White with Gold Tracer	196,000	16,333	39,200	
ML9MFG	9"	3"	720'	White with Gold Tracer	250,800	20,900	50,160	
ML10MFG	10"	3-1/4"	720'	White with Gold Tracer	297,000	24,750	59,400	
ML12MFG	12"	4"	720'	White with Gold Tracer	418,950	34,913	83,790	

8-Braid X2 Ultima w/6' Canvas Covered Eyes Both Ends

8-strand high strength polyester/polypropylene blended mooring lines, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring lines and they float. All our mooring lines are supplied with 6 ft. covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: White

Standard coils of 720 ft.



Ultra High Strength

Part #		Diameter	Lenath	Color	Minimum Breaking	Working Load Limits Range (WLL) (lbs.)	
		Strength (lbs.)	Min	Max			
ML6X2U	6"	2"	720'	White with Red and Blue Tracer	136,049	11,337	27,210
ML7X2U	7"	2-1/4"	720'	White with Red and Blue Tracer	178,605	14,884	35,721
ML7-1/2X2U	7-1/2"	2-1/2"	720'	White with Red and Blue Tracer	202,860	16,905	40,572
ML8X2U	8"	2-5/8"	720'	White with Red and Blue Tracer	226,454	18,871	45,291
ML9X2U	9"	3"	720'	White with Red and Blue Tracer	289,076	24,090	57,815
ML10X2U	10"	3-1/4"	720'	White with Red and Blue Tracer	345,083	28,757	69,017





12-Strand MaxiFlex-12 w/6' Canvas Covered Eyes Both Ends

12-strand high strength polyester/polypropylene blended mooring lines, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring lines and they float. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: White

Standard coils of 720 ft.

Part #	Circumference	Diameter L	Length	Color		Working Load Limits Range (WLL) (lbs.)		
	Stren	Strength (lbs.)	Min	Max				
ML7F12	7"	2-1/4"	720'	White with Red Tracer	138,000	11,500	27,600	
ML7-1/2F12	7-1/2"	2-1/2"	720'	White with Red Tracer	158,000	13,167	31,600	
ML8F12	8"	2-5/8"	720'	White with Red Tracer	182,100	15,175	36,420	
ML9F12	9"	3"	720'	White with Red Tracer	224,900	18,742	44,980	
ML10F12	10"	3-1/4"	720'	White with Red Tracer	276,700	23,058	55,340	

Maxiflex Mooring Tail

8-strand high strength polyester/polypropylene blended mooring tails, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring tails and they float. All our mooring tails come with either ABS or Lloyds certificates.

- · 36 ft. long
- \cdot 3 ft. and $\overset{\circ}{6}$ ft. Canvas Cover Eyes

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

High Strength

Shock Load Absorption

36 ft. Tail Length

Canvas Covered Eyes



Part Number	Length	Eye Size	Circumference	Tensile	Working Load Limit	s Range (WLL) (lbs.)
					Min	Max
МТ8МТ	36'	3' & 6'	8"	182,000	15,167	36,000
MT9MF	36'	3' & 6'	9"	224,900	18,742	44,980
MTIOMF	36'	3' & 6'	10"	275,000	22,917	55,000
MT12MF	36'	3' & 6'	12"	407,000	33,917	81,400

Nylon Plus Mooring Tail

8-Braid plaited nylon plus rope is a non-rotational rope that eliminates hocking and other problems associated with twisted anchor lines. Nylon plus is known for its elasticity and tremendous shock absorbing qualities. Other properties include good abrasion and UV resistance. Additionally, it resists oil, gasoline, and most chemicals.

- · 36 ft. long
- · 3 ft. and 6 ft. Canvas Cover Eyes

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

High Strength

Shock Load Absorption

36 ft. Tail Length

Canvas Covered Eyes



Part Number	Length	Eye Size	Working Load Limits Rang		ts Range (WLL) (lbs.)
Fartivarriser	Letigati Lyc Size circumicience	Min	Max		
МТ9	36'	3' & 6'	9"	15,000	36,000
МТ10	36'	3' & 6'	10"	19,583	47,000
MT12	36'	3' & 6'	12"	23,750	57,000







8-Braid Nylon Plus Rope

8-Braid plaited nylon plus rope is a non-rotational rope that eliminates hocking and other problems associated with twisted anchor lines. Nylon plus is known for its elasticity and tremendous shock absorbing qualities. Other properties include good abrasion and UV resistance. Additionally, it resists oil, gasoline, and most chemicals. Ideal for use with windlass anchor lines.

Categories: Ropes and Cordages, 8-Braid Nylon Plus Rope

Key Features

Available colors: White

Standard coils of 720 ft.

Part #	Circumference	Length	Color	Working Load Limit	s Range (WLL) (lbs.)
Part #	Circumierence	Length	Coloi	Min	Max
N68B	6"	600'	White	5,917	14,200
N88B	8"	600'	White	12,000	28,800
N98B	9"	600'	White	15,000	36,000
N108B	10"	600'	White	16,667	40,000
N128B	12"	600'	White	25,833	62,000
N148B	14"	600'	White	32,250	77,400
N158B	15"	600'	White	37,917	91,000
N168B	16"	600'	White	37,917	91,000
N188B	18"	600'	White	45,000	108,000





3-Strand Poly Dacron Black Battle Rope

Polydac rope is made from a combination of polyester and polypropylene fibers and is an excellent, low cost, general utility rope. This economical, high strength rope has very low stretch properties, high abrasion resistance and is easily spliced. Additionally polydac has good dielectric properties. Used in construction and fishing industries.

Categories: Ropes and Cordages, 3-Strand Poly Dacron Black Battle Rope

Key Features

Black

Additional sizes and colors available to special order

Standard reels of 600 ft.

Part #	Part # Circumference Length Color		Working Load Limits Range (WLL) (lbs.)		
				Min	Max
PDB1-1/2	1-1/2"	600'	Black	3,008	7,220
PD2B	2"	600'	Black	4,004	9,610

Solid Braid

Our soft, high strength, lightweight solid braid rope is highly resistant to abrasion and mildew. This rope is suitable for agricultural, general-purpose utility, and leisure marine industries. It works well with tarps, flag poles, boat covers, awnings, and pulleys.

- · Available Colors: White and Black (Special order colors available)
- · Standard reels of 500 ft. and 1000 ft.

Categories: Ropes and Cordages, Solid Braid

Key Features

High strength

Flexible braided rope

Excellent abrasion resistance



Part #	Circumference	Diameter	Length	Color	Working Load Limit	Working Load Limits Range (WLL) (lbs.)	
Pait #	Circumierence	Diameter	Length	Color	Min	Max	
SBN3/321	#3	3/32"	1,000'	White	33	80	
SBN1/8	#4	1/8"	500'	White	42	100	
SBN1/81	#4	1/8"	1,000'	White	42	100	
SBN5/321	#5	5/32"	1,000'	White	56	134	
SBN3/1650	#6	3/16"	50'	White	71	170	
SBN3/16	#6	3/16"	500'	White	71	170	
SBN3/161	#6	3/16"	1,000'	White	71	170	
SBN7/321	#7	7/32"	1,000'	White	81	195	
SBN1/450	#8	1/4"	50'	White	106	255	
SBN1/4100	#8	1/4"	100'	White	106	255	
SBN1/42	#8	1/4"	200'	White	106	255	
SBN1/43	#8	1/4"	300'	White	106	255	
SBN1/4	#8	1/4"	500'	White	106	255	
SBN1/41	#8	1/4"	1,000'	White	106	255	
SBN1/412	#8	1/4"	1,200'	White	106	255	
SBN5/1650	#10	5/16"	50'	White	183	440	
SBN5/16100	#10	5/16"	100'	White	183	440	
SBN5/16175	#10	5/16"	175'	White	183	440	
SBN5/16	#10	5/16"	500'	White	183	440	
SBN5/161	#10	5/16"	1,000'	White	183	440	
SBN3/850	#12	3/8"	50'	White	263	632	







Solid Braid

Part # Circumference Diameter Length Color Make Mak							
SSM MARION MTZ SRIF 100 White 263 632 SRIA WRITER 417 578° 125° White 263 632 SRIA WRITER 417 36° 300° Write 263 632 SRIA WRITER 417 36° 1000° Write 263 632 SRIA WRITER 414 77° 500° Write 400 60 SRIA WRITER 416 12° 300° Write 425 1020 SRIA WRITER 416 12° 1000° Write 425 1020 SRIA WRITER 42° 100° <	Part #	Circumference	Diameter	Length	Color		
Semilor Mile	SBN3/8100	#12	3/8"	100'	White		
SERVICE SERV							
Senta Part Senta Senta							
Sent/Sign							
SENS/SES							
SENT/IGE							
SENIVIDES #14 7/16" 500° White 400 960							
SENT/FIST B14 7/16' 1,000' White 400 960							
SENI/280							
SBN1/23 #16 1/2" 300" White 425 1020 SBN1/21 #16 1/2" 500" White 425 1,020 SBN1/31 #16 1/2" 1,000" White 425 1,020 SBN5/8 #20 5/8" 500" White 583 1,400 SBN5/81 #20 5/8" 1,000" White 583 1,400 SBN5/82 #4 1/8" 500" Black 42 100 SBN1/81B #4 1/8" 1,000" Black 42 100 SBN3/161B #5 5/32" 1,000" Black 71 170 SBN3/161B #6 3/16" 500" Black 71 170 SBN3/161B #8 1/4" 500" Black 106 255 SBN3/161B #8 1/4" 1,000" Black 183 440 SBN3/161B #10 5/16" 1,000"							
SBN/Z #16 1/2" 500' White 425 1,020 SBN/ZI #16 1/2" 1,000' White 425 1,020 SBNS/B #20 5/6" 500' White 583 1,400 SBNS/BI #20 5/6" 1,000' White 583 1,400 SBNI/BB #4 1/8" 500' Black 42 100 SBNI/BB #4 1/8" 1,000' Black 42 100 SBNI/BB #4 1/8" 1,000' Black 42 100 SBNI/BB #5 5/32" 1,000' Black 71 170 SBNI/GB #6 3/16" 500' Black 71 170 SBNI/AB #8 1/4" 500' Black 106 255 SBNI/AB #10 5/6" 500' Black 133 440 SBNS/BB #10 5/6" 1,000' Black	SBN1/280	#16		80'	White	425 	1,020
SBNI/2I #16 1/2" 1,000' White 425 1,020 SBNS/8 #20 5/8" 500' White 583 1,400 SBNS/81 #20 5/8" 1,000' White 583 1,400 SBNI/8B #4 1/8" 500' Black 42 100 SBNI/8B #4 1/8" 1,000' Black 42 100 SBNI/8B #4 1/8" 1,000' Black 42 100 SBNI/6B #5 5/32" 1,000' Black 56 134 SBNI/6B #6 3/16" 500' Black 71 170 SBNI/4B #8 1/4" 500' Black 106 255 SBNI/4B #8 1/4" 1,000' Black 106 255 SBNS/16B #10 5/16" 500' Black 183 440 SBNS/16B #12 3/8" 500' Black <td>SBN1/23</td> <td>#16</td> <td>1/2"</td> <td>300'</td> <td>White</td> <td>425</td> <td>1,020</td>	SBN1/23	#16	1/2"	300'	White	425	1,020
SBNS/88 #20 5/8" 500' White 583 1,400 SBNS/61 #20 5/8" 1,000' White 583 1,400 SBNI/8B #4 1/8" 500' Black 42 100 SBNI/8B #4 1/8" 1,000' Black 42 100 SBNI/8B #5 5/32" 1,000' Black 56 134 SBNI/6B #6 3/16" 500' Black 71 170 SBNI/4B #8 1/4" 500' Black 106 255 SBNI/4B #8 1/4" 1,000' Black 106 255 SBNS/6GB #10 5/16" 500' Black 183 440 SBNS/6GB #10 5/16" 1,000' Black 183 440 SBNS/6GB #12 3/8" 500' Black 263 632 SBNS/16B #12 3/8" 1,000' Black	SBN1/2	#16	1/2"	500'	White	425	1,020
SBN5/81 #20 5/8" 1,000' White 583 1,400 SBN1/81B #4 1/8" 500' Black 42 100 SBN1/81B #4 1/8" 1,000' Black 42 100 SBN5/321B #5 5/32" 1,000' Black 56 134 SBN3/66B #6 3/16" 500' Black 71 170 SBN3/16B #6 3/16" 1,000' Black 71 170 SBN3/16B #8 1/4" 500' Black 106 255 SBN3/16B #10 5/16" 500' Black 106 255 SBN3/16B #10 5/16" 1,000' Black 183 440 SBN3/16B #12 3/8" 500' Black 263 632 SBN3/16B #12 3/8" 500' Black 263 632 SBN3/16B #14 7/16" 500'	SBN1/21	#16	1/2"	1,000'	White	425	1,020
SBNI/BB #4 1/8" 500' Black 42 100 SBNI/BIB #4 1/8" 1,000' Black 42 100 SBNS/16B #5 5/32" 1,000' Black 56 134 SBNS/16B #6 3/16" 1,000' Black 71 170 SBNI/AB #8 1/4" 500' Black 106 255 SBNI/AB #8 1/4" 1,000' Black 106 255 SBNI/AB #8 1/4" 1,000' Black 106 255 SBNI/16B #10 5/16" 500' Black 183 440 SBNIS/16B #10 5/16" 1,000' Black 183 440 SBNIS/16B #12 3/8" 500' Black 263 632 SBNIS/16B #14 7/16" 500' Black 400 960 SBNIS/16B #14 7/16" 1,000' <t< td=""><td>SBN5/8</td><td>#20</td><td>5/8"</td><td>500'</td><td>White</td><td>583</td><td>1,400</td></t<>	SBN5/8	#20	5/8"	500'	White	583	1,400
SBN1/81B #4 1/8" 1,000' Black 42 100 SBN5/321B #5 5/32" 1,000' Black 56 134 SBN3/16B #6 3/16" 500' Black 71 170 SBN3/16B #6 3/16" 1,000' Black 71 170 SBN1/4B #8 1/4" 500' Black 106 255 SBN1/4B #8 1/4" 1,000' Black 106 255 SBN5/16B #10 5/16" 500' Black 183 440 SBN5/16B #10 5/16" 1,000' Black 183 440 SBN3/8B #12 3/8" 500' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN1/2B #16 1/2" 500' Black 400 960 SBN1/2B #16 1/2" 500' Black	SBN5/81	#20	5/8"	1,000'	White	583	1,400
SBN5/321B #5 5/32" 1,000' Black 56 134 SBN3/16B #6 3/16" 500' Black 71 170 SBN3/16IB #6 3/16" 1,000' Black 71 170 SBN1/4B #8 1/4" 500' Black 106 255 SBN1/4IB #8 1/4" 1,000' Black 106 255 SBN5/16B #10 5/16" 500' Black 183 440 SBN3/8IB #12 3/8" 500' Black 263 632 SBN3/8IB #12 3/8" 500' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN1/2B #14 7/16" 1,000' Black 400 960 SBN1/2B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500'	SBN1/8B	#4	1/8"	500'	Black	42	100
SBN3/16B #6 3/16" 500' Black 71 170 SBN3/16IB #6 3/16" 1,000' Black 71 170 SBN1/4B #8 1/4" 500' Black 106 255 SBN1/4IB #8 1/4" 1,000' Black 106 255 SBN5/16B #10 5/16" 500' Black 183 440 SBN5/16B #10 5/16" 1,000' Black 183 440 SBN5/16B #12 3/8" 500' Black 263 632 SBN3/8IB #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/16B #14 7/16" 1,000' Black 400 960 SBN7/16B #14 7/16" 1,000' Black 400 960	SBN1/81B	#4	1/8"	1,000'	Black	42	100
SBN3/161B #6 3/16' 1,000' Black 71 170 SBN1/4B #8 1/4" 500' Black 106 255 SBN1/41B #8 1/4" 1,000' Black 106 255 SBN5/16B #10 5/16' 500' Black 183 440 SBN3/6B #12 3/8" 500' Black 263 632 SBN3/6B #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/16B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 400 960	SBN5/321B	#5	5/32"	1,000'	Black	56	134
SBN1/4B #8 1/4" 500' Black 106 255 SBN1/4IB #8 1/4" 1,000' Black 106 255 SBN5/16B #10 5/16" 500' Black 183 440 SBN5/16IB #10 5/16" 1,000' Black 183 440 SBN3/8B #12 3/8" 500' Black 263 632 SBN3/8IB #12 3/8" 1,000' Black 400 960 SBN7/16IB #14 7/16" 500' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN3/16B	#6	3/16"	500'	Black	71	170
SBN1/41B #8 1/4" 1,000' Black 106 255 SBN5/16B #10 5/16" 500' Black 183 440 SBN5/16IB #10 5/16" 1,000' Black 183 440 SBN3/8B #12 3/8" 500' Black 263 632 SBN3/8IB #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/16IB #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN3/161B	#6	3/16"	1,000'	Black	71	170
SBN5/16B #10 5/16" 500' Black 183 440 SBN5/161B #10 5/16" 1,000' Black 183 440 SBN3/8B #12 3/8" 500' Black 263 632 SBN3/81B #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/16IB #16 1/2" 500' Black 425 1,020	SBN1/4B	#8	1/4"	500'	Black	106	255
SBN5/161B #10 5/16" 1,000' Black 183 440 SBN3/8B #12 3/8" 500' Black 263 632 SBN3/81B #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/161B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN1/41B	#8	1/4"	1,000'	Black	106	255
SBN3/8B #12 3/8" 500' Black 263 632 SBN3/81B #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/161B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN5/16B	#10	5/16"	500'	Black	183	440
SBN3/81B #12 3/8" 1,000' Black 263 632 SBN7/16B #14 7/16" 500' Black 400 960 SBN7/161B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN5/161B	#10	5/16"	1,000'	Black	183	440
SBN7/16B #14 7/16" 500' Black 400 960 SBN7/161B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN3/8B	#12	3/8"	500'	Black	263	632
SBN7/161B #14 7/16" 1,000' Black 400 960 SBN1/2B #16 1/2" 500' Black 425 1,020	SBN3/81B	#12	3/8"	1,000'	Black	263	632
SBN1/2B #16 1/2" 500' Black 425 1,020	SBN7/16B	#14	7/16"	500'	Black	400	960
	SBN7/161B	#14	7/16"	1,000'	Black	400	960
	SBN1/2B	#16	1/2"	500'	Black	425	1,020
SBN5/8B #20 5/8" 500' Black 583 1,400							



Double Braid Nylon

Our double braid is high heat resistant and torque-free. It is designed to absorb sudden shock loads and generally used as an anchor, mooring, towing and dock lines. A must-have for securing a boat when not in use. Double Braid Polyester also available in the below sizes.

- \cdot Available Colors: White
- · Standard reels of 600 ft., 1200 ft., and Master reels

Categories: Ropes and Cordages, Double Braid Nylon

Perfect for yachting, dock lines, camping, and other outdoor applications



Key Features
High strength and abrasion resistance
Multi-Purpose
Rot and mildew resistant
Minimal stretch design for durability
Nylon provides more stretch than polyester
Double braid construction holds knots firmly in place
Spliceable

Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs	
r arc #	Diameter	Lengur	Color	Min	Max
DBN1/4	1/4"	600'	White	167	400
DBN5/16	5/16"	600'	White	263	630
DBN3/8	3/8"	600'	White	367	880
DBN3/812	3/8"	1,200'	White	367	880
DBN1/2	1/2"	600'	White	650	1,560
DBN1/212	1/2"	1,200'	White	650	1,560
DBN5/8	5/8"	600'	White	1,017	2,440
DBN5/812	5/8"	1,200'	White	1,017	2,440
DBN3/4	3/4"	600'	White	1,446	3,470
DBN3/41	3/4"	1,000'	White	1,446	3,470
DBN3/412	3/4"	1,200'	White	1,446	3,470
DBN7/8	7/8"	600'	White	1,950	4,680
DBN7/812	7/8"	1,200'	White	1,950	4,680
DBN1	"ן	600'	White	2,521	6,050
DBN112	"ן	1,200'	White	2,521	6,050
DBN1-1/8FT	1-1/8"	600'	White	3,150	7,560
DBN1-1/4FT	1-1/4"	600'	White	3,871	9,290
DBN1-1/2FT	1-1/2"	600'	White	5,500	13,200
DBN1-3/4FT	1-3/4"	600'	White	7,442	17,860
DBN2FT	2"	600'	White	9,692	23,260







Cotton Sash Cord

Our cotton sash cord is great general purpose rope. Common uses are repairing wooden windows, film industry, arts and crafts, awnings, hammocks, and draperies.

Categories: Ropes and Cordages, Cotton Sash Cord

Key Features

Forms tight, strong knots

Soft, extremely flexible

Mildew and rot resistant

Part #	Special Type	Size	Diameter	Length	Color	Working Load Limi	ts Range (WLL) (Ibs.)
						Min	Max
SC1/848P	Polished	#4	1/8"	48'	Natural White	16	39
SC1/86		#4	1/8"	600'	Natural White	16	39
SC1/83P	Polished	#4	1/8"	3,000'	Natural White	16	39
SC3/161		#6	3/16"	100'	Natural White	20	48
SC1/4		#8	1/4"	100'	Natural White	63	150
SC1/46		#8	1/4"	600'	Natural White	63	150
SC1/41		#8	1/4"	1,000'	Natural White	63	150
SC1/412		#8	1/4"	1,200'	Natural White	63	150
SC5/161		#10	5/16"	100'	Natural White	100	240
SC5/166		#10	5/16"	600'	Natural White	100	240
SC5/1612P	Polished	#10	5/16"	1,200'	Natural White	100	240
SC3/81		#12	3/8"	100'	Natural White	123	295
SC3/86		#12	3/8"	600'	Natural White	123	295
SC3/812		#12	3/8"	1,200'	Natural White	123	295
SC1/21		#16	1/2"	100'	Natural White	142	340
SC1/848BP	Polished	#4	1/8"	48'	Black	16	39
SC1/85BP	Polished	#4	1/8"	500'	Black	16	39
SC1/86B		#4	1/8"	600'	Black	16	39
SC1/812BP	Polished	#4	1/8"	1,200'	Black	16	39
SC1/815BP	Polished	#4	1/8"	1,500'	Black	16	39
SC1/83BP	Polished	#4	1/8"	3,000'	Black	16	39
SC3/161B		#6	3/16"	100'	Black	20	48
SC1/41BP	Polished	#8	1/4"	100'	Black	63	150
SC1/412BP	Polished	#8	1/4"	1,200'	Black	63	150
SC5/161B		#10	5/16"	100'	Black	100	240
SC5/1612BP	Polished	#10	5/16"	1,200'	Black	100	240
SC3/81B		#12	3/8"	100'	Black	123	295
SC1/21BP	Polished	#16	1/2"	100'	Black	142	340

3-Strand Cotton Rope

Our 3-strand cotton rope construction is a 65% cotton / 35% polyester blend produced using three cotton strands twisted together to make a soft, versatile, and dynamic rope. This rope is ideal for horse halters, livestock, lead ropes, hammocks, crafts, bag handles, and decorative projects. Exceptionally simple to tie and graft; makes this rope one of the most mainstream materials for creating versatile DIY crafts, hobbies, and home décor.

· Available lengths include: 300 ft., 600 ft., and 1200 ft.

Categories: Ropes and Cordages, Cotton Rope

Key Features

Environmentally friendly and biodegradable

Easy to work with

Soft to the touch



Part #	Diameter	Length	Color	Working Load Limi	ts Range (WLL) (lbs.)
		3		Min	Max
CR1/412	1/4"	1,200'	Natural White	35	84
CR3/8	3/8"	600'	Natural White	74	178
CR1/2	1/2"	600'	Natural White	121	290
CR5/8	5/8"	600'	Natural White	190	455
CR3/4	3/4"	600'	Natural White	258	620
CR13	יין"	300'	Natural White	425	1,020
CRI		600'	Natural White	425	1,020







Pull Tape

Our premium polyester pull tape is lightweight, thin, and high strength resulting in enhanced efficiency and worker safety. This wide and flat profile is mostly used in small and almost impossible to reach ducts and conduits. Marked with printed measurements every foot, our premium pull tape is perfect for contractors. When pulling heavy cables, the construction of this cord protects it from heat and friction, preventing breaks.

- · Available Colors: White
- \cdot Standard widths are 1/2", 5/8", and 3/4"
- · Master reels of 3000 ft. to 5000 ft.

Categories: Ropes and Cordages, Pull Tape

Key Features
Low Stretch
Abrasion Resistant
High Strength

Part #	Width	Length
PULLTAPE1/2500	1/2"	500'
PULLTAPE121500	1/2"	1,500'
PULLTAPE123000	1/2"	3,000'
PULLTAPE585000	5/8"	3,000'
PULLTAPE583000	5/8"	5,000'
PULLTAPE341500	3/4"	1,500'
PULLTAPE343000	3/4"	3,000'
PULLTAPE345000	3/4"	5,000'




Bungee Cord

Our premium bungee cord with abrasion-resistant cover provides durable flexibility. The interlacing strands of polyester over rubber core provide elasticity and shock absorption that are ideal for securing loads on tractor-trailers, marine vessels, and outdoor activities.

- · Available Colors: White with a Black Tracer, White, and Black
- · Standard reels of 100 ft., 250 ft. and 500 ft.

Categories: Ropes and Cordages, Bungee Cord





Part #	Diameter	Length	Color
SBBUNGEE3/8	3/8"	100'	White with Black Tracer
SBBUNGEE1/2	1/2"	100'	White with Black Tracer
SBBUNGEE5/8	5/8"	100'	White with Black Tracer
BCW1/4250	1/4"	250'	White
BCW1/4500	1/4"	500'	White
BCW3/8250	3/8"	250'	White
BCW3/8500	3/8"	500'	White
BCW1/2250	1/2"	250'	White
BCW1/2500	1/2"	500'	White
BCBL1/4250	1/4"	250'	Black
BCBL1/4500	1/4"	500'	Black
BCBL3/8250	3/8"	250'	Black
BCBL3/8500	3/8"	500'	Black
BCBL1/2250	1/2"	250'	Black
BCBL1/2500	1/2"	500'	Black







/ Tree Rope

Grip Tight™ Tree Rope is manufactured from a proprietary blend of monofilament polypropylene joined with a spiral wrap. This produces a highly flexible and durable tree rope that will not fray when cut. Our lay-flat design will not damage tree bark, trunk or limbs. Grip Tight™ Tree Rope is more economical when compared to natural fiber rope. Our rope will not mildew, rot and is UV stabilized.

- · Average Tube Weight: 4.2 lbs.
- · Typical Tensile Strength: 620 lbs.

Categories: Twine

Key Features

Does not rot or mildew

UV stabilized

Part #	Length	Color	Case	Descriptions
TR620/955	955'	Black with orange spiral wrap	8 coils	TREE ROPE 955' EACH



Sisal Twine

Our Sisal twine is biodegradable, low chemical resistance, and knots well. Sisal twine is commonly used to secure large cartons, and bale heavy recycling. The strength and length make this general purpose twine popular.

· Natural Fiber

Categories: Twine

Key Features

100% sisal

Biodegradable and recyclable

Part #	Special Type	Length	Color	Case
STIPLY	1 PLY	300'	Natural	10 rolls (10 lbs each)
ST2PLY	2 PLY	300'	Natural	10 rolls (10 lbs each)
ST3PLY	3 PLY	300'	Natural	10 rolls (10 lbs each)
SIST1360	1 PLY	360'	Natural	10 rolls (6 lbs each)
SIST2360	2 PLY	360'	Natural	10 rolls (6 lbs each)
ST2PLY50	2 PLY	300'	Natural	50 lb Reel
SIST2PLY480	2 PLY M/E	480'	Natural	90 lb Reel

Braided and Twisted Mason Seine Twine

Mason Seine Twine is a general-purpose twine featuring excellent resistance to wear and tear and offers high tensile strength. Ideal for both indoor and outdoor applications and commonly used for crafting, camping, boating, surveying, mason line, chalk line, plumb line, fishing, hunting, survival, and marine industry. Sold by the case.

- · Available as Twisted and Braided construction
- · Available Colors: Yellow, Green, Orange, Pink, Fluorescent, and White (Special order colors available)

Categories: Twine



Key Features

Highly resistant to moisture, UV rays, chemicals, oil, and weather.

Will not degrade or lose strength in direct sunlight or submerged in water

Part #	Roll Weight	Size	Type	Colors	Case
N#181/4	1/4 lb	#18	Twisted	White	12
N#181/2	1/2 lb	#18	Twisted	White	12
N#181	1 lb	#18	Twisted	White	12
N#181/4FG	1/4 lb	#18	Twisted	Fluorescent Green	12
N#181G	1 lb	#18	Twisted	Green	12
N#181/40	1/4 lb	#18	Twisted	Orange	12
N#181/2O	1/2 lb	#18	Twisted	Orange	12
N#181O	1 lb	#18	Twisted	Orange	12
N#181/4P	1/4 lb	#18	Twisted	Fluorescent Pink	12
N#181/2P	1/2 lb	#18	Twisted	Fluorescent Pink	12
N#181P	1 lb	#18	Twisted	Fluorescent Pink	12
N#181/4Y	1/4 lb	#18	Twisted	Yellow	12
N#181/4FY	1/4 lb	#18	Twisted	Fluorescent Yellow	12
N#181/2FY	1/2 lb	#18	Twisted	Fluorescent Yellow	12

Part #	Roll Weight	Size	Type	Colors	Case
N#181/2Y	1/2 lb	#18	Twisted	Yellow	12
N#181Y	1 lb	#18	Twisted	Yellow	12
N#181/4B	1/4 lb	#18	Braided	White	12
N#181B	1 lb	#18	Braided	White	12
N#181FLG	1 lb	#18	Braided	Fluorescent Green	12
N#181/4BG	1/4 lb	#18	Braided	Green	12
N#181BG	1 lb	#18	Braided	Green	12
N#181/4PB	1/4 lb	#18	Braided	Fluorescent Pink	12
N#181PB	1 lb	#18	Braided	Fluorescent Pink	12
N#181BP	1 lb	#18	Braided	Fluorescent Pink	12
N#181/2BFYB	1/2 lb	#18	Braided	Yellow	12
N#181/2BY	1/2 lb	#18	Braided	Yellow	12
N#181BY	1 lb	#18	Braided	Yellow	12







Baler Twine

Our high quality polypropylene baler twine is a small diameter general purpose twine that is widely used in the agriculture industry. Polypropylene baler twine will not rot or mold, is resistant to most chemicals and acids, floats in salt and freshwater, and can be kept wet.

· Packaged in cases of 2 rolls, 48 tubes, 80 tubes

Categories: Twine

Key Features

General Purpose

Can be stored wet or dry

UV Stabilized

Part #	Knot Strength	Length	Color	Case
BTO3900/550	550	3900'	Orange	48 tubes
BTO4000/350	350	4000'	Orange	48 tubes
BTO6500/240	240	6500'	Orange	48 tubes
BTO8500/245	245	8500'	Orange	48 tubes
BTW8500/245	245	8500'	White	48 Tubes
BTY8500/245	245	8500'	Yellow	48 Tubes
BTO9000/130	130	9000'	Orange	80 tubes
BTO9600/170	170	9600'	Orange	2 rolls



Tying Twine

Our polypropylene tying twine will not rot or mold, is resistant to most chemicals and acids, floats in salt and freshwater, and can be kept wet. This general purpose twine is perfect for any project that requires secure fastening.

- · Standard colors include Clear and Black
- · Packaged in cases of 4/10 lbs boxes

Categories: Twine

Key Features

General Purpose

Can be stored wet or dry

Packaged in cases of 4/10 lbs boxes

Part #	Length	Color	Approx Tensile	Approx Knot/Break	Case
STT350	350'	Clear	325 lbs.	240 lbs.	4 / 10 lbs.
STT450	450'	Clear	260 lbs.	190 lbs.	4 / 10 lbs.
STT550	550'	Clear	210 lbs.	155 lbs.	4 / 10 lbs.
STT650	650'	Clear	180 lbs.	125 lbs.	4/10 lbs.
STT850	850'	Clear	135 lbs.	100 lbs.	4 / 10 lbs.
STT1050	1,050'	Clear	110 lbs.	80 lbs.	4 / 10 lbs.
STT1250	1,250'	Clear	90 lbs.	70 lbs.	4/10 lbs.
STT550BK	550'	Black	210 lbs.	155 lbs.	4 / 10 lbs.
STT1050BK	1,050'	Black	110 lbs.	80 lbs.	4/10 lbs.

Tying Tape

Our D8 tying tape is a polyethylene tying ribbon with the ability to stretch without distorting. Commonly used for laundry and soft packaging.

Categories: Twine

Key Features

Flexible

Durable

Minimum 35 lb. tensile



Part #	Color	Approx. Length	Weight per roll	Case
TTD28B	Blue	2,720'	4 lbs.	10
TTD28BL	Black	2,720'	4 lbs.	10
TTD28C	Clear	2,720'	4 lbs.	10
TTD28COP	Copper	2,720'	4 lbs.	10
TTD28G	Green	2,720'	4 lbs.	10
TTD28L	Lavender	2,720'	4 lbs.	10
TTD28R	Red	2,720'	4 lbs.	10
TTD28Y	Yellow	2,720'	4 lbs.	10

PE Tape

Our Polyethylene/Stucco Tape is flexible, resistant to most chemicals, excellent durability with excellent tack and shear strength. These features support a range of applications from surface protection, packing, patch, repair, and wrap. Common industries include screen printing, abatement, remediation, construction, concrete, and stucco.

Categories: Tape, Adhesive

Key Features

Clean removal from most surfaces

Stretches without distorting adhesive for consistent seal

Clear, Orange, White, and Red



Part #	Edges	Mils	Size	Length	Color	Tensile Strength (lbs.)	Case
T2STUCCO		7MIL	2"	60 YD	RED	25 lbs/in	24
T2STUCCO/CLEAR		7MIL	2"	60 YD	CLEAR	25 lbs/in	24
T2STUCCO/ORANGE		7MIL	2"	60 YD	ORANGE	25 lbs/in	24
T2STUCCO/RED		7MIL	2"	60 YD	RED	20 lbs/in	24
T3STUCCO/RED		7MIL	3"	60 YD	RED	24 lbs/in	16
T4STUCCO/RED		7MIL	4"	60 YD	RED	25 lbs/in	12
T4STUCCO/WHITE		7MIL	4"	60 YD	WHITE	25 lbs/in	12
T2PET		7MIL	2"	60 YD	TEAL	25 lbs/in	24
T2PT757WP2	PINKED EDGE	7MIL	2"	60 YD	WHITE	25 lbs/in	24
T4PT759W		9MIL	4"	60 YD	WHITE	30 lbs/in	12















BERRY

Duct Tape

A wide cloth adhesive tape perfect for sealing and securing. Works great with indoor and outdoor use, including seaming, packaging, repairing, bundling, masking and moisture barrier applications. Common sectors are versatile from commercial to personal.

Categories: Tape, Adhesive

Key Features

Great for outdoor and indoor repair

Versatile use

Silver, White, Red, Black, Green, Yellow, Olive Green, Teal, and Blue

Part	Brand	Special Type	Size	Length	Color	Case
T2DTGP36	PALMER SAFETY	6 MIL	2"	60YD	Silver	24
T2DTAC6	PALMER SAFETY	6 MIL	2"	60YD	Silver	24
T2DTI	PALMER SAFETY	6 MIL	2"	60YD	Silver	24
T2DTPC460	SHURTAPE	6 MIL	2"	60YD	Silver	24
T2DTPS	PALMER SAFETY	6 MIL	2"	60YD	Silver	24
T2DT307	NASHUA	7 MIL	2"	60YD	Silver	24
T2DTGWPS2637	PALMER SAFETY	7 MIL	2"	60YD	Silver	24
T2DT64613	TESA	7.4 MIL	2"	60YD	Silver	24
T2DTBAC15	INTERTAPE	8 MIL	2"	60YD	Black	24
T2DTSAC15	INTERTAPE	8 MIL	2"	60YD	Silver	24
T2DTGP2280BL	NASHUA	9 MIL	2"	60YD	Black	24
T2DT9IB	PALMER SAFETY	9 MIL	2"	60YD	Black	24
T2DTBL	INTERTAPE	9 MIL	2"	60YD	Blue	24
T2DTGP2280B	NASHUA	9 MIL	2"	60YD	Blue	24
T2DTGP2280G	NASHUA	9 MIL	2"	60YD	Green	24
T2DTCDT36OLIVE	ADHESIVE TAPE	9 MIL	2"	60YD	Olive Green	24
T2DT9IR	PALMER SAFETY	9 MIL	2"	60YD	Red	24
T2DTGP2280R	NASHUA	9 MIL	2"	60YD	Red	24
T2DTPC599R	SHURTAPE	9 MIL	2"	60YD	Red	24
T2DT GP2280R	NASHUA	9 MIL	2"	60YD	Red	24
T2DT9I	PALMER SAFETY	9 MIL	2"	60YD	Silver	24
T2DTGP2280SILVER	NASHUA	9 MIL	2"	60YD	Silver	24
T2DTPC599S	SHURTAPE	9 MIL	2"	60YD	Silver	24
T2DTAC20	INTERTAPE	9 MIL	2"	60YD	Silver	24
TGP2280SILVER	NASHUA	9 MIL	2"	60YD	Silver	24
T2DTGP2280W	NASHUA	9 MIL	2"	60YD	White	24

Part	Brand	Special Type	Size	Length	Color	Case
T2DTGP2280Y	NASHUA	9 MIL	2"	60YD	Yellow	24
T2DT300B	NASHUA	10 MIL	2"	60YD	Black	24
T2DT300	NASHUA	10 MIL	2"	60YD	Silver	24
T2DTN396	NASHUA	10 MIL	2"	60YD	Silver	24
T2DTS300	NASHUA	10 MIL	2"	60YD	Silver	24
T2DTTEAL	POLYKEN	10 MIL	2"	60YD	Teal	24
T2DTBN398	NASHUA	11 MIL	2"	60YD	Black	24
T2DTN398G	NASHUA	11 MIL	2"	60YD	Green	24
T2DTN398	NASHUA	11 MIL	2"	60YD	Silver	24
T2DT357WHITE	NASHUA	11 MIL	2"	60YD	White	24
T2DTBAC45	INTERTAPE	12 MIL	2"	60YD	Black	24
T2DT229	POLYKEN	12 MIL	2"	60YD	Silver	24
T2DT64663	TESA	12 MIL	2"	60YD	Silver	24
T2DT357BLACK	NASHUA	13 MIL	2"	60YD	Black	24
T2DT357	NASHUA	13 MIL	2"	60YD	Silver	24
T2DTPC657	SHURTAPE	14.5 MIL	2"	60YD	Silver	24
T3DT	PALMER SAFETY	6 MIL	3"	60YD	Silver	16
T3DTGP2280R	NASHUA	9 MIL	3"	60YD	Red	16
T3DT2280	NASHUA	9 MIL	3"	60YD	Silver	16
T3DT357WHITE	NASHUA	13MIL	3"	60YD	White	16
T4DT	PALMER SAFETY	6 MIL	4"	60YD	Silver	12
T4DT2280	NASHUA	9 MIL	4"	60YD	Silver	12
T4DTGP2280Y	NASHUA	9 MIL	4"	60YD	Yellow	12
T4DT300	NASHUA	10 MIL	4"	60YD	Silver	12
T4DTBN398	NASHUA	11 MIL	4"	60YD	Black	12
T4DTN398	NASHUA	11 MIL	4"	60YD	Silver	12
T6DT	PALMER SAFETY	9 MIL	6"	60YD	Silver	8

Clear Tape

Our clear packaging tape has a quality adhesive to wrap and secure numerous package types. For home and professional use, our clear packing tape is built for light-duty strapping, bundling, and reinforcing items. This is the best choice for high adhesion and holding power.

Categories: Tape, Adhesive

Key Features

Pressure sensitive

Good holding power

Standard widths are 2", 3"



Part #	Size	Length	Color	Case
T2PT110	2"	110 YD	CLEAR	36
T2PT1102MIL	2"	110 YD	CLEAR	36
T2PT55	2"	55 YD	CLEAR	96
T3PT110	3"	110 YD	CLEAR	24
T3PT1102MIL	3"	110 YD	CLEAR	24

Filament/Strapping Tape

Our Filament Tape is great for any packing functions and supporting heavy loads and weak box construction. This versatile tape is abrasion, moisture and scuff resistant to most fiberboard, plastic, and metal surfaces. Common applications include light-duty strapping, bundling, and reinforcing items. This is a perfect choice for fastening to irregular surfaces, including plastic and metal.

Categories: Tape, Adhesive



Key Features

Great Tensile Strength

Excellent Abrasion Resistance

Standard widths are 3/4", 1", and 2"

Part #	Size	Length	Case
T3/4FT	3/4"	60 YD	48
T3/4ST	3/4"	60 YD	48
TIST	"ן	60 YD	36
TISTI	"ן	60 YD	36
T2FT	2"	60 YD	24
T2ST	2"	60 YD	24







Electrical Tape

For long-lasting performance in tough environments, our vinyl electrical tape is resistant to high voltage, hot/cold temperatures, and flame. Applications include PVC pipe, temporary surface repair, color coding, safety, décor, and wire harnessing.

Categories: Tape, Adhesive

Key Features

Strength and Flexibility; 7 mil

Black, Blue, Brown, Green, Orange, Purple, Red, White, Grey, and Yellow

Meets or exceeds ASTM D-1000; UL Approved

Part #	Size	Color	Case
T3/4E	3/4"	Black	200 rolls / 10 per sleeve
T3/4EB	3/4"	Blue	200 rolls / 10 per sleeve
T3/4EBR	3/4"	Brown	200 rolls / 10 per sleeve
T3/4EG	3/4"	Green	200 rolls / 10 per sleeve
T3/4EO	3/4"	Orange	200 rolls / 10 per sleeve
T3/4EP	3/4"	Purple	200 rolls / 10 per sleeve
T3/4ER	3/4"	Red	200 rolls / 10 per sleeve
T3/4EW	3/4"	White	200 rolls / 10 per sleeve
T3/4EY	3/4"	Yellow	200 rolls / 10 per sleeve
T3/4EGY	3/4"	Grey	200 rolls / 10 per sleeve





Painters Tape

Our painters tape provides clean removability from a variety of surfaces and withstands high temperatures. This is an excellent choice as a general-purpose tape that best protects areas from painting, soldering, blasting, spraying, coating, plating, and polishing. Most commonly requested by painters, designers, carpenters, and homeowners.

Categories: Tape, Adhesive

Key Features

Easily hand tearable

Standard widths are 1", 2", and 3"

Part	Brand	Size	Length	Color	Case
ТІМТР	INTERTAPE	ן"	60 YD	BLUE	36
Т2МТР	INTERTAPE	2"	60 YD	BLUE	24
T2MTP2	ADHESIVE TAPE	2"	60 YD	BLUE	24
T2MTPG	INTERTAPE	2"	60 YD	GREEN	24
T2MTPI	PALMER SAFETY	2"	60 YD	BLUE	24
ТЗМТР	INTERTAPE	3"	60 YD	BLUE	16









Masking Tape

Our masking tape is versatile, lightweight, and has a clean removal from most surfaces. This premium masking tape is a general-purpose tape that best protects areas from painting, soldering, blasting, spraying, coating, plating, and polishing. Most commonly requested by painters, designers, carpenters, and homeowners.

Categories: Tape, Adhesive

Key Features

Easily hand tearable

Good holding power

Standard widths are 3/4", 1", 2", 3", 4"

Part	Brand	Size	Length	Color	Case
T3/4M	INTERTAPE #803	3/4"	60 YD		48
ТІМТ	INTERTAPE #506	יין	60 YD		36
ТІМТСР105	SHURTAPE #105	יין"	60 YD		36
ТІМТІ	PALMER SAFETY	יין"	60 YD		36
T1-1/2MT	INTERTAPE #513	1-1/2"	60 YD		24
Т2МТ	INTERTAPE #513	2"	60 YD		24
T2MT0M4855	INTERTAPE HIGH TEMP	2"	60 YD	ORANGE	24
T2MT2	INTERTAPE #506	2"	60 YD		24
T2MT4421	TESA #4421	2"	60 YD		24
T2MT505	INTERTAPE #PG505	2"	60 YD		24
Т2МТСР105	SHURTAPE #CP105	2"	60 YD		24
T2MTCP66	SHURTAPE #CP66	2"	60 YD		24
T2MTCZ901	SHURTAPE #CZ901	2"	60 YD		24
T2MTI	PALMER SAFETY	2"	60 YD		24
T2MTI2	PALMER SAFETY	2"	60 YD		24
T2MTPG49	INTERTAPE #PG49	2"	60 YD		24
ТЗМТ	INTERTAPE	3"	60 YD		16
T3MTCZ901	SHURTAPE HIGH TEMP	3"	60 YD		16
T3MTPG49	INTERTAPE #PG49 HIGH TEMP	3"	60 YD		16
T4MT	INTERTAPE	4"	60 YD		12






Thread Seal Tape

For professionals and non-professionals alike, our thread seal tape provides a high-grade tool built for a lifetime. Quick and easy application that is flexible, durable, non-toxic, and not reactive to chemicals. This material forms a tight long-lasting seal that is commonly used with water, air, gases, and piping systems servicing most acids.

Categories: Tape, Adhesive





Part #	Size	Length	Case
T1/2T260	1/2"	260'	200
T1/2T260100	1/2"	260'	100
T1/2T520	1/2"	520'	200
T3/4T260	3/4"	260'	144
T3/4T520	3/4"	520'	144
T3/4T520MERCO	3/4"	520'	144
T1T520	"ן	520'	144
T1T520100	"ן	520'	100



Caution Tape

Our 3-inch Caution Tape can withstand tough weather conditions and is highly visible to pedestrians. Each message is printed in bold black ink on durable yellow polypropylene tape. Common sectors for best use include construction, custodial, safety event management, law enforcement, and utility. Simply unroll the amount of tape needed and block off areas that offer a potential hazard.

Categories: Tape, Barrier / Marking Tape

Key Features

Warn of hazards and prevent accidents

Highly visible heavy-duty construction

Available Prints: Caution, Caution/Do Not Enter, Caution/Cuidado, and Caution/Hydro Blast

Product Name	Part#	Size	Length	Case
Caution	T3C1612/C300	3"	300'	12
Caution	T3C1512/C	3"	1000'	12
Cuidado	T3CS1512/C	3"	1000'	12
Do Not Enter	T3CDNE1512/C	3"	1000'	8
Hydro Blasting	T3CH12/C	3"	1000'	12

Danger Tape

Our 3-inch versatile use Danger Tape provides a noticeable red strip with bold black lettering printed "DANGER". The durable, weather-resistant polypropylene film prevents accidental tearing. This is a perfect choice for hazardous environments, construction areas, custodial, safety event management, law enforcement, and utility. Simply unroll the amount of tape needed and block off areas that offer a potential hazard.



Categories: Tape, Barrier / Marking Tape

Key Features

Warn of hazards and prevent accidents

Highly visible heavy-duty construction

Available Prints: Danger, Danger/Do Not Enter, Danger/Peligro, and Danger/Hydro Blast

Product Name	Part#	Size	Length	Case
Danger	T3D1612/C300	3"	300'	12
Danger	T3D1512/C	3"	1,000'	12
Do Not Enter	T3CDNE1512/C	3"	1,000'	12
Danger/Peligro	T3DS12/C	3"	1,000'	12
Danger/Hydro Blasting	T3DH12/C	3"	1,000'	12





Flagging Tape

Our highly visible flagging tape colors provide a multitude of marking options. Flagging is preferred by professional sportsmen and surveyors. Applications include marking hazardous areas, boundaries, or identifying areas of high importance.

Categories: Tape, Barrier / Marking Tape

Key Features

Weather-resistant

Standard width is 1-3/16"



Part #	Size	Length	Color	Case
TFTFG	1-3/16"	150'	FLO GREEN	12
TFTFO	1-3/16"	150'	FLO ORANGE	12
TFTFP	1-3/16"	150'	FLO PINK	12
TFTFY	1-3/16"	150'	FLO YELLOW	12
T2FTBLK	1-3/16"	300'	BLACK	12
TFTB	1-3/16"	300'	BLUE	12
TFTG	1-3/16"	300'	GREEN	12
TFTO	1-3/16"	300'	ORANGE	12
TFTP	1-3/16"	300'	PURPLE	12
TFTR	1-3/16"	300'	RED	12
TFTW	1-3/16"	300'	WHITE	12
TFTY	1-3/16"	300'	YELLOW	12



Woven Tape

Our woven barricade tape is an extra durable polypropylene tape that offers a lasting barrier solution. Applications include marking hazardous areas, boundaries, or identifying areas of high importance. This woven barricade tape is perfect for its excellent chemical and weather resistance along with its ability to untangle for reuse.

Categories: Tape, Barrier / Marking Tape

Key Features

Highly visible

Solid Red, Red/Black, and Yellow/Black

Part #	Size	Length	Color	Case
T2WR150	2"	150'	SOLID RED	48
T2WRB150	2"	150'	RED/BLACK	48
T2WYB150	2"	150'	YELLOW/BLACK	48
T2WRB200	2"	200'	RED/BLACK	48
T2WYB200	2"	200'	YELLOW/BLACK	48



Blue Poly Tarps

Our polyethylene tarpaulin sheet has reinforced hem and aluminum eyelets at 3 feet intervals. This lightweight tarp is most commonly used as protection from rain, shade, and ground moisture.

- · Weight is 65 grams/square meter
- · Eyelets at 3' intervals

Categories: Tarps

Key Features

Lightweight

Waterproof

Provide shade protection or ground cover.

Part#	Size	Color
PT5X7	5' X 7'	Blue
PT6X8	6' X 8'	Blue
PT8X10	8' X 10'	Blue
PT8X12	8' X 12'	Blue
PT10X10	10' X 10'	Blue
PT10X12	10' X 12'	Blue
PT10X16	10' X 16'	Blue
PT10X20	10' X 20'	Blue
PT12X12	12' X 12'	Blue
PT12X14	12' X 14'	Blue

Part#	Size	Color
PT12X16	12' X 16'	Blue
PT12X20	12' X 20'	Blue
PT12X24	12' X 24'	Blue
PT15X30	15' X 30'	Blue
PT16X20	16' X 20'	Blue
PT18X24	18' X 24'	Blue
PT20X20	20' X 20'	Blue
PT20X25	20' X 25'	Blue
PT20X30	20' X 30'	Blue

Part#	Size	Color
PT20X40	20' X 40'	Blue
PT24X36	24' X 36'	Blue
PT30X30	30' X 30'	Blue
PT30X40	30' X 40'	Blue
PT30X50	30' X 50'	Blue
PT30X60	30' X 60'	Blue
PT40X40	40' X 40'	Blue
PT40X60	40' X 60'	Blue
PT50X100	50' X 100'	Blue

Heavy Duty Silver Tarps

Our heavy duty silver polyethylene tarpaulin sheet has reinforced edges with polypro rope in hem with regular interval eyelets and reinforced corners. This super strong tarp is most commonly used as industrial covers, construction covers, truck covers, tent covers and outdoor storage.

Categories: Tarps

Key Features

Heavy Duty

Waterproof

High Density with UV Treatment

Washable and Recyclable

Part#	Special Type	Size	Color
PTS6X8	Heavy Duty	6' X 8'	Silver
PTS8X10	Heavy Duty	8' X 10'	Silver
PTS10X10	Heavy Duty	10' X 10'	Silver
PTS10X12	Heavy Duty	10' X 12'	Silver
PTS10X16	Heavy Duty	10' X 16'	Silver
PTS12X12	Heavy Duty	12' X 12'	Silver
PTS12X16	Heavy Duty	12' X 16'	Silver
PTS12X20	Heavy Duty	12' X 20'	Silver
PTS12X24	Heavy Duty	12' X 24'	Silver

Part#	Special Type	Size	Color
PTS16X20	Heavy Duty	16' X 20'	Silver
PTS18X24	Heavy Duty	18' X 24'	Silver
PTS20X30	Heavy Duty	20' X 30'	Silver
PTS30X30	Heavy Duty	30' X 30'	Silver
PTS30X40	Heavy Duty	30' X 40'	Silver
PTS30X60	Heavy Duty	30' X 60'	Silver
PTS40X40	Heavy Duty	40' X 40'	Silver
PTS40X60	Heavy Duty	40' X 60'	Silver





Stretch Film

Our stretch film is a high quality film providing excellent protection and tear resistance. While holding materials in place stretch film gives protection from theft, dirt, damage, and moisture. Mostly used for packaging warehouse pallets as a perfect alternative to tape and banding.

Available grades are machine and hand grade wraps

Categories: Stretch Film

Key Features

Offers an easy to use extended core

Alternative to tape and banding



Part #	Special Type	Width	Gauge	Length
SW20	MACHINE WRAP	20"	80	5,000'
SW20S	MACHINE WRAP	20"	80	5,000'
SW20115	MACHINE WRAP	20"	115	3,500'
SW20120	MACHINE WRAP	20"	120	3,750'
SW6075	MACHINE WRAP	60"	75	5,000'

Part #	Special Type	Width	Gauge	Color	Length
SW580	HAND GRADE	5"	80		1,500'
SW5120	HAND GRADE	5"	120		700'
SW1280AEP	HAND GRADE	12"	80		1,500'
SW1534	HAND GRADE	15"	34		1,500'
SW17	HAND GRADE	17.2"	30		1,500'
SW1839ECO	HAND GRADE	18"	39		1,500'
SW1851GVF	HAND GRADE	18"	51		1,500'
SW1860	HAND GRADE	18"	60		1,500'
SW1863G	HAND GRADE	18"	63	Green	1,500'
SW1870AEP	HAND GRADE	18"	70		1,500'
SW1814XH	HAND GRADE	18"	80		1,476'
SW1880AEP	HAND GRADE	18"	80		1,500'
SW1880B	HAND GRADE	18"	80	Black	1,500'
SW1880HYBRID	HAND GRADE	18"	80		1,500'
SW18100	HAND GRADE	18"	100		1,500'
SW181B	HAND GRADE	18"	110	Black	1,000'
SW1815B	HAND GRADE	18"	115	Black	1,500'
SW18120AEP	HAND GRADE	18"	120		1,000'
SW18120B	HAND GRADE	18"	120	Black	1,000'
SW18B120	HAND GRADE	18"	120	Blue	1,000'
SWC201070	HAND GRADE W/ HANDLE	20"	70		1,000'
SW20H	HAND GRADE	20"	80		1,000'
SW20B	HAND GRADE	20"	80		5,000'





Steel Banding

Our steel strapping is a strong and reliable strap that provides high shock resistance during delivery. Applications include securing packaged glass, wide loads, wood shipping containers, and securing irregular loads to pallets. Perfect choice for heavy duty loads that require high strength restraint.

- · Standard widths include: 1/2", 5/8", 3/4", 1-1/4", 2"
- · Packaged on a pallet of 14 or 22 (90-100 lb average) rolls

Categories: Strapping / Seals / Tools, Steel Strapping

Key Features

High strength

Stronger than poly strapping

Part #	Width	Thickness	Pallet
SDSS1/2-020	1/2"	0.020"	14 Rolls
SDSS1/2-023	1/2"	0.023"	14 Rolls
SDSS5/8-020	5/8"	0.020"	14 Rolls
SDSS5/8-023	5/8"	0.023"	14 Rolls
SDSS3/4-020	3/4"	0.020"	14 Rolls
SDSS3/4-023	3/4"	0.023"	14 Rolls
SDSS3/4-025	3/4"	0.025"	14 Rolls
SDSS1-1/4-031	1-1/4"	0.031"	22 Rolls
SDSS2-044	2"	0.044"	14 Rolls

Pre-Cut Strapping

Our polypropylene pre-cut strapping comes in multiple colors making it easy to identify. In addition, with the pre-attached poly buckle, this is a perfect choice to quickly strap. Pre-cut strapping is a general-purpose banding ideal for applications including pallets, drums, and boxes.

- · Standard size is 1/2" x 17'
- · Packaged in cases of 500 rolls

Categories: Strapping / Seals / Tools, Pre-cut Strapping



Quick and easy

General-purpose



Part #	Special Type	Size	Color	Case
PSB1/217	With Buckle	1/2" x 17'	Blue	500
PSBL1/217	With Buckle	1/2" × 17'	Black	500
PSG1/217	With Buckle	1/2" x 17'	Green	500
PSO1/217	With Buckle	1/2" x 17'	Orange	500
PSP1/217	With Buckle	1/2" × 17'	Purple	500
PSR1/217	With Buckle	1/2" x 17'	Red	500
PSW1/217	With Buckle	1/2" x 17'	White	500
PSY1/217	With Buckle	1/2" x 17'	Yellow	500






Open Seals

Our open seal clips are the most common type of seal, ideal for your strapping needs. This steel strapping is an efficient accessory that provides a solid hold and strap alignment before tensioning.

·Standard sizes are 1/2", 5/8", 3/4", and 1-1/4"

Categories: Strapping / Seals / Tools, Seals

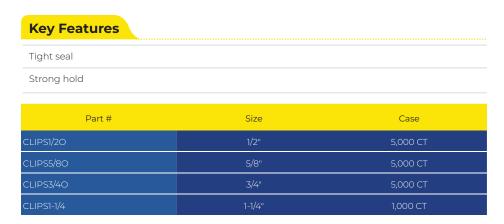





Closed Seals

Our closed seals are a great alternative to open seal clips. This mechanically crimped accessory is threaded onto steel banding to create a tighter hold during strap placement.

Categories: Strapping / Seals / Tools, Seals

Key Features	
Tight seal	
Strong hold	
Part #	Size
CLIPS3/4C	3/4"
CLIPS1-1/4CLOSED	1-1/4"







Our commercial grade hand crimping tool is easy to use, lightweight, and great for uneven surfaces. This hand sealer is ideal for crimping and sealing to create a solid banding connection. Most used for thick packaged materials, securing goods for transport, pallets, and warehouses loads.

Categories: Strapping / Seals / Tools, Tools

Key Features
Easy to use
Great for uneven surface
Creates tight seals and strong hold

Part #	Size	Special Type
BT1/2CRIMPER	1/2"	
BT5/8CRIMPER	5/8"	
BT3/4CEP1800	3/4"	Premium
BT3/4CRIMPER	3/4"	

Tensioner

Our tensioner is a manual tensioner that is easy to use, lightweight, and great for uneven surfaces. Most used for industrial strapping and household packaging. Applications include securing goods for transport, pallets, and warehouses loads.

Categories: Strapping / Seals / Tools, Tools

Key Features	Part #: BTTEN		
Easy to use			
Great for uneven surfa	ice		
3/8"-3/4"			







Sealless Tensioner

Our sealless tensioner is a two in one manual tensioner and sealer that is easy to use, lightweight, and great for uneven surfaces. Most used for industrial strapping and household packaging. Applications include securing goods for transport, pallets, and warehouses loads.

Categories: Strapping / Seals / Tools, Tools

Key Features	Part #: STSCSL200	
Faritaina		
Easy to use		
Great for uneven surfa	ce	
1/2"-3/4"		





Banding Cart

Our banding cart is portable and provides easy dispensing of steel strapping or banding.

Categories: Strapping / Seals / Tools, Carts

Key Features Part #: BCART	
Mobile	
Works great with steel and plastic banding	
Durable	
Easy to use	



3-1/2 Lb. (16 gauge) Tie Wire

Our industrial use tie wire is easy to bend and manipulate for flexible fastening. This wire is commonly used to secure a rebar in place or tie several rebars together before concrete is poured. No tool box should be without a roll.

Categories: Tie Wire

Key Features

Flexible, Durable, and Thin

Part #	Size	Special Type	Case
CMBW16	16 GA. (3-1/2 lb roll)	Black	20 rolls

100 Lb. (9 gauge) Tie Wire

Our industrial use 9-gauge black annealed tie wire is a 100 lb spool that is softer and more flexible than iron. Common uses may include binding, tying, bundling, and bailing for farm work or personal use.

Categories: Tie Wire

Key Features

More flexible than iron; Annealed

Part #	Size	Color	Pallet
CMBW9	9 GA. / 100lbs	Black	Bundle/10



Oil Pads

Our sonic bonded oil pads are long-lasting pads that bond fibers together at small points, making this product highly sorbent. Perfect for small spills or dripping on tools, equipment, and cement floors. These high performance oil pads absorb industrial fluids cleanly and efficiently, even in small and hard to reach spaces.

- · Our white oil pad is perfect for petroleum based product spills.
- · Our grey oil pad is a universal pad ideal for all liquids including aggressive chemical spills and leaks.

Categories: Sorbents

Key Features

Highly absorbent

Polyethylene construction



Part#	Weight	Color	Size	Special Type	Pack	Pallet
OPL1003C	Light	White	15"x18"	Sonic Bonded - Petroleum Only	100 CT	60 PER SKID
OPL1003CG	Light	Grey	15"x18"	Sonic Bonded - Universal	100 CT	60 PER SKID
OPLUSMWG	Light	Grey	15"x18"	Sonic Bonded - Universal (Economy)	200 CT	60 PER SKID
OPM10027C	Medium	White	15"x18"	Sonic Bonded - Petroleum Only	100 CT	48 PER SKID
OPM10027CG	Medium	Grey	15"x18"	Sonic Bonded - Universal	100 CT	48 PER SKID
OPH10029C	Heavy	White	15"x18"	Sonic Bonded - Petroleum Only	100 CT	36 PER SKID
OPH10029CG	Heavy	Grey	15"x18"	Sonic Bonded - Universal	100 CT	36 PER SKID






Oil Booms

Our oil boom is a temporary floating barrier used to contain oil spills. They are ideal for outdoor spill response application. Additionally, our oil booms absorb fuels and petroleum-bases products.

Categories: Sorbents



Part #	Size	Bundle	Pallet
OPB510D	5" X 10'	4 BOOMS	20 BUNDLES PER SKID
OPB810D	8" X 10'	4 BOOMS	16 BUNDLES PER SKID





Oil Spill Rolls

Our oil spill roll is a highly absorbent fiber perfect for managing large volume clean ups. The small dimples bond this 100% melt blown polypropylene construction together producing increased strength and durability. These high performance oil rolls absorb industrial fluids cleanly and efficiently.

- · Our white oil pad is perfect for petroleum based product spills.
- Our grey oil pad is a universal pad ideal for all liquids including aggressive chemical spills and leaks.

Categories: Sorbents

Key Features

Highly absorbent

Polyethylene construction

Part #	Color	Size	Special Type	Pallet
OPM19/144	Grey	19"x144'	Sonic Bonded - Universal	20 PER SKID
OPB38144G	Grey	38"x144'	Sonic Bonded - Universal	20 PER SKID
OPM36/144	White	36"x144'	Sonic Bonded - Petroleum Only	20 PER SKID
OPM38/144	White	38"x144'	Sonic Bonded - Petroleum Only	20 PER SKID



Plastic Buckets and Lids

Our high-density polyethylene (HDPE) buckets and lids offer strength and durability. This bucket is a great outdoor or household multipurpose accessory that can handle a large range of applications. The metal handle makes this product easy to grip and carry.

- \cdot Available in gallons of 1, 2, 3, 3-1/2, 4, and 5
- · Available colors are: White, Red, Black, Blue, Yellow, and Green

Categories: Buckets and Lids

Key Features

Metal handle

Food grade

High-density polyethylene (HDPE) construction

Part #	Subcategory	Gallons	Color
PBIG	Buckets	1	White
PB2G	Buckets	2	White
PB3G	Buckets	3	White
PB3-1/2G	Buckets	3-1/2	White
PB4GW	Buckets	4	White
PB5GWN	Buckets	5	White
PB5GMR	Buckets	5	Red
PB5GBLK	Buckets	5	Black
PB5GBN	Buckets	5	Blue
PB5GY	Buckets	5	Yellow
PB5GG	Buckets	5	Green
PB5GST	Screw Top Bucket	5	White

Part #	Special Type	Volume	Color
PLIP	Solid Lid	1	White
PB2GL	Solid Lid	2	White
PL3-1/2G	Solid Lid	3-1/2	White
PB4SL	Pour Spout Lid with tint plug center	4	White
PL5GPN	Solid Lid	5	White
PL5GR	Solid Lid	5	Red
PL5GPB	Solid Lid	5	Black
PL5GPS	Pour Spout Lid	5	White
PL5GPSB	Pour Spout Lid	5	Blue
PL5GSMR	Pour Spout Lid	5	Red
PL5GST	Solid Lid screw top	5	White

Metal Buckets and Lids

Our metal bucket and lids offer additional strength and durability. This bucket is a great outdoor or household multipurpose accessory that can handle a large range of applications. To prevent leakage and adding extraordinary resistance our metal buckets have curling on the top edge that prevents deformation during handling and securing a more reliable closing process.

Categories: Buckets and Lids

Key Features

Metal handle provides high strength reliability

Triple seam technology

Part #	Product	Color	Volume
MB5G	Buckets	Grey	5
PL5GM	Lids	Grey	5







Bright Common

Our bright common nail is a quality metal shank with a solid construction for common use. This construction is mostly used for carpentry and framing. This large shank gives great strength, commonly for outdoor use.

Categories: Nails

Key Features					
Common nail					
Most popular nail and versatile s	Most popular nail and versatile style				
For construction, carpentry and	For construction, carpentry and framing				
Part#	Size	Box			
CMBRTCOMMON8	8D	50 lbs.			
CMBRTCOMMON16	16D	50 lbs.			



Duplex

Our Duplex Nail has a dual-head for easy removal. This nail is mainly used for temporary structures where nail removal is required. Applications included concrete forming and scaffolding.

- \cdot Standard sizes are 8D and 16D
- · Packaged in cases of 30lbs. and 50lbs.

Categories: Nails

	Key	Features
--	-----	-----------------

Easy driving
Easy removal
8D and 16D

Part#	Length	Вох
CMDUPLEX8	8D	50 lbs.
CMDUPLEX16	16D	50 lbs.
CMDUPLEX1630#	16D	30 lbs.



Fluted Nail

Our fluted nail is a hardened steel shank durable for general purpose projects. This nail is commonly used for cleats, flood plates, fastening furring, and partitions.

Categories: Nails

Key Features	
Hardened steel	
Flute shank – flat head	
50 lb. Box	

Length

Phosphate Coated (PC) Drywall

Our phosphate coated drywall nail with a diamond point and cup dish head. This smooth finish shank is perfect for roofing and drywall. The phosphate coating makes these nails easier to drive and not react with drywall compound.

Categories: Nails

Key Features		
Smooth finish shank		
General purpose		
Diamond point		
Part #	Size	Вох
CMDRYWALLNAILS	1-3/8"	50 lbs.







Printed

Our durable rubber band printed with country of origin and produce code. Applications include agriculture, farming, and packaging.

- · Available Colors: Blue, Purple, Yellow, Red, and White,
- · Standard sizes are #63 and #81

Categories: Rubber Bands



Reusable High Elasticity Durable

Part#	Size	Inches	Color	Case	Product number	Print
RBC#63BL60PL4080	#63	3" x 1/4"	Blue	25 lb. case (1 lb. bag)	4080	Produce of Mexico PLU 4080
RBC#63BLUSPL4080	#63	3" x 1/4"	Blue	25 lb. case (1 lb. bag)	4080	Produce of USA PLU 4080
RBC#63BWFPLU4080	#63	3" x 1/4"	Blue	25 lb. case (1 lb. bag)	4080	Produce of Mexico PLU 4080 in French
RBPC#63BLUS94080	#63	3" x 1/4"	Blue	25 lb. case (1 lb. bag)	94080	Organic Produce of USA PLU 94080
RBC#63PU60PL4080	#63	3" x 1/4"	Purple	25 lb. case (1 lb. bag)	4080	Produce of Mexico PLU 4080
RBC#63WHPLU94080	#63	3" x 1/4"	White	25 lb. case (1 lb. bag)	94080	Organic Produce of USA PLU 94080
RBC#63BLMXPL4629	#63	3" x 1/4"	Blue	25 lb. case (1 lb. bag)	4629	Produce of Mexico PLU 4629
RBC#63PUUSPL4080	#63	3" x 1/4"	Purple	25 lb. case (1 lb. bag)	4080	Produce of USA PLU 4080
RBCR#8125PLU	#81	2" x 3/8"	Blue	25 lb. case (1 lb. bag)	4060	Produce of USA PLU 4060
RBCR#81PLUORG	#81	2" x 3/8"	Blue	25 lb. case (1 lb. bag)	94060	Organic Produce of USA PLU 94060
RBCR#81RPLU4060	#81	2" x 3/8"	Red	25 lb. case (1 lb. bag)	4060	Produce of USA PLU 4060
RBCR#81BUSPL4629	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	4629	Produce of USA PLU 4629
RBCR#81MEX	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	4060	Produce of Mexico PLU 4060
RBCR#81MXPLU4629	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	4629	Produce of Mexico PLU 4629
RBC#81BWFPLU4060	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	4060	Produce of Mexico PLU 4060 in French
RBCR#81	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	4060	Produce of USA PLU 4060
RBCR#81WPLU4060	#81	2" x 3/8"	White	40 lb. case (5 lb. bag)	4060	Produce of USA PLU 4060
RBCR#81YPLU4060	#81	2" x 3/8"	Yellow	40 lb. case (5 lb. bag)	4060	Produce of USA PLU 4060
RBCR#81PLU94060	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	94060	Organic Produce of Mexico PLU 94060
RBCR#81PUPLU4060	#81	2" x 3/8"	Blue	40 lb. case (5 lb. bag)	4060	Produce of USA PLU 4060
RBC#63BL60	#63	3" x 1/4"	Blue	25 lb. case (1 lb. bag)		No Print
RBC#63PURPLE	#63	3" x 1/4"	Purple	25 lb. case (1 lb. bag)		No Print
RBPC#63W	#63	3" x 1/4"	White	25 lb. case (1 lb. bag)		No Print
RBCR#81PLAIN25	#81	2" x 3/8"	Blue	25 lb. case (1 lb. bag)		No Print
RBCR#81PLAIN	#81	2" x 3/8"	Blue	25 lb. case (1 lb. bag)		No Print
RBPC#81P	#81	2" x 3/8"	Purple	25 lb. case (1 lb. bag)		No Print





Our crepe band is a soft stretch reusable band. Crepe rubber bands are commonly used as a general-purpose rubber band to stock in the office, warehouse, and home. This elastic band provides a soft hold and excellent durability, perfect for a wide range of applications.

- · Available Colors: Natural, Blue, Black, Brown, White, Assorted, Rainbow, Purple, Green, Red, Yellow, Pink, and Orange
- Standard sizes are #8, #10, #12, #14, #16, #18, #19, #26, #27, #30, #31, #32, #33, #62, #63, #64, #105, #107, #124, #125, #127, and #137

Categories: Rubber Bands

Key Features

Softest stretch

General Purpose

Long lasting

Part #	Size	Inches	Color	Case
RBPC#8N	#8	7/8" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#8N	#8	7/8" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#10B	#10	1-1/4" x 1/16"	Blue	25 lb. case (1 lb. bag)
RBPC#10G	#10	1-1/4" x 1/16"	Green	25 lb. case (1 lb. bag)
RBPC#10N	#10	1-1/4" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#10R	#10	1-1/4" x 1/16"	Red	25 lb. case (1 lb. bag)
RBPC#105N	#10	1-1/4" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#12B	#12	1-3/4" x 1/16"	Blue	25 lb. case (1 lb. bag)
RBPC#12N	#12	1-3/4" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#12P	#12	1-3/4" x 1/16"	Purple	25 lb. case (1 lb. bag)
RBPC#12R	#12	1-3/4" x 1/16"	Red	25 lb. case (1 lb. bag)
RBC#14B	#14	2" x 1/16"	Blue	25 lb. case (1 lb. bag)
RBC#14B60	#14	2" x 1/16"	Blue (Premium)	25 lb. case (1 lb. bag)
RBPC#14N	#14	2" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBC#14R	#14	2" x 1/16"	Red	25 lb. case (1 lb. bag)
RBC#16B	#16	2-1/2" x 1/16"	Blue	25 lb. case (1 lb. bag)
RBPC#16N	#16	2-1/2" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBC#16R	#16	2-1/2" x 1/16"	Red	25 lb. case (1 lb. bag)
RBPC#18G	#18	3" x 1/16"	Green	25 lb. case (1 lb. bag)
RBPC#18N	#18	3" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#19B	#19	3-1/2" x 1/16"	Blue	25 lb. case (1 lb. bag)
RBPC#19G	#19	3-1/2" x 1/16"	Green	25 lb. case (1 lb. bag)
RBPC#19N	#19	3-1/2" x 1/16"	Natural	25 lb. case (1 lb. bag)
RBPC#19R	#19	3-1/2" x 1/16"	Red	25 lb. case (1 lb. bag)
RBPC#19Y	#19	3-1/2" x 1/16"	Yellow	25 lb. case (1 lb. bag)





Crepe

Part #	Size	Inches	Color	Case
RBPC#26N95	#26	7/8" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#27N	#27	1-1/4" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#27N	#27	1-3/4" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#30N	#30	2" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#31N	#31	2-1/2" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#32BL	#32	3" x 1/8"	Black	25 lb. case (1 lb. bag)
RBPC#32B	#32	3" x 1/8"	Blue	25 lb. case (1 lb. bag)
RBPC#32BR	#32	3" x 1/8"	Brown	25 lb. case (1 lb. bag)
RBPC#32G	#32	3" x 1/8"	Green	25 lb. case (1 lb. bag)
RBPC#32N	#32	3" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#320	#32	3" x 1/8"	Orange	25 lb. case (1 lb. bag)
RBPC#32PI	#32	3" x 1/8"	Pink	25 lb. case (1 lb. bag)
RBPC#32P	#32	3" x 1/8"	Purple	25 lb. case (1 lb. bag)
RBPC#32R	#32	3" x 1/8"	Red	25 lb. case (1 lb. bag)
RBPC#32W	#32	3" x 1/8"	White	25 lb. case (1 lb. bag)
RBPC#32Y	#32	3" x 1/8"	Yellow	25 lb. case (1 lb. bag)
RBC#33ASSORTED	#33	3-1/2" x 1/8"	Assorted	25 lb. case (1 lb. bag)
RBPC#33N	#33	3-1/2" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBC#33RAINBOW	#33	3-1/2" x 1/8"	Rainbow	25 lb. case (1 lb. bag)
RBPC#33R	#33	3-1/2" x 1/8"	Red	25 lb. case (1 lb. bag)
RBPC#33R90	#33	3-1/2" x 1/8"	Red (Premium)	25 lb. case (1 lb. bag)
RBPC#62B	#62	2-1/2" x 1/4"	Blue	25 lb. case (1 lb. bag)
RBPC#62N	#62	2-1/2" x 1/4"	Natural	25 lb. case (1 lb. bag)
RBPC#62N95	#62	2-1/2" x 1/4"	Natural	25 lb. case (1 lb. bag)
RBPC#62R	#62	2-1/2" x 1/4"	Red	25 lb. case (1 lb. bag)
RBPC#63N	#63	3" x 1/4"	Natural	25 lb. case (1 lb. bag)
RBPC#63W	#63	3" x 1/4"	White	25 lb. case (1 lb. bag)
RBPC#64N	#64	3-1/2" x 1/4"	Natural	25 lb. case (1 lb. bag)
RBPC#84N	#84	3-1/2" x 1/2"	Natural	25 lb. case (1 lb. bag)
RBPC#84N	#84	3-1/2" x 1/2"	Natural	25 lb. case (1 lb. bag)
RBPC#105N	#105	5" x 5/8"	Natural	25 lb. case (1 lb. bag)
RBPC#107N	#107	7" x 5/8"	Natural	25 lb. case (1 lb. bag)
RBPC#124N	#124	4" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#125N	#125	5" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#127N	#127	7" x 1/8"	Natural	25 lb. case (1 lb. bag)
RBPC#137N	#137	7" x 1/4"	Natural	25 lb. case (1 lb. bag)





Our ceramic rubber band is a heavy duty rubber band used on ceramic molds. Great for pottery, woodworking, and plaster molds.

Categories: Rubber Bands

Key Features	
UV Additive	
Durable	
Heavy Duty	

Part#	Size	Inches	Color	Case
RBCER#173	#173	3" × 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#174	#174	4" x 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#175	#175	5" x 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#176	#176	6" x 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#177	#177	7" × 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#178	#178	8" x 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#179	#179	9" x 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#1710	#1710	10" x 3/4"	Natural	25 lb. case (1 lb. bag)
RBCER#173-179MIX	#173-179	3" x 3/4" to 9" x 3/4"	Natural	25 lb. case (1 lb. bag)





Pallet Bands

Our pallet band is a large durable, flexible and reusable rubber band. This is a great choice for pallet securing/supporting content and covers such as tarps during transport.

Categories: Rubber Bands





Part#	Size	Color	Case
RBPC 12 X 3/8	12" x 3/8"	Natural Crepe	25 lb. case
RBPC 14 X 3/8	14" x 3/8"	Natural Crepe	25 lb. case
RBPC46-3/4G	46" x 3/4"	Green	25 lb. case
RBPC46-3/4N	46" x 3/4"	Natural	25 lb. case

Palmer Safety PS360 Series

The Palmer Safety PS360 Glove with Para-Aramid lining delivers an ANSI Cut Level A6 and an ANSI Puncture Level 4. The Goat Skin Leather provides premium dexterity and comfort along with a Hi-Vis Fluorescent Orange TPR for ideal impact resistance.

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G9050
APPLICATIONS:	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry
MATERIAL:	100% Goat Skin Leather / ThermoplasticRubber (TPR) / Para-Aramid Lining
COLOR:	Hi-Vis Fluorescent Orange / Beige
CUFF STYLE:	Shirred Elastic Wrist
ANSI:	Cut Level A6; Puncture Level 4

Size Available	S	М	L	XL	2XL	3XL
Hem Color	Red	Green	Brown	Blue	Black	Orange
Total Length (cm)	23	24	25	26	26.5	28
Palm Width (cm)	8.5	9.5	10.3	11	11.5	12.3

















Palmer Safety PS360 Series

The Palmer Safety PS360 Glove with Para-Aramid lining delivers an ANSI Cut Level A6 and an ANSI Puncture Level 4. The Goat Skin Leather provides premium dexterity and comfort along with a Hi-Vis Fluorescent Orange and Black TPR for ideal impact resistance.

Key Feature	s Part #:	G9060							
APPLICATIONS:	Hand	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry							
MATERIAL:		100% Goat Skin Leather / ThermoplasticRubber (TPR) / Para-Aramid Lining							
COLOR:	Hi-Vis	Hi-Vis Fluorescent Orange / Black							
CUFF STYLE:	Shirre	ed Elastic Wrist							
ANSI:	Cut L	evel A6; Punctur	re Level 4						
Size Available	S	М		ΧL	2XL				
Hem Color	Red	Green	Brown	Blue	Black				
Total Length (cm)	23	24 25 26 26.5							
Palm Width (cm)	8.5	9.5	10.3	11	11.5				













Palmer Safety PS360 Series

The Palmer Safety PS360 Glove with Para-Aramid lining delivers an ANSI Cut Level A5 and an ANSI Puncture Level 3. The Goat Skin Leather provides premium dexterity and comfort along with a Hi-Vis Fluorescent Green and Black TPR for ideal impact resistance.

Categories: Personal Protective Equipment, Gloves

Key Feature	s Part	#: G9065						
APPLICATIONS:	Н	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry						
MATERIAL:		100% Goat Skin Leather / ThermoplasticRubber (TPR) / Para-Aramid Lining						
COLOR:	Н	Hi-Vis Fluorescent Green / Black						
CUFF STYLE:	SI	Shirred Elastic Wrist						
ANSI:	С	Cut Level A5; Puncture Level 3						
Size Available	S	S M L XL 2XL 3XL						
Hem Color	Red	Green	Brown	Blue	Black	Orange		
Total Longth (cm)	27	2/:	25	26	26.5	20		

Palmer Safety PS933 Series

The Palmer Safety PS933 Glove with Para-Aramid/Steel lining delivers an ANSI Cut Level A6 and an ANSI Puncture Level 4. The Goat Skin Leather provides premium dexterity and comfort along with a Hi-Vis Green and Yellow TPR for ideal impact resistance.

Key Features	Part #: G933G
DESIGN:	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry
MATERIAL:	100% Goat Skin Leather / Thermoplastic-Rubber (TPR) / Para-Aramid / Steel Lining / Breathable Mesh
COLOR:	Hi-Vis Green / Yellow
ANSI:	Cut Level A6; Puncture Level 4

Size Available	S	М	L	XL	2XL
Hem Color	Red	Green	Brown	Blue	Black
Total Length (cm)	23	24	25	26	26.5
Palm Width (cm)	8.5	9.5	10.3	11	11.5







Palmer Safety X64

The Palmer Safety X64 glove with velcro strap delivers an ANSI Cut Level A6 and an ANSI Puncture Level 4. The black, sandy Nitrile palm provides optimal abrasion and cut resistance along with a strong grip in dry and wet environments. The light and breathable 13-gauge High Performance Polyethylene (HPPE) backing provides a moisture wick material with the flexibility needed to get any job done. There is a reinforced support between the thumb and forefinger to prevent wear along with a stitched Hi-Vis TPR for ideal impact resistance.

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G4570
APPLICATIONS:	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry
MATERIAL:	High Performance Polyethylene (HPPE) /Thermoplastic-Rubber (TPR)
COLOR:	Light Grey and Black / Hi-Vis Yellow /Black
CUFF STYLE:	Adjustable Velcro Closure
ANSI:	Cut Level A6; Puncture Level 4

Size Available	S	М	L	XL	2XL	3XL
Hem Color	Red	Green	Brown	Blue	Black	Orange
Total Length (cm)	23	24	25	26	26.5	28
Palm Width (cm)	8.5	9.5	10.3	11	11.5	12.3















Gulf Grip XTRA

Gulf Grip XTRA by GWP is an all purpose cut resistant glove used for applications such as construction, tool use, material handling, demolition and assembly.

Key Features	Part #: G4550
APPLICATIONS:	Construction, Tool Use, Material Handling, Demolition and Assembly
MATERIAL:	Polyester/Nitrile
COLOR:	Hi-Vis Yellow/Orange
ANSI:	Cut Level 4; Puncture Level 5

Size Available	S	М	L	XL	2XL	3XL
HEM Color	Red	Green	Brown	Blue	Black	Orange
Total Length (cm)	23	24	25	26	27	28
Palm Width (cm)	8.5	9.5	10.3	11	11.6	12.1









Gulf Grip Plus

The Palmer Safety Gulf Grip Plus glove with velcro strap delivers an ANSI Cut Level A5 and an ANSI Puncture Level 3. The black, sandy Nitrile palm provides optimal abrasion and cut resistance along with a strong grip in dry and wet environments. The light and breathable 13-gauge High Performance Polyethylene (HPPE) backing provides a moisture wick material with the flexibility needed to get any job done. There is a reinforced support between the thumb and forefinger to prevent wear along with a stitched Hi-Vis TPR for ideal impact resistance.

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G4565
APPLICATIONS:	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry
MATERIAL:	Nylon / High Performance Polyethylene (HPPE) / Thermoplastic-Rubber (TPR)
COLOR:	Hi-Vis Yellow / Black
ANSI:	Cut Level A5; Puncture Level 3

Size Available		М		XL	2XL	3XL
Hem Color	Red	Green	Brown	Blue	Black	Orange
Total Length (cm)	23	24	25	26	26.5	28
Palm Width (cm)	8.5	9.5	10.3	11	11.5	12.3

Gulf Grip

The Palmer Safety Gulf Grip glove delivers an ANSI Cut Level A4 and an ANSI Puncture Level 3. The black, sandy Nitrile palm provides optimal abrasion and cut resistance along with a strong grip in dry and wet environments. The light and breathable 13-gauge High Performance Polyethylene (HPPE) backing provides a moisture wick material with the flexibility needed to get any job done. There is a reinforced support between the thumb and forefinger to prevent wear along with a stitched Hi-Vis TPR for ideal impact resistance.

Key Features Page 1	art #: G4564
DESIGN:	General Construction, Industrial, Tool Use, Power Tools, Material Handling, Demolition and Assembly, Wet and Dry Conditions, Heavy Lifting, Oil and Gas Industry
MATERIAL:	Nylon / High Performance Polyethylene (HPPE) / Thermoplastic-Rubber (TPR)
COLOR:	Hi-Vis Yellow / Black
ANSI:	Cut Level A4; Puncture Level 3

Size Available	S	М	L	XL	2XL	3XL
Hem Color	Red	Green	Brown	Blue	Black	Orange
Total Length (cm)	23	24	25	26	26.5	28
Palm Width (cm)	8.5	9.5	10.3	11	11.5	12.3









G-Core 4590

Our form fitting HPPE and Fiberglass Core glove with breathable coating is designed to keep hands protected with outstanding wet/dry grip. Common uses include electronics, glass cutting, sheet metal handling, and general assembly.

Categories: Personal Protective Equipment, Gloves

Key Features Part #: G4590							
APPLICATIONS:		Electronics, Glass (Assembly	Electronics, Glass Cutting, Sheet Metal Handling and General Assembly				
MATERIAL:		13 Gauge Nylon, HPF	E and Fiberglass;	; Polyurethane C	oated Palm		
COLOR:		Grey					
ADDITIONAL FEAT		Cut Resistant; Excel Form Fit and Co Stretchable Wrist Re	mfortable; Ťouc	hscreen Comp	atible; Knitted		
ANSI:		Cut Level A4					
Size Available		М		XL	2XL		
Hem Color	Red	Green	Brown	Blue	Black		
Total Length (cm)	23	24	25	26	26.5		
Palm Width (cm)	8.5	9.5	10.3	11	11.5		











Gulf Flex Gloves

Handling of glass, metals and other sharp objects, parts assembly, MEP and general construction.

Key Features	Part #: G4542 & G4543
FEATURES:	Excellent grip in oily, wet and dry environments, nylon knit wrist helps prevent debris from entering into the glove.
MATERIAL:	13 gauge high performance polyethylene / fiberglass shell; Black Sandy Nitrile Palm
COLOR:	G4542 - Mandarin Orange G4543 - Hi Vis Yellow
CUFF STYLE:	Knit Wrist
ANSI:	Cut Level 4; Puncture Level 3

Size Available		М		XL	2XL
Hem Color	Red	Green	Brown	Blue	Black
Total Length (cm)	23	24	25	26	27
Palm Width (cm)	8.5	9.5	10.3	11	11.6









Our extreme form fit and comfortable G-Flex glove is designed for dry/oily grip with minimal liquid penetration. Common trade users include mechanical, electrical, plumbing, HVAC, light industrial and general assembly. Excellent choice for extreme dexterity and sense of touch.

Categories: Personal Protective Equipment, Gloves

Key Features Part #: G4595							
APPLICATIONS:		Mechanical, Electrical, Plumbing, HVAC, Light Industrial and General Assembly					
MATERIAL:		15 Gauge Grey Nylon with Spandex Liner; Ultra-Lightweight, Microfoam Nitrile Palm					
COLOR:	Gre	y and Black					
ADDITIONAL FEAT	Min Prod	Touchscreen Compatible; Excellent Dexterity, Sensitivity and Tactility; Minimal Liquid Penetration; Breathable Palm Coating; Silicone Free; Produces Minimal Lint and Dust Particulate; Knitted Stretchable Wrist Reduces Debris from Entering the Glove					
ANSI:	Cut	Cut Level Al					
Size Available	S	M L XL 2XL					
Hem Color	Red	Green	Brown	Blue	Black		

G-Flex Dot 4596

Our extreme form fit and comfortable G-Flex Dot glove is designed for dry/oily grip with minimal liquid penetration. Common trade users include mechanical, electrical, plumbing, HVAC, light industrial and general assembly. Excellent choice for extreme dexterity and sense of touch.

Categories: Personal Protective Equipment, Gloves

TOUCHSCREEN COMPATIBLE

Key Features Part #: G4596							
APPLICATIONS:		Mechanical, Electrical, Plumbing, HVAC, Light Industrial and General Assembly					
MATERIAL:		15 Gauge Grey Nylon with Spandex Liner; Ultra-Lightweight, Microfoam Nitrile Palm					
COLOR:	Grey	and Black					
ADDITIONAL FEAT	Nitr Liqu Min	Touchscreen Compatible; Excellent Dexterity, Sensitivity and Tactility; Nitrile Dots on Fingers and Palm for Added Grip Assistance; Minimal Liquid Penetration; Breathable Palm Coating; Silicone Free; Produces Minimal Lint and Dust Particulate; Knitted Stretchable Wrist Reduces Debris from Entering the Glove					
ANSI:	Cut	Cut Level Al					
Size Available	S	М	L	XL	2XL		
Hem Color	Red	Green	Brown	Blue	Black		
Total Length (cm)	23	24	25	26	26.5		











Cow Grain Watch Your Hands Driver

Our natural soft leather driver glove provides excellent durability and abrasion resistance. Watch Your Hands glove is a orange fingertip glove for low light conditions. Great for wet work, carpentry, construction, driving, equipment operation, farming, landscaping, tractor trailer operators, and forklift operations. This general-purpose glove is perfect for indoor and outdoor use.

Categories: Personal Protective Equipment, Gloves

Key Features Pa	art #: G8823HVWH
APPLICATIONS:	Construction, Electrical Contractors, Marine, MEP, Fabrication, Agriculture & Transportation
MATERIAL:	100% Grain Cowhide Leather
COLOR:	Beige with Orange Fingers
ADDITIONAL FEATURES:	Lining: Unlined; Cuff Style: Shirred Elastic Wrist; Palm Style: Full Leather; Thumb Type: Keystone Thumb; Glove Pattern: Gunn Cut

Size Available		М		XL	XXL	3XL	4XL
Hem Color	Red	Green	Brown	Blue	Black	Orange	Grey
Total Length (cm)	22.5	23.2	24.5	25.1	26.3	26.5	27.5
Palm Width (cm)	10.5	11.6	12.25	12.55	13.15	14.25	14.75

Cow Grain Leather Driver

Our natural soft leather driver glove provides excellent durability and abrasion resistance. Great for wet work, carpentry, construction, driving, equipment operation, farming, landscaping, tractor trailer operators, and fork lift operations. This general-purpose glove is perfect for indoor and outdoor use.

Key Features Page 1	art #: G8834
APPLICATIONS:	Construction, Electrical Contractors, Marine, MEP, Fabrication, Agriculture & Transportation
MATERIAL:	100% Grain Cowhide Leather
COLOR:	Beige
ADDITIONAL FEATURES:	Lining: Unlined; Cuff Style: Shirred Elastic Wrist; Palm Style: Full Leather; Thumb Type: Keystone Thumb; Glove Pattern: Gunn Cut

Size Available	S	М	L	XL	XXL	3XL	4XL
Hem Color	Red	Green	Brown	Blue	Black	Orange	Grey
Total Length (cm)	22.5	23.2	24.5	25.1	26.3	26.5	27.5
Palm Width (cm)	10.5	11.6	12.25	12.55	13.15	14.25	14.75







Cow Split Double Leather Palm

Our Double Leather Palm glove gives a comfortable and secure fit. The reinforced leather palm is designed for heavy or abrasive object handling. Professionals commonly use this glove for massive assembly, rigging, construction, splicing work, and manufacturing.

Categories: Personal Protective Equipment, Gloves



Part #	Special Type	Size	Case
G3281	One size fits most	L/XL	10 DOZ





Cow Split Leather Palm

Our Leather Palm glove gives a comfortable and safe fit application. These traditional work gloves are designed for construction, light-medium fabrication, lumber industry, steel and iron work, and handling rebar. This general-purpose glove is perfect for indoor and outdoor use.

Key Features Part #: G3260 & G3280
Durable and strong
Heavy duty
Comfortable and safe
One size fit most

Part #	Special Type	Size	Case
G3260	One sizes fits most	L/XL	10 DOZ
G3280	One sizes fits most	L/XL	10 DOZ





String Knit PVC Palm Coated

Our string knit gloves are comfortable and flexible with a PVC palm coat for an extra layer of protection. This string knit is great for general hand protection for numerous light duty task and keeps hands warm while working in the warehouse.

- Made of a cotton/polyester blend
- · Packaged in cases of 25 dozen

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G4718
FEATURES:	Warm and comfortableReversibleElastic knit wristSeamless knitted
SPECIAL TYPE:	7 Gauge
COLOR:	Natural white string knit Brown PVC coating
CASE:	25 DOZ

String Knit Latex Palm Coated

Our string knit gloves are comfortable and flexible with a latex palm coat for an extra layer of protection. This string knit is great for general hand protection for numerous light duty task and keeps hands warm while working in the warehouse.

- · Made of a cotton/polyester blend
- · Packaged in cases of 25 dozen

Categories: Personal Protective Equipment, Gloves



Part #: G4719, G4722RL

FEATURES: · Warm and comfortable

Reversible7 Gauge

Elastic knit wristSeamless knitted

COLOR: Blue, Red

CASE: 25 DOZ

Part #	Size	Color	Case
G4719S	Small	Blue	25 DOZ
G4719M	Medium	Blue	25 DOZ
G4719L	Large	Blue	25 DOZ
G4722RL	Large	Red	25 DOZ
G4719XL	XL	Blue	25 DOZ







String Knit

Our string knit gloves are comfortable and flexible. This string knit is great for general hand protection for numerous light duty task and keeps hands warm while working in the warehouse. This glove is most commonly used as a second layer of protection as a glove-liner.

· Made of a cotton/polyester blend

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G4517
FEATURES:	 Warm and comfortable, Reversible, 7 Gauge, Elastic knit wrist, Seamless knitted
SPECIAL TYPE:	38 GRAMS PER PAIR
LENGTH:	26CM
CASE:	25 DOZ





Brown Jersey Glove

Our premium cotton glove is a light weight, low density, comfortable fit, cool, breathable, and absorbent material. This glove is excellent for low heat, light duty, and general purpose applications.

- · Packaged in cases of 25 dozen
- One size fit most

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G4503	
FEATURES:	· Light weight and Multipurpose, Elastic	l comfortable, 7 oz., Machine Washable, ic knit wrist
CASE:	25 DOZ	



Part #	Color	Case
G7270	GREY	6 DOZ
G7630	Red	5 DOZ
G7380K	Blue	6 DOZ

Welder

Our Welders Glove is flexible and durable for comfortable fit. Excellent choice for heavy duty work and keeps hands cool even in the hottest temperatures. Designed with a full leather armored glove cuff and one-piece palm has no exposed seams.

· Packaged in cases of 5 and 6 dozen

Kov	Epa:	tiir	'AC

FEATURES:	Regular shoulder split leatherFull sock linedWing thumb
COLOR:	Grey, Red, Blue
CASE:	6 DOZ, 5 DOZ







Black Dot

Our general-purpose black dot glove is light weight and made of a cotton/polyester blend that protects your hand during light duties. Perfect for warehouse, construction sites, and carpentry work. The quality and comfort of this black dot glove makes it versatile, and useful addition to your safety gear.

- One size fits most
- · Packaged in cases of 25 dozen

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G4505
FEATURES:	Universal fitFirm grip/extra gripGeneral purpose useWashes well
CASE:	25 DOZ

Part #	Case	Color
G4505	25 DOZ	
G4505A	25 DOZ	
G4505O	25 DOZ	Orange

Double Dot

Our PVC double dot glove is a practical choice for most men and women hand sizes alike. Designed for a number of situations this Double Dot glove is a seamless knit cover made for comfortable and flexible use. Applications such as construction, general work, package handling, warehousing, and general assembly.

· Packaged in cases of 25 dozen









PVC Rough 12" and 14"

Our PVC glove with rough finish is designed to provide maximum protection and durability. Industry professionals would consider this as general-purpose and best for most industrial settings and applications. This glove provides workers a protection barrier from basic chemicals, oils, acid, and grease.

- · Available lengths: 12" and 14"
- · Packaged in cases of 10 dozen

Categories: Personal Protective Equipment, Gloves

Key Features

FEATURES: · Liquid and basic chemical protection

WashableRough grip

COLOR: 12", 14"

CASE: 10 DOZ

Part #	Special Type	Length	Case
G2233R		12"	10 DOZ
G2234R		14"	10 DOZ
G2234RRHO	Right Hand Only	14"	10 DOZ





PVC Smooth 12", 14", and 18"

Our PVC smooth glove is general-purpose and best for most industrial settings and applications. This glove provides workers a protection barrier from basic chemicals, oils, acid, and grease. Perfect choice for mining, fishing, utilities, and refining.

- · Available lengths: 12", 14", and 18"
- · Packaged in cases of 10 dozen

Categories: Personal Protective Equipment, Gloves

Key Features

FEATURES:	Liquid and basic chemical protectionWashable
COLOR:	12", 14", 18"
CASE:	10 DOZ

Part #	Length	Case
G2233S	12"	10 DOZ
G2234	14"	10 DOZ
G2238	18"	10 DOZ







Latex

Our powder free dishwashing latex glove is a glove that provides perfect protection for general purpose tasks. With an excellent tensile strength, capabilities include gripping wet or dry materials for home and industrial use. Considered applications include general cleaning, janitorial, maintenance, and architectural projects.

- Available size: Large
- · Packaged 12 dozen per case

Categories: Personal Protective Equipment, Gloves

Key Features	Part #: G2870
FEATURES:	 17 mil thickness Embossed grip on palm and fingers 12" length Ingredients comply with FDA regulations for food contact
COLOR:	Yellow
SIZE:	Large
CASE:	12 DOZ

Nitrile

Perfect alternative to a latex glove. Our powder free dishwashing nitrile glove is a glove that provides perfect protection for general purpose tasks. With an excellent tensile strength, capabilities include gripping wet or dry materials for home and industrial use. Considered applications include general cleaning, janitorial, maintenance, and architectural projects.

- Available size: XL
- · Packaged 12 dozen per case

Key Features	Part #: G2970XL
FEATURES:	 15 mil thickness Embossed grip on palm and fingers 13" length
SIZE:	XL
COLOR:	Green
CASE:	12 DOZ







White Microporous Disposable Coveralls

Our microporous white disposable coveralls are a breathable laminated material providing general protection to soft liquid splashes and dust protection. The microporous material is perfectly manufactured for durability and added protection. Common uses may include painting, machine maintenance, polishing, and light duty cleaning.

- · Available sizes: Medium 7XL
- · Packaged in Cases: 25 Suits

Categories: Personal Protective Equipment, Disposable Coveralls

Key Features

FEATURES:

 Microporous, Aerosol of Mist Protection, Breathable Protection, Laydown collar, Elastic Wrists, Elastic Ankles, Front Zipper closure

Part #	Size	Color	Case
PPCW1600M	Medium	White	25
PPCW1600L	Large	White	25
PPCW1600XL	XL	White	25
PPCW16002XL	2XL	White	25
PPCW16003XL	3XL	White	25
PPCW16004XL	4XL	White	25
PPCW16005XL	5XL	White	25
PPCW16006XL	6XL	White	25
PPCW16007XL	7XL	White	25





LF Blue Disposable Coveralls

Our high quality blue disposable coveralls are optimized for breathable protection and limited flammability. Common industries may include turnarounds, oil / gas manufacturing, and industrial.

- · Available sizes: Medium 7XL
- · Packaged in Cases: 25 Suits

Categories: Personal Protective Equipment, Disposable Coveralls

Key Features

FEATURES:

 Limited Flammability, Spun Polypropylene, Ideal for Dry Particulate, Breathable Protection, Laydown collar, Elastic Wrist, Elastic Ankle, Front Zipper closure

Part #	Size	Color	Case
PPCB1601M	Medium	Blue	25
PPCB1601L	Large	Blue	25
PPCB1601XL	XL	Blue	25
PPCB16012XL	2XL	Blue	25
PPCB16013XL	3XL	Blue	25
PPCB16014XL	4XL	Blue	25
PPCB16015XL	5XL	Blue	25
PPCB16016XL	6XL	Blue	25
PPCB16017XL	7XL	Blue	25









FR Coverall

- \cdot Lightweight 7 ounce 100% cotton FR treated
- Meets the following standards:
 (1) UL Certified NFPA 2112-2018
 (2) HRC2 / CAT2
 - (3) ATPV 8

Categories: Personal Protective Equipment, Coveralls

Key Features

FABRIC:	7 ounce FR fabric100% FR cotton
GARMENT CONSTRUCTION:	 All metal thermally protected from the skin Heavy duty brass zipper Breakaway zipper Storm guard over front zipper with 3 snaps closure Full action back for mobility Elasticized waist Cuffs with 1 position snap for adjustment
POCKETS:	 2 chest patch pockets,pencil slot on the left pocket 2 waist patch pockets with side access, 1 snap closure 2 rear hip patch pockets Pen pocket on left sleeve
COLORS:	Navy BlueTanGrey

Sizing Chart

Coverall		М		XL	2XL	3XL	4XL	5XL	6XL
NUMERIC	34/36	38/40	42/44	46/48	50/52	54/56	58/60	62/24	66/68
CHEST	41	44	48	52	56	60	64	68	72
EXTEND WAIST	36	39	43	47	51	55	59	63	67
TRUCK	35	36	37	38	39	40	41	42	43
TRUCK LONG	35.75	36.75	37.75	38.75	39.75	40.75	41.75	42.75	43.75
TRUCK SHORT	34.25	35.25	36.25	37.25	38.25	39.25	40.25	41.25	42.25
INSEAM	29	29.5	30	30.5	31	31.5	32	32.5	33
INSEAM LONG	30.5	31	31.5	32	32.5	33	33.5	34	34.5
SLEEVE	31	32	34	36	37	38	40	41	42
SLEEVE LONG	32.75	33.75	35.75	37.75	38.75	39.75	41.75	42.75	43.75
SLEEVE SHORT	29.25	30.25	32.25	34.25	35.25	36.25	38.25	39.25	40.25





FR Coverall

Part #	Size	Color	Case
COVERALLFRNS	Small	Navy Blue	10/Case
COVERALLFRNM	Medium	Navy Blue	10/Case
COVERALLFRNL	Large	Navy Blue	10/Case
COVERALLFRNXL	XL	Navy Blue	10/Case
COVERALLFRN2XL	2XL	Navy Blue	10/Case
COVERALLFRN3XL	3XL	Navy Blue	10/Case
COVERALLFRN4XL	4XL	Navy Blue	10/Case
COVERALLFRN5XL	5XL	Navy Blue	10/Case
COVERALLFRN6XL	6XL	Navy Blue	10/Case
COVERALLFRTS	Small	Tan	10/Case
COVERALLFRTM	Medium	Tan	10/Case
COVERALLFRTL	Large	Tan	10/Case
COVERALLFRTXL	XL	Tan	10/Case
COVERALLFRT2XL	2XL	Tan	10/Case
COVERALLFRT3XL	3XL	Tan	10/Case
COVERALLFRT4XL	4XL	Tan	10/Case
COVERALLFRT5XL	5XL	Tan	10/Case
COVERALLFRT6XL	6XL	Tan	10/Case
COVERALLFRGS	Small	Grey	10/Case
COVERALLFRGM	Medium	Grey	10/Case
COVERALLFRGL	Large	Grey	10/Case
COVERALLFRGXL	XL	Grey	10/Case
COVERALLFRG2XL	2XL	Grey	10/Case
COVERALLFRG3XL	3XL	Grey	10/Case
COVERALLFRG4XL	4XL	Grey	10/Case
COVERALLFRG5XL	5XL	Grey	10/Case
COVERALLFRG6XL	6XL	Grey	10/Case



CORE Eyewear

CORE Eyewear offers a sleek design which allows for a perfect fit for both men and women, ensuring all around acceptance. Durable lens coated for scratch resistance and 99.9% UV protection. Protective polycarbonate lens provides impact resistance. Safety Glass meets ANSI Z87.1+

Categories: Personal Protective Equipment, CORE Eyewear

Key Features

STYLE:• Clear Hard Coat
• Smoke Hard Coat

Indoor/Outdoor

PACKAGING: 12 per box, 300 per case





Part#	Style/Lens Color
SGCORECLEARH/C	Clear Hard Coat
SGCOREGREYH/C	Smoke Hard Coat
SGCOREI/O	Indoor/Outdoor




AEGIS Eyewear

AEGIS Eyewear fits securely over prescription glasses while feeling extremely comfortable with a non slip design. Comes standard with anti-fog, anti-scratch lenses and 99.9% UV protection. Meets ANSI Z87.1+ Impact Rating.

Categories: Personal Protective Equipment, AEGIS Eyewear

Key Features

STYLE:	Clear Hard Coat
PACKAGING:	12 per box, 300 per case













RIVAL Eyewear

Lightweight, cool-looking RIVAL Safety Glasses will appeal to all workers. The convenient neck cord keeps glasses always within reach. Rubber-tipped temples help relieve pressure and a soft rubber nosepiece offer all-day comfort. Durable lens coated for scratch resistance and 99.9% UV protection. Safety Glass meets ANSI Z87.1+

Categories: Personal Protective Equipment, RIVAL Eyewear

Key Features

STYLE:

· Clear Anti-Fog

Clear Hard Coat Smoke Anti-Fog

Smoke Hard Coat

Indoor/Outdoor

PACKAGING:

12 per box, 300 per case

Part#	Style/Lens Color
SGRIVALCLEARA/F	Clear Anti-Fog
SGRIVALCLEARH/C	Clear Hard Coat
SGRIVALGREYA/F	Smoke Anti-Fog
SGRIVALGREYH/C	Smoke Hard Coat
SGRIVALI/O	Indoor/Outdoor













Palmer SV2184FR Class 2 Vest (5 Pocket Vest)

Our Hi-Viz safety vest comes in bright fluorescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors. Detailing include zipper front closure, silver reflective tape in suspender pattern over top of shoulders and a 360-degree reflective band encircling torso.

Categories: Personal Protective Equipment, Safety Vests

Key Features

DESIGN:	· 100% mesh polyester · Meets ANSI/ISEA 107-2015 · Meets ASTM D6413
AVAILABLE SIZES:	Small, Medium, Large, XL, 2XL, 3XL, 4XL, 5XL, 6XL, and 7XL.
AVAILABLE COLORS:	Hi-Viz Lime Green and Fluorescent Orange
POCKETS:	2 Front Lower, 2 Inside Lower, 1 Front Chest

Part#		Colors	Case
SVL2184FRS	Small	Hi-Viz Lime Green	50
SVL2184FRM	Medium	Hi-Viz Lime Green	50
SVL2184FRL	Large	Hi-Viz Lime Green	50
SVL2184FRXL	XL	Hi-Viz Lime Green	50
SVL2184FR2XL	2XL	Hi-Viz Lime Green	50
SVL2184FR3XL	3XL	Hi-Viz Lime Green	50
SVL2184FR4XL	4XL	Hi-Viz Lime Green	50
SVL2184FR5XL	5XL	Hi-Viz Lime Green	50
SVL2184FR6XL	6XL	Hi-Viz Lime Green	50
SVL2184FR7XL	7XL	Hi-Viz Lime Green	50
SVO2184FRS	Small	Hi-Viz Fluorescent Orange	50
SVO2184FRM	Medium	Hi-Viz Fluorescent Orange	50
SVO2184FRL	Large	Hi-Viz Fluorescent Orange	50
SVO2184FRXL	XL	Hi-Viz Fluorescent Orange	50
SVO2184FR2XL	2XL	Hi-Viz Fluorescent Orange	50
SVO2184FR3XL	3XL	Hi-Viz Fluorescent Orange	50
SVO2184FR4XL	4XL	Hi-Viz Fluorescent Orange	50
SVO2184FR5XL	5XL	Hi-Viz Fluorescent Orange	50
SVO2184FR6XL	6XL	Hi-Viz Fluorescent Orange	50
SVO2184FR7XL	7XL	Hi-Viz Fluorescent Orange	50





Palmer SV2187FR Two-Tone Vest (6 Pocket Vest)

Our Hi-Viz two-tone safety vest comes in bright fluorescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors. Detailing include zipper front closure, silver reflective tape in suspender pattern over top of shoulders and a 360 degree reflective band encircling torso.

Categories: Personal Protective Equipment, Safety Vests

Key Features

DESIGN: · 100% mesh polyester

· Meets ANSI/ISEA 107-2015

· Meets ASTM D6413

AVAILABLE SIZES: Small, Medium, Large, XL, 2XL, 3XL, 4XL, 5XL, 6XL, and 7XL.

AVAILABLE COLORS: Two-tone Hi-Viz Lime Green and Fluorescent Orange

POCKETS: 2 Front Flaps lower, 2 Inside Lower, 2 Front Chest





Part#	Size	Colors	Case
SVL2187FRS	Small	Hi-Viz Lime Green	50
SVL2187FRM	Medium	Hi-Viz Lime Green	50
SVL2187FRL	Large	Hi-Viz Lime Green	50
SVL2187FRXL	XL	Hi-Viz Lime Green	50
SVL2187FR2XL	2XL	Hi-Viz Lime Green	50
SVL2187FR3XL	3XL	Hi-Viz Lime Green	50
SVL2187FR4XL	4XL	Hi-Viz Lime Green	50
SVL2187FR5XL	5XL	Hi-Viz Lime Green	50
SVL2187FR6XL	6XL	Hi-Viz Lime Green	50
SVL2187FR7XL	7XL	Hi-Viz Lime Green	50
SVO2187FRS	Small	Hi-Viz Fluorescent Orange	50
SVO2187FRM	Medium	Hi-Viz Fluorescent Orange	50
SVO2187FRL	Large	Hi-Viz Fluorescent Orange	50
SVO2187FRXL	XL	Hi-Viz Fluorescent Orange	50
SVO2187FR2XL	2XL	Hi-Viz Fluorescent Orange	50
SVO2187FR3XL	3XL	Hi-Viz Fluorescent Orange	50
SVO2187FR4XL	4XL	Hi-Viz Fluorescent Orange	50
SVO2187FR5XL	5XL	Hi-Viz Fluorescent Orange	50
SVO2187FR6XL	6XL	Hi-Viz Fluorescent Orange	50
SVO2187FR7XL	7XL	Hi-Viz Fluorescent Orange	50







Palmer SV2301 and SV2302 Class 2 Type R Vest

Our Hi-Viz safety vest comes in bright fluorescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors. Detailing includes Hi-Viz Lime Green or Hi-Viz Fluorescent Orange class two, type R 100% mesh polyester with zipper front closure, 2" reflective strip, mic tab, 3 pockets, and meets ANSI/ISEA 107-2015 Class 2, Type R.

Categories: Personal Protective Equipment, Safety Vests

Key Features

DESIGN:

• Class 2, Type R
• 360 degree reflective band encircling torso
• 100% mesh polyester
• 3 pockets
• Meets ANSI/ISEA 107-2015

AVAILABLE SIZES:

Small, Medium, Large, XL, 2XL, 3XL, 4XL, and 5XL.

AVAILABLE COLORS:

Hi-Viz Lime Green and Fluorescent Orange

POCKETS:

1 Front Chest and 2 lower inside fronts

Part#	Size	Colors	Case
SVL2301S	Small	Hi-Viz Lime Green	50
SVL2301M	Medium	Hi-Viz Lime Green	50
SVL2301L	Large	Hi-Viz Lime Green	50
SVL2301XL	XL	Hi-Viz Lime Green	50
SVL23012XL	2XL	Hi-Viz Lime Green	50
SVL23013XL	3XL	Hi-Viz Lime Green	50
SVL23014XL	4XL	Hi-Viz Lime Green	50
SVL23015XL	5XL	Hi-Viz Lime Green	50
SVO2302S	Small	Hi-Viz Fluorescent Orange	50
SVO2302M	Medium	Hi-Viz Fluorescent Orange	50
SVO2302L	Large	Hi-Viz Fluorescent Orange	50
SVO2302XL	XL	Hi-Viz Fluorescent Orange	50
SVO23022XL	2XL	Hi-Viz Fluorescent Orange	50
SVO23023XL	3XL	Hi-Viz Fluorescent Orange	50
SVO23024XL	4XL	Hi-Viz Fluorescent Orange	50
SVO23025XL	5XL	Hi-Viz Fluorescent Orange	50





Palmer SV2313 Two-Tone with Black Bottom Vest

Our Hi-Viz safety vest comes in bright fluorescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors. Detailing include left chest mic tab, zipper front closure, black mesh bottom with black trim, and 360 degree reflective band encircling torso.

Categories: Personal Protective Equipment, Safety Vests

Key Features

DESIGN: • Multiple pockets with radio tab

· Class 2 Type R

· Meets ANSI/ISEA 107-2015

AVAILABLE SIZES: Small, Medium, Large, XL, 2XL, 3XL, 4XL, and 5XL.

AVAILABLE COLORS: Two-tone Hi-Viz Lime Green or Fluorescent Orange with black bottom

and trim

POCKETS: 1 Front Left chest and bottom waist pocket



Part#		Colors	Case
SVL2313S	Small	Hi-Viz Lime Green	50
SVL2313M	Medium	Hi-Viz Lime Green	50
SVL2313L	Large	Hi-Viz Lime Green	50
SVL2313XL	XL	Hi-Viz Lime Green	50
SVL23132XL	2XL	Hi-Viz Lime Green	50
SVL23133XL	3XL	Hi-Viz Lime Green	50
SVL23134XL	4XL	Hi-Viz Lime Green	50
SVL23135XL	5XL	Hi-Viz Lime Green	50
SVO2313S	Small	Hi-Viz Fluorescent Orange	50
SVO2313M	Medium	Hi-Viz Fluorescent Orange	50
SVO2313L	Large	Hi-Viz Fluorescent Orange	50
SVO2313XL	XL	Hi-Viz Fluorescent Orange	50
SVO23132XL	2XL	Hi-Viz Fluorescent Orange	50
SVO23133XL	3XL	Hi-Viz Fluorescent Orange	50
SVO23134XL	4XL	Hi-Viz Fluorescent Orange	50
SVO23135XL	5XL	Hi-Viz Fluorescent Orange	50





POCKETS:

Endless selection. We've got you covered.



Palmer SV2327 Six Pocket Surveyors Vest

Our Hi-Viz safety vest comes in bright fluorescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors. Detailing includes zipper front closure, Hi Vis solid color vest with HD Radio tabs, six pockets, and 360 degree reflective band encircling torso.

Categories: Personal Protective Equipment, Safety Vests

Key Features	
DESIGN:	Class 26 pocketsMeets ANSI/ISEA 107-2015
AVAILABLE SIZES:	Small, Medium, Large, XL, 2XL, 3XL, 4XL, and 5XL.
AVAILABLE COLORS:	Hi-Viz Lime Green and Fluorescent Orange

Radio, Chest, 2 waists, 2 inside, and 4 pen pockets

Part#	Size	Colors	Case
SVL2327S	Small	Hi-Viz Lime Green	50
SVL2327M	Medium	Hi-Viz Lime Green	50
SVL2327L	Large	Hi-Viz Lime Green	50
SVL2327XL	XL	Hi-Viz Lime Green	50
SVL23272XL	2XL	Hi-Viz Lime Green	50
SVL23273XL	3XL	Hi-Viz Lime Green	50
SVL23274XL	4XL	Hi-Viz Lime Green	50
SVL23275XL	5XL	Hi-Viz Lime Green	50
SVO2327S	Small	Hi-Viz Fluorescent Orange	50
SVO2327M	Medium	Hi-Viz Fluorescent Orange	50
SVO2327L	Large	Hi-Viz Fluorescent Orange	50
SVO2327XL	XL	Hi-Viz Fluorescent Orange	50
SVO23272XL	2XL	Hi-Viz Fluorescent Orange	50
SVO23273XL	3XL	Hi-Viz Fluorescent Orange	50
SVO23274XL	4XL	Hi-Viz Fluorescent Orange	50
SVO23275XL	5XL	Hi-Viz Fluorescent Orange	50





Palmer SV2339

Our Hi-Viz safety vest comes in bright fluorescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors. This Hi-Viz vest has reflective chainsaw pattern strip with, one large chest pocket, 2 waist pockets (with Velcro), ID badge holder, and 2 radio mic tabs. Detailing includes Hi-Viz Lime Green or Fluorescent Orange mesh vest and black bottom with DOT contrasting.

Categories: Personal Protective Equipment, Safety Vests

Key Features

DESIGN:

Class 2 Type R Standard
360 degree reflective band encircling torso
Meets ANSI/ISEA 107-2015

AVAILABLE SIZES:

Small, Medium, Large, XL, 2XL, 3XL, 4XL, and 5XL.

AVAILABLE COLORS:

Hi-Viz Lime Green and Fluorescent Orange

POCKETS:

1 Large chest pocket, Velcro ID badge holder, 2 radio mic tabs and 2 waist pockets



Part#		Colors	Case
SVL2339S	Small	Hi-Viz Lime Green	50
SVL2339M	Medium	Hi-Viz Lime Green	50
SVL2339L	Large	Hi-Viz Lime Green	50
SVL2339XL	XL	Hi-Viz Lime Green	50
SVL23392XL	2XL	Hi-Viz Lime Green	50
SVL23393XL	3XL	Hi-Viz Lime Green	50
SVL23394XL	4XL	Hi-Viz Lime Green	50
SVL23395XL	5XL	Hi-Viz Lime Green	50
SVO2339S	Small	Hi-Viz Fluorescent Orange	50
SVO2339M	Medium	Hi-Viz Fluorescent Orange	50
SVO2339L	Large	Hi-Viz Fluorescent Orange	50
SVO2339XL	XL	Hi-Viz Fluorescent Orange	50
SVO23392XL	2XL	Hi-Viz Fluorescent Orange	50
SVO23393XL	3XL	Hi-Viz Fluorescent Orange	50
SVO23394XL	4XL	Hi-Viz Fluorescent Orange	50
SVO23395XL	5XL	Hi-Viz Fluorescent Orange	50









Class 2 Type R Safety Vests

Our hi-viz safety vest come in bright florescent colors with a reflective silver tape to ensure proper visibility. Perfect choice for crossing guards, utility, emergency work, airport luggage handlers, highways, and surveyors.

Categories: Personal Protective Equipment, Safety Vests

Key Features

POCKETS:

DESIGN:

Class 2 Type R
Meets ANSI/ISEA 107-2015
Self-Extinguishing
Maximum visibility
Lightweight
Comfortable fit

AVAILABLE SIZES:
Small, Medium, Large, XL, 2XL, 3XL, and 4XL.

AVAILABLE COLORS:
Hi-Viz Lime Green and Fluorescent Orange

1 Front Chest and 1 lower inside front

Part#		Colors	Case
SVLS	Hi-Viz Lime Green	Small	25/Case
SVLM	Hi-Viz Lime Green	Medium	25/Case
SVLL	Hi-Viz Lime Green	Large	25/Case
SVLXL	Hi-Viz Lime Green	XL	25/Case
SVLXXL	Hi-Viz Lime Green	2XL	25/Case
SVL3XL	Hi-Viz Lime Green	3XL	25/Case
SVL4XL	Hi-Viz Lime Green	4XL	25/Case
SVOS	Hi-Viz Fluorescent Orange	Small	25/Case
SVOM	Hi-Viz Fluorescent Orange	Medium	25/Case
SVOL	Hi-Viz Fluorescent Orange	Large	25/Case
SVOXL	Hi-Viz Fluorescent Orange	XL	25/Case
SVOXXL	Hi-Viz Fluorescent Orange	2XL	25/Case
SVO3XL	Hi-Viz Fluorescent Orange	3XL	25/Case
SVO4XL	Hi-Viz Fluorescent Orange	4XL	25/Case





Chem Suit – 42 mil PVC/Polyester, Liquid Penetration, 3 pc. Jacket, Hood, & Bib

PALMER RAINWEAR SERIES

MARLIN

Categories: Personal Protective Equipment, Chem Suits

Key Features

Part #: RS96S

DESIGN:

- · PVC on polyester (42 mil)
- · Liquid Penetration (ASTM F903)
- · Stand-up collar snaps and detachable hood
- \cdot Neck tab on collar
- · Raglan shoulder design
- · Inner sleeves on arms with elastic
- · Snap front closure
- · High bib front trousers
- · Adjustable suspenders
- · Inner sleeves on bottom leg openings
- · Non-conductive snaps
- · Electronically sealed seams

COLOR: Green

SIZE: Sizes Small to 6XL

Part#	Size
RS96SS	Small
RS96SM	Medium
RS96SL	Large
RS96SXL	XL
RS96S2XL	2XL
RS96S3XL	3XL
RS96S4XL	4XL
RS96S5XL	5XL
RS96S6XL	6XL







PALMER RAINWEAR SERIES **DOLPHIN**



Hydroblasting Suit PVC/Polyester Snap Front Storm Flap, Jacket, Hood, & Bib

For those tough wet jobs that include washdown, splash, pressure washing and any job with extreme exposure.



9 9	

Key Features Part #: RS600

DESIGN: • PVC on polyester

· Snaps on front for adjustable exterior shroud adjustment

· Velcro closures

 \cdot Attached hood with drawing string closures designed for maximum protection

 \cdot Bat wing shoulder design for easy movement

· Take-up tabs on neck, arms and legs with drawstring jacket sweep

· High bib trouser

· Adjustable suspenders

· Non-conductive snaps

· Electronically sealed seams

COLOR: Yellow

Sizes Small to 6XL

Part#	Size
RS600S	Small
RS600M	Medium
RS600L	Large
RS600XL	XL
RS6002XL	2XL
RS6003XL	3XL
RS6004XL	4XL
RS6005XL	5XL
RS6006XL	6XL





30 mil LF 100% PVC 3 Pc. Jacket w/Hood & Bib

Categories: Personal Protective Equipment, Rainwear

PALMER RAINWEAR SERIES BARRACUDA

Key Features Part #: RS36S

DESIGN:

- · PVC on polyester on PVC (30 mil)
- · Double Coated
- · Flame Resistant (ASTM D6413)
- · Stand-up collar snaps and detachable hood
- · Raglan shoulder design with underarm vents
- · Vented back
- · Snap front closure
- \cdot 2 side entry pockets
- · Bib front trousers with safety fly
- · Adjustable suspenders
- · Take-up snaps on sleeves and leg cuffs
- · Non-conductive snaps
- · Electronically sealed seams

COLOR:

Yellow

SIZE:

Sizes Small to 6XL

Part#	Size
RS36SS	Small
RS36SM	Medium
RS36SL	Large
RS36SXL	XL
RS36S2XL	2XL
RS36S3XL	3XL
RS36S4XL	4XL
RS36S5XL	5XL
RS36S6XL	6XL









SIZE:

Endless selection. We've got you covered.

PALMER RAINWEAR SERIES **MAKO**





35 m

35 mil LF PVC/Polyester 3 pc. Jacket, Hood, & Bib

Categories: Personal Protective Equipment, Rainwear

Sizes Small to 6XL

Key Features	Part #: RS260FR
DESIGN:	PVC on polyester (35 mil) Flame Resistant (ASTM D6413) Stand-up collar snaps and detachable hood Raglan shoulder design (No vents) Snap front closure 2 side entry pockets Bib front trousers (No fly) Adjustable suspenders Take-up snaps on sleeves, waist and leg cuffs Non-conductive snaps Electronically sealed seams
COLOR:	Yellow

Part#	Size
RS260FRS	Small
RS260FRM	Medium
RS260FRL	Large
RS260FRXL	XL
RS260FR2XL	2XL
RS260FR3XL	3XL
RS260FR4XL	4XL
RS260FR5XL	5XL
RS260FR6XL	6XL





35 mil LF PVC/Polyester 3 pc. Jacket, Hood, & Bib

Categories: Personal Protective Equipment, Rainwear

PALMER RAINWEAR SERIES HAMMERHEAD

Key Features	Part #: RS160FR
DESIGN:	PVC on polyester (35 mil) Flame Resistant (ASTM D6413) Stand-up collar snaps and detachable hood Raglan shoulder design with underarm vents Vented back Snap front closure Side entry pockets Bib front trousers with safety fly Adjustable suspenders Take-up snaps on sleeves and waist Non-conductive snaps Electronically sealed seams
COLOR:	Yellow
SIZE:	Sizes Small to 6XL

Part#	Size				
RS160FRS	Small				
RS160FRM	Medium				
RS160FRL	Large				
RS160FRXL	XL				
RS160FR2XL	2XL				
RS160FR3XL	3XL				
RS160FR4XL	4XL				
RS160FR5XL	5XL				
RS160FR6XL	6XL				









PALMER RAINWEAR SERIES **COBIA**



35 mil PVC/Polyester 3 pc. Jacket, Hood, & Bib

This is an ideal basic three-piece rain suit to have on hand for times when the weather changes and coverage is needed fast. It is made of durable water-resistant PVC over polyester with electronically welded seams.

Categories: Personal Protective Equipment, Rainwear



Key Features Part #: RS260

1 410 11.11.02.00

DESIGN: • PVC on polyester (35 mil)

· Stand-up collar snaps and detachable hood

· Raglan shoulder design (No vent)

· Snap front closure

· 2 side entry pockets

· Bib front trousers (No fly)

· Adjustable suspenders

· Take-up snaps on sleeves, waist and leg cuffs

· Non-conductive snaps

 $\cdot \, \text{Electronically sealed seams} \\$

COLOR: Yellov

SIZE: Sizes Small to 6XL

Part#	Size
RS260S	Small
RS260M	Medium
RS260L	Large
RS260XL	XL
RS2602XL	2XL
RS2603XL	3XL
RS2604XL	4XL
RS2605XL	5XL
RS2606XL	6XL





35 mil PVC/Polyester 3 pc. Jacket, Hood, & Bib

PALMER RAINWEAR SERIES **SNAPPER**

This is an ideal basic three-piece rain suit to have on hand for times when the weather changes and coverage is needed fast. It is made of durable water-resistant PVC over polyester with electronically welded seams.

Categories: Personal Protective Equipment, Rainwear

Key Features

Part #: RS160

DESIGN:

- · PVC on polyester (35 mil)
- · Stand-up collar snaps and detachable hood
- · Raglan shoulder design with underarm vents
- · Vented back

Yellow

- · Snap front closure
- \cdot 2 side entry pockets
- · Bib front trousers with safety fly
- · Adjustable suspenders
- · Take-up snaps on sleeves and leg cuffs
- Non-conductive snaps
- \cdot Electronically sealed seams

COLOR:

SIZE: Sizes Small to 6XL

Part#	Size
RS160S	Small
RS160M	Medium
RS160L	Large
RS160XL	XL
RS1602XL	2XL
RS1603XL	3XL
RS1604XL	4XL
RS1605XL	5XL
RS1606XL	6XL







PALMER RAINWEAR SERIES TARPON



35 mil PVC/ Polyester 48" Rain Coat



Key Features	Part #: RC165
DESIGN:	 PVC on polyester (35 mil) Stand-up collar with snaps and detachable hood Raglan shoulder design with underarm vents Vented back Snap front closure Take up snaps on sleeves 2 side entry pockets Non-conductive snaps Electronically sealed seams
COLOR:	Yellow
LENGTH:	Coat is 48" long
SIZE:	Sizes Small to 6XL

Part#	Size			
RC165S	Small			
RC165M	Medium			
RC165L	Large			
RC165XL	XL			
RC1652XL	2XL			
RC1653XL	3XL			
RC1654XL	4XL			
RC1655XL	5XL			
RC1656XL	6XL			





35 mil PVC/ Polyester 60" Rain Coat - Yellow



Key Feature	s Part #: RC179
DESIGN:	 PVC on polyester (35 mil) Stand-up corduroy collar with snaps and detachable hood Raglan shoulder design with underarm vents Vented back Snap front closure Take up snaps on sleeves 2 side entry pockets Badge patch on left chest Non-conductive snaps Electronically sealed seams
COLOR:	Yellow
LENGTH:	Coat is 60" long
SIZE:	Sizes Small to 6XL

Part#	Size				
RC179S	Small				
RC179M	Medium				
RC179L	Large				
RC179XL	XL				
RC1792XL	2XL				
RC1793XL	3XL				
RC1794XL	4XL				
RC1795XL	5XL				
RC1796XL	6XL				







PALMER RAINWEAR SERIES
BLACKFIN

35 mil PVC/ Polyester 60" Rain Coat – Black



Key Features	Part #: RCB179
DESIGN:	PVC on polyester (35 mil) Stand-up corduroy collar with snaps and detachable hood Raglan shoulder design with underarm vents Vented back Snap front closure Z side entry pockets Badge patch on left chest Non-conductive snaps Electronically sealed seams
COLOR:	Black
LENGTH:	Coat is 60" long
SIZE:	Sizes Small to 6XL

Part#	Size			
RCB179S	Small			
RCB179M	Medium			
RCB179L	Large			
RCB179XL	XL			
RCB1792XL	2XL			
RCB1793XL	3XL			
RCB1794XL	4XL			
RCB1795XL	5XL			
RCB1796XL	6XL			





35 mil LF PVC/ Polyester 60" Rain Coat - Black



Key Features	Part #: RCB179FR
DESIGN:	PVC on polyester (35 mil) Flame Resistant (ASTM D6413) Stand-up corduroy collar with snaps and detachable hood Raglan shoulder design with underarm vents Vented back Snap front closure Side entry pockets Badge patch on left chest Non-conductive snaps Electronically sealed seams
COLOR:	Black
LENGTH:	Coat is 60" long
SIZE:	Sizes Small to 6XL

Part#	Size
RCB179FRS	Small
RCB179FRM	Medium
RCB179FRL	Large
RCB179FRXL	XL
RCB179FR2XL	2XL
RCB179FR3XL	3XL
RCB179FR4XL	4XL
RCB179FR5XL	5XL
RCB179FR6XL	6XL









Plain Toe Boots

Our flexible boots are waterproof and resistant to most common chemicals. The textured and wider sole provides a sure grip for non-slip traction. The application includes environmental clean-up, construction, and agriculture.

Categories: Personal Protective Equipment, PVC Boots

Key Features

DESIGN:

- PVC Rubber
- · Removal insole
- $\cdot \, \mathsf{Lined} \, \mathsf{for} \, \mathsf{Comfort} \,$
- · Slip-resistant sole
- · Abrasion-resistant PVC leakproof protection

Part#	RB#15516	RB15517	RB15518	RB15519	RB15510	RB#155111	RB#155112	RB#155113	RB#155114
Size	SIZE 6	SIZE 7	SIZE 8	SIZE 9	SIZE 10	SIZE 11	SIZE 12	SIZE 13	SIZE 14
Case	6	6	6	6	6	6	6	6	6

Steel Toe Boots

Our steel toe PVC boots are resistant to organic chemicals and some exposure to oils. These steel toes provide a comfortable fit with a removable cushion insole for better alignment and improved heel cushioning.

Categories: Personal Protective Equipment, PVC Boots

DESIGN:

- · Slip-resistant sole
- · 100% waterproof
- · Removal insole
- \cdot Comfortable and flexible

STANDARDS:

Steel Toe meets or exceeds ASTM F2413-11 I/75 C/75.

Part#	RB#15506	RB#15507	RB#15508	RB#15509	RB#155010	RB#155011	RB#155012	RB#155013	RB#155014
Size	SIZE 6	SIZE 7	SIZE 8	SIZE 9	SIZE 10	SIZE 11	SIZE 12	SIZE 13	SIZE 14
Case	6	6	6	6	6	6	6	6	6







Steel Toe with Steel Sole

Our steel toe and steel sole PVC boots are resistant to organic chemicals, and some exposure to oils. These steel toe and steel sole boots provide a comfortable fit with a removal cushion insole for better alignment and improved heel cushioning. Additionally, the steel plate in the sole helps protect from sharp objects penetrating the bottom of this steel-plated boot.

Categories: Personal Protective Equipment, PVC Boots

Key Features

DESIGN: Slip-resistant sole

· 100% waterproof

· Removal insole

· Comfortable and flexible

STANDARDS:

Steel Toe meets or exceeds ASTM F2413-11 I/75 C/75.



Part#	RB16116	RB16117	RB16118	RB16119	RB16110	RB16111	RB16112	RB16113	RB16114
Size	SIZE 6	SIZE 7	SIZE 8	SIZE 9	SIZE 10	SIZE 11	SIZE 12	SIZE 13	SIZE 14
Case	6	6	6	6	6	6	6	6	6





Endless selection.

We've got you covered.









FR Safety Debris Netting

Our debris netting is a 1/4", 1/8" or 1/16" mesh hole opening made to protect workers and patrons near commercial buildings and industrial plants. This netting provides privacy, dust and debris control for job sites, shipyards, and dry-docks.

Categories: Safety Fencing and Netting

Key Features

DESIGN:

- · NFP-701 flame retardant
- · UV protection
- · Orange reinforced hem
- · Privacy screening
- · Scaffolding enclosures
- · High-Density Knitted Polyethylene

Part #	Opening	Height	Length	Grams per Square meter	Color	Tearing Strength	Tensile Strength	Bursting Strength
DN2150100	1/4"	2'	150'	100	Orange	WARP 12.14 lbs. WEFT 13.19 lbs.	WARP 81.5 lbs. WEFT 92.4 lbs.	92 psi
DN4150100	1/4"	4'	150'	100	Orange	WARP 12.14 lbs. WEFT 13.19 lbs.	WARP 81.5 lbs. WEFT 92.4 lbs.	92 psi
DN415100BL	1/4"	4'	150'	100	Blue	WARP 12.14 lbs. WEFT 13.19 lbs.	WARP 81.5 lbs. WEFT 92.4 lbs.	92 psi
DN4150110	1/4"	4'	150'	110	Orange	WARP 13.7 lbs. WEFT 14.16 lbs.	WARP 89.9 lbs. WEFT 98.9 lbs.	94.9 psi
DN4150120	1/4"	4'	150'	120	Orange	WARP 15.28 lbs. WEFT 17.2 lbs.	WARP 91 lbs. WEFT 103 lbs.	104.4 psi
DN5.61501000	1/4"	5' 6"	150'	100	Orange	WARP 12.14 lbs. WEFT 13.19 lbs.	WARP 81.5 lbs. WEFT 92.4 lbs.	92 psi
DN8150200B	1/16"	8'	150'	200	Black	WARP 24.26 lbs. WEFT 25.2 lbs.	WARP 102.5 lbs. WEFT 122 lbs.	141.52 psi
DN8.6150100B	1/4"	8' 6"	150'	100	Black	WARP 12.14 lbs. WEFT 13.19 lbs.	WARP 81.5 lbs. WEFT 92.4 lbs.	92 psi
DN10150200B	1/16"	10'	150'	200	Black	WARP 24.26 lbs. WEFT 25.2 lbs.	WARP 102.5 lbs. WEFT 122 lbs.	141.52 psi
DN8.6150100B1/8	1/8"	8' 6"	150'	100	Black/Orange	WARP 12.14 lbs. WEFT 13.19 lbs.	WARP 81.5 lbs. WEFT 92.4 lbs.	92 psi





Safety Fencing

Our orange fencing is a general purpose fencing for homeowners and professionals that will not rust or corrode. Common uses include yard sectioning, crowd control, and construction site.

Categories: Safety Fencing and Netting

Key Features

DESIGN:


· General-purpose

· Durable

· Maximum visibility

SIZES:

Standard sizes are 100' x 4'



Part #	Height	Length	Grams per Square meter
SF410080	4'	100'	80
SF4100100	4'	100'	100
SF4100140	4'	100'	140
SF47.25100230DF	47.2"	100'	230





Why Palmer Safety?

Palmer Safety is a full service fall protection and safety training organization with offices in Houston, New Orleans, New York, and Los Angeles.

We are different in regards to how we go to business. We believe knowledge is power and, in the case of fall protection, can mean life or death. We want our customers to buy our material, but most importantly we want to be the place you come to for information that is critical for you, the end user, to run your safety operations.

Our technical sales forces has the background to deliver a service level that most of our competition has given up on due to indirect costs. We pride ourselves on being able to work with you to solve your safety needs as a team.


There are a number of companies out there that you can buy from, and there are plenty of choices you can use. We hope you base your buying decision on not only price, but also the knowledge and customer service that comes with that purchase. We offer the complete package: high quality products serviced by experienced personnel with industry knowledge. Along with that, we provide first rate industry specific safety training courses with more in development. That is our definition of full service and what Palmer Safety delivers to our customers across the United States.

Most importantly we believe in stocking what we sell. If we offer it, we should be stocking it.

We take your safety seriously!

Greg Palmer CEO - Palmer Safety



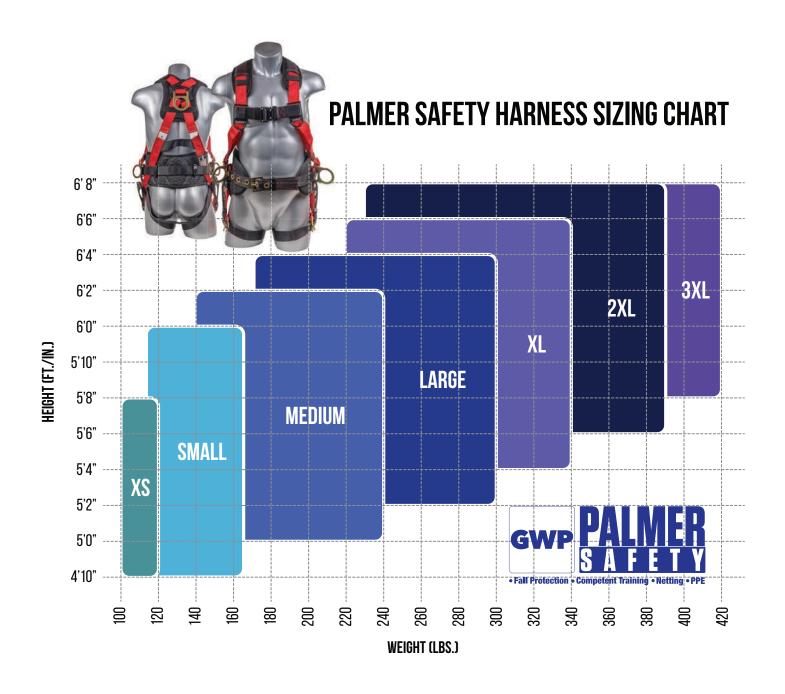



We take **YOUR SAFETY** seriously!

Harness 3pt., Pass-Thru Legs, Back D-Ring.

Full body harness with 3 point adjustment, dorsal D-ring, adjustable mating buckle leg straps, and fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H11110005	
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)	
DESIGN:	Dorsal D-ring for fall arrest. Adjustable leg straps.	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	
WEIGHT OF HARNESS:	2.23 lbs.	





Harness 3pt., Grommet Legs, Back D-Ring, Yellow Color.

3 point adjustment harness, dorsal D-ring, tongue buckle leg straps. Fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Key Features	art #: H11210005
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring for fall arrest. Adjustable grommeted leg straps.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	2.81 lbs.





Harness 3pt., Pass-Thru Legs, Back/Side D-Rings, Yellow Color.

3 point adjustment harness, dorsal D-ring, hip D-rings, adjustable mating buckle leg straps. Fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H11110105
DESIGN:	Dorsal D-ring for fall arrest. Two lateral D-rings at waist for positioning.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	2.91 lbs.

Harness 3pt., Grommet Legs and Back/Side D-Rings, Yellow Color.

Yellow full body harness with 3 point adjustment, dorsal D-ring, hip D-rings, tongue buckle leg straps, and fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Key Features	Part #: H11210105	
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)	
DESIGN:	Dorsal D-ring for fall arrest.	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy steel	
WEIGHT OF HARNESS:	3.53 lbs.	





We take **YOUR SAFETY** seriously!

Harness 5pt., Back and Side D-Rings, Pass-Thru Legs, Blue Color

Blue top, black bottom. Full body harness with 5 point adjustment, dorsal D-ring, Side D-ring, pass though leg straps, Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H211101031
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring and Side D-Rings Two lanyard parking Pass though leg straps
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	3.64 lbs.





Harness 5pt., Back and Side D-Rings, Grommet Legs, Blue Color

Blue top, black bottom. Full body harness with 5 point adjustment, dorsal D-ring, Side D-ring, grommet leg straps, Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

USER CAPACITY: 130 – 310 lbs. (59 -140 kg) DESIGN: Dorsal D-ring and Side D-Rings Two lanyard parking Grommet leg straps WEBBING: Material: Polyester Width: 1.73 in. METAL COMPONENT: Alloy Steel	Key Features	Part #: H212101031
Two lanyard parking Grommet leg straps WEBBING: Material: Polyester Width: 1.73 in. METAL COMPONENT: Alloy Steel	USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
Width: 1.73 in. METAL COMPONENT: Alloy Steel	DESIGN:	Two lanyard parking
	WEBBING:	9
WEIGHT OF HADNESS: 4 00 lbs	METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS: 4.08 IDS.	WEIGHT OF HARNESS:	4.08 lbs.





Harness 5pt., Back, Front and Side D-Rings, Grommet Legs, Blue Color

Blue top, black bottom. Full body harness with 5 point adjustment, dorsal D-ring, Front D-ring, Side D-ring, grommet leg straps, Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2013

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H212111031	
DESIGN:	Dorsal, Chest and Side D-Rings Two lanyard parking Grommet leg straps	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	
WEIGHT OF HARNESS:	4.0 lbs.	

Harness 5pt., Back and Shoulder D-Rings, Grommet Legs, Blue Color

Blue top, black bottom. Full body harness with 5 point adjustment, dorsal D-ring, Confined Space D-rings, grommet leg straps, Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

USER CAPACITY: 130 – 310 lbs. (59 -140 kg) DESIGN: Dorsal and Shoulder Rescue D-Rings Two lanyard parking Grommet leg straps WEBBING: Material: Polyester Width: 1.73 in. METAL COMPONENT: Alloy steel WEIGHT OF HARNESS: 3.6 lbs.	Key Features	Part #: H212300031
Two lanyard parking Grommet leg straps WEBBING: Material: Polyester Width: 1.73 in. METAL COMPONENT: Alloy steel	USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
Width: 1.73 in. METAL COMPONENT: Alloy steel	DESIGN:	Two lanyard parking
	WEBBING:	· · · · · · · · · · · · · · · · · · ·
WEIGHT OF HARNESS: 3.6 lbs.	METAL COMPONENT:	Alloy steel
	WEIGHT OF HARNESS:	3.6 lbs.





We take **YOUR SAFETY** seriously!

Harness 5pt., Grommet Legs, Back D-Ring.



Full body harness with 5 point adjustment, Dorsal D-ring, Grommet legs, and Fall Indicators. Multiple sizes. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features

USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring for fall arrest.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	3.30 lbs.

Part#	Color
H212100031	Blue
H212100061	Green
H212100072	Purple/Yellow









Harness 5pt., QCB, Padded Back and Leg, Back D-ring. Black color.

5 point harness with QCB, padded back and padded legs sewn in. Back D-ring and fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H223100521	
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)	
DESIGN:	Dorsal D-ring for fall arrest.	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	
WEIGHT OF HARNESS:	6.48 lbs.	





Harness 5pt., QCB, Padded Back and Leg, Back/Side D-Rings, Positioning Belt, Dual Front D-Rings.

5 point harness, QCB, padded back and padded legs sewn in. Positioning belt black. 3 D-rings. Front Dual D-rings, and fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Key Features Pa	art #: H22312162
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring for fall arrest and two front D-rings for climbing and rescue
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	5.82 lbs.



We take **YOUR SAFETY** seriously!

Harness 5pt., Grommet Legs, Padded Back, Back/Side D-Rings.



5 point adjustment harness. Pass Through Chest, Tongue Buckle Legs, Hip D-Rings, Sewn In Back Pads. Fall Indicators. Multiple sizes. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

1.7	
KOV	Features
NEV	reatules

USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring for fall arrest. Adjustable torso.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	High Strength Steel
WEIGHT OF HARNESS:	3.97 lbs.

Part#	Color
H21210111	Red
H21210115	Yellow
H21210116	Green









Harness 5pt. Back Padded, QCB Chest, Grommet Legs, Back/Side D-Rings, Positioning Belt. Variable Colors.

5 point adjustment harness, dorsal D-ring, hip D-rings, heavy duty back support/positioning pad with removable tool belt, Tongue buckle leg straps. Quick connect chest. Sewn in back pad. Fall indicators. Multiple sizes available. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features

USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring for fall arrest. Adjustable torso.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	5.28 lbs.

Part#	Color
H222101121	Red
H222101123	Blue
H222101125	Yellow
H222101126	Green









Harness 3pt., Dielectric, Loop D-Ring, Orange Color.

3 point adjustment harness, loop dorsal D-ring, mating buckle chest and leg straps. All Dielectric hardware. Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	art #: H134200021 _
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal loop attachment for fall arrest. Adjustable leg straps.
WEBBING:	Material: Polyester Width: 1.73 in.
HARDWARE COMPONENT	Reinforced Polymer with Alloy Steel core
WEIGHT OF HARNESS:	1.98 lbs.



Harness 5pt., Dielectric, Back and Side D-rings. Black Color.

5 point adjustment harness, dorsal and side D-rings, pass through leg straps. All Dielectric hardware. Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Key Features Pa	rt #: H234200021
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	5 – Point adjustable full body harness. Torso straps with Dielectric friction buckles for easy adjustment
WEBBING:	Material: Polyester Width: 1.73 in.
HARDWARE COMPONENT:	Reinforced Polymer with Alloy Steel core
WEIGHT OF HARNESS:	4.56 lbs.







Harness 5pt., FR Dielectric, Back D-Ring, Black Color

Black top, black bottom. Full body harness with 5 point adjustment, dorsal D-ring, pass though leg straps. All Dielectric hardware. Fall Indicators. Flame Resistant. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H234302522	
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)	
DESIGN:	Flame Resistant, Dielectric Dorsal D-ring Two lanyard parking	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	
WEIGHT OF HARNESS	2.8 lbs.	









Harness 5pt., FR Dielectric, Back and Side D-Rings, Shoulder and Waist Pads, Black Color

Black top, black bottom. Full body harness with 5 point adjustment, dorsal D-ring, Side D-rings with positioning belt, pass though leg straps. All Dielectric hardware. Fall Indicators. Flame Resistant. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

Key Features	Part #: H234302122
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Flame Resistant, Dielectric Dorsal D-ring, two sides D-rings Two lanyard parking Shoulder and Waist Pads
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	4.6 lbs.







Harness 5pt., Pass-Thru Legs, Back D-Ring, Black Color.

Full body harness with 5 point adjustment, Dorsal D-ring, Pass through leg straps. Fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H211100021	
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)	
DESIGN:	Dorsal D-ring for fall arrest. Adjustable torso.	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	
WEIGHT OF HARNESS:	2.88 lbs.	





Harness 5pt., QCB, Padded Back and Legs, Back D-Ring, Side D-Rings with Positioning Belt, Black Color.

5 point adjustable harness, QCB, padded back sewn in, QCB padded legs. 3 D-rings. Fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Key Features	Part #: H223111621
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	Dorsal D-ring for fall arrest. Adjustable torso for easy adjustment and snug fitting.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	5.89 lbs.





Harness/Vest Combo 3pt., Grommet Legs. Back D-Ring, Orange Color.

Vest full body Harness, Three point. Back D-ring, Orange vest. Fall Indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H112100341	
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)	
DESIGN:	Dorsal D-ring for fall arrest. Adjustable leg and torso.	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	
WEIGHT OF HARNESS:	4.21lbs.	

Harness 5pt., Padded Back, Padded QCB Legs, Back D-ring. Black Color.

5 point harness, QCB, padded back sewn in, padded QCB legs. Positioning belt black. 3 D-ring. Oil and Dust Resistant, fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Key Features	Part #: H212100574
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	One dorsal attachment D-ring for fall arrest. Adjustable torso for easy adjustment and Snug fitting.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	5.88 lbs.






Harness 5pt., Padded Back, Grommet Legs, Back D-ring. Red/Black color.

5 point FBH, Red top, black bottom, grommeted legs, single dorsal D-ring, and fall indicators. This is a premium harness with full padding shoulder/back. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

Categories: Bodywear, Full Body Harnesses

Key Features	Part #: H212100511
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	One dorsal attachment D-ring for fall arrest. Adjustable torso.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	3.30 lbs.



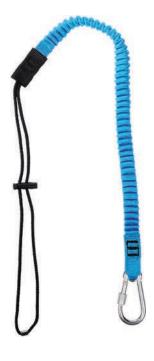

Tool Lanyard Screw Gate

Tool Lanyard with Screw Gate Carabiner. 15 lbs. tool rated. Meets or exceeds the ANSI/ISEA 121-2018 standard for Screw Gate Carabiner.

Categories: Bodywear, Accessories, Tool Lanyards


Key Features	Part #: T2203
DESIGN:	Convenient stretch lanyard for tool holding Provided with a lightweight carabiner for attachment to the user's belt
MATERIAL:	Webbing: 0.55 in. polyester Carabiner: High strength aluminum
STRENGTH:	Strength of tool lanyard is 15 lbs.
LENGTH:	51.18"
WEIGHT:	0.12 lbs.





3 ft. single leg lanyard with small hooks. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

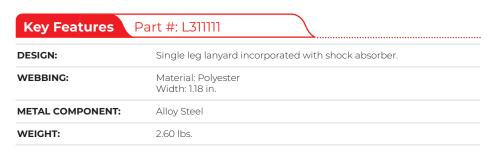



Positioning Device Lanyard

4 - 6 ft. Adjustable restraint lanyard. Meets or Exceeds ANSI Z359.3-2007.

Categories: Connectors, Positioning/Restraint

Key Features	Part #: L00046
DESIGN:	Designed for work positioning.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	2.29 lbs.







Lanyard 6 ft. Shock Absorber, Rebar Hook, Single Leg.

6 ft. Single leg lanyard, 2-1/4" rebar hook. Yellow webbing, Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features	Part #: L112111
DESIGN:	Single leg lanyard incorporated with shock absorber.
WEBBING:	Material: Polyester Width: 0.98 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	3.44 lbs.

Lanyard 6 ft. Shock Absorber, Small Hooks, Single Leg.

6 ft. Single leg lanyard, 3/4" hook, Yellow webbing, Meets or Exceeds ANSI Z359.13-2013.

Key Features	Part #: Lillill
DESIGN:	Single leg lanyard incorporated with shock absorber. Both ends of the lanyard equipped with steel snap hook.
WEBBING:	Material: Polyester Width: 0.98 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	2.72 lbs.





Adjustable lanyard 4 - 6 ft. Blue shock absorber, rebar hook.

4 - 6 ft. adjustable shock absorbing lanyard with 2-1/4" rebar hook. Meets or Exceeds ANSI Z359.13-2013.

Categories: Shock Absorbing Lanyards

Key Features	Part #: L212111
DESIGN:	Webbing lanyard incorporated with shock absorber.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	3.61 lbs.





Adjustable lanyard 4 - 6 ft. Blue shock absorber, small hook.

4 - 6 ft. adjustable shock absorbing lanyard with 3/4" hook. Meets or Exceeds ANSI Z359.13-2013.

Categories: Shock Absorbing Lanyards

Key Features	Part #: L211111
DESIGN:	Single leg lanyard incorporated with shock absorber.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	2.88 lbs.





Double Leg Lanyard 6 ft. 12 ft. free fall. Blue shock pack, small hooks.

6 ft. Double leg lanyard, 3/4" hooks. Yellow webbing. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features	Part #: L151211
DESIGN:	Double, Y shaped lanyard Webbing lanyard incorporated with shock absorber.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	4.13 lbs.

6 ft. Double Lanyard, Blue Shock Absorber, Steel Snap Hooks.

6 ft. shock absorbing double lanyard with 3/4" hooks. Meets or Exceeds ANSI Z359.13-2013.

Key Features	Part #: L111211
DESIGN:	Webbing lanyard incorporated with shock absorber.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	3.61 lbs.





Lanyard 6 ft. 12 ft. free fall. Shock absorber, Rebar hooks. Double Leg.

6 ft. Double leg lanyard, 2-1/4" rebar hooks. Yellow webbing. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features	Part #: L152211
DESIGN:	Double, Y shaped lanyard Webbing lanyard incorporated with shock absorber.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	5.79 lbs.





Lanyard 6 ft. Shock Absorber, Rebar Hooks, Double Leg.

6 ft. Double leg lanyard, 2-1/4" rebar hooks. Yellow webbing. Meets or Exceeds ANSI Z359.13-2013.

Key Features	Part #: L112211
DESIGN:	Double, Y shaped lanyard incorporated with shock absorber. One end of the shock absorber equipped with steel snap hook while the other sides of the lanyard are equipped with Steel rebar hooks.
WEBBING:	Material: Polyester Width: 0.98 in.
METAL COMPONENT:	Medium Carbon Steel
WEIGHT:	3.85 lbs.





Lanyard 6 ft. FR, 6 ft. Free Fall. Shock absorber, Small Hooks. Double Leg.

Double leg Y style made out of 0.98 in. FR webbing with 3/4" hooks and shock absorber (6 ft.) free fall. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features	Part #: L615222 \
DESIGN:	Double leg, Y shaped lanyard Webbing lanyard incorporated with shock absorber
WEBBING:	Material: Aramid (Nomax type) Width: 0.98 in.
METAL COMPONENT:	Alloy Steel
WEIGHT:	4.17 lbs.



Lanyard 6 ft. FR, 6 ft. Free Fall. Shock Absorber, Rebar Hooks. Double Leg.

Double leg Y style made out of 0.98 in. FR webbing with 2-1/4" rebar hooks and shock absorber (6 ft.) free fall. Meets or Exceeds ANSI Z359.13-2013.

Key Features	Part #: L616222
DESIGN:	Double leg, Y shaped lanyard Webbing lanyard incorporated with shock absorber
WEBBING:	Material: Aramid (Nomax type) Width: 0.98 in.
METAL COMPONENT:	Alloy Steel
WEIGHT OF HARNESS:	5.66 lbs.







Lanyard 6 ft. Internal Shock, Rebar Hook, Single Leg.

6 ft. single leg, internal shock absorber lanyard, 2-1/4" rebar hook. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features P	Part #: L122133
DESIGN:	Polyester tubular webbing incorporated with energy absorber (6 ft.).
WEBBING:	Material: Polyester Width: 1.57 in.
METAL COMPONENT:	Alloy steel
WEIGHT:	3.37 lbs.





Lanyard 6 ft. Internal Shock, Small Hook, Single Leg.

6 ft. single leg, internal shock absorbing lanyard, 3/4" hook. Meets or Exceeds ANSI Z359.13-2013.

Key Features	Part #: L121133
DESIGN:	Polyester tubular webbing incorporated with energy absorber (6 ft.).
WEBBING:	Material: Polyester Width: 1.57 in.
METAL COMPONENT:	Alloy steel
WEIGHT:	2.54 lbs.





Lanyard 6 ft. Internal Shock, Rebar Hooks, Double Leg.

6 ft. double leg lanyard, internal shock absorber, 2-1/4" rebar hooks. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features	Part #: L122233
DESIGN:	Y shaped polyester tubular webbing incorporated with energy absorber (6 ft.).
WEBBING:	Material: Polyester Width: 1.57 in.
METAL COMPONENT:	Alloy steel
WEIGHT:	5.84 lbs.

Positioning Device Rebar

Rebar chain positioning device, one 2-1/4" swivel rebar hook on top and two 3/4" snap hooks on opposite ends. Meets or Exceeds ANSI Z359.3-2007.

Categories: Connectors, Positioning/Restraint

Key Features	Part #: A00004
DESIGN:	Double, Y shaped lanyard. This positioning device incorporates a high tensile strength chain and has swivel rebar hook.
CHAIN:	0.31" diameter link of chain, Grade 80; 24 inch
METAL COMPONENT:	Alloy steel
WEIGHT:	4.9 lbs.





D-Ring Extender 18 in.

18 in. 1-3/4" web single leg D-ring extender, loop on one end and large D-ring on opposite end. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Accessories

Key Features	Part #: LE18134L
DESIGN:	Polyester webbing having a large D-ring at one end and a loop at other end.
WEBBING:	Material: Polyester Width: 1.75 in.
METAL COMPONENT:	Alloy steel
WEIGHT:	0.4 lbs.



D-Ring Extender 18 in.

18 in. D-ring extender, 3/4" snap hook on one end and large D-ring on opposite end. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Accessories



Key Features	Part #: LE18134
DESIGN:	Polyester webbing having steel stamped snap hook at one end and D-ring at other end.
WEBBING:	Material: Polyester Width: 1.18 in.
METAL COMPONENT:	Alloy steel
WEIGHT:	1.21 lbs.



Rescue Trauma Strap

Trauma Strap step up relief pack.

Categories: Bodywear, Accessories

Key Features	Part #: T2200
DESIGN:	Polyester webbing Formed pouch Loops on straps provide height adjustment
WEBBING:	Material: Polyester Width: 0.79 in.
WEIGHT:	0.24 lbs.

Personal Shock Absorber Extension

Personal Shock Absorber Extension, 6 ft. Free Fall, Blue Color, Limits arresting forces to 900 lbs. Meets or Exceeds ANSI Z359.13-2013.

Categories: Connectors, Shock Absorbing Lanyards

Key Features Part #: LS63008

DESIGN: 6ft free fall shock pack

Forged steel snap hook for better strength





SRLD 60' Galvanized Cable with Small Hook.

Self Retractable Lifeline Retrieval System for tripod. Galvanized cable, 3/4" load indicator hook, 1/2" carabiner. Min breaking strength 3400 lbs. Meets or Exceeds ANSI Z359.14-2014 Class B, ANSI Z359.14-2014 SRL-R.

Categories: Self-Retracting Lifelines (SRL), Cable, Confined Space

Key Features Part #: SRL1211412		
DESIGN:	Retrieval fall arrester block in polymer casing coupled with hoisting winch to enable easy retrieval of victim.	
PHYSICAL PARAMETERS:	Durable plastic housing.	
LENGTH:	60 ft.	
CABLE:	3/16" diameter GAC	
CONFORM TO THE NORM:	Meets or Exceeds ANSI Z359.14-2014 SRDR and OSHA Compliant	
WEIGHT:	20.3 lbs.	





SRD 8' Lightweight Web with Small Hook.

8ft. Retractable web, plastic housing, 3/4" load indicator hook, 1/2" carabiner included. Blue housing. Min breaking strength 3000 lbs. Meets or Exceeds ANSI Z359.14-2014 Class B.

Categories: Devices, Self-Retracting Lifelines (SRL), Web

Key Features	Part #: SRL221311
DESIGN:	Equipped with steel Carabiner (C111) at swivel Anchorage with Load Indicator and Steel Snap Hook for attachment to the user's harness.
WEBBING:	Material: Polyester Width: 1.8 in.
STEEL CASING:	Medium carbon steel
WEIGHT:	3.60 lbs.





SRD Galvanized Cable with Small Hook. Variable Lengths.

10', 15', 20', 30', 50', or 100' retractable galvanized cable, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner with tagline included. Meets or Exceeds ANSI Z359.14-2014 Class B.

Categories: Devices, Self-Retracting Lifelines (SRL), Cable



PHYSICAL PARAMETERS: Composite housing.

Swivel anchorage eye.

CABLE: 3/16" GAC

Part#	Length	Weight
SRL311311	10'	5.25 lbs.
SRL511311	15'	8.24 lbs.
SRL611311	20'	8.54 lbs.
SRL711311	30'	10.80 lbs.
SRL811311	50'	15.30 lbs.
SRL1311311	100'	28.49 lbs.



SRD LE Galvanized Cable with Small Hook. Variable Lengths.

18', 25', or 50' leading edge retractable galvanized cable, swivel top composite housing, 3/4'' load indicator hook, 1/2'' carabiner. Meets or Exceeds ANSI Z359.14-2014 and ANSI Z359.14-2014 SRD-LE.

Categories: Devices, Self-Retracting Lifelines, Cable, SRL-LE

Key Features

PHYSICAL PARAMETERS: Composite housing. Swivel anchorage eye.

CABLE: 3/16" GAC

CONFORM TO THE NORM: Meets or Exceeds ANSI Z359.14-2014 SRD-LE

Part#	Length	Weight
SRL911212	18'	9.07 lbs.
SRL1011212	25'	10.48 lbs.
SRL1111212	50'	19.53 lbs.





SRL Web, Small Hook. Variable Lengths.

11', 15', or 20' retractable web, swivel top composite housing, 3/4'' load indicator hook, 1/2'' carabiner included. Meets or Exceeds ANSI Z359.14-2012 Class B.

Categories: Devices, Self-Retracting Lifelines (SRL), Web

Key Features

PHYSICAL PARAMETERS:	Composite housing. Swivel anchorage eye.
WEBBING:	Material: Polyester Width: 1"

Part#	Length	Weight
SRL421311	11'	3.52 lbs.
SRL521311	15'	5.12 lbs.
SRL621311	20'	5.42 lbs.



CAME PROPERTY OF THE PARTY OF T

SRL 11' Web with Rebar Hook

11' retractable web, swivel top composite housing, 2-1/4" load indicator hook, 1/2" carabiner included. Meets or Exceeds ANSI Z359.14-2012 Class B.

Categories: Devices, Self-Retracting Lifelines (SRL), Web

Key Features Pa	art #: SRL421321	
PHYSICAL PARAMETERS:	Composite housing. Swivel anchorage eye.	
LENGTH:	11 ft.	
WEBBING:	Material: Polyester Width: 1"	
WEIGHT:	4.35 lbs.	





Twin SRD Connector

DUAL LEG SRD CONVERTER - a Carabiner with SRD Plastic Connector. Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Carabiners

Key Features	Part #: SRL169
DESIGN:	Ultimate solution to attach 2 SRD's directly with user's harness with no additional connector required.
MATERIAL:	Alloy Steel
MINIMUM BREAKING STRENGTH:	23 kN (5170 lbs.)
FINISH:	Yellow chromate
WEIGHT:	0.38 lbs.

Twin SRD Steel Connector

Dual Leg SRD Converter. Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Carabiners

Key Features	Part #: SRL170
DESIGN:	Ultimate solution to attach 2 SRD's directly with user's harness with no additional connector required.
MATERIAL:	Alloy Steel
FINISH:	Yellow chromate
MINIMUM BREAKING STRENGTH:	23 kN (5170 lbs.)
WEIGHT:	0.37 lbs.





SRD 6' Lightweight Web. Variable Hooks.

6' retractable web, lightweight composite housing, external shock absorber, 1/2" carabiner included. Available with either a 2-1/4" rebar hook, 3/4" double locking snap hook, or a 2-1/4" aluminum rebar hook. Meets or Exceeds ANSI Z359.14-2014 Class A.

Categories: Devices, Self-Retracting Lifelines (SRL), Web

Key Features

PHYSICAL PARAMETERS:	Lightest available SRD in its range/class. Composite housing.
LENGTH:	6 ft. (Maximum)
LOAD CAPACITY:	420 lbs.
WEBBING:	Material: Dyneema webbing 13/16" Minimum Breaking Strength: 3000 lbs.

Part#	Model	Hook Type	Weight
SRL121122	Single 6' SRD	2-1/4" Rebar Hook	3.63 lbs.
SRL121122T	Twin 6' SRD	2-1/4" Rebar Hook	7.64 lbs.
SRL121132	Single 6' SRD	3/4" Hook	2.83 lbs.
SRL121132T	Twin 6' SRD	3/4" Hook	6.03 lbs.
SRL121142	Single 6' SRD	2-1/4" Aluminum Rebar Hook	3.37 lbs.
SRL121142T	Twin 6' SRD	2-1/4" Aluminum Rebar Hook	7.11 lbs.



SRL121142T w/SRL170












All Twin Models Also Available with the SRL169 Option









Palmer Safety has relationships with **certified fall protection installers** that will be brought in for **engineering services**. We combine that with relationships with our suppliers to offer **height safety engineered services**. Our goal is to help provide an overall approach to fall safety.

Self Retracting Devices repair and re-certification

is a major service issue to our end users. We offer this service not as a profit center but to allow our customers to use Palmer Safety devices longer at a lower service cost. With two repair centers developed we try to limit time spent waiting for shipments to arrive. Our overall service goals will be to have regional repair centers to limit wait times on returning SRD's.



Inspection Services are offered as well when you chose

Palmer Safety. Our goal in offering this service is to help our end users become OSHA compliant with regards to completing company wide inspections. This is free of charge as long as you are a Palmer Safety customer. We inspect every product in your fleet and provide an overall picture of where your program is in terms of compliance. The ultimate decision on whether or not to take out of service is still up to your competent person authorized by your safety department. We are here to help lessen the burden on how and where to start.

Rental services are being developed for our large industrial contractor base. These programs will be managed through our key distribution partners with full Palmer Safety support.

We take your safety seriously!





Part#	Length
A36806	3'
A48806	4'
A72806	6'
A96806	8'
A120806	10'
A144806	12'
A168806	14'
A192806	16'

Cross Arm Strap

3" wide (variable lengths available) with large D-ring and small D-ring. Meets or Exceeds ANSI Z359.18-2017 and OSHA.

Categories: Anchorage, Multi-Purpose

KOV	Features
NEV	reatures

DESIGN:	1-3/4" wide polyester webbing stitched with 3" webbing on the back for extra protection.
WEBBING:	Material: Polyester
STITCHING THREAD:	Material: High-tenacity polyester
METAL COMPONENT:	Alloy Steel, Yellow Chromate
VITAL TEST COMPLIANCE:	Static Strength: 5000 lbs.

Anchor Strap

Disposable concrete anchor strap is attached to a structure capable of supporting 5000 lbs. 1-3/4" wide strap (variable lengths available) with a loop on one end, large D-Ring on the other end, and a full length wear pad. Red strap. Meets or Exceeds ANSI Z359.18-2017 and OSHA.

Categories: Anchorage, Concrete

Key Features

DESIGN:	1-3/4" wide polyester webbing with one end having a textile loop and the other side a D-ring.
WEBBING:	Material: Polyester
STITCHING THREAD:	Material: High-tenacity polyester
D-RING:	Yellow Chromate
VITAL TEST COMPLIANCE:	Static Strength: 5000 lbs.



Part#	Length
A4125000	4'
A6125000	6'
A8125000	8'
A10125000	10'



Anchor Cable Cross Arm

4' or 6' X 1/4" vinyl coated I-beam cable cross-over strap with large ring and small ring for pass-through. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Multi-Purpose

Key Features	
DESIGN:	Made of PVC coated Galvanized steel
CABLE:	7X19 GAC
VITAL TEST COMPLIANCE:	Static Strength: 3000 lbs. for 3 Minutes



Part#	Length	Weight
AC48408	4'	1.10 lbs
AC72408	6'	1.42 lbs



Part# Length		Weight
ACH48407	4'	1.82 lbs.
ACH72407	6'	2.14 lbs.

Anchor Cable With Hook

4' or $6' \times 1/4"$ vinyl coated cable I-beam crossover strap, ring on one end and locking snap hook on opposite end. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Multi-Purpose

Key Features	
DESIGN:	Made of PVC coated Galvanized steel
CABLE:	7X19 GAC
VITAL TEST COMPLIANCE:	Static Strength: 5000 lbs.



Beam Anchor Trolley

Beam Anchor Trolley. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.18-2017.



Categories: Anchorage, I-Beam

Key Features Part #: A00008		
DESIGN:	Anchor connector installed on flange of beams.	
COMPATIBLE WITH MIN FLANGE WIDTH:	3.14"	
COMPATIBLE WITH MAX FLANGE WIDTH:	9.84"	
MATERIAL:	Aluminum Alloy and Stainless steel.	
MINIMUM BREAKING STRENGTH:	5000 lbs.	
WEIGHT:	8.59 lbs.	


Beam Anchor

Beam Anchor, 3"-6" flange adjustable. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.18-2017 Type A.

Categories: Anchorage, Steel

Key Features	Part #: A3145001
STRENGTH:	5000 lbs.
MATERIAL:	Aluminum Alloy and Brass
MAX USER WEIGHT:	310 lbs./140kg
WEIGHT:	3.43 lbs. / 1556g
CONFORM TO NORM:	Meets or Exceeds Z359.18-2017 Type A







Anchor Sliding Super Beamer

Super Sliding Beam Anchor, 12" - 30" flange adjustable. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Steel

Key Features P	art #: A12305000	
STRENGTH:	5000 lbs.	
MATERIAL:	Bronze / Aluminum / Yellow Chromate Steel	
MAX USER WEIGHT:	310 lbs.	
WEIGHT:	7.24 lbs.	



Anchor Sliding Beamer



Categories: Anchorage, Steel



Key Features	Part #: A3145000
STRENGTH:	5000 lbs.
MAX USER WEIGHT:	310 lbs.
MATERIAL:	Aluminum / Yellow Chromate Steel
WEIGHT:	3.52 lbs.





Parapet Anchor

Parapet Anchor. Galvanized Steel. 2.36"-14.17" parapet range. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Roof

Key Features Part #: A00002		
DESIGN:	Anchor suitable to be installed on the parapet of a building such that the anchor point lies at the top on the outside facade of the building.	
MIN. WIDTH OF THE PARAPET ON WHICH INSTALLATION IS POSSIBLE:	2.36 in.	
MATERIAL:	High strength alloy steel	
FINISH:	Silver/yellow galvanized	
SYSTEM STRENGTH:	Greater than 25 kN	
WEIGHT:	19.84 lbs.	

Anchor Door Jamb

Door Jamb Anchor, Aluminum construction. Min breaking strength 5000 lbs. Meets or Exceeds ANSI 735918-2017

Categories: Anchorage, Multipurpose

Key Features Part #	: A00003	
DESIGN:	Door/window anchor is compressed against the door or window frame "jamming" itself between the two vertical sides.	
MINIMUM OPENING:	23.62"	
MAXIMUM OPENING:	49.21"	
MATERIAL:	High strength aluminum alloy	
FINISH:	Anodized	
WEIGHT:	12.47 lbs.	
MINIMUM BREAKING STRENGTH:	5000 lbs.	







Girder Steel Anchor

Girder Steel Anchor. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Steel

Key Features Part #	A00006
DESIGN:	Girder steel anchor is a removable/reusable anchor that can be mounted on solid steel structures, girders and steel I-Beams.
USAGE:	For use as an anchorage point for fall protection equipment
MATERIAL:	Eye nut and Main body: Alloy steel. Outer Body: Stainless steel molded with polymer.
RECOMMENDED BOLT HOLE SIZE:	0.80" to 1.18"
MINIMUM BREAKING STRENGTH:	5000 lbs.
MAXIMUM THICKNESS OF THE STRUCTURE ON WHICH INSTALLATION POSSIBLE::	1.57"
WEIGHT:	1.21 lbs.



3/4" Reusable Concrete Anchor 5000 lbs.



Reusable Concrete Anchor 3/4" Hole. 5000 lbs. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Concrete

Key Features	Part #: A345000	
DESIGN:	Anchor is capable of being installed on concrete having minimum thickness of 5.9" through a predefined hole of 3/4" diameter.	
MATERIAL:	Cable: Galvanized steel 0.24" diameter	
MINIMUM BREAKING STRENGTH:	5000 lbs.	
WEIGHT:	0.33 lbs.	





Reusable Concrete Anchor 1" Hole 10,000 lbs. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Concrete



Anchor Mega Swivel

5K MEGA Swivel Anchor. Designed for repeated use and is 100% retrievable (Concrete). Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Concrete

Key Features	Part #: A5000Mega	
MINIMUM BREAKING STRENGTH:	5,000-lbf/22kN	
MAX USER WEIGHT:	310 lbs.	
MATERIALS:	Zinc Plated Steel	
WEIGHT:	1.17 lbs.	







Rope 4-Person HLL System

Horizontal Lifeline system. Covers span length of 15' to 100'. Min Breaking Strength 5620 lbs. Kernmantle rope of diameter 5/8". Comes complete with carabiners, rope tensioner, cross arm straps, and carrying bag. Meets or Exceeds ANSI A10.32-2012 Section 4.4.

Categories: Horizontal Lifeline



Kov	Feat	IIPAC	Part

Part #: A3001100

DESIGN:Temporary horizontal lifeline consisting of 0.63" diameter Kernmantle rope having a swivel brass connector at one end of the lifeline and a specially designed tensioner at the other end.

MATERIAL: O Ring: Forged alloy steel

Tensioner: Aluminum alloy and stainless steel

MINIMUM BREAKING STRENGTH: 25 kN

SYSTEM WEIGHT: 20.46 lbs.



Cable 2-Person HLL System

Horizontal Lifeline system. Max Span Length 60 ft. System Breaking Strength 5000 lbs. 3/4" load indicator hook. Two person approved system. Meets or Exceeds ANSI A10.32-2012 Section 4.4.

Categories: Horizontal Lifeline

Key Features Part #: A400160	
DESIGN:	Housing made up of durable and high strength polymer. Horizontal lifeline system easy to install, remove and store.
WIRE ROPE:	Construction: 7 X 19 GAC
MAXIMUM SPAN LENGTH:	59.06 ft.
NUMBER OF USERS:	2
SYSTEM STRENGTH:	Greater than 24 kN
WEIGHT:	28.88 lbs.







Single Point Steel Anchor

Steel point anchor. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Steel



Key Features	Part #: A00001
DESIGN:	Single point anchor is designed to be fixed on walls, ceilings, roof tops or steel structures.
FINISH:	Yellow Chromate
MINIMUM BREAKING STRENGTH:	5000 lbs.
WEIGHT:	0.84 lbs.

Reusable Roof Anchor

Reusable Roof Anchor. Steel with stamped D-ring. Min breaking strength 5000 lbs., Meets or Exceeds ANSI Z359.18-2017.

Categories: Anchorage, Roof

Key Features	Part #: A00150
DESIGN:	An ideal anchorage device to be fixed on wooden beams used in roofing. The D-ring can be safely used as an anchor point.
MATERIAL:	High strength alloy steel
FINISH:	Powder coated or Zinc plated
MINIMUM BREAKING STRENGTH:	5000 lbs.
WEIGHT:	2.39 lbs.





Vertical Co-Polymer Rope Lifeline

Variable Length Lifeline 5/8" co-polymer rope, 3/4" hook on one end. Meets or Exceeds ANSI Z359.15-2014.

Categories: Vertical Lifelines

Key Features

DESIGN: This lifeline is made up of high strength co-polymer twisted rope.

The diameter of the rope is 5/8".

It is provided with snap hook spliced at one end or both ends.

STEEL SNAP HOOK: Made of Alloy Steel

Silver or golden yellow galvanized

Breaking strength: 5000 lbs.

LENGTHS: 50', 100' or 150'





1 Snap I	1 Snap Hook	
Part#	Length	
V503201	50'	
V1003201	100'	
V1503201	150'	

2 Snap Hooks	
Part#	Length
V503202	50'
V1003202 100'	
V1503202	150'

Roofing Kit



Categories: Kits, Roofer's Kits



Key Features	Part #: V5501
USER CAPACITY:	130 – 310 lbs. (59 -140 kg)
DESIGN:	One dorsal attachment D-ring for fall arrest. Adjustable torso.
WEBBING:	Material: Polyester Width: 1.73 in.
METAL COMPONENT:	Alloy steel
WEIGHT:	15.8 lbs.



Rope Grab 5/8" Diameter

Categories: Rope Grabs

5/8" Large Bail Yellow Chromate Finish Rope Grab. Meets or Exceeds ANSI Z359.15-2014.



Key Features	Part #: C0850
DESIGN:	Trailing Rope Grab moves along with the user climbing up or down and locks in case of a fall.
MATERIAL:	High strength alloy steel
FINISH:	Yellow chromate
WEIGHT:	1.21 lbs.

Rope Grab Attached Lanyard 2'

5/8" Large Bail Yellow Chromate Finish Rope Grab, attached 2 ft. shock absorbing web lanyard and 3/4" hook. Meets or Exceeds ANSI Z359.15-2014 and ANSI Z359.13-2013.

Categories: Rope Grabs

Key Features	Part #: C3002	
DESIGN:	Rope grab with 2' lanyard	
WEBBING:	Material: Polyester Width: 1.73 in.	
METAL COMPONENT:	Alloy Steel	





Hook Carabiner .67"

Steel twist lock, 5/8" gate opening, Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Carabiners

Key Features P	art #: C111
DESIGN:	Gate opening 0.67". Oval shaped carabiner made of round steel bar.
FINISH:	Yellow chromate
MATERIAL:	Alloy Steel
MINIMUM BREAKING STRENGTH:	5000 lbs.
GATE FACE STRENGTH:	3600 lbs.
GATE SIDE STRENGTH:	3600 lbs.; Minor axis: 3600 lbs.
WEIGHT:	0.35 lbs.





Hook Carabiner .84"

Steel twist lock, 13/16" gate opening, Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Carabiners

Key Features P	art #: C113
DESIGN:	Gate opening 0.84". Oval shaped carabiner made of 0.43" diameter round bar.
FINISH:	Yellow chromate
MATERIAL:	Alloy Steel
MINIMUM BREAKING STRENGTH:	5000 lbs.
GATE FACE STRENGTH:	3600 lbs.
GATE SIDE STRENGTH:	3600 lbs.; Minor axis: 3600 lbs.
WEIGHT:	0.58 lbs.





Hook Carabiner 1.97"

Yellow chromate finish, forged steel twist lock gate , 1-15/16" gate opening. Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors, Carabiners

Key Features P	art #: C134
DESIGN:	Gate opening 1.97". Steel tower hook made of 0.55" diameter round bar.
MATERIAL:	Alloy Steel
FINISH:	Yellow chromate
MINIMUM BREAKING STRENGTH:	5000 lbs.
GATE FACE STRENGTH:	3600 lbs.
GATE SIDE STRENGTH:	3600 lbs.; Minor axis: 3600 lbs.
WEIGHT:	1.65 lbs.



Hook Rebar Scaffold



Rebar scaffold hook. Alloy Steel. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Categories: Connectors

Key Features P	art #: S00140
DESIGN:	Gate opening 2.36" Auto closing and auto locking type steel rebar scaffold hook.
PROCESS:	Forged
MATERIAL:	Alloy Steel
FINISH:	Yellow chromate
MINIMUM BREAKING STRENGTH:	5000 lbs.
GATE FACE STRENGTH:	3600 lbs.
GATE SIDE STRENGTH:	3600 lbs.
WEIGHT:	1.8 lbs.







Categories: Devices, Confined Space



Key Features Pa	art #: CS717
DESIGN:	Adjustable height from 4'4" to 7' from ground level.
LOAD CAPACITY	310 lbs.
TRIPOD LEGS:	Material: Prime quality aluminum alloy Finish: Anodized
HEAD:	Material: Prime quality aluminum alloy Finish: Powder coated
LOCKING PINS:	Material: Prime quality aluminum alloy eye bolt and stainless steel locking pin Finish: Deburred and polished
VITAL TEST COMPLIANCE:	Static Strength: 25 kN (5000 lbs.) for 1 minute
WEIGHT:	41.9 lbs.


Confined Space Winch

Confined Space Winch, galvanized cable, 3/4" hook. Max load 310 lbs. Personal or material. Meets or Exceeds ANSI Z117. 1-1995.

Categories: Devices, Confined Space

Key Features Part #: CS817	
DESIGN:	Material or man lifting rescue winch. Mounting plate having four bolts for mounting with use of specialized brackets. Galvanized steel wire rope of 3/16" and length of 60' maximum.
BODY:	Material: Galvanized steel
RATED LOAD CAPACITY:	310 lbs.
VITAL TEST COMPLIANCE:	Static Strength: Tested at 3100 lbs.
WEIGHT:	20.61 lbs.









When elevated work hazards are present, Fall Protection equipment and Fall Protection systems play an essential role in safely executing work activities.

Palmer Safety is a full-service Fall Protection and safety training organization that strives to be your source for solutions to executing elevated work safely. In doing so, we set ourselves apart from our competition.

With locations in New Orleans, Houston, New York and California, Palmer Safety can fully service your Fall Protection needs. We continue to innovate as we pursue leading edge products. Palmer Safety offers high performance, high quality products along with an experienced and knowledgeable Technical Support Team.

The buying decision should always consider the value of customer service and product support that is part of the Palmer Safety experience.

We take Success in Safety seriously!

Courses Offered

Fall Protection Component Training

Fall Protection Component Refresher Training

Fall Protection Awareness Training

Fall Protection Equipment Inspection Training

Confined Space Awareness and Training

Fall Protection Program Development

EM 385-1-1 24 Hour Fall Protection Course

Fall Protection Rescue and Program Training





Palmer Safety Test Tower

Palmer Safety is committed to everyone's safety. To help ensure our quality, we batch test random samples per every 500 units to confirm compliance to the pertaining ANSI Z359 standard.

Palmer Safety conducts measurements of arrest forces on products including dynamic performance testing on harnesses, SRD's, fall arrestors, personal shock absorbers, positioning lanyards and anchorage connectors and dynamic strength testing on SRD's. Certificates of Conformance can be issued upon request.

Customers are invited to come watch the performance testing of our fall protection equipment. Please call your sales account manager to schedule a test day and tour our facility.









Locations Nationwide to Better Assist You!

CORP. OFFICE - NEW ORLEANS

6000 Jefferson Hwy Harahan, LA 70123 (504) 733-1808

HOUSTON OFFICE

104 Japhet Street Houston, TX 77020 (713) 671-6061

NEW YORK OFFICE

139 Route 9W North, Unit 8 Haverstraw, NY 10927 (845) 786-5647

CCI GROUP, LLC

14401 Industry Circle La Mirada, CA 90638 (714) 994-3070

STOCKING WAREHOUSES

Florida Ohio Georgia Washington