

# OPERATION GUIDE

FS-3540MFP  
FS-3640MFP



## Introduction


Thank you for your purchase of FS-3540MFP/FS-3640MFP.

This Operation Guide is intended to help you operate the machine correctly, perform routine maintenance and take a simple troubleshooting action as necessary, so that you can always use the machine in good condition.

Please read this Operation Guide before you start using the machine.

We recommend the use of our own brand supplies. We will not be liable for any damage caused by the use of third party supplies in this machine.

A label shown in the illustration assures that the supplies are our own brand.

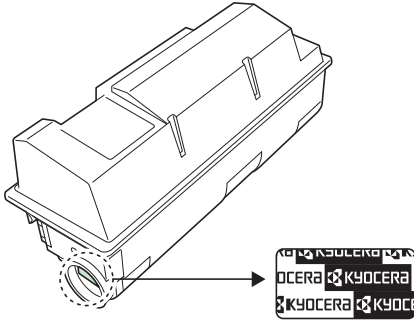

## Included Guides

The following guides are supplied with the machine. Refer to them as necessary.

<b>Quick Installation Guide</b>	Describes the procedures for installation of the machine, frequently-used operations, routine maintenance, and troubleshooting action.
<b>Safety Guide</b>	Provides safety and cautionary information for the installation and use of the machine. Be sure to read this guide before using the machine.
<b>Safety Guide (FS-3540MFP/FS-3640MFP)</b>	Describes the machine installation space, cautionary space, and other information. Be sure to read this guide before using the machine.

## DVD (Product Library)

<b>Operation Guide (This Guide)</b>	Describes how to load paper, basic copy, print and scan operations, and troubleshooting.
<b>FAX Operation Guide</b>	Describes fax functionality.
<b>Card Authentication Kit (B) Operation Guide</b>	Describes how to authenticate to the machine using the ID card.
<b>KYOCERA COMMAND CENTER Operation Guide</b>	Describes how to access the machine from a computer via a Web browser to check and change settings.
<b>Printer Driver Operation Guide</b>	Describes how to install the printer driver and use printer functionality.
<b>Network FAX Driver Operation Guide</b>	Describes how to install and use the network fax driver in order to use network fax functionality.
<b>KM-NET for Direct Printing Operation Guide</b>	Describes how to use functionality for printing PDF files without launching Adobe Acrobat or Reader.
<b>KMnet Viewer User Guide</b>	Describes how to monitor the network printing system with KMnet Viewer.
<b>PRESCRIBE Commands Technical Reference</b>	Describes the native printer language (PRESCRIBE commands).
<b>PRESCRIBE Commands Command Reference</b>	Describes PRESCRIBE command functionality and control for each type of emulation.





---

# Contents

<b>1</b>	<b>Preface .....</b>	<b>1-1</b>
	Notice .....	1-2
	Safety Conventions in This Guide .....	1-2
	Environment .....	1-3
	Precautions for Use .....	1-3
	Legal Restriction on Copying/Scanning .....	1-8
	Legal and Safety Information .....	1-9
	Legal Information .....	1-9
	Energy Saving Control Function .....	1-12
	Automatic 2-Sided Copy Function .....	1-12
	Paper Recycling .....	1-12
	Energy Star (ENERGY STAR®) Program .....	1-12
	About this Operation Guide .....	1-13
	Conventions in This Guide .....	1-13
	Originals and Paper Sizes .....	1-15
<b>2</b>	<b>Preparation before Use .....</b>	<b>2-1</b>
	Part Names .....	2-2
	Machine .....	2-2
	Operation Panel .....	2-5
	Touch Panel .....	2-6
	Determining the Connection Method and Preparing Cables .....	2-7
	Connection Example .....	2-7
	Preparing Necessary Cables .....	2-8
	Connecting Cables .....	2-9
	Connecting LAN Cable .....	2-9
	Connecting USB Cable .....	2-10
	Connecting the Power Cable .....	2-10
	Power On/Off .....	2-11
	Power On .....	2-11
	Power Off .....	2-11
	Installing Software .....	2-13
	Installing Printer Driver .....	2-13
	Setting TWAIN Driver .....	2-17
	Setting WIA Driver .....	2-18
	Energy Saver function .....	2-19
	Sleep and Auto Sleep .....	2-19
	Machine Setup Wizard .....	2-20
	COMMAND CENTER (Settings for E-mail) .....	2-21
	Sending E-mail .....	2-22
<b>3</b>	<b>Common Operations .....</b>	<b>3-1</b>
	Loading Paper .....	3-2
	Before Loading Paper .....	3-2
	Loading Paper in the Cassettes .....	3-3
	Loading Paper in the Multi Purpose Tray .....	3-7
	Loading Originals .....	3-12
	Placing Originals on the Platen .....	3-12
	Loading Originals in the Document Processor .....	3-13
	Checking the Equipment's Serial Number .....	3-15
	Checking the Counter .....	3-16
	Login/Logout .....	3-17
	Login .....	3-17
	Logout .....	3-18

Favorites .....	3-19
Registering Favorites .....	3-19
Editing and Deleting Favorites .....	3-23
Using Favorites .....	3-25
Shortcuts .....	3-27
Registering Shortcuts .....	3-27
Editing and Deleting Shortcuts .....	3-29
Using Shortcuts .....	3-30
Quick Setup Wizard .....	3-31
Help Screen .....	3-33
Canceling Jobs .....	3-34
Using Various Functions .....	3-35
Common Functionality .....	3-36
Original Size .....	3-37
Original Orientation .....	3-38
Duplex .....	3-39
Continuous Scan .....	3-41
Paper Selection .....	3-43
Collate .....	3-44
Density .....	3-45
Scan Resolution .....	3-46
Original Image .....	3-47
Sharpness .....	3-48
Background Density Adjust .....	3-49
Zoom .....	3-50
File Format .....	3-51
Color Selection .....	3-53
Job Finish Notice .....	3-54
File Name Entry .....	3-56
Priority Override .....	3-57

## **4 Copying .....4-1**

Basic Operation .....	4-2
Copying Functions .....	4-4
Zoom .....	4-5
Duplex .....	4-7
Combine .....	4-10
EcoPrint .....	4-13

## **5 Printing .....5-1**

Printing from Applications .....	5-2
Printing Data Saved on the Printer .....	5-5
Private Print .....	5-5
Proof and Hold .....	5-7
Automatic Delete Setting for Temporary Documents .....	5-10

## **6 Sending .....6-1**

Basic Operation .....	6-2
Preparation for Sending a Document to a PC .....	6-5
Checking What to Enter for [Host Name] .....	6-5
Checking What to Enter for [Login User Name] .....	6-6
Creating a Shared Folder .....	6-7
Checking the [Path] .....	6-10
Configuring Windows Firewall (for Windows 7) .....	6-11
Specifying Destination .....	6-15
Choosing from the Address Book .....	6-15
Choosing by One Touch Key .....	6-17

Entering a New E-mail Address .....	6-18
Specifying a New PC Folder .....	6-19
Checking and Editing Destinations .....	6-22
Sending to Different Types of Destinations (Multi Sending) .....	6-23
Registering Destinations in the Address Book .....	6-24
Adding a Contact .....	6-24
Adding a Group .....	6-28
Editing and Deleting Address Book Entries .....	6-31
Adding a Destination on One Touch Key .....	6-33
Adding a Destination .....	6-33
Editing and Deleting One Touch Key .....	6-35
Sending Functions .....	6-36
Sending Size .....	6-37
File Separation .....	6-39
E-mail Subject/Body .....	6-40
FTP Encrypted TX .....	6-41
WSD Scan .....	6-42
Scanning using TWAIN .....	6-45

## **7 Document Box .....7-1**

Printing Documents Stored in Removable USB Memory .....	7-2
Saving Documents to USB Memory (Scan to USB) .....	7-5
Removing USB Memory .....	7-8
Functions for Document Box .....	7-9
Duplex .....	7-10
Encrypted PDF Password .....	7-11
JPEG/TIFF Print .....	7-12
XPS Fit to Page .....	7-13
Storing Size .....	7-14

## **8 Status / Job Cancel .....8-1**

Checking Job Status .....	8-2
Details of the Status Screens .....	8-3
Checking Job History .....	8-7
Sending the Log History .....	8-8
Setting the Destination .....	8-9
Automatic Log History Transmission .....	8-10
Manual Log History Transmission .....	8-10
Setting E-mail Subject .....	8-11
Check of Device Status .....	8-12
Checking the Remaining Amount of Toner and Paper .....	8-14

## **9 Setup, Registration, and User Management .....9-1**

System Menu .....	9-2
Operation Method .....	9-2
System Menu Settings .....	9-3
Language .....	9-5
Report .....	9-5
User Property .....	9-7
Cassette/MP Tray Settings .....	9-7
Common Settings .....	9-9
Copy .....	9-13
Send .....	9-14
Favorites/Application .....	9-15
Internet .....	9-15
Printer .....	9-16
System .....	9-17

Date/Timer .....	9-22
Adjustment/Maintenance .....	9-23
User Login Administration .....	9-25
First User Login Administration .....	9-25
User Login Settings .....	9-26
Enabling/Disabling User Login Administration .....	9-27
Adding a User .....	9-29
Local User Authorization .....	9-33
My Panel .....	9-34
Editing and Deleting Users .....	9-35
Simple Login .....	9-38
Group Authorization .....	9-44
Obtain Network User Property .....	9-48
Job Accounting .....	9-50
First Job Accounting Setup .....	9-50
Job Accounting Settings .....	9-52
Enabling/Disabling Job Accounting .....	9-53
Login/Logout .....	9-54
Adding an Account .....	9-55
Editing and Deleting Accounts .....	9-57
Restricting the Use of the Machine .....	9-59
Counting the Number of Pages Printed .....	9-61
Printing an Accounting Report .....	9-63
Job Accounting Default Setting .....	9-64
Unknown Login User Name Job .....	9-65

## **10 Troubleshooting ..... 10-1**

Toner Container Replacement .....	10-2
Waste Toner Box Replacement .....	10-4
Replacing the Maintenance Kit (MK-370) .....	10-6
Cleaning .....	10-7
Glass Platen .....	10-7
Document Processor .....	10-7
Machine .....	10-8
Solving Malfunctions .....	10-10
Responding to Error Messages .....	10-13
Clearing Paper Jams .....	10-22
Paper Jam Location .....	10-22
Multi Purpose Tray .....	10-23
Cassette .....	10-23
Duplexer .....	10-24
Inside the Machine .....	10-25
Rear Unit .....	10-26
Document Processor .....	10-26

## **11 Appendix ..... 11-1**

Optional Equipment .....	11-2
Overview of Optional Equipment .....	11-2
Paper Feeder .....	11-2
Expansion Memory .....	11-3
Card Authentication Kit .....	11-4
USB Keyboard .....	11-4
Optional Function .....	11-5
Character Entry Method .....	11-7
Entry Screens .....	11-7
Entering Characters .....	11-9
Paper .....	11-10
Basic Paper Specifications .....	11-11

---

Choosing the Appropriate Paper .....	11-11
Special Paper .....	11-14
Specifications .....	11-18
Machine .....	11-18
Printer .....	11-20
Scanner .....	11-20
Document Processor .....	11-21
Environmental Specifications .....	11-21
Glossary .....	11-22
Index .....	Index-1



# Quick Guide

Be sure to read *Precautions for Use* before using this machine.



## To make copies


Simply press the **Start** key to make copies. You can also fine-tune the copy settings by changing the paper size, adjusting the density, etc.



## To print

You can print via a network or print a PDF file directly from USB memory.


### Administrator tasks

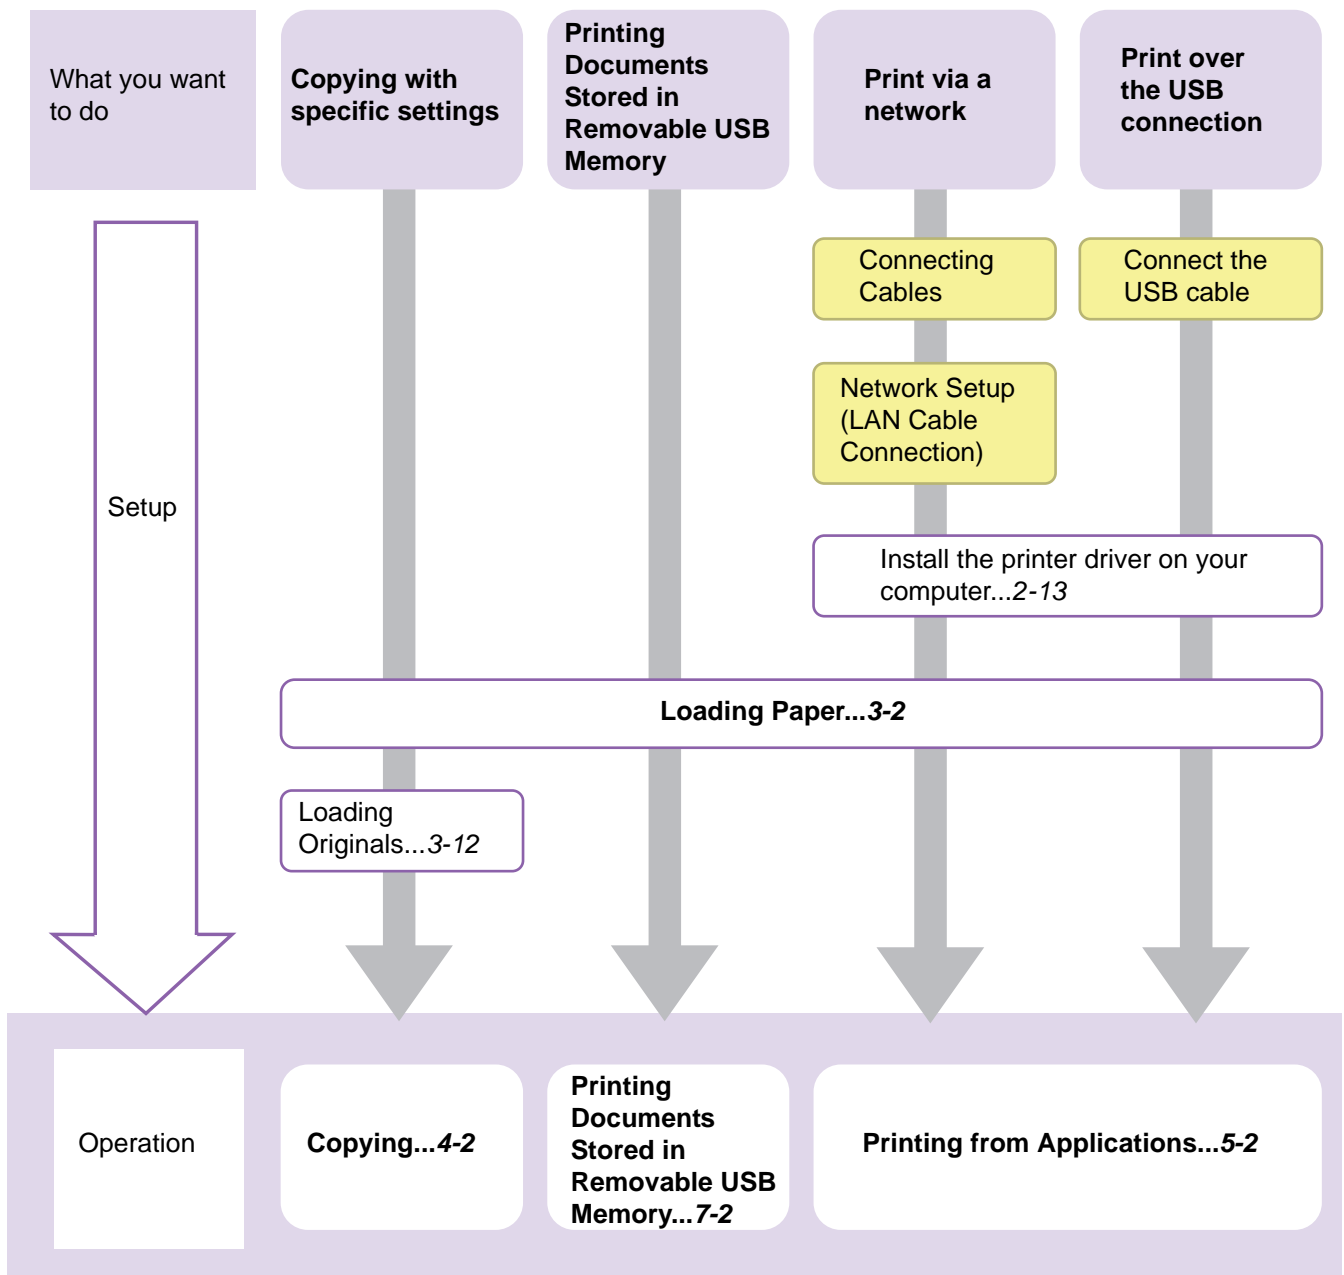



## To send documents

You can send scanned images via a network. Or, you can also store scanned images in USB memory.

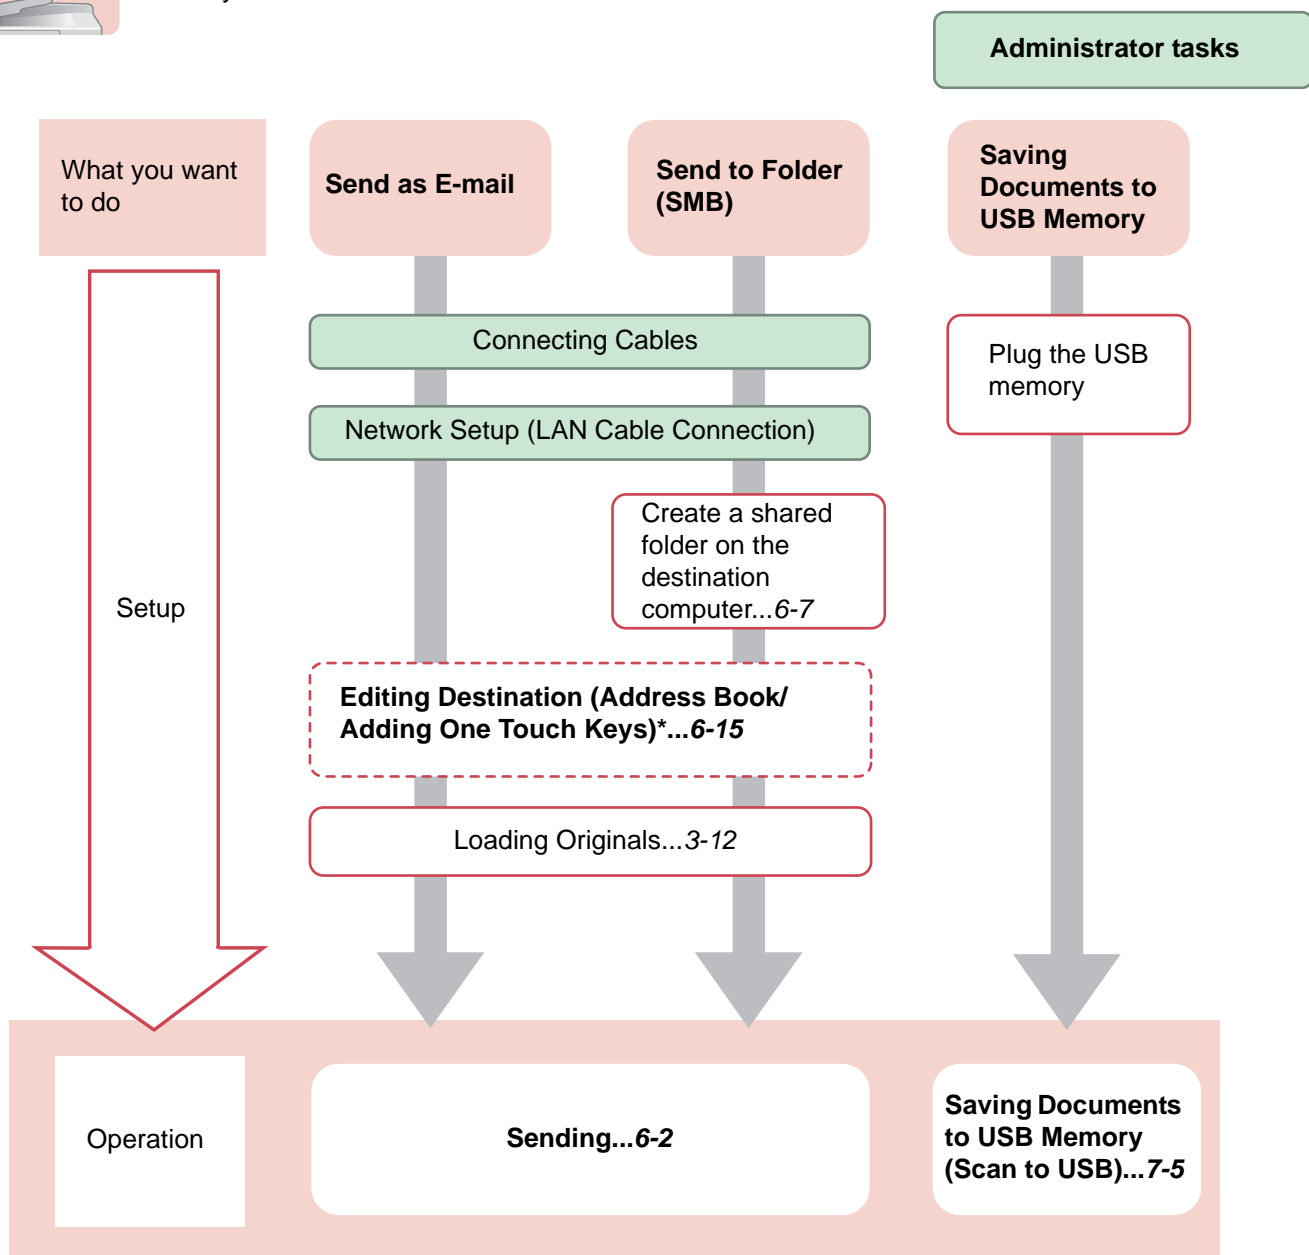

\* If the destination is not stored in the address book, you can send by entering the address directly.





## To send a FAX (only on products with the fax function installed)


As well as sending a FAX via the telephone lines, you can also send a FAX via a network.



### NOTE

For more information on setting up and sending a FAX, refer to the *FAX Operation Guide*.

### Administrator tasks

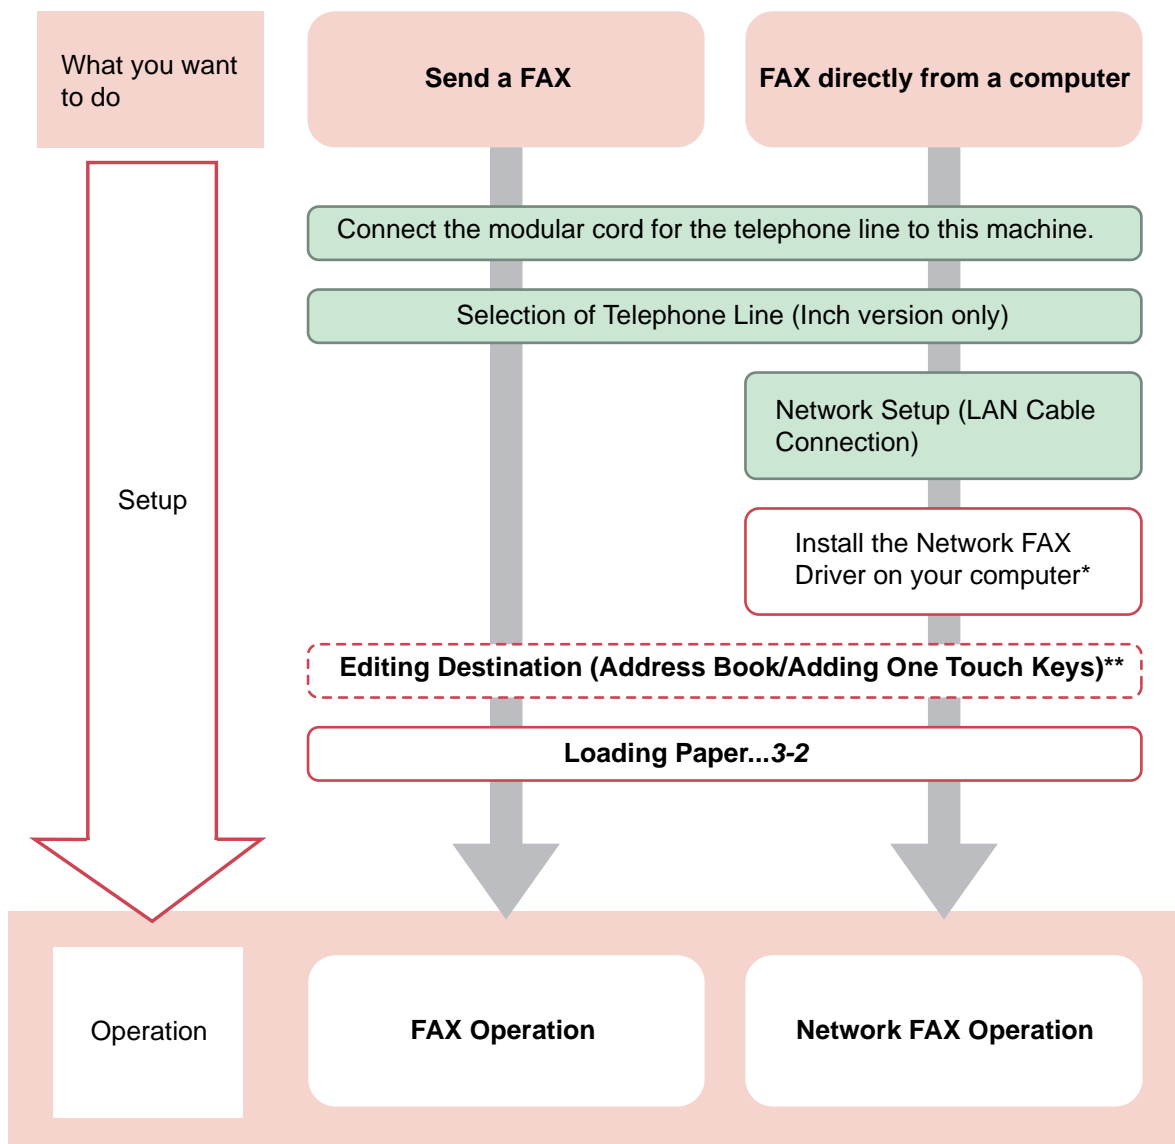

\* For more information, refer to the *Network FAX Driver Operation Guide*.

\*\* If the destination is not stored in the address book, you can send the FAX by entering the address directly.

# Menu Map

## Copy



Copies (page 4-2)	
Paper Selection (page 3-43)	
Zoom (page 4-5)	
Density (page 3-45)	
Duplex (page 4-7)	
Combine (page 4-10)	
Collate (page 3-44)	
Functions	Original Size (page 3-37)
	Original Orientation (page 3-38)
	Original Image (page 3-47)
	EcoPrint (page 4-13)
	Sharpness (page 3-48)
	Background Density Adj. (page 3-49)
	Continuous Scan (page 3-41)
	Job Finish Notice (page 3-54)
	File Name Entry (page 3-56)
	Priority Override (page 3-57)
Add/Edit Shortcut (page 3-27)	

# Send



One Touch Key (page 6-17)	
Address Book (page 6-15)	
Ext. Address Book (refer to <i>KYOCERA COMMAND CENTER Operation Guide</i> )	
E-mail (page 6-18)	
Folder (page 6-19)	
FAX (refer to <i>Fax Operation Guide</i> )	
WSD Scan (page 6-42)	
Functions	File Format (page 3-51)
	Original Size (page 3-37)
	Original Orientation (page 3-38)
	Duplex (page 3-39)
	Sending Size (page 6-37)
	File Separation (page 6-39)
	Scan Resolution (page 3-46)
	Density (page 3-45)
	Color Selection (page 3-53)
	Original Image (page 3-47)
	Sharpness (page 3-48)
	Background Density Adj. (page 3-49)
	FAX TX Resolution (refer to <i>Fax Operation Guide</i> )
	Zoom (page 3-50)
	Continuous Scan (page 3-41)
	File Name Entry (page 3-56)
	E-mail Subject/Body (page 6-40)
	Job Finish Notice (page 3-54)
	FTP Encrypted TX (page 6-41)
	FAX Delayed Transmission (refer to <i>Fax Operation Guide</i> )
FAX Direct Transmission (refer to <i>Fax Operation Guide</i> )	
FAX Polling RX (refer to <i>Fax Operation Guide</i> )	
Add/Edit Shortcut (page 3-27)	

Document  
Box



Job Box (page 5-5)				
Removable Memory	Menu	Store File	File Format (page 3-51)	
			Duplex (page 3-39)	
			Scan Resolution (page 3-46)	
			Density (page 3-45)	
			File Name Entry (page 3-56)	
			Functions	Original Size (page 3-37)
				Original Orientation (page 3-38)
				Storing Size (page 7-14)
				Color Selection (page 3-53)
				Original Image (page 3-47)
				Sharpness (page 3-48)
				Background Density Adj. (page 3-49)
			Zoom (page 3-50)	
	Continuous Scan (page 3-41)			
	Job Finish Notice (page 3-54)			
	Add/Edit Shortcut (page 3-27)			
	Print	Copies (page 7-3)	Paper Selection (page 3-43)	
			Collate (page 3-44)	
			Duplex (page 7-10)	
			Functions	Job Finish Notice (page 3-54)
Priority Override (page 3-57)				
Encrypted PDF Password (page 7-11)				
JPEG/TIFF Print (page 7-12)				
XPS Fit to Page (page 7-13)				
Add/Edit Shortcut (page 3-27)				
Sub Address Box (refer to <i>Fax Operation Guide</i> )				
Polling Box (refer to <i>Fax Operation Guide</i> )				

---

Status/  
Job Cancel



Print Job Status (page 8-3)
Send Job Status (page 8-4)
Store Job Status (page 8-5)
Scheduled Job (page 8-6)
Print Job Log (page 8-7)
Send Job Log (page 8-7)
Store Job Log (page 8-7)
Scanner (page 8-12)
Printer (page 8-13)
FAX (page 8-13)
Toner Status (page 8-14)
Paper Status (page 8-14)
Removable Memory (page 8-13)

◆ System Menu / Counter



Quick Setup Wizard (page 3-31)	FAX Setup (page 3-31)	
	Paper Setup (page 3-31)	
	Energy Saver Setup (page 3-31)	
Language (page 9-5)		
Report (page 9-5)	Report Print (page 9-5)	Status Page (page 9-5)
		Font List (page 9-5)
		Network Status (page 9-5)
		Service Status (page 9-6)
		Accounting Report (page 9-6)
		Sub Address Box List (refer to <i>Fax Operation Guide</i> )
		FAX List (Index) (refer to <i>Fax Operation Guide</i> )
		FAX List (No.) (refer to <i>Fax Operation Guide</i> )
		Outgoing FAX Report (refer to <i>Fax Operation Guide</i> )
		Incoming FAX Report (refer to <i>Fax Operation Guide</i> )
	Admin Report Settings (refer to <i>Fax Operation Guide</i> )	
	Result Report Setting (page 9-6)	Send Result Report (page 9-6)
		RX Result Report (refer to <i>Fax Operation Guide</i> )
		Job Finish Notice Setting (page 9-6)
	Sending Log History (page 8-8)	Send Log History (page 8-10)
		Auto Sending (page 8-10)
		Destination (page 8-9)
		Job Log Subject (page 8-11)
	Counter	Printed Pages (page 3-16)
Scanned Pages (page 3-16)		
User Property (page 9-7)	User Name (page 9-7)	
	Login User Name (page 9-7)	
	Login Password (page 9-7)	
	Access Level (page 9-7)	
	Account Name (page 9-7)	
	E-mail Address (page 9-7)	
	Simple Login (page 9-7)	
	My Panel (page 9-7)	
	Group Name (page 9-7)	
Group ID (page 9-7)		

Cassette/MP Tray Settings (page 9-7)	Cassette 1 (to 4) (page 9-7)	Paper Size (page 9-7)	
		Media Type (page 9-7)	
	Multi Purpose Tray (page 9-8)	Paper Size (page 9-8)	
		Media Type (page 9-8)	
Common Settings (page 9-9)	Default Screen (page 9-9)		
	Sound (page 9-9)	Buzzer (page 9-9)	Volume (page 9-9)
			Key Confirmation (page 9-9)
			Job Finish (page 9-9)
			Ready (page 9-9)
			Warning (page 9-9)
			Key Confirmation (USB Keyboard) (page 9-9)
		FAX Speaker Volume (refer to <i>Fax Operation Guide</i> )	
		FAX Monitor Volume (refer to <i>Fax Operation Guide</i> )	
	Original Settings (page 9-9)	Custom Original Size (page 9-9)	
		Default Original Size (page 9-9)	
	Paper Settings (page 9-10)	Custom Paper Size (page 9-10)	
		Media Type Settings (page 9-10)	
		Default Paper Source (page 9-10)	
		Paper Selection (page 9-10)	
		Media for Auto (B & W) (page 9-10)	
Special Paper Action (page 9-10)			

	Function Defaults (page 9-11)	File Format (page 9-11)		
		Original Orientation (page 9-11)		
		Collate (page 9-11)		
		File Separation (page 9-11)		
		Scan Resolution (page 9-11)		
		Color Selection (page 9-11)		
		Original Image (page 9-11)		
		Background Density Adj. (page 9-11)		
		EcoPrint (page 9-11)		
		FAX TX Resolution (refer to <i>Fax Operation Guide</i> )		
		Zoom (page 9-11)		
		Continuous Scan (page 9-12)		
		File Name Entry (page 9-12)		
		E-mail Subject/Body (page 9-12)		
		FTP Encrypted TX (page 9-12)		
		JPEG/TIFF Print (page 9-12)		
		XPS Fit to Page (page 9-12)		
		Detail Settings (page 9-12)	Image Quality (page 9-12)	
			PDF/A (page 9-12)	
	Preset Limit (page 9-12)			
	Error Handling (page 9-13)	Duplexing Error (page 9-13)		
		Paper Mismatch Error (page 9-13)		
Measurement (page 9-13)				
Keyboard Layout (page 9-13)				
USB Keyboard Type (page 9-13)				
Copy (page 9-13)	Auto Paper Selection (page 9-13)			
	Auto % Priority (page 9-13)			
Send (page 9-14)	Dest. Check before Send (page 9-14)			
	Entry Check for New Dest. (page 9-14)			
	Send and Forward (page 9-14)	Forward (page 9-14)		
		Destination (page 9-14)		
	Color TIFF Compression (page 9-14)			
Default Screen (page 9-14)				
Document Box	Sub Address Box (refer to <i>Fax Operation Guide</i> )			
	Job Box (page 5-5)	Quick Copy Job Retention (page 5-7)		
		Deletion of Job Retention (page 5-10)		
Polling Box (refer to <i>Fax Operation Guide</i> )				
FAX (refer to <i>Fax Operation Guide</i> )				



Favorites/Application (page 9-15)	Default Screen (page 9-15)			
	Application (page 9-15)			
Internet (page 9-15)	Proxy (page 9-15)			
Address Book/One Touch	Address Book (page 6-24)			
	One Touch Key (page 6-33)			
	Address Book Defaults	Sort		
	Print List (refer to <i>Fax Operation Guide</i> )			
User Login/Job Accounting	User Login Settings (page 9-25)	User Login (page 9-27)		
		Local User List (page 9-29)		
		Simple login settings (page 9-38)	Simple Login (page 9-38)	
			Simple Login Setup (page 9-38)	
		Local User Authorization (page 9-33)		
		Group Authorization Set. (page 9-44)	Group Authorization (page 9-44)	
			Group List (page 9-44)	
	Obtain NW User Property (page 9-48)			
	Job Accounting Settings (page 9-50)	Job Accounting (page 9-53)		
		Print Accounting Report (page 9-63)		
		Total Job Accounting (page 9-61)	Printed Pages (page 9-61)	
			Scanned Pages (page 9-61)	
			FAX TX Pages (page 9-61)	
			FAX TX Time (page 9-61)	
			Counter Reset (page 9-61)	
		Each Job Accounting (page 9-61)		
		Accounting List (page 9-55)		
		Default Setting (page 9-64)	Apply Limit (page 9-64)	
	Copier/Printer Count (page 9-64)			
	Default Counter Limit (page 9-64)			
	Unknown ID Job (page 9-65)			

---

Printer (page 9-16)	Emulation (page 9-16)
	EcoPrint (page 9-16)
	Override A4/Letter (page 9-16)
	Duplex (page 9-16)
	Copies (page 9-16)
	Orientation (page 9-16)
	Wide A4 (page 9-16)
	Form Feed TimeOut (page 9-16)
	LF Action (page 9-16)
	CR Action (page 9-16)
	Paper Feed Mode (page 9-16)
	Resolution (page 9-17)
	KIR (page 9-17)

System (page 9-17)	Network (page 9-17)	Host Name (page 9-17)	
		TCP/IP Settings (page 9-17)	TCP/IP (page 9-17)
			IPv4 Settings (page 9-17)
			IPv6 Settings (page 9-18)
			Protocol Detail (page 9-19)
		Netware (page 9-20)	
		AppleTalk (page 9-20)	
		WSD Scan (page 9-20)	
		WSD Print (page 9-20)	
		Enhanced WSD (page 9-20)	
		Enhanced WSD (SSL) (page 9-20)	
		IPSec (page 9-21)	
		Secure Protocol (page 9-21)	SSL (page 9-21)
			IPP Security (page 9-21)
			HTTP Security (page 9-21)
	LDAP Security (Ext. Address Book) (page 9-21)		
	LDAP Security (User Property) (page 9-21)		
	LAN Interface (page 9-21)		
	Interface Block Setting (page 9-21)	USB Host (page 9-21)	
		USB Device (page 9-21)	
		Optional Interface (page 9-21)	
	Security Level (page 9-4)		
	Restart (page 9-4)		
RAM Disk Setting (page 9-22)			
Optional Memory (page 9-22)			
Optional Function (page 11-5)			
Date/Timer (page 9-22)	Date/Time (page 9-22)		
	Date Format (page 9-22)		
	Time Zone (page 9-22)		
	Auto Panel Reset (page 9-22)		
	Auto Error Clear (page 9-22)		
	Panel Reset Timer (page 9-22)		
	Sleep Timer (page 9-22)		
	Error Clear Timer (page 9-22)		
	Unusable Time (refer to <i>Fax Operation Guide</i> )		

Adjustment/ Maintenance (page 9-23)	Density Adjustment (page 9-23)	Copy (page 9-23)		
		Send/Box (page 9-23)		
	Background Density Adj. (page 9-23)	Copy (Auto) (page 9-23)		
		Send/Box (Auto) (page 9-23)		
	Toner Save Level (EcoPrint) (page 9-23)	Copy (page 9-23)		
		Printer (page 9-23)		
	Print Density (page 9-23)			
	Auto Color Correction (page 9-23)			
	Correcting Black Line (page 9-23)			
	Display Brightness (page 9-23)			
	Drum Refresh (page 9-24)			
	Auto Drum Refresh (page 9-24)			
	Service Settings	Developer		
		FAX Country Code		
		FAX Call Settings (Europe Only)	Exchange Selection (refer to <i>Fax Operation Guide</i> )	
PBX Setting				
Dial No. to PSTN (refer to <i>Fax Operation Guide</i> )				

# 1 Preface


This chapter explains the following topics:


Notice .....	1-2
Safety Conventions in This Guide .....	1-2
Environment .....	1-3
Precautions for Use .....	1-3
Legal and Safety Information .....	1-9
Legal Information .....	1-9
Energy Saving Control Function .....	1-12
Automatic 2-Sided Copy Function .....	1-12
Paper Recycling .....	1-12
Energy Star (ENERGY STAR®) Program .....	1-12
About this Operation Guide .....	1-13
Conventions in This Guide .....	1-13
Originals and Paper Sizes .....	1-15

# Notice

## Safety Conventions in This Guide


The sections of this guide and parts of the machine marked with symbols are safety warnings meant to protect the user, other individuals and surrounding objects, and ensure correct and safe usage of the machine. The symbols and their meanings are indicated below.


 **WARNING:** Indicates that serious injury or even death may result from insufficient attention to or incorrect compliance with the related points.

 **CAUTION:** Indicates that personal injury or mechanical damage may result from insufficient attention to or incorrect compliance with the related points.


## Symbols


The  $\triangle$  symbol indicates that the related section includes safety warnings. Specific points of attention are indicated inside the symbol.

 ... [General warning]


 ... [Warning of high temperature]

The  $\otimes$  symbol indicates that the related section includes information on prohibited actions. Specifics of the prohibited action are indicated inside the symbol.


 ... [Warning of prohibited action]

 ... [Disassembly prohibited]

The  $\bullet$  symbol indicates that the related section includes information on actions which must be performed. Specifics of the required action are indicated inside the symbol.

 ... [Alert of required action]

 ... [Remove the power plug from the outlet]

 ... [Always connect the machine to an outlet with a ground connection]

Please contact your service representative to order a replacement if the safety warnings in this Operation Guide are illegible or if the guide itself is missing (fee required).



### NOTE

An original which resembles a bank note closely may not be copied properly in some rare cases because this machine is equipped with a counterfeiting prevention function.

## Environment

The service environmental conditions are as follows:

- Temperature: 50 to 90.5 °F (10 to 32.5 °C)
- Humidity: 15 to 80 %

However, adverse environmental conditions may affect the image quality. It is recommended to use the machine at a temperature: around 60.8 to 80.6 °F or less (16 to 27 °C), humidity: around 36 to 65%. In addition, Avoid the following locations when selecting a site for the machine.

- Avoid locations near a window or with exposure to direct sunlight.
- Avoid locations with vibrations.
- Avoid locations with drastic temperature fluctuations.
- Avoid locations with direct exposure to hot or cold air.
- Avoid poorly ventilated locations.

If the floor is delicate against casters, when this machine is moved after installation, the floor material may be damaged.

During copying, some ozone is released, but the amount does not cause any ill effect to one's health. If, however, the machine is used over a long period of time in a poorly ventilated room or when making an extremely large number of copies, the smell may become unpleasant. To maintain the appropriate environment for copy work, it is suggested that the room be properly ventilated.

## Precautions for Use

### Cautions when handling consumables

#### CAUTION

Do not attempt to incinerate the toner container or the waste toner box. Dangerous sparks may cause burns.

Keep the toner container and the waste toner box out of the reach of children.

If toner happens to spill from the toner container or the waste toner box, avoid inhalation and ingestion, as well as contact with your eyes and skin.

- If you do happen to inhale toner, move to a place with fresh air and gargle thoroughly with a large amount of water. If coughing develops, contact a physician.
- If you do happen to ingest toner, rinse your mouth with water and drink 1 or 2 cups of water to dilute the contents of your stomach. If necessary, contact a physician.
- If you do happen to get toner in your eyes, flush them thoroughly with water. If there is any remaining tenderness, contact a physician.
- If toner does happen to get on your skin, wash with soap and water.

Do not attempt to force open or destroy the toner container or the waste toner box.

### Other precautions

Return the exhausted toner container and waste toner box to your dealer or service representative. The collected toner container and waste toner box will be recycled or disposed in accordance with the relevant regulations.

Store the machine while avoiding exposure to direct sunlight.

Store the machine in a place where the temperature stays below 40 °C while avoiding sharp changes of temperature and humidity.

If the machine will not be used for an extended period of time, remove the paper from the cassette and the Multi Purpose (MP) Tray, return it to its original package and reseal it.

## Laser Safety (Europe)

Laser radiation could be hazardous to the human body. For this reason, laser radiation emitted inside this machine is hermetically sealed within the protective housing and external cover. In the normal operation of the product by user, no radiation can leak from the machine.

This machine is classified as Class 1 laser product under IEC/EN 60825-1:2007.

**Caution:** Performance of procedures other than those specified in this manual may result in hazardous radiation exposure.

These labels are attached to the laser scanner unit inside the machine and are not in a user access area.



The label shown below is attached on the left side of the machine.






# SAFETY OF LASER BEAM (USA)

## 1. Safety of laser beam

This machine has been certified by the manufacturer to Class 1 level under the radiation performance standards established by the U.S.DHHS (Department of Health and Human Services) in 1968. This indicates that the product is safe to use during normal operation and maintenance. The laser optical system, enclosed in a protective housing and sealed within the external covers, never permits the laser beam to escape.

## 2. The CDRH Act

A laser-product-related act was implemented on Aug. 2, 1976, by the Center for Devices and Radiological Health (CDRH) of the U.S. Food and Drug Administration (FDA). This act prohibits the sale of laser products in the U.S. without certification, and applies to laser products manufactured after Aug. 1, 1976. The label shown below indicates compliance with the CDRH regulations and must be attached to laser products marketed in the United States. On this machine, the label is on the right.

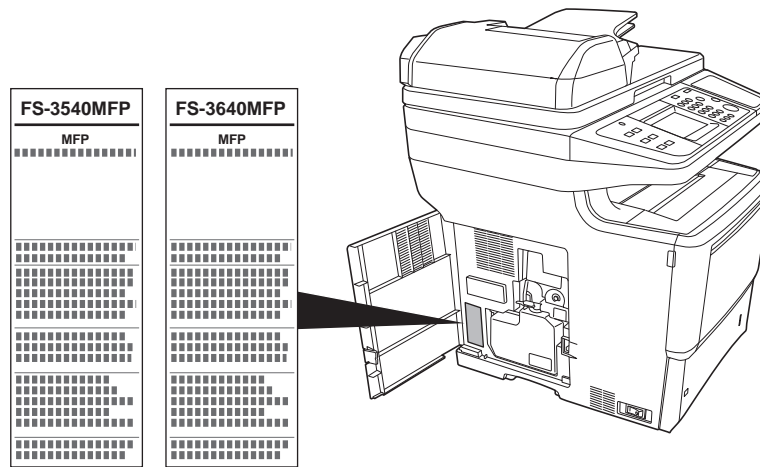

## 3. Optical unit

When checking the optical unit, avoid direct exposure to the laser beam, which is invisible. Shown at below is the label located on the cover of the optical unit.



## 4. Maintenance

For safety of the service personnel, follow the maintenance instructions in the other section of this manual.

## 5. Safety switch

The power to the laser unit is cut off when the front cover is opened.

## Safety Instructions Regarding the Disconnection of Power

**Caution:** The power plug is the main isolation device! Other switches on the equipment are only functional switches and are not suitable for isolating the equipment from the power source.

**Attention:** Le débranchement de la fiche secteur est le seul moyen de mettre l'appareil hors tension. Les interrupteurs sur l'appareil ne sont que des interrupteurs de fonctionnement: ils ne mettent pas l'appareil hors tension.

### WARNING

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- The use of a non-shielded interface cable with the referenced device is prohibited.

CAUTION — The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device contains the module, which complies with Part 15 of FCC Rules and RSS-Gen of IC Rules.

Operation is subject to the following two conditions; (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

## Radio Tag Technology

In some countries the radio tag technology used in this equipment to identify the toner container may be subject to authorization and the use of this equipment may consequently be restricted.

## Other precautions (for users in California, the United States)

This product contains a CR Coin Lithium Battery which contains Perchlorate Material - special handling may apply. See [www.dtsc.ca.gov/hazardouswaste/perchlorate](http://www.dtsc.ca.gov/hazardouswaste/perchlorate).

## Warranty (the United States)

### **FS-3540MFP/FS-3640MFP MULTIFUNCTIONAL PRODUCT LIMITED WARRANTY**

Kyocera Mita America, Inc. and Kyocera Mita Canada, Ltd. (both referred to as "Kyocera") warrant the Customer's new Multifunctional Product (referred to as "MFP"), and the new accessories installed with the initial installation of the MFP, against any defects in material and workmanship for a period of one (1) year, or 300,000 copies/prints from date of installation, whichever first occurs. In the event the MFP or an accessory is found to be defective within the warranty period, Kyocera's only obligation and the Customer's exclusive remedy shall be replacement of any defective parts. Kyocera shall have no obligation to furnish labor.

This warranty is valid only for the original retail purchaser (referred to as the "Customer") of a new Kyocera MFP in the United States of America or Canada, based upon the country of purchase.

In order to obtain performance of this warranty, the Customer must immediately notify the Authorized Kyocera Dealer from whom the product was purchased. If the Kyocera Dealer is not able to provide service, write to Kyocera at the address below for the name and address of the Authorized Kyocera Dealer in your area or check Kyocera's website at [www.kyoceramita.com/us](http://www.kyoceramita.com/us).

This warranty does not cover MFP's or accessories, which: (a) have become damaged due to operator negligence, misuse, accidents, improper storage or unusual physical or electrical stress, (b) have used parts or supplies which are not genuine Kyocera brand parts or supplies, (c) have been installed or serviced by a technician not employed by Kyocera or an Authorized Kyocera Dealer, or (d) have had the serial number modified, altered, or removed.

This warranty does not cover Maintenance Kits or the components of Maintenance Kits, which consist of the developing unit, the drum unit, the transfer roller, the fixing unit and the feed roller unit, which have a separate warranty.

This warranty gives the Customer specific legal rights. The Customer may also have other rights, which vary from state to state, or province to province. Neither the seller, nor any other person, is authorized to extend the time period or expand this warranty on behalf of Kyocera.

THIS WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES AND CONDITIONS, EXPRESS OR IMPLIED, AND KYOCERA SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SHALL NOT EXTEND TO, AND KYOCERA SHALL NOT BE LIABLE FOR, ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY ARISE OUT OF THE USE OF, OR INABILITY TO USE, THE MFP.

#### **KYOCERA MITA AMERICA, INC.**

225 Sand Road  
Fairfield, New Jersey  
07004-0008, USA

#### **KYOCERA MITA CANADA, LTD.**

6120 Kestrel Road  
Mississauga, Ontario L5T 1S8  
Canada

## Legal Restriction on Copying/Scanning

It may be prohibited to copy/scan copyrighted material without permission of the copyright owner.

Copying/Scanning the following items is prohibited and may be penalized by law. It may not be limited to these items. Do not knowingly copy/scan the items that are not to be copied/scanned.

- Paper money
- Bank note
- Securities
- Stamp
- Passport
- Certificate

Local laws and regulations may prohibit or restrict copying/scanning of other items not mentioned above.

# Legal and Safety Information

## Legal Information

Copying or other reproduction of all or part of this guide without the prior written consent of Kyocera Mita Corporation is prohibited.

### Regarding Trade Names

- PRESCRIBE and ECOSYS are trademarks of Kyocera Corporation.
- KPDL is a trademark of Kyocera Corporation.
- Microsoft, MS-DOS and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and/or other countries.
- PCL is a trademark of Hewlett-Packard Company.
- Adobe Acrobat, Adobe Reader and PostScript are trademarks of Adobe Systems, Incorporated.
- Ethernet is a registered trademark of Xerox Corporation.
- Novell and NetWare are registered trademarks of Novell, Inc.
- IBM and IBM PC/AT are trademarks of International Business Machines Corporation.
- Power PC is a trademark of IBM in the U.S.A. and/or other countries.
- AppleTalk, Bonjour, Macintosh, and Mac OS are trademarks of Apple Inc., registered in the U.S. and other countries.
- All European language fonts installed in this machine are used under licensing agreement with Monotype Imaging Inc.
- Helvetica, Palatino and Times are registered trademarks of Linotype GmbH.
- ITC Avant Garde Gothic, ITC Bookman, ITC ZapfChancery and ITC ZapfDingbats are registered trademarks of International Typeface Corporation.
- UFST™ MicroType® fonts by Monotype Imaging Inc. are installed in this machine.
- This machine contains the NF module developed by ACCESS Co., Ltd.
- This machine contains the software having modules developed by Independent JPEG Group.
- ThinPrint is a trademark of ThinPrint GmbH in Germany and other countries.

All other brands and product names are registered trademarks or trademarks designations ™ and ® will not be used in this Operation Guide.

### GPL/LGPL

This product contains GPL (<http://www.gnu.org/licenses/gpl.html>) and/or LGPL (<http://www.gnu.org/licenses/lgpl.html>) software as part of its firmware. You can get the source code, and you are permitted to copy, redistribute and modify it under the terms of GPL/LGPL. For further information including availability of the source code, visit <http://www.kyoceramita.com/gpl/>.

### Open SSL License

**Copyright (c) 1998-2006 The OpenSSL Project. All rights reserved.**

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. All advertising materials mentioning features or use of this software must display the following acknowledgment:  
“This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit.  
(<http://www.openssl.org/>)”
4. The names “OpenSSL Toolkit” and “OpenSSL Project” must not be used to endorse or promote products derived from this software without prior written permission.  
For written permission, please contact [openssl-core@openssl.org](mailto:openssl-core@openssl.org).
5. Products derived from this software may not be called “OpenSSL” nor may “OpenSSL” appear in their names without prior written permission of the OpenSSL Project.
6. Redistributions of any form whatsoever must retain the following acknowledgment: “This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)”

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT “AS IS” AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## Original SSLeay License

**Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com) All rights reserved.**

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com). The implementation was written so as to conform with Netscapes SSL.

This library is free for commercial and non-commercial use as long as the following conditions are aheared to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com).

Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed.

If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used.

This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:  
“This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)”  
The word ‘cryptographic’ can be left out if the rouines from the library being used are not cryptographic related :-).
4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement: “This product includes software written by Tim Hudson (tjh@cryptsoft.com)”

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The licence and distribution terms for any publically available version or derivative of this code cannot be changed. i.e. this code cannot simply be copied and put under another distribution licence [including the GNU Public Licence.]

## Monotype Imaging License Agreement

- 1 *Software* shall mean the digitally encoded, machine readable, scalable outline data as encoded in a special format as well as the UFST Software.
- 2 You agree to accept a non-exclusive license to use the Software to reproduce and display weights, styles and versions of letters, numerals, characters and symbols (*Typefaces*) solely for your own customary business or personal purposes at the address stated on the registration card you return to Monotype Imaging. Under the terms of this License Agreement, you have the right to use the Fonts on up to three printers. If you need to have access to the fonts on more than three printers, you need to acquire a multiuser license agreement which can be obtained from Monotype Imaging. Monotype Imaging retains all rights, title and interest to the Software and Typefaces and no rights are granted to you other than a License to use the Software on the terms expressly set forth in this Agreement.
- 3 To protect proprietary rights of Monotype Imaging, you agree to maintain the Software and other proprietary information concerning the Typefaces in strict confidence and to establish reasonable procedures regulating access to and use of the Software and Typefaces.
- 4 You agree not to duplicate or copy the Software or Typefaces, except that you may make one backup copy. You agree that any such copy shall contain the same proprietary notices as those appearing on the original.
- 5 This License shall continue until the last use of the Software and Typefaces, unless sooner terminated. This License may be terminated by Monotype Imaging if you fail to comply with the terms of this License and such failure is not remedied within thirty (30) days after notice from Monotype Imaging. When this License expires or is terminated, you shall either return to Monotype Imaging or destroy all copies of the Software and Typefaces and documentation as requested.
- 6 You agree that you will not modify, alter, disassemble, decrypt, reverse engineer or decompile the Software.
- 7 Monotype Imaging warrants that for ninety (90) days after delivery, the Software will perform in accordance with Monotype Imaging-published specifications, and the diskette will be free from defects in material and workmanship. Monotype Imaging does not warrant that the Software is free from all bugs, errors and omissions.  
  
The parties agree that all other warranties, expressed or implied, including warranties of fitness for a particular purpose and merchantability, are excluded.
- 8 Your exclusive remedy and the sole liability of Monotype Imaging in connection with the Software and Typefaces is repair or replacement of defective parts, upon their return to Monotype Imaging.  
  
In no event will Monotype Imaging be liable for lost profits, lost data, or any other incidental or consequential damages, or any damages caused by abuse or misapplication of the Software and Typefaces.
- 9 Massachusetts U.S.A. law governs this Agreement.
- 10 You shall not sublicense, sell, lease, or otherwise transfer the Software and/or Typefaces without the prior written consent of Monotype Imaging.
- 11 Use, duplication or disclosure by the Government is subject to restrictions as set forth in the Rights in Technical Data and Computer Software clause at FAR 252-227-7013, subdivision (b)(3)(ii) or subparagraph (c)(1)(ii), as appropriate. Further use, duplication or disclosure is subject to restrictions applicable to restricted rights software as set forth in FAR 52.227-19 (c)(2).
- 12 You acknowledge that you have read this Agreement, understand it, and agree to be bound by its terms and conditions. Neither party shall be bound by any statement or representation not contained in this Agreement. No change in this Agreement is effective unless written and signed by properly authorized representatives of each party. By opening this diskette package, you agree to accept the terms and conditions of this Agreement.

## Energy Saving Control Function

The device comes equipped with energy-saving functionality for automatically transitioning to Sleep to minimize power consumption after a certain amount of time elapses since the device was last used.

### Sleep

The device automatically enters Sleep when 1 minute have passed since the device was last used. The amount of time of no activity that must pass before Sleep is activated may be lengthened. For more information refer to *Sleep and Auto Sleep* on page 2-19.

## Automatic 2-Sided Copy Function

This device includes 2-sided copying as a standard function. For example, by copying two 1-sided originals onto a single sheet of paper as a 2-sided copy, it is possible to lower the amount of paper used. For more information refer to *Duplex* on page 4-7.

## Paper Recycling

This device supports the recycled paper which reduces the load on the environment. Your sales or service representative can provide information about recommended paper types.

## Energy Star (ENERGY STAR®) Program



We have determined as a company participating in ENERGY STAR that this product has earned the ENERGY STAR.






# About this Operation Guide

This Operation Guide contains the following chapters.


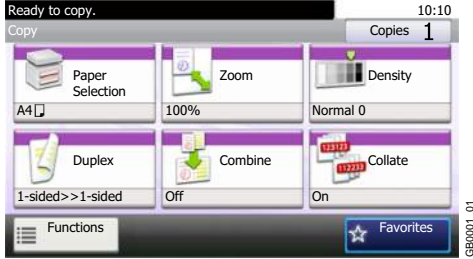



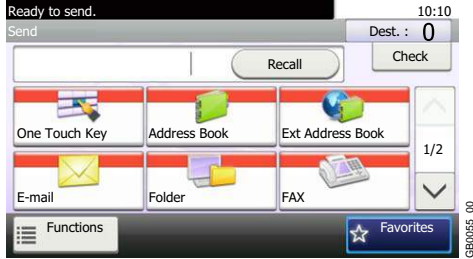


Chapter		Contents
1	<b>Preface</b>	Includes information about operating precautions, trademarks, and this manual.
2	<b>Preparation before Use</b>	Provides information about part names, connecting cables, and setting up and configuring the machine.
3	<b>Common Operations</b>	Explains overall machine operation, including loading paper and originals and logging in and out.
4	<b>Copying</b>	Describes the functions you can use when copying.
5	<b>Printing</b>	Provides information about functionality that is available when using the machine as a printer.
6	<b>Sending</b>	Describes the functions you can use when sending originals.
7	<b>Document Box</b>	Provides a basic guide to using document boxes.
8	<b>Status / Job Cancel</b>	Explains how to check the job status and job history and how to cancel jobs being printed or waiting to print. Also explains how to check the remaining paper and device status and how to cancel fax transmission.
9	<b>Setup, Registration, and User Management</b>	Explains system menu functionality related to overall machine operation, job accounting, and user management.
10	<b>Troubleshooting</b>	Explains how to respond to error indications such as when the machine runs out of toner and problems such as paper jams.
11	<b>Appendix</b>	Explains how to enter characters, and lists the machine specifications. Introduces the convenient optional equipment available for this machine. Provides information on media types and paper sizes. Also includes a glossary of terms.

## Conventions in This Guide

The following conventions are used depending on the nature of the description.


Convention	Description	Example
<b>Bold</b>	Indicates the operation panel keys or a computer screen.	Press the <b>Start</b> key.
[Regular]	Indicates the touch panel keys.	Press [OK].
<i>Italic</i>	Indicates a message displayed on the touch panel.	<i>Ready to copy</i> is displayed.
	Used to emphasize a key word, phrase or references to additional information.	For more information refer to <i>Sleep and Auto Sleep</i> on page 2-19.
<b>NOTE</b>	Indicates supplemental information or operations for reference.	 <b>NOTE</b>
<b>IMPORTANT</b>	Indicates items that are required or prohibited so as to avoid problems.	 <b>IMPORTANT</b>
<b>CAUTION</b>	Indicates what must be observed to prevent injury or machine breakdown and how to deal with it.	 <b>CAUTION</b>

Job types for which each function can be set are shown with icons.

Icon	Description	Icon	Description
	<p>This function can be set while copying a document.</p>  <p><i>Copy Screen</i></p>		<p>This function can be set while printing from USB memory.</p>  <p><i>Print Screen</i></p>
	<p>This function can be set while sending a document.</p>  <p><i>Send Screen</i></p>		<p>This function can be set while saving a file to USB memory.</p>  <p><i>Store File Screen</i></p>

In this guide, steps where touch panel keys are used are outlined in red.

E.g.) Select [Zoom].

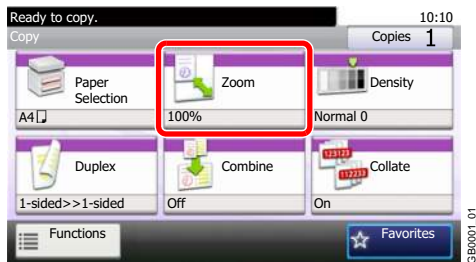

Procedures consisting of a series of operation panel and/or touch panel operations are numbered as follows:

E.g.) Select [Functions] and then [EcoPrint].





## Originals and Paper Sizes

This section explains the notation used in this guide when referring to sizes of originals or paper sizes.

### Icons on the Touch Panel

The following icons are used to indicate originals and paper placement directions on the touch panel.

Originals	Paper
 <p data-bbox="568 589 775 613">Horizontal direction</p>	 <p data-bbox="1137 589 1315 613">Vertical direction</p>




# 2 Preparation before Use

This chapter explains the following topics:


Part Names .....	2-2
Machine .....	2-2
Operation Panel .....	2-5
Touch Panel .....	2-6
Determining the Connection Method and Preparing Cables .....	2-7
Connection Example .....	2-7
Preparing Necessary Cables .....	2-8
Connecting Cables .....	2-9
Connecting LAN Cable .....	2-9
Connecting USB Cable .....	2-10
Connecting the Power Cable .....	2-10
Power On/Off .....	2-11
Power On .....	2-11
Power Off .....	2-11
Installing Software .....	2-13
Installing Printer Driver .....	2-13
Setting TWAIN Driver .....	2-17
Setting WIA Driver .....	2-18
Energy Saver function .....	2-19
Sleep and Auto Sleep .....	2-19
Machine Setup Wizard .....	2-20
COMMAND CENTER (Settings for E-mail) .....	2-21
Sending E-mail .....	2-22

# Part Names


## Machine

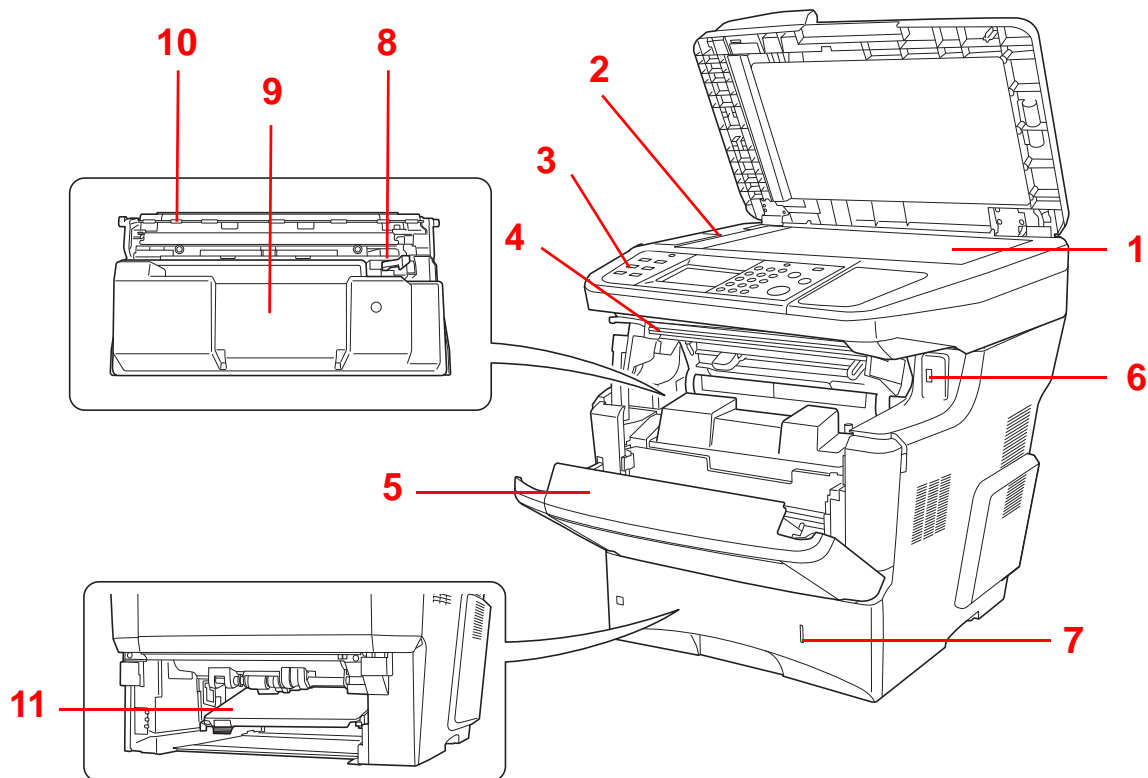


- 1 Platen
- 2 Slit Glass
- 3 Operation Panel
- 4 Top Cover
- 5 Front Cover
- 6 USB Memory Slot
- 7 Paper Gauge
- 8 Toner Container Lock Lever
- 9 Toner Container
- 10 Developer Unit
- 11 Duplex Front Cover

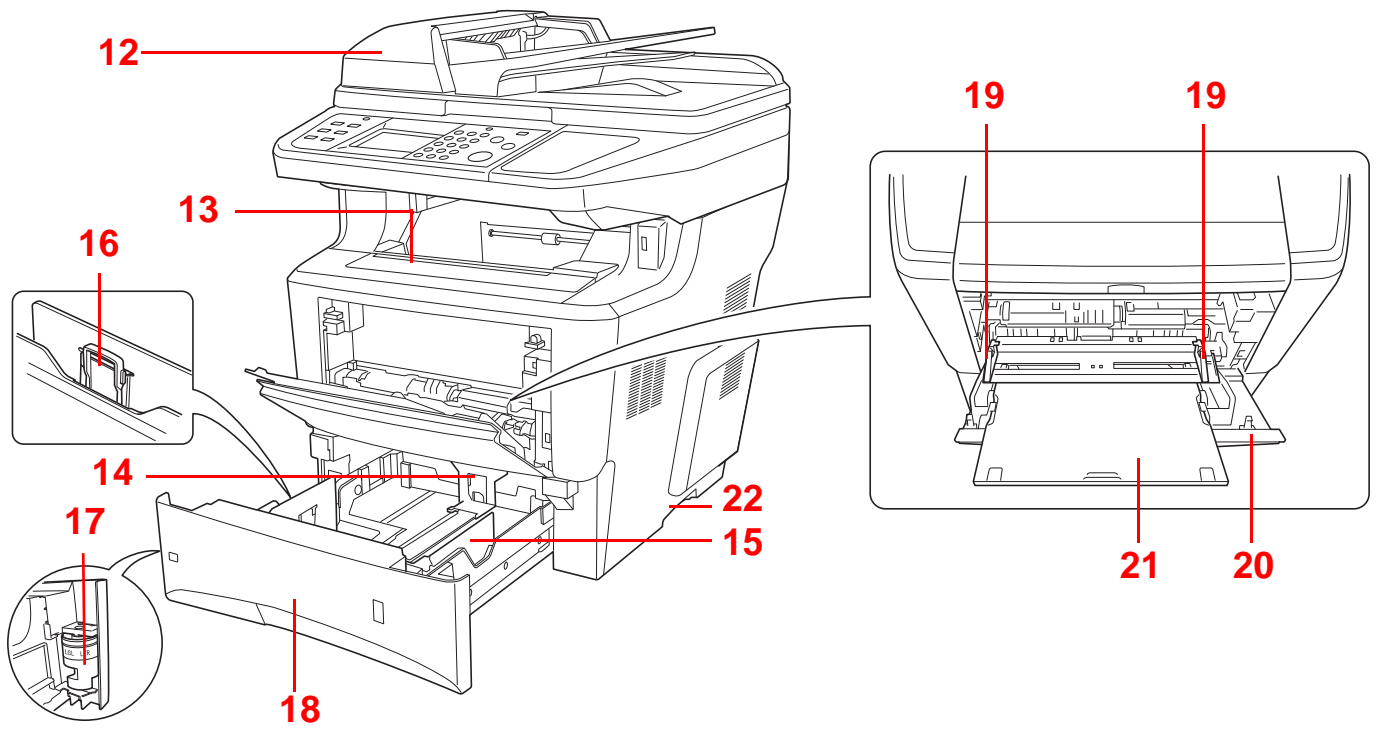


- 12 Document Processor
- 13 Inner Tray
- 14 Paper Length Guide
- 15 Paper Width Guides
- 16 Paper Width Adjusting Tab
- 17 Paper Size Dial
- 18 Cassette 1
- 19 Paper Width Guides
- 20 Multi Purpose Tray (MP Tray)
- 21 Support Tray Section of the Multi Purpose Tray
- 22 Handholds

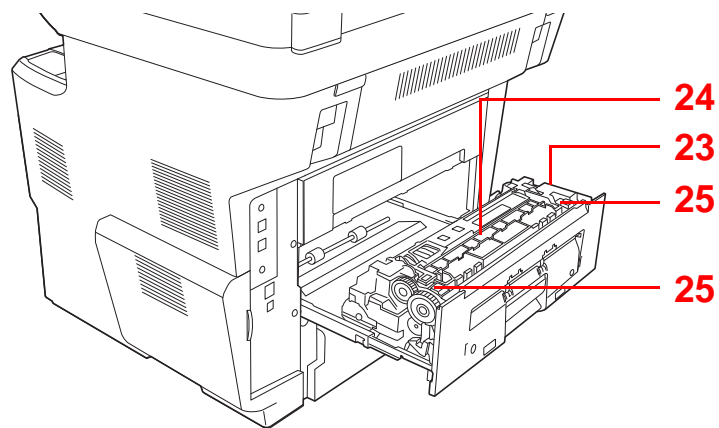

- 23 Rear Unit
- 24 Fuser Cover
- 25 Envelope Switch

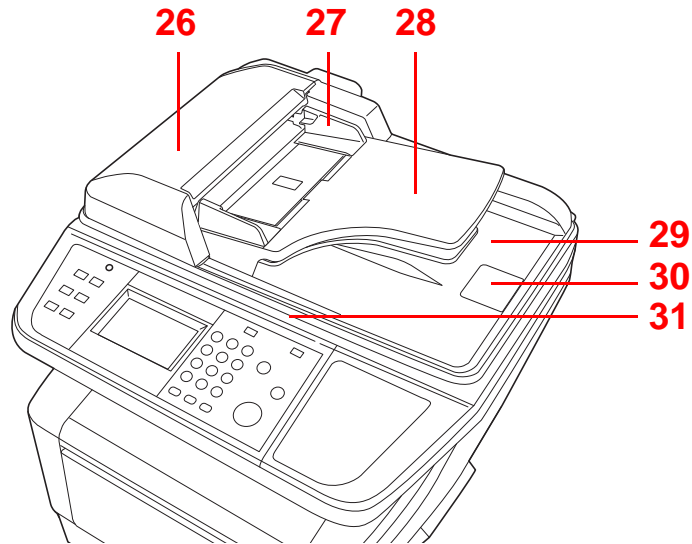

- 26** Document Processor Cover
- 27** Original Width Guides
- 28** Original Table
- 29** Original Eject Table
- 30** Original Stopper
- 31** Document Processor Open/Close Handle

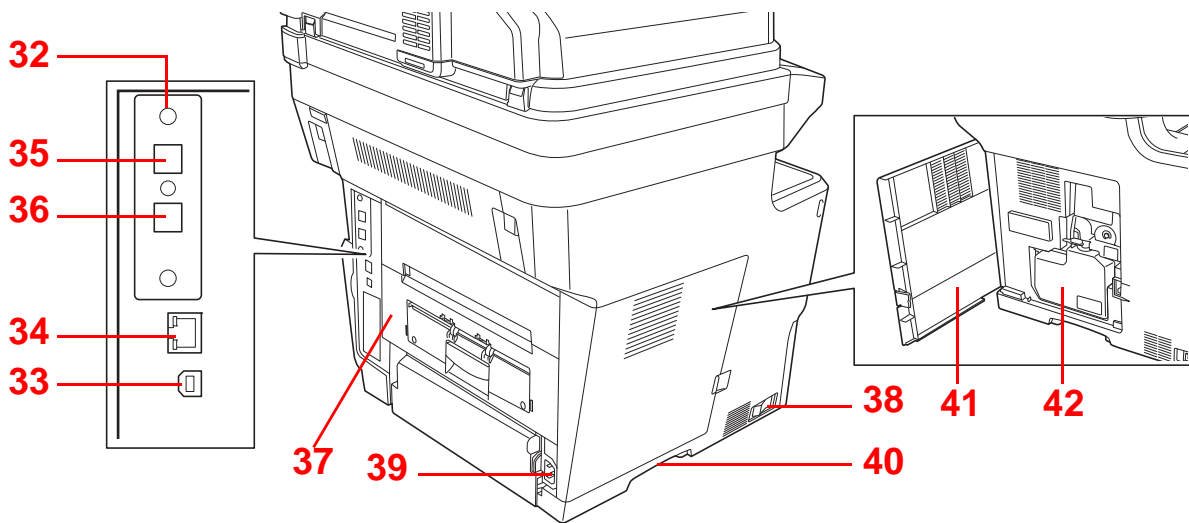












- 32** Option Interface Slot
- 33** USB Interface Connector
- 34** Network Interface Connector/Indicators
- 35** LINE Connector \*
- 36** TEL Connector \*
- 37** Rear Cover
- 38** Main Power Switch
- 39** Power Cord Connector
- 40** Handholds
- 41** Left Cover
- 42** Waste Toner Box


\* Only on products with the fax function installed.



# Operation Panel

 System Menu / Counter		Displays the System Menu/Counter screen.	
 Status/ Job Cancel	Displays the Status/Job Cancel screen.	 Copy	Displays the Copy screen.
 Favorites/ Application	Displays the Favorites screen. When using an application, displays the application screen.	 Send	Displays the screen for sending.
 Document Box	Displays the Document Box screen.	 FAX	Displays the FAX screen.

 Logout	Ends operation (logs out) on the Administration screen.
 Power 	Puts the machine into Sleep Mode. Recovers from Sleep if in Sleep Mode.
	Lit when the machine's main power is on.

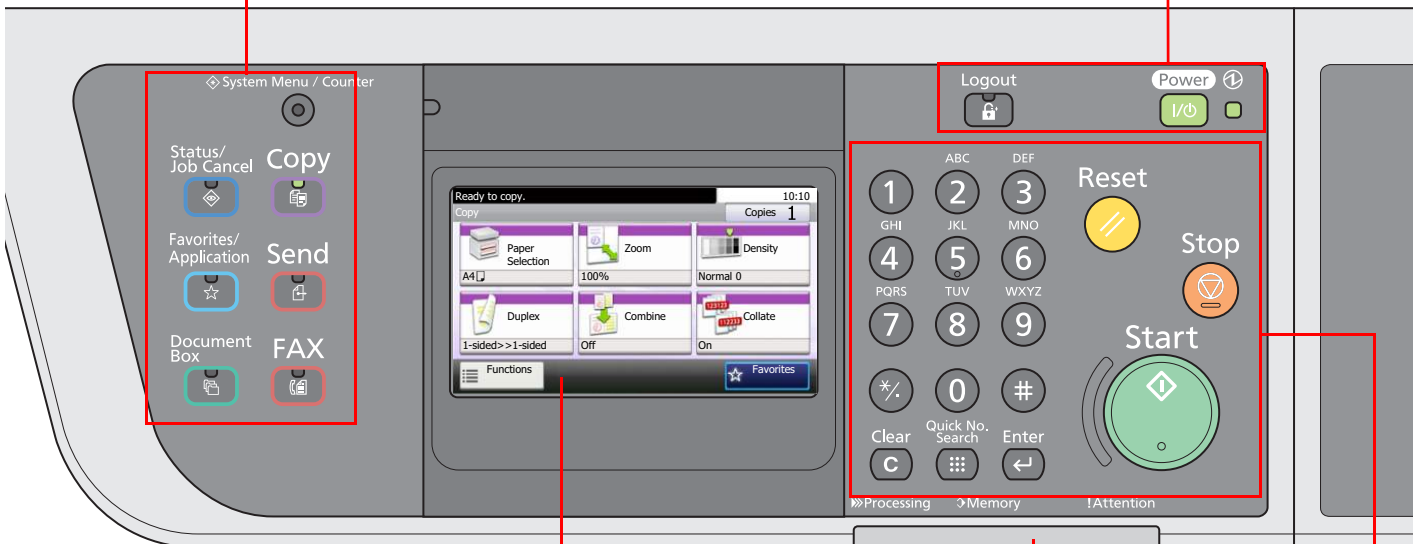








Touch panel. Displays buttons for configuring machine settings.


**Processing:** Blinks while printing or sending.

**Memory:** Blinks while the machine is accessing the fax memory or USB memory (generalpurpose item).

**Attention:** Lights or blinks when an error occurs and a job is stopped.

	Numeric keys. Enter numbers and symbols.	 Clear	Clears entered numbers and characters.	 Reset	Returns settings to their default states.
		 Quick No. Search	Specifies registered information such as address numbers and user IDs by number.	 Stop	Cancels or pauses the printing job in progress.
		 Enter	Finalizes numeric key entry, and finalizes screen during setting of functions. Operates linked with the on-screen [OK].	 Start	Starts copying and scanning operations and processing for setting operations.

## Touch Panel

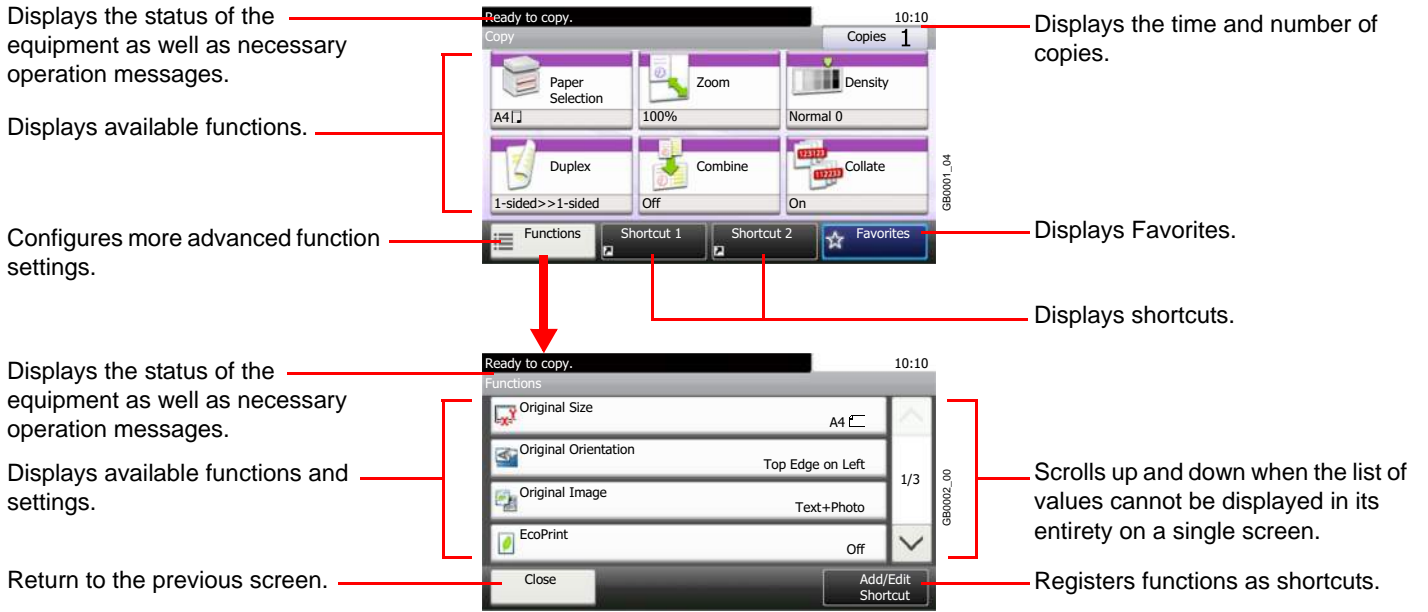


# Determining the Connection Method and Preparing Cables

Check the method to connect the equipment to a PC or network, and prepare the necessary cables for your environment.

## Connection Example

Determine the method to connect the equipment to a PC or network by referring to the illustration below.

### Connecting a scanner to your PC network with a network cable (1000BASE-T, 100BASE-TX or 10BASE-T)

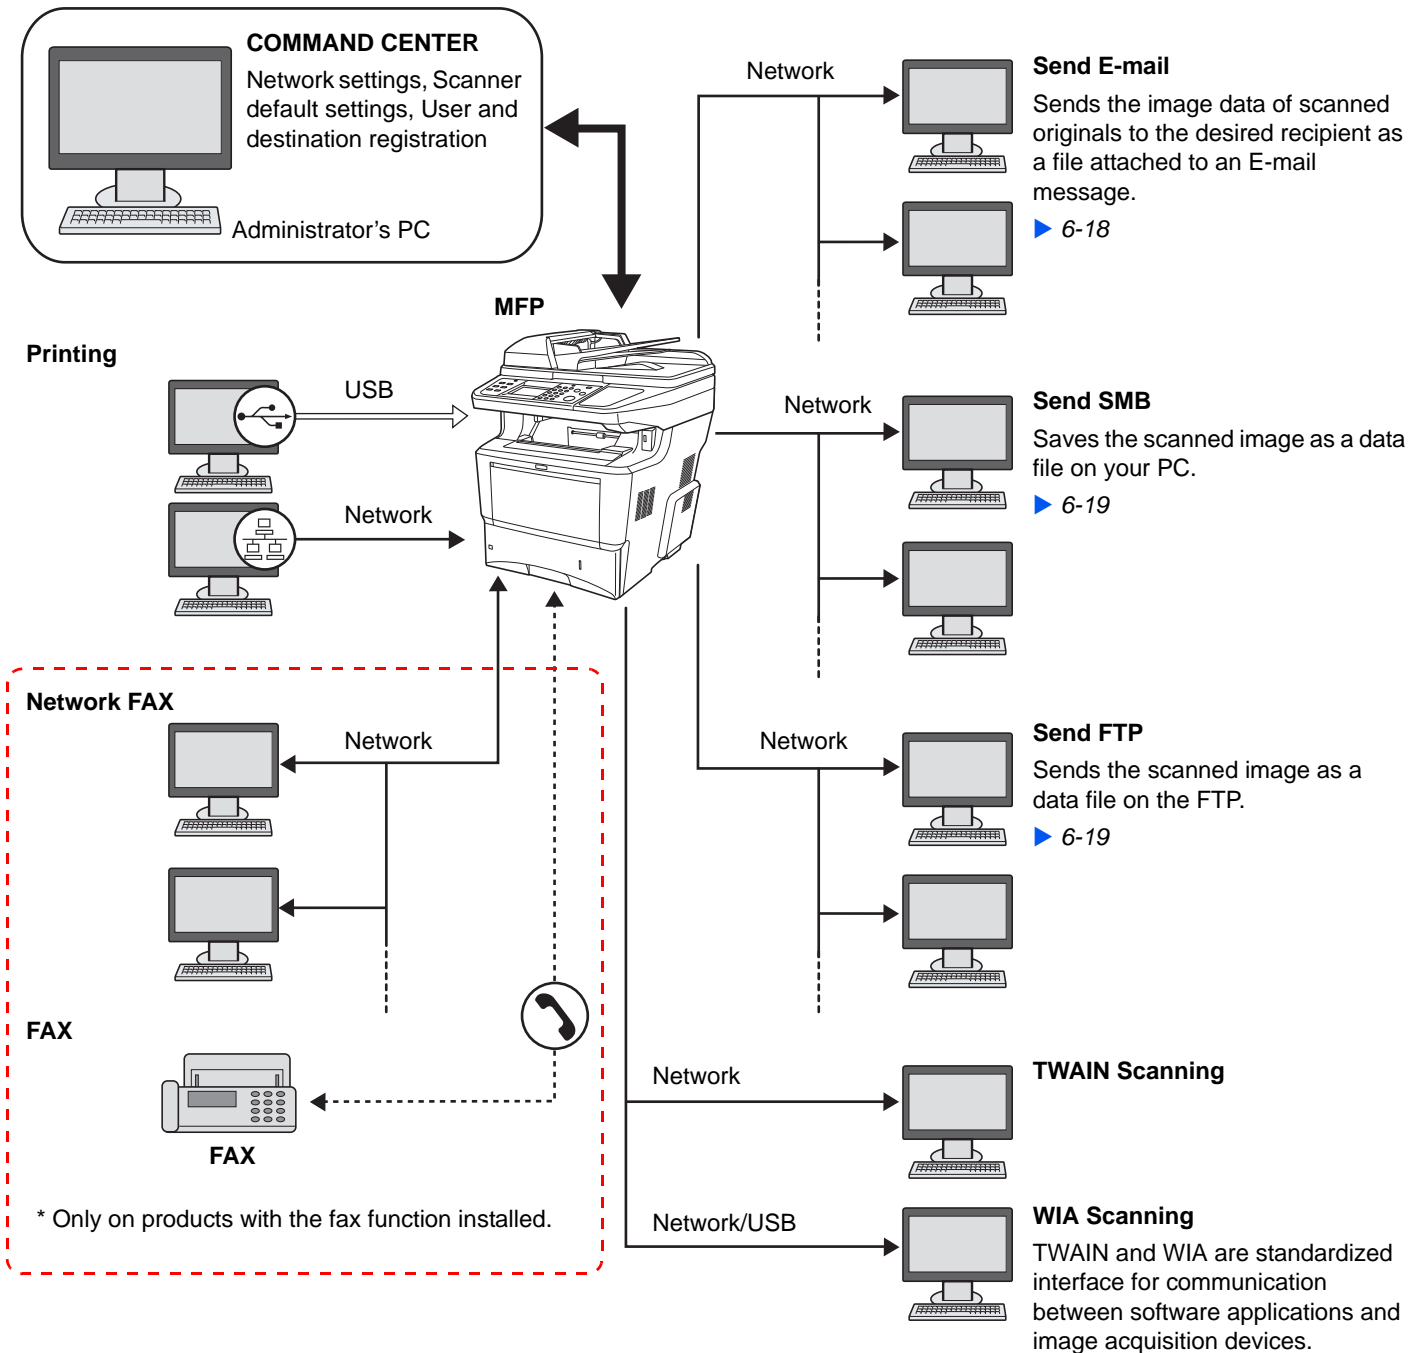

## Preparing Necessary Cables

Prepare the necessary cables according to the interface you use.



Connection Environment	Function	Necessary Cable
Connect a LAN cable to the machine.	<ul style="list-style-type: none"><li>• Printer</li><li>• Scanner (Send E-mail/Send SMB/Send FTP)</li><li>• Scanner (TWAIN/WIA)</li></ul>	LAN (10Base-T, 100Base-TX, or 1000BASE-T Shielded)
Connect a USB cable to the machine.	<ul style="list-style-type: none"><li>• Printer</li><li>• Scanner (WIA)</li></ul>	USB2.0 compatible cable (Hi-Speed USB compliant, Max. 5.0 m, Shielded)

# Connecting Cables

## Connecting LAN Cable

The equipment can be connected with a network cable and used as a network printer or network scanner.


### 1 Power Off.

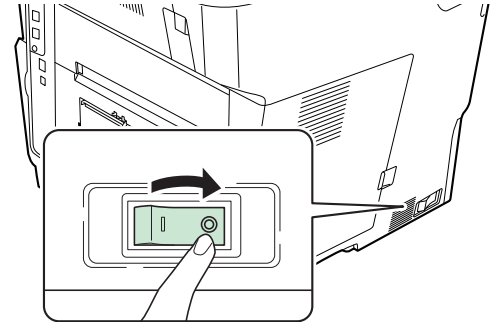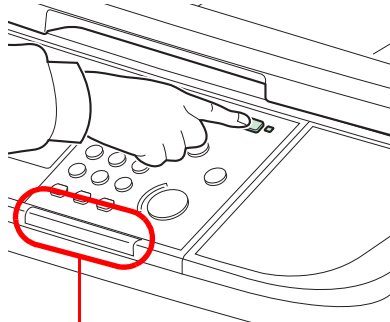

Check that the indicators are off.

### 2 Connect the machine.

- 1 Connect the LAN cable to the network interface located on right side of the body.

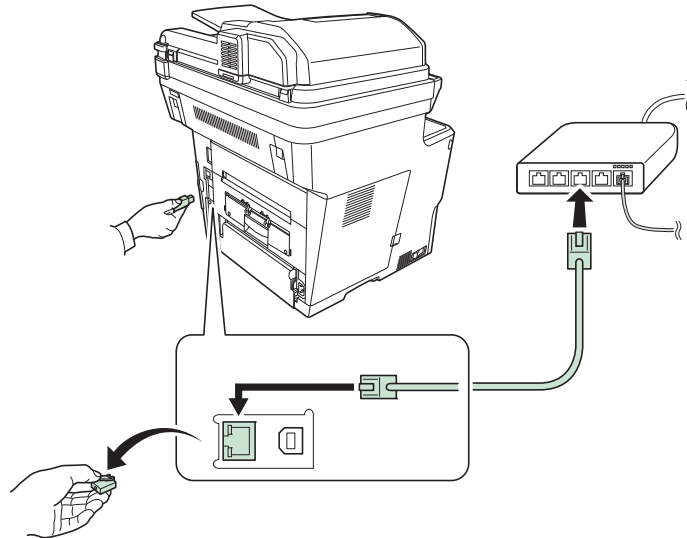

- 2 Connect the other end of the cable to the hub.

### 3 Set up the machine.

Configure the network settings.




For details, refer to *Machine Setup Wizard* on page 2-20.

## Connecting USB Cable


The equipment can be connected with a USB cable and used as a printer or scanner in an environment where there is no network.

### 1 Power Off.

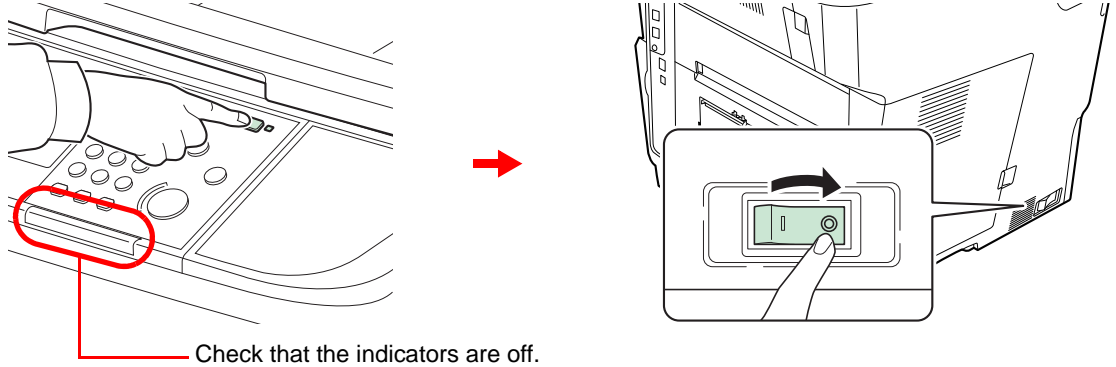


### 2 Connect the machine.

- 1 Connect the USB cable to the appropriate interface located on the right side of the body.

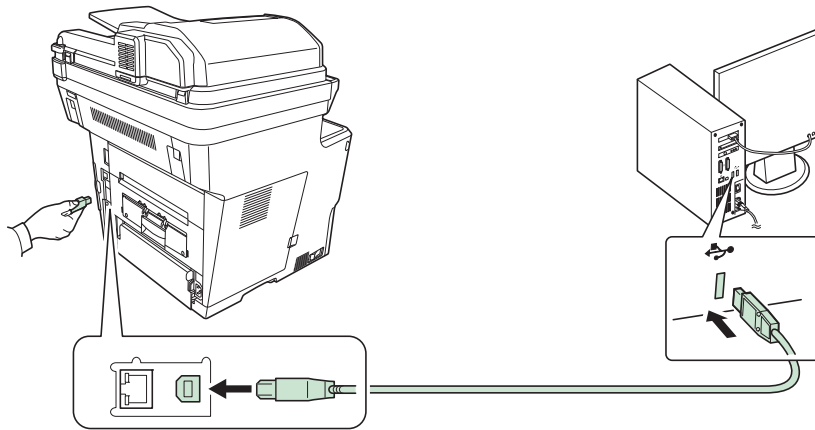

- 2 Connect the other end of the cable to the PC.

## Connecting the Power Cable

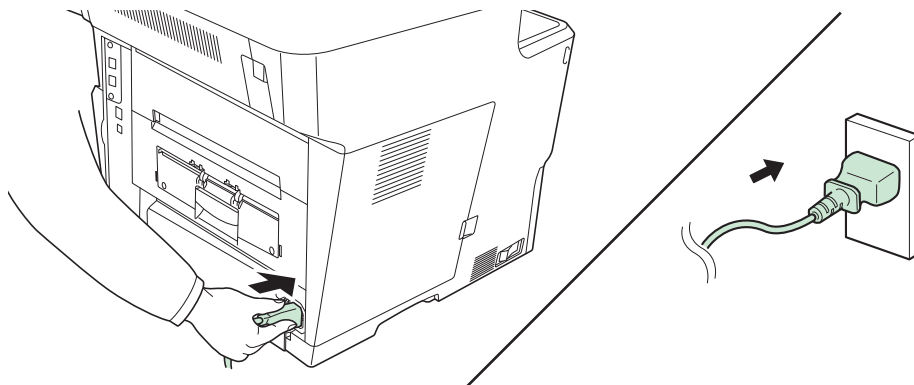

Connect one end of the supplied power cable to the machine and the other end to a power outlet.


 **IMPORTANT**

Only use the power cable that comes with the machine.

## Power On/Off


### Power On

**When the main power indicator is lit... (Recovery from sleep)**

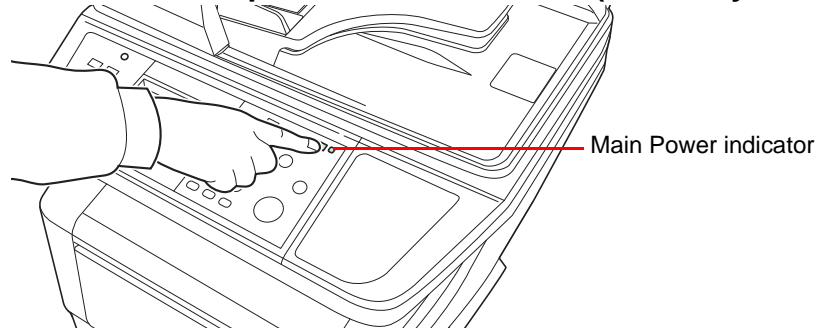

Press the **Power** key.

**When the main power indicator is off...**

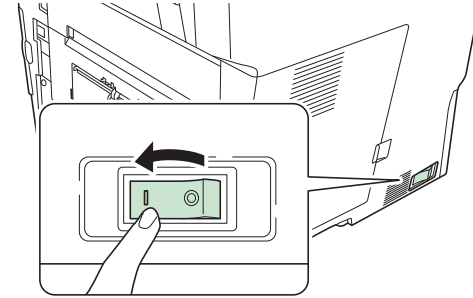


Turn the main power switch on.

 **IMPORTANT**

**When turning off the main power switch, do not turn on the main power switch again immediately. Wait more than 5 seconds, and then turn on the main power switch.**

### Power Off

**When not turning off the main power switch (sleep)**

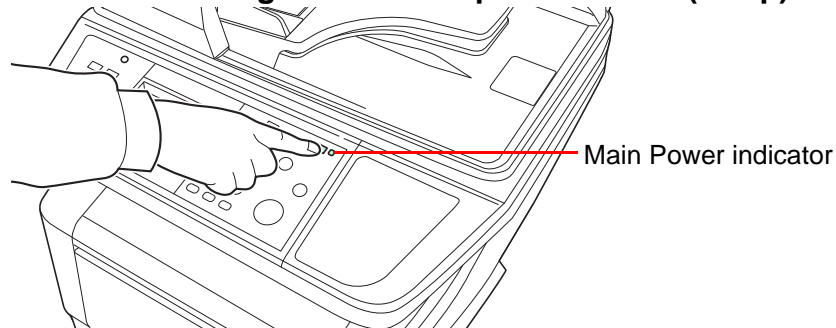


Press the **Power** key. The **Power** key light will go out, and the Main Power indicator will light up.

## When turning off the main power switch

Note that when the main power switch is turned off, the machine will be unable to automatically receive print data from computers or faxes.


### 1 Press the Power key.

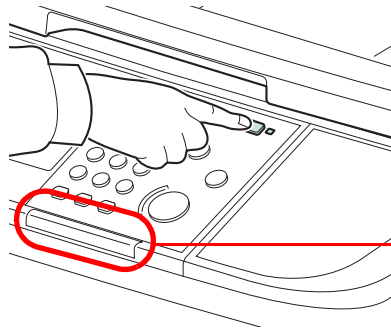

Check that the indicators are off.

Verify that the **Power** key light has gone out and that the Main Power indicator is lit up.

### 2 Turn the main power switch off.

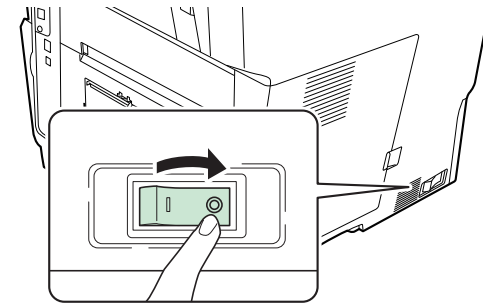

#### NOTE

When the **Processing** indicator or **Memory** indicator is lit up, the machine is operating. Turning off the main power switch while the machine is operating may cause it to malfunction.

## In case of not using the machine for an extended period of time



#### CAUTION

If this machine will be left unused for an extended period (e.g. overnight), turn it off at the main power switch. If the machine will not be used for an even longer period of time (e.g. vacation), remove the power plug from the outlet as a safety precaution. If using the products equipped with the fax function, note that turning the machine off at the main power switch disables fax transmission and reception.



#### IMPORTANT

Remove paper from the cassettes and seal it in the paper storage bag to protect it from humidity.



# Installing Software

Install appropriate software on your PC from the included Product Library DVD (Product Library) if you want to use the printer function of this machine or perform TWAIN / WIA transmission or Network FAX transmission from your PC.

**NOTE**  
Installation on Windows must be done by a user logged on with administrator privileges.  
Plug and Play is disabled on this device when in Sleep. Wake the device from Sleep before continuing. Refer to *Sleep and Auto Sleep* on page 2-19.  
Fax functionality can only be used on products equipped with fax capability.  
WIA driver cannot be installed on Windows XP.

## Installing Printer Driver

Ensure the machine is plugged in and connected to the PC before installing the printer driver from the DVD.


### Installing Printer Driver in Windows

If you are connecting this machine to a Windows PC, follow the next steps to install the printer driver. The example shows you how to connect your machine to a Windows 7 PC.


**NOTE**  
If the **Welcome to the Found New Hardware Wizard** dialog box displays, select **Cancel**.  
If the autorun screen is displayed, click **Run Setup.exe**.  
If the user account management window appears, click **Allow**.

You can use either Express Mode or Custom Mode to install the software. Express Mode automatically detects connected machines and installs the required software. Use Custom Mode if you want to specify the printer port and select the software to be installed. For details, refer to Custom Installation in the *Printer Driver Operation Guide* on the DVD.

#### 1 Insert the DVD.




#### 2 Display the screen.

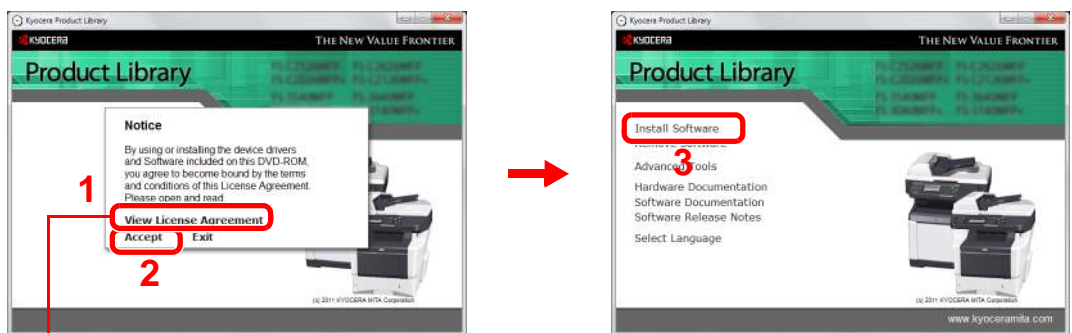


Click **View License Agreement** and read the License Agreement.

### 3 Install using Express Mode.

1 Select the print system to be installed.

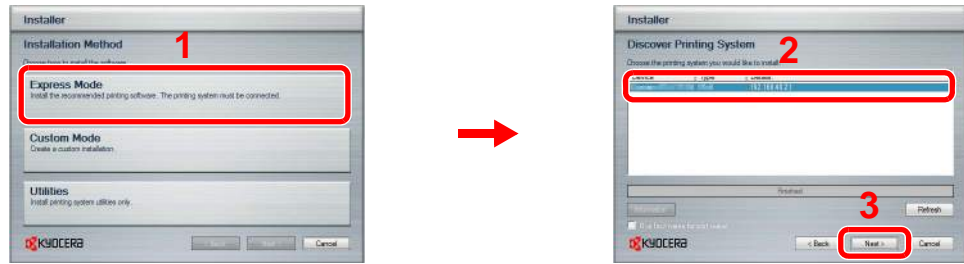

2 Customize the print system name if the print system is connected via a network.

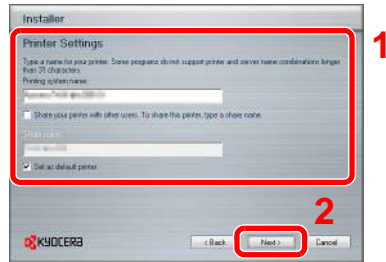

3 Start installing.



#### NOTE

The machine cannot be detected unless it is on. If the computer fails to detect the machine, verify that it is connected to the computer via a network or USB cable and that it is turned on and click **Reload**.

If the Windows security window appears, click **Install this driver software anyway**.

### 4 Finish the installation.



This completes the printer driver installation procedure. Follow the on-screen instructions to restart the system, if required.

You can install the WIA driver using Custom Mode if the machine and computer are connected via a network.

The TWAIN driver can be installed if the machine and computer are connected via a network.

If you are installing the TWAIN driver or WIA driver, continue by configuring the TWAIN driver (2-17) or WIA driver (2-18).

## Installing Printer Driver in Macintosh

The machine's printer functionality can be used by a Macintosh computer.

### NOTE


When printing from a Macintosh computer, set the machine's emulation to "KPD L" or "KPD L(Auto)". For details about the configuration method, refer to *Printer on page 9-16*.

If connecting by Bonjour, enable Bonjour in the machine's network settings. For details, refer to *Network on page 9-17*.

In the Authenticate screen, enter the name and password used to log in to the operating system.


AppleTalk icon is not displayed on Mac OS X 10.6.

### 1 Insert the DVD.




Double-click the DVD icon.

### 2 Display the screen.

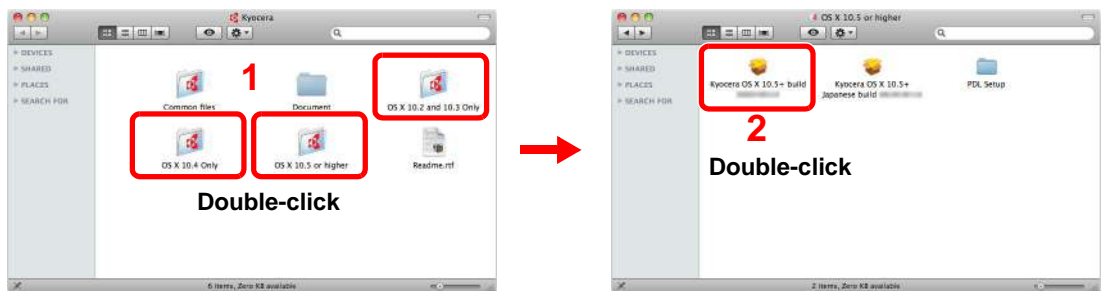

Double-click either **OS X 10.2 and 10.3 Only**, **OS X 10.4 Only** or **OS X 10.5 or higher** depending on your Mac OS version.

### 3 Install Printer Driver.

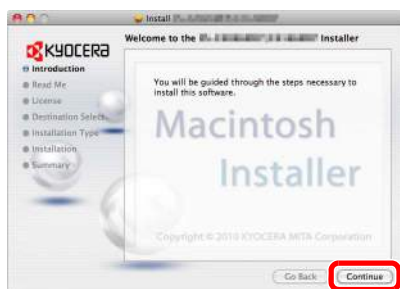



Install the printer driver as directed by the instructions in the installation software.

This completes the printer driver installation.


Next, specify the print settings. If an IP or AppleTalk connection is used, the settings below are required. If a USB connection is used, the machine is automatically recognized and connected.

## 4 Configure the printer.


1 Display the window.

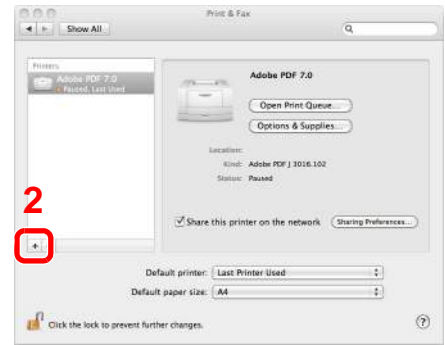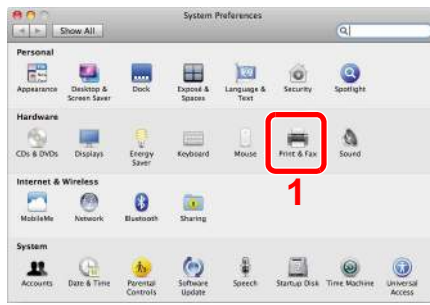


2 Click the **IP** icon for an IP connection or the **AppleTalk** icon for an AppleTalk connection and then enter the IP address and printer name.

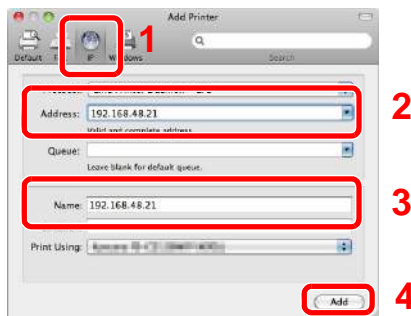

3 Select the options available for the machine and click **Continue**.

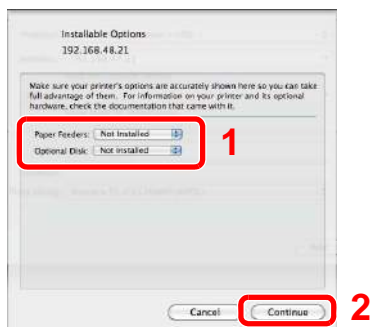

4 The selected machine is added.

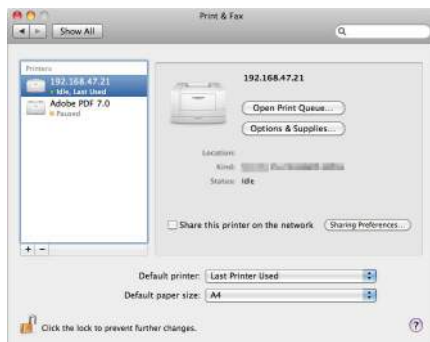


# Setting TWAIN Driver


Register this machine to the TWAIN Driver.

## 1 Display the screen.

- 1 Select **Start** button of the Windows display, **All Programs**, **Kyocera** and then **TWAIN Driver Setting**.
- 2 Click **Add**.



## 2 Configure TWAIN Driver.

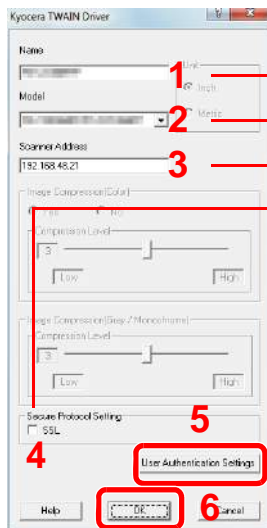

1 Enter the machine name.


2 Select this machine from the list.

3 Enter the machine's IP address or host name.

4 When using SSL, select the checkbox beside **SSL**.

5

6



When user login administration is enabled, select the checkbox beside **Authentication**, and enter Login User Name (up to 64 characters) and Password (up to 64 characters).


When job accounting is enabled, select the checkbox beside **Account ID**, and enter the account ID as many as eight digits.



### NOTE

When the machine's IP address is unknown, contact Administrator.

## 3 Finish registering.



### NOTE

Click **Delete** to delete the added machine. Click **Edit** to change names.

## Setting WIA Driver


Register this machine to the WIA Driver. Instructions are based on interface elements as they appear in Windows 7.

### NOTE

The following is not necessary to register when using the machine possesses an IP address or host name that you have specified during installation of WIA Driver.

## 1 Display the screen.


- 1 Click the Windows **Start** button and enter **Scanner** in **Program and File Search**. Click **View scanners and cameras** in the search list.
- 2 Select the same name as this machine from WIA Drivers, and press the **Properties**.

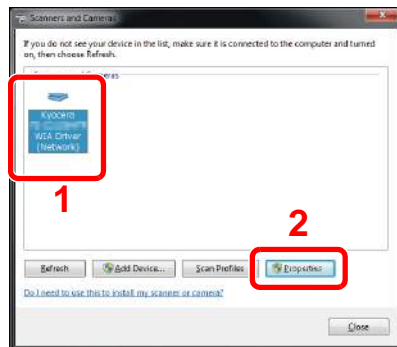

## 2 Configure WIA Driver.

Enter the machine name.

When using SSL, select the checkbox beside **SSL**.

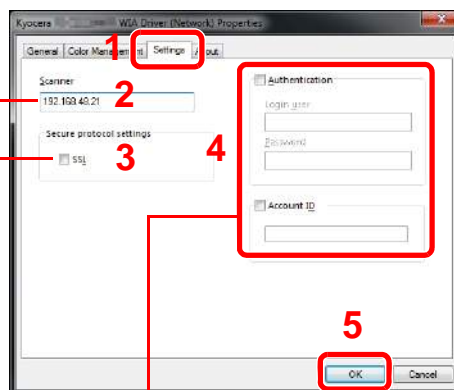

When user login administration is enabled, select the checkbox beside **Authentication**, and enter Login User Name (up to 64 characters) and Password (up to 64 characters).


When job accounting is enabled, select the checkbox beside **Account ID**, and enter the account ID as many as eight digits.

### NOTE

Enter the scanner address when the device and computer are connected via a network.

# Energy Saver function

## Sleep and Auto Sleep



To enter Sleep, press the **Power** key. Touch panel and all indicators on the operation panel will go out to save a maximum amount of power except the Main Power indicator. This status is referred to as Sleep.

If print data is received during Sleep, the touch panel lights up and printing starts.

If you are using the products equipped with the fax function, received data is printed out while the operation panel remains unlit.

To resume, press the **Power** key. The machine will be ready to use within 15 seconds.

Note that ambient environmental conditions, such as ventilation, may cause the machine to respond more slowly.

### Auto Sleep


Auto Sleep automatically switches the machine into Sleep if left idle for a preset time. The default preset time is 1 minute.



For more information about configuring settings, refer to *Sleep Timer on page 9-22*.

# Machine Setup Wizard

The Machine Setup Wizard is launched when the equipment is turned on for the first time after being installed.

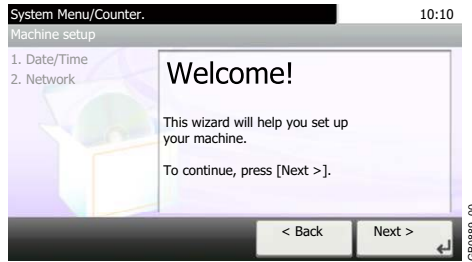

Following the instructions on the screen to configure the following settings:

Date/Time settings	Time Zone
	Summer Time
	Date
	Time
Network settings	Obtain IP Address
	IP Address
	Subnet Mask
	Default Gateway



For details about settings, refer to the help information displayed on the touch panel. To make changes after this initial configuration, refer to *Date/Timer* on page 9-22 and *System* on page 9-17.



# COMMAND CENTER (Settings for E-mail)

COMMAND CENTER is a tool used for tasks such as verifying the operating status of the machine and changing the settings for security, network printing, E-mail transmission and advanced networking.



## NOTE

Here, information on the FAX settings has been omitted. For more information on using the FAX, refer to the *FAX Operation Guide*.


FAX functions are available only on products with the fax function installed.

## 1 Display the screen.

1 Launch your Web browser.

2 In the Address or Location bar, enter the machine's IP address.

E.g.) `http://192.168.48.21/`



The web page displays basic information about the machine and COMMAND CENTER as well as their current status.

## 2 Configure the function.

Select a category from the navigation bar on the left of the screen. The values for each category must be set separately.

If restrictions have been set for COMMAND CENTER, enter a password to access pages other than the startup page. The default password is "admin00". The password can be changed.

For details, refer to the *KYOCERA COMMAND CENTER Operation Guide*.


## Sending E-mail

Specifying the SMTP settings allows you to send images loaded onto this machine as E-mail attachments. To use this function, this machine must be connected to a mail server using the SMTP protocol.

Before sending images loaded onto this machine as E-mail attachments, check the following:

- The network environment used to connect this machine to the mail server: A full-time connection via a LAN is recommended.
- SMTP Settings: Use COMMAND CENTER to register the IP address or host name of the SMTP server.
- If limits have been set on the size of E-mail messages, it may not be possible to send very large E-mails.

### 1 Display the screen.

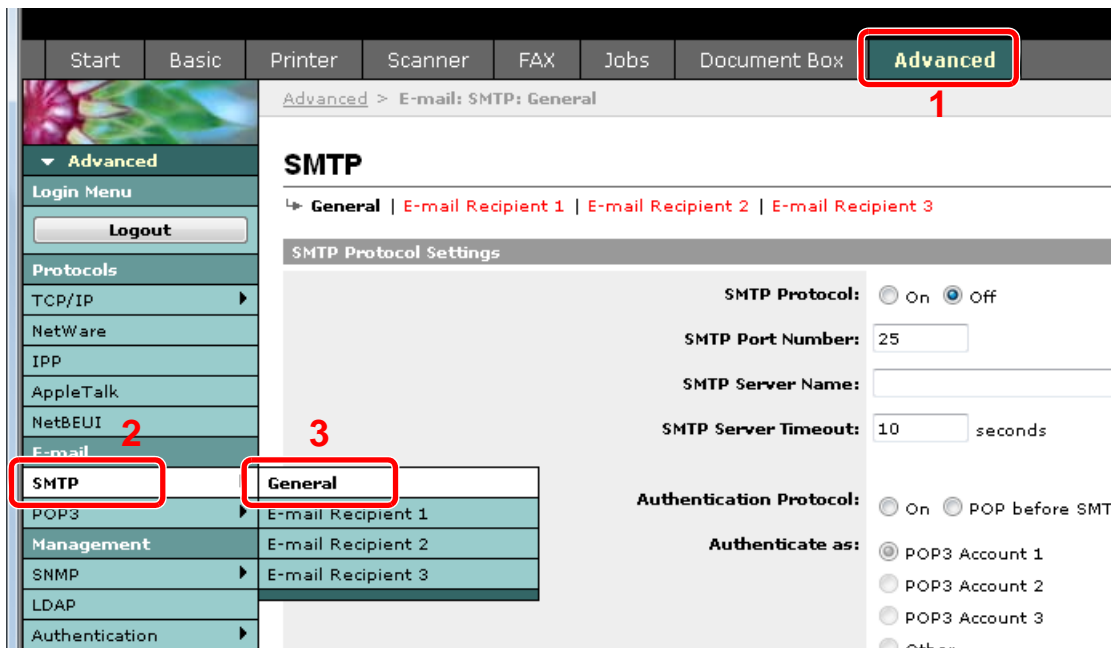

### 2 Configure the function.

Enter the correct settings in each field.

Item	Description
SMTP Protocol	Enables or disables SMTP protocol. To use E-mail, this protocol must be enabled.
SMTP Port Number	Set the SMTP Port Number or use the SMTP default port 25.
SMTP Server Name	Enter the SMTP server IP address or its name. The maximum length of the SMTP server name and IP address is 64 characters. If entering the name, a DNS server address must also be configured. The DNS server address may be entered on the TCP/IP General tab.
SMTP Server Timeout	Set the amount of time to wait before time-out in seconds.
Authentication Protocol	Enables or disables the SMTP authentication protocol or sets POP before SMTP as the protocol. The SMTP authentication supports Microsoft Exchange 2000.
Authenticate as	Authentication can be set from three POP3 accounts or you can choose a different account.
Login User Name	When Other is selected for Authenticate, the login user name set here will be used for SMTP authentication. The maximum length of the login user name is 64 characters.

Item	Description
Login Password	When Other is selected for Authenticate, the password set here will be used for authentication. The maximum length of the login password is 64 characters.
POP before SMTP Timeout	Set the amount of time to wait before time-out in seconds when you have selected POP before SMTP as the Authentication Protocol.
Test	This will test if the SMTP connection can be successfully established.
E-mail Size Limit	Enter the maximum size of E-mail that can be sent in kilobytes. When the value is 0, no maximum size is set.
Sender Address	Enter the E-mail address of the person responsible for the machine, such as the machine administrator, so that a reply or non-delivery report will go to a person rather than to the machine. The sender address must be entered correctly for SMTP authentication. The maximum length of the sender address is 128 characters.
Signature	Enter the signature. The signature is free form text that will appear at the end of the E-mail body. It is often used for further identification of the machine. The maximum length of the signature is 512 characters.
Domain Restriction	Enter the domain names that can be permitted or rejected. The maximum length of the domain name is 32 characters. You can also specify E-mail addresses.

**3** Click [Submit].



# 3 Common Operations

This chapter explains the following topics:


Loading Paper .....	3-2
Before Loading Paper .....	3-2
Loading Paper in the Cassettes .....	3-3
Loading Paper in the Multi Purpose Tray .....	3-7
Loading Originals .....	3-12
Placing Originals on the Platen .....	3-12
Loading Originals in the Document Processor .....	3-13
Checking the Equipment's Serial Number .....	3-15
Checking the Counter .....	3-16
Login/Logout .....	3-17
Favorites .....	3-19
Registering Favorites .....	3-19
Editing and Deleting Favorites .....	3-23
Using Favorites .....	3-25
Shortcuts .....	3-27
Registering Shortcuts .....	3-27
Editing and Deleting Shortcuts .....	3-29
Using Shortcuts .....	3-30
Quick Setup Wizard .....	3-31
Help Screen .....	3-33
Canceling Jobs .....	3-34
Using Various Functions .....	3-35
Original Size .....	3-37
Original Orientation .....	3-38
Duplex .....	3-39
Continuous Scan .....	3-41
Paper Selection .....	3-43
Collate .....	3-44
Density .....	3-45
Scan Resolution .....	3-46
Original Image .....	3-47
Sharpness .....	3-48
Background Density Adjust .....	3-49
Zoom .....	3-50
File Format .....	3-51
Color Selection .....	3-53
Job Finish Notice .....	3-54
File Name Entry .....	3-56
Priority Override .....	3-57

# Loading Paper

Paper can be loaded standardly in the cassette and the multi purpose tray. A paper feeder is also available as an option (refer to *Optional Equipment* on page 11-2).

## Before Loading Paper

When you open a new package of paper, fan the sheets to separate them slightly prior to loading in the following steps.

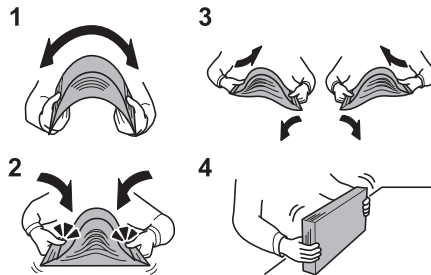


- 1 Bend the whole set of sheets to swell them in the middle.
- 2 Hold the stack at both ends and stretch it while keeping the entire stack swelled.
- 3 Raise the right and left hands alternately to create a gap and feed air between the papers.
- 4 Finally, align the papers on a level, flat table.

If the paper is curled or folded, straighten it before loading. Paper that is curled or folded may cause a jam.

 **IMPORTANT**

**If you copy onto used paper (paper already used for copying), do not use paper that is stapled or clipped together. This may damage the machine or cause poor image quality.**

 **NOTE**

If printouts are curled, turn the stack in the cassette upside down.

If you use special paper such as letterhead, paper with holes or paper with pre-prints like logo or company name, refer to *Paper* on page 11-10.

Avoid exposing opened paper to high temperatures and high humidity as dampness can be a cause of problems. Seal any remaining paper after loading in the multi purpose tray or cassettes back in the paper storage bag.

If the machine will not be used for a prolonged period, protect all paper from humidity by removing it from the cassettes and sealing it in the paper storage bag.

## Loading Paper in the Cassettes

The standard cassette will each hold plain paper, recycled paper or color paper. The standard cassette holds up to 500 sheets of plain paper (80 g/m<sup>2</sup>).

The following paper sizes are supported: A4, A5, A6, B5, Legal, Letter, Other (Folio, Oficio II, Executive, Statement, 16K and Envelope C5).



### NOTE

You should not use inkjet printer paper or any paper with a special surface coating. (Such paper may cause paper jams or other faults.)


When using media types other than plain paper (such as recycled or colored paper), always specify the media type setting. (Refer to *Media Type on page 9-7*) The cassettes can hold paper with weights up to 120 g/m<sup>2</sup>.

Do not load thick paper that is heavier than 120 g/m<sup>2</sup> in the cassettes. Use the multi purpose tray for paper that is heavier than 120 g/m<sup>2</sup>.

If the machine will not be used for a prolonged period, protect all paper from humidity by removing it from the cassettes and sealing it in the paper storage bag.

Statement and A6 can only be used in cassette 1.


### 1 Adjust the cassette size.

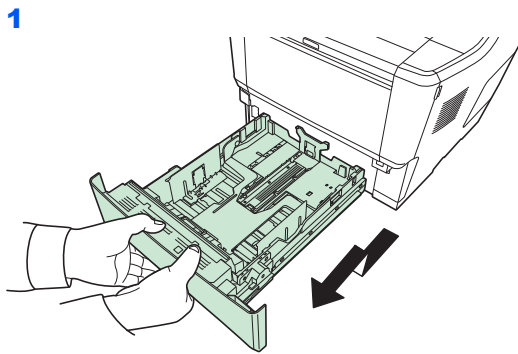

### IMPORTANT

When pulling the cassette out of the machine, ensure it is supported and does not fall out.

2

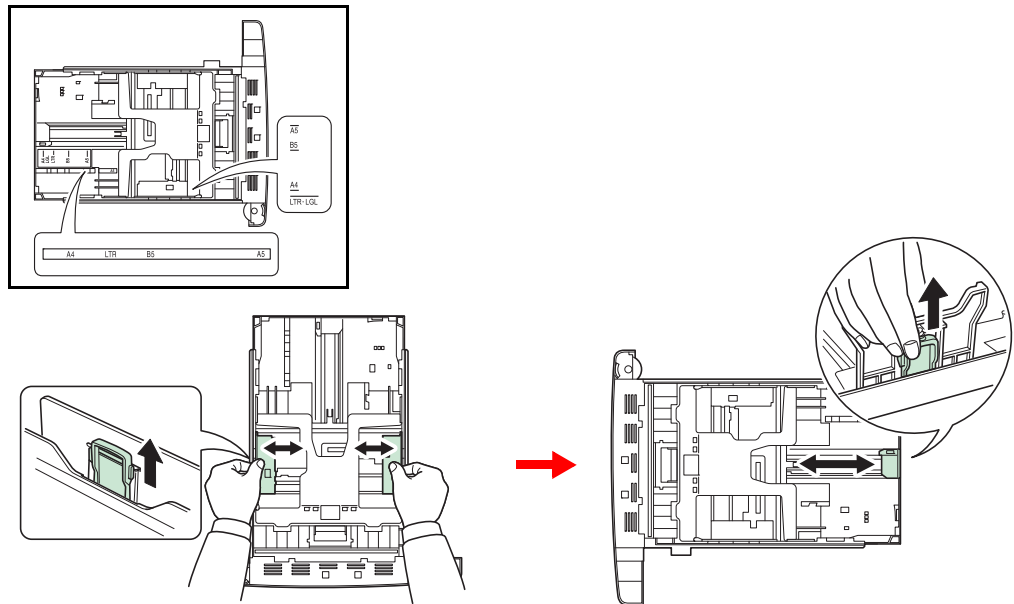


Adjust the cassette size to reflect the size of paper being loaded. Paper sizes are marked on the cassette.




**NOTE**

If you are going to set paper that is longer than A4, pull out the extension cassettes pushing the lock lever one by one and adjust them to the desired paper size.

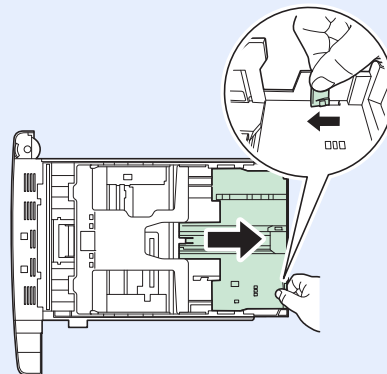

2 Turn the paper size dial to the size of the paper.

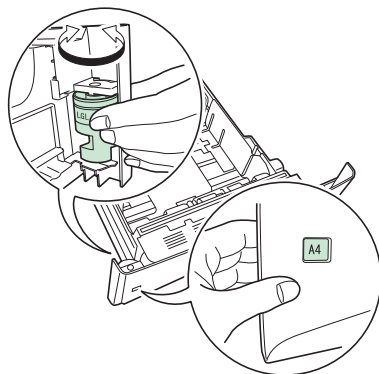


**IMPORTANT**

To use a paper size that does not appear on the size dial, set the size dial to "Other". The paper size must also be set from the operation panel. For details, see *Quick Setup Wizard* on page 3-31.



### 3 Load paper

1

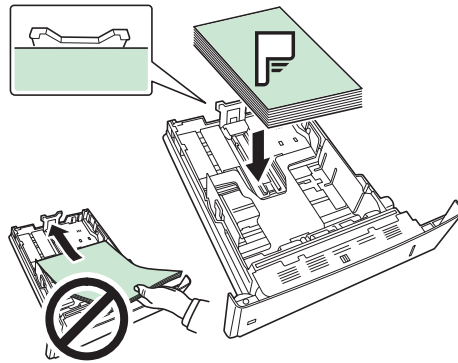


✔ **IMPORTANT**

Load the paper with the print side facing down.

Before loading the paper, be sure that it is not curled or folded. Paper that is curled or folded may cause paper jams.

Do not load more paper than will fit under the load limits on the paper width guides. The cassette holds up to 500 sheets of A4 or smaller plain paper (80 g/m<sup>2</sup>).

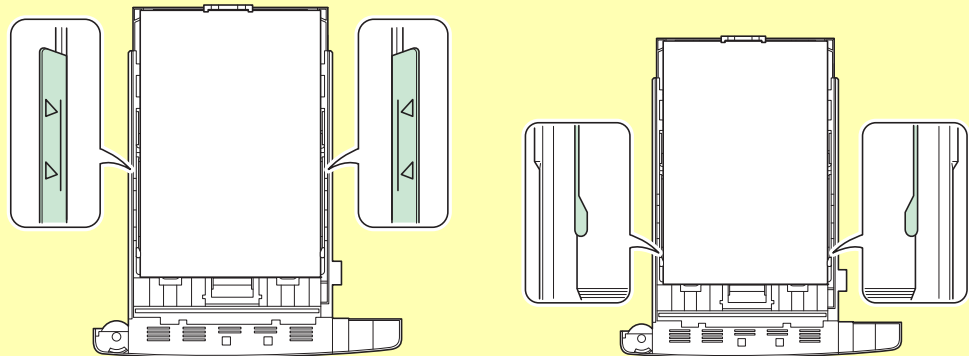



When loading the paper, keep the side that was closest the package seal facing up.

The paper length and width guides must be adjusted to the paper size. Loading the paper without adjusting these guides may cause skewed feeding and paper jams.

Be sure that the paper length and width guides rest securely against the paper. If there is a gap, readjust the guides to fit the paper.

2

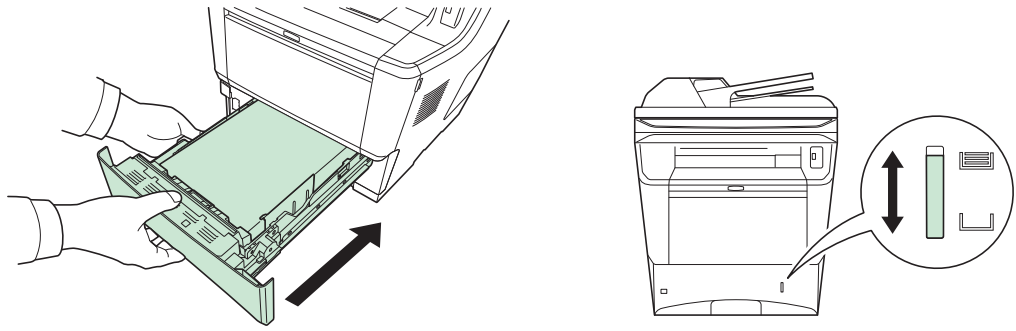

There is a paper gauge on the right side of the front of the paper cassette to indicate the remaining paper supply. When paper is exhausted, the pointer will go down to the level of  (empty).

## Loading Paper in the Multi Purpose Tray

The multi purpose tray will hold up to 100 sheets of A4 or smaller plain paper (80 g/m<sup>2</sup>).

The multi purpose tray accepts paper sizes from A4 to A6 and Hagaki and from Legal to Statement, and 16K. Be sure to use the multi purpose tray when you print on any special paper.

**✔ IMPORTANT**  
When using media types other than plain paper (such as recycled or colored paper), always specify the media type setting. (Refer to *Quick Setup Wizard* on page 3-31.)


The capacity of the multi purpose tray is as follows.

- A4 or smaller plain paper (80 g/m<sup>2</sup>), recycled paper or color paper: 100 sheets
- Hagaki: 1 sheet
- OHP film: 1 sheet
- Envelope: 5 sheets


**🔍 NOTE**  
When you load custom size paper, enter the paper size by referring to *Paper Size* on page 9-8.  
When you use special paper such as transparencies, select the media type by referring to *Media Type* on page 9-8.

### 1 Adjust the multi purpose tray size.


1

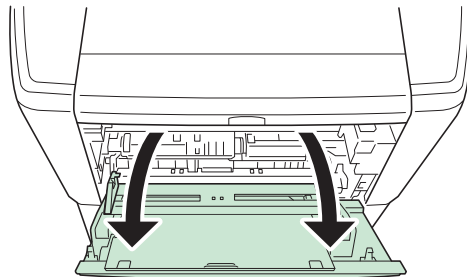

2

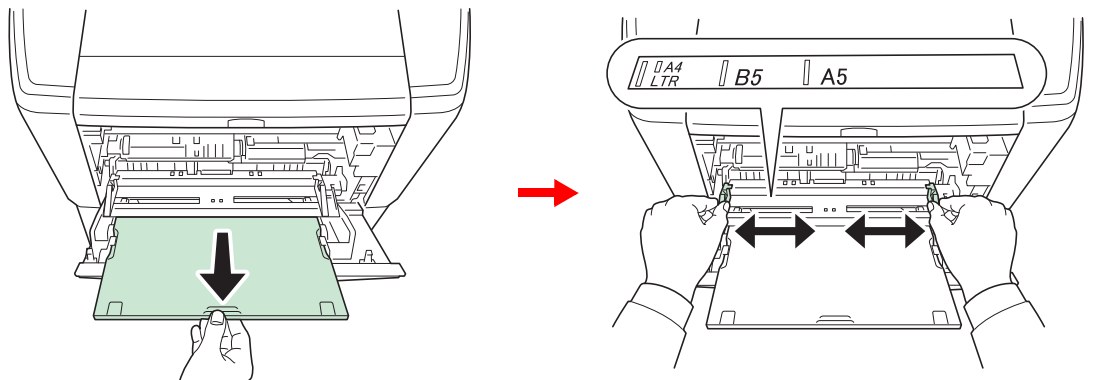

## 2 Load paper.

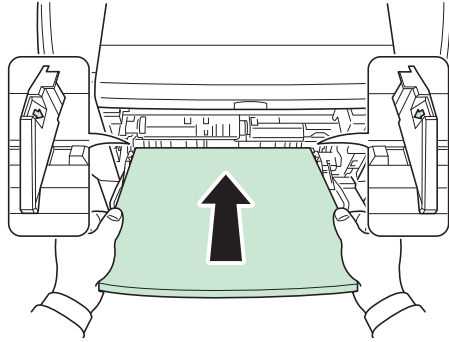

Insert the paper along the paper width guides into the tray until it stops.

**✔ IMPORTANT**

**Curled paper must be uncurled before use.**

**Do not load paper above the triangle mark located on the width guide.**

**If the paper is considerably curled in one direction, for example, if the paper is already printed on one side, try to roll the paper in the opposite direction to counteract the curl. Printed sheets will then come out flat.**

○		
×		

## 3 Specifying Paper Size and Media Type for the Multi Purpose Tray.



Refer to *Quick Setup Wizard* on page 3-31.

## Loading Envelopes


5 envelope may be loaded in the multi purpose tray.

Acceptable envelope sizes are as follows.


Acceptable Envelope	Size
Hagaki	148 × 100 (mm)
Oufuku Hagaki	148 × 200 (mm)
Youkei 2	162 × 114 (mm)
Youkei 4	235 × 105 (mm)
Monarch	3 7/8" × 7 1/2"
Envelope #10 (Commercial #10)	4 1/8" × 9 1/2"
Envelope DL	110 × 220 (mm)
Envelope C5	162 × 229 (mm)
Executive	7-1/4" × 10-1/2"
Envelope #9 (Commercial #9)	3-7/8" × 8-7/8"
Envelope #6 (Commercial #6 3/4)	3-5/8" × 6-1/2"
ISO B5	176 × 250 (mm)

To print on envelopes, press the envelope switch in the rear unit to change to envelope mode.

### 1 Open the rear cover.

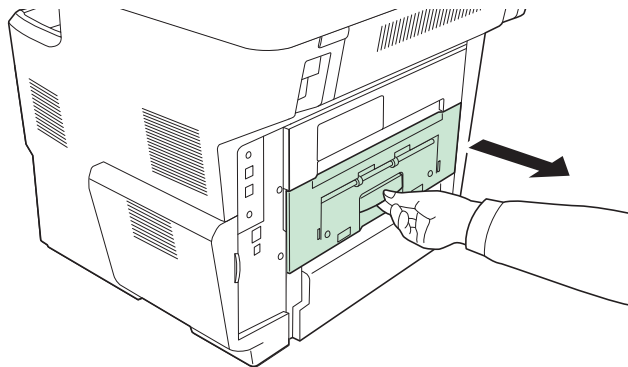

## 2 Press the envelope switches (green).

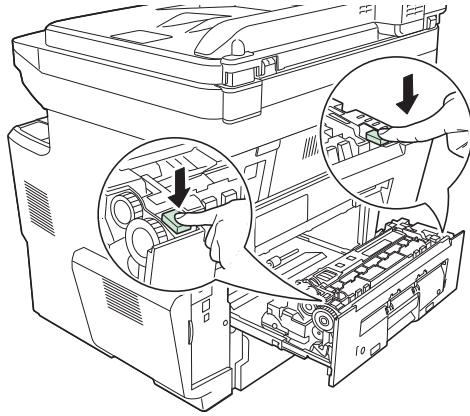


Press the two envelope switches (green) to change the paper feed mode to envelope mode.

### CAUTION

The fuser unit inside the printer is hot. Do not touch it with your hands as it may result in burn injury.


## 3 Close the rear cover.

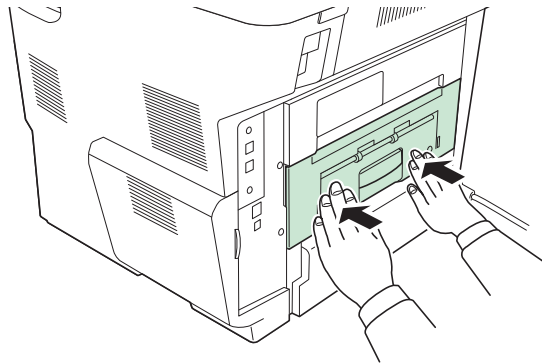

### NOTE

When printing on plain paper, press the two envelope switches (green) again to change the paper feed mode to plain paper mode.

## When you load envelopes or cardstock in the multi purpose tray

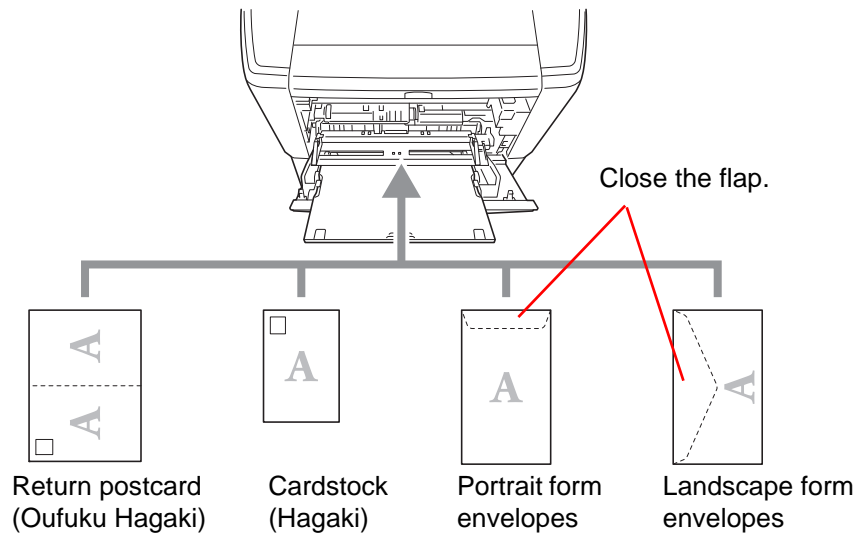

Load envelope with the print side facing up.

**✔ IMPORTANT**

**Use unfolded return postcard (Oufukuhagaki).**

**How to load envelopes (orientation and facing) will differ depending on the type of envelope. Be sure to load it in correctly, otherwise printing may be done in the wrong direction or on the wrong face.**

**When you load envelopes in the multi purpose tray, select the envelope type by referring to *Multi Purpose Tray* on page 9-8**

# Loading Originals


## Placing Originals on the Platen

You may place books or magazines on the platen in addition to ordinary sheet originals.


 **NOTE**

Before opening the document processor, be sure that there are no originals left on the original table or on the original eject table. Originals left on the original table or on the original eject table may fall off when the document processor is opened.

Shadows may be produced around the edges and in the middle of open-faced originals.

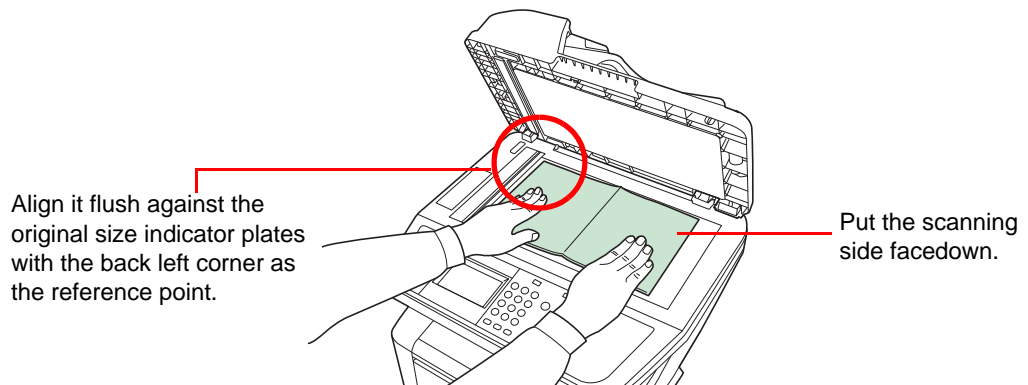

Open the original cover or document processor, and place the original.

 **CAUTION**

Do not leave the document processor open as there is a danger of personal injury.

 **IMPORTANT**

Do not push the original cover forcefully when you close it. Excessive pressure may crack the platen glass.

When placing books or magazines on the machine, do so with the document processor or original cover in the open position.



## Loading Originals in the Document Processor

The document processor automatically scans each sheet of multiple originals. Both sides of two-sided originals are scanned.

### Originals Supported by the Document Processor

Weight	50 to 120 g/m <sup>2</sup> (duplex: 50 to 110 g/m <sup>2</sup> )
Size	Maximum A4 to Minimum A5 Maximum Legal to Minimum Statement
Capacity	Plain paper (80 g/m <sup>2</sup> ), Colored paper, Recycled paper, High quality paper: 50 sheets Plain paper (110 g/m <sup>2</sup> ): 36 sheets Thick paper (120 g/m <sup>2</sup> ): 33 sheets Art paper: 1 sheet


### Originals Not Supported by the Document Processor

- Soft originals such as vinyl sheets
- Transparencies such as OHP film
- Carbon paper
- Originals with very slippery surfaces
- Originals with adhesive tape or glue
- Wet originals
- Originals with correction fluid which is not dried
- Irregularly shaped (non-rectangular) originals
- Originals with cut-out sections
- Crumpled paper
- Originals with folds (Straighten the folds before loading. Failure to do so may cause the originals to jam).
- Originals bound with clips or staples (Remove the clips or staples and straighten curls, wrinkles or creases before loading. Failure to do so may cause the originals to jam).


### How to Load Originals

**✔ IMPORTANT**  
Before loading originals, be sure that there are no originals left on the original eject table. Originals left on the original eject table may cause the new originals to jam.

#### 1 Adjust the original table size.

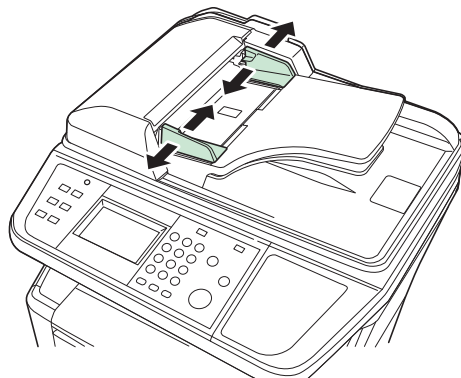

## 2 Load Originals.

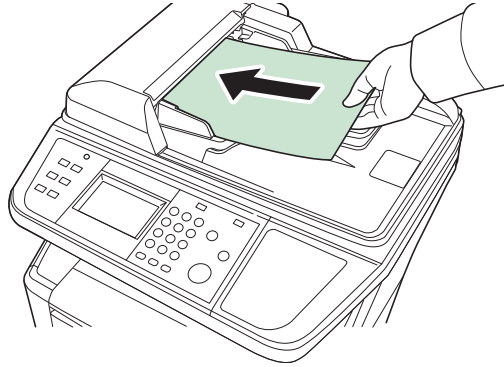


Put the side to be scanned (or the first side of two-sided originals) face-up. Slide the leading edge into the document processor as far as it will go.



### NOTE

Ensure that loaded originals do not exceed the level indicator. Exceeding the maximum level may cause the originals to jam (see the figure).

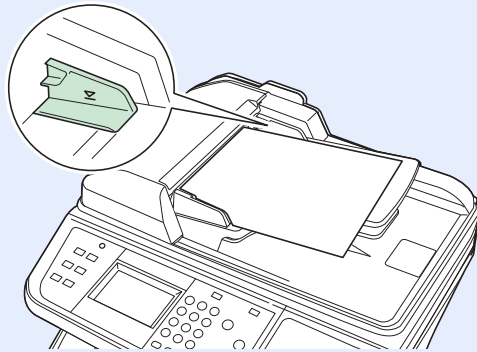


Confirm that the original width guides exactly fit the originals. If there is a gap, readjust the original width guides. The gap may cause the originals to jam.

Originals with punched holes or perforated lines should be placed in such a way that the holes or perforations will be scanned last (not first).

## Checking the Equipment's Serial Number

The equipment's serial number is printed in the location shown in the figure.

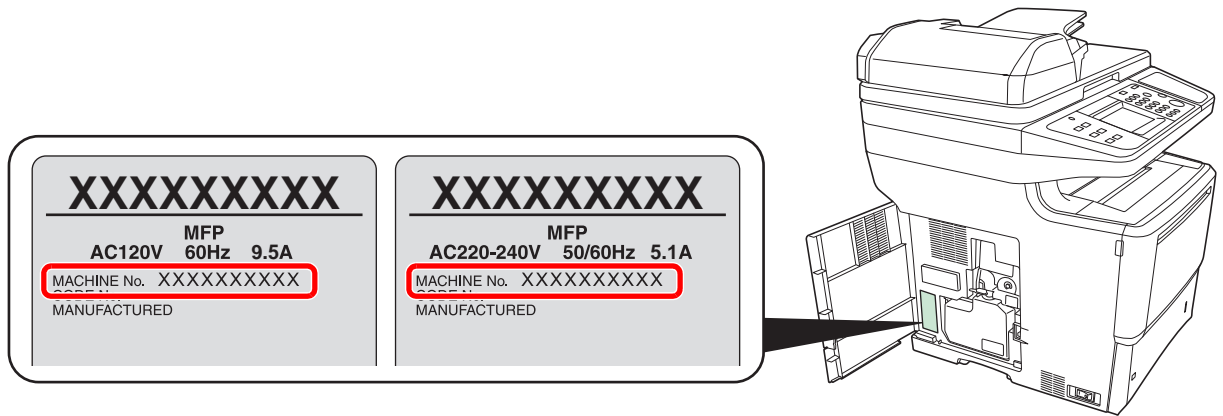


**NOTE**  
You'll need the equipment's serial number when contacting your Service Representative. Please check the number before contacting your Service Representative.

# Checking the Counter

Check the number of pages printed and scanned.


## 1 Display the screen.

◆ System Menu / Counter




Use [▽] or [△] to scroll up and down.

## 2 Check the counter.

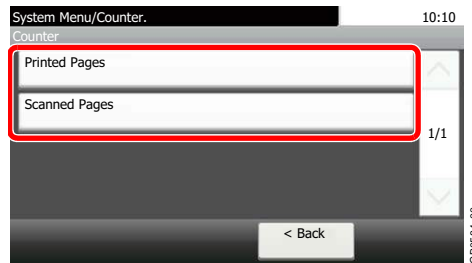

Select the job you wish to check.


### [Printed Pages]

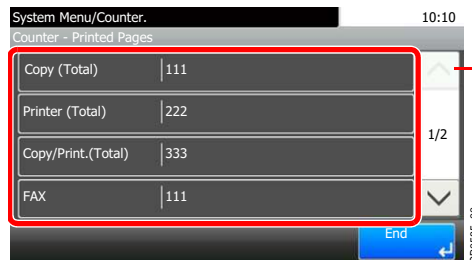

Use [▽] or [△] to scroll up and down.


Scroll the screen to check the number of pages. Pressing [Count by Paper Size] and then [Black & White] allows you to check the number of pages by paper size.

### [Scanned Pages]

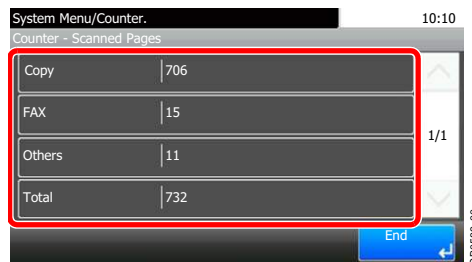

# Login/Logout

If user login administration is enabled, it is necessary to enter the login user name and password to use the machine.

 Refer to *Adding a User on page 9-29* for the default login user name and password.


 **NOTE**

You will be unable to login if you forget your login user name or login password. In this event, login with administrator privileges and change your login user name or login password.


## Login

### Normal login


**1 Enter the login user name.**

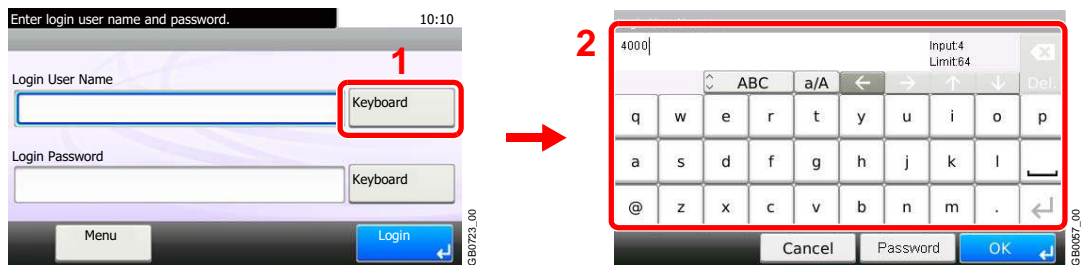

If this screen is displayed during operations, press [Keyboard] to enter the login user name. The name can also be entered using the numeric keypad.

 Refer to *Character Entry Method on page 11-7* for details on entering characters.

**2 Enter the login password.**

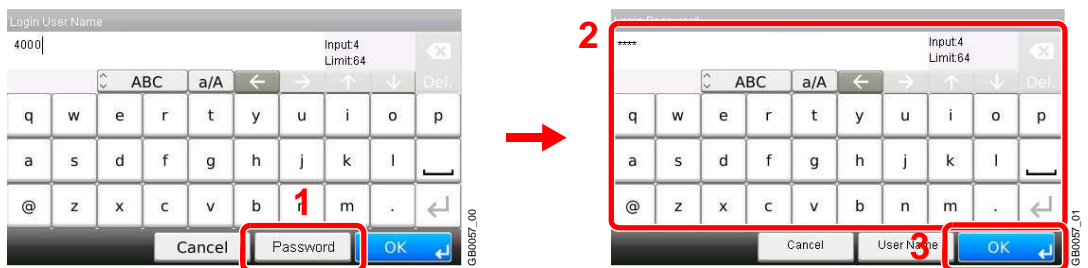

Press [Password] to enter the login password.

### 3 Log in.



#### NOTE

If *Network Authentication* is selected as the user authentication method, either Local or Network can be selected as the authentication destination.

### Simple Login



If this screen is displayed during operations, select a user and log in.



#### NOTE

If a user password is required, an input screen will be displayed.



Refer to *Simple Login* on page 9-38.

### Logout

To logout from the machine, press the Logout key to return to the login user name/password entry screen.

#### Logout



Users are automatically logged out in the following circumstances:

- When the machine is put to Sleep by pressing the **Power** key.
- When the Auto Sleep function is activated.
- When the auto panel reset function is activated.

# Favorites

Frequently used functions can be registered as favorites so that they can be called up easily.

The following functions are pre-registered on this machine. You can delete these functions as well as register new functions.

- ID Card Copy
- Paper Saving Copy
- Scan to PC (Address Entry)
- Scan to PC (Address Book)
- Scan to E-mail (Address Entry)
- Scan to E-mail (Address Book)

## Registering Favorites

When registering a favorite, you can choose from two methods for calling it up:


- *Wizard mode*: Registered settings are called up in order and configured as you check or change each one.
- *Program mode*: Settings are called up immediately when you press the key to which they are registered.



**NOTE**

Up to 20 settings can be registered as favorites.

### 1 Configure the function.

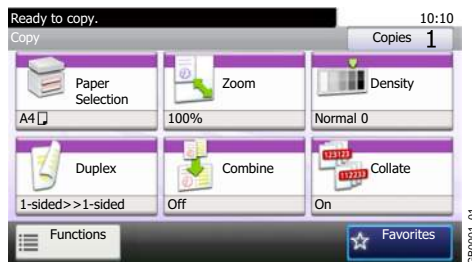


When registering favorites in program mode, configure the copy function, send function\*, destination, or other setting to register.

\* Only on products with the fax function installed.

### 2 Display the screen.


Favorites/  
Application

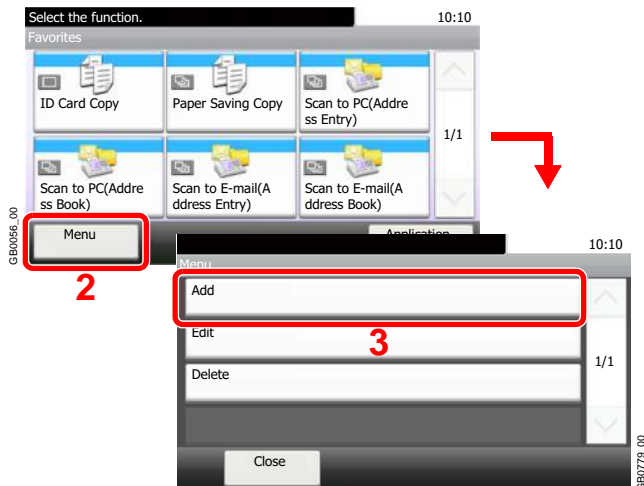





**NOTE**



Press [Application] to display the Application screen. You can install applications that enable your daily work to be accomplished more efficiently. For the applications, see *Favorites/ Application on page 9-15*.

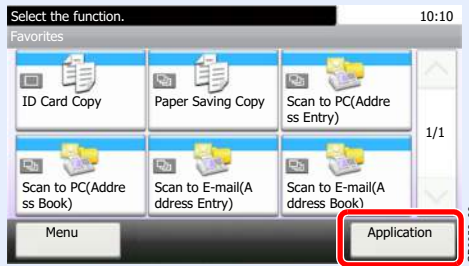

**3 Select the job type.**

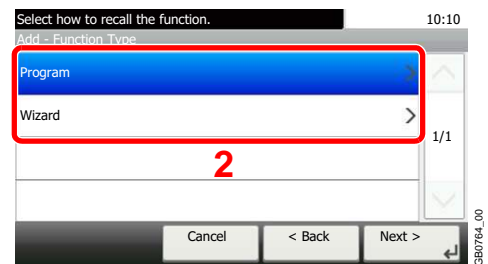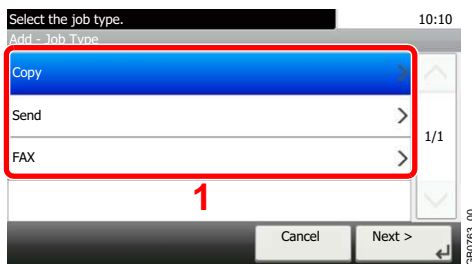

**When you select the wizard mode**

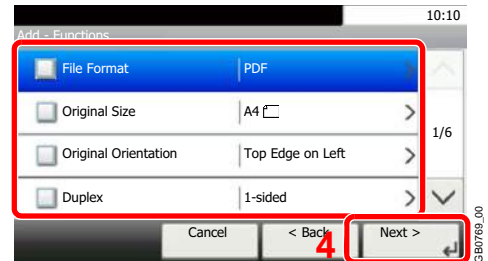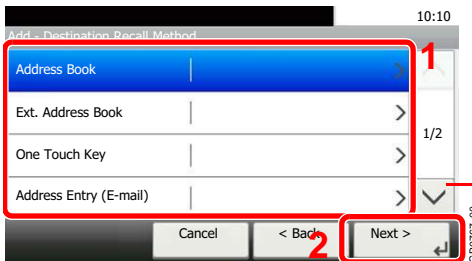

Use [∨] or [∧] to scroll up and down.


Select the function. Checked items will be shown as part of the wizard.



**NOTE**

When the job type is *Copy*, the Destination Recall Method screen will not be displayed.

**4 Enter a name.**

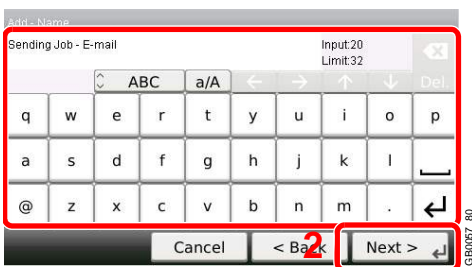


Refer to *Character Entry Method on page 11-7* for details on entering characters.





## 5 Check the settings.

Check the settings and change or add information as needed.



### [Name]

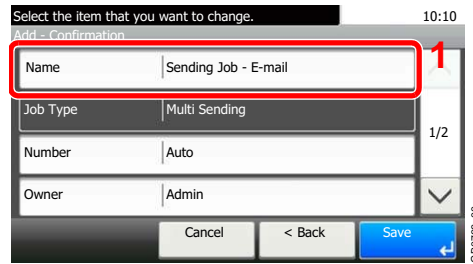

### [Number]

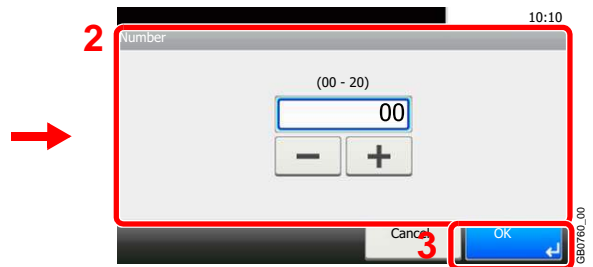
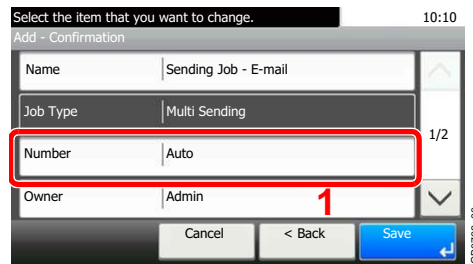


### [Permission]

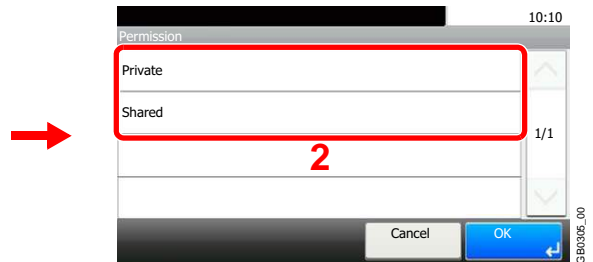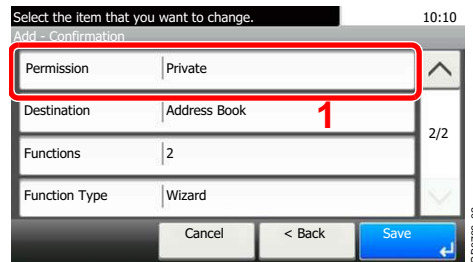



Configures permission settings for favorites to determine how they are shared with other users.

### [Destination]

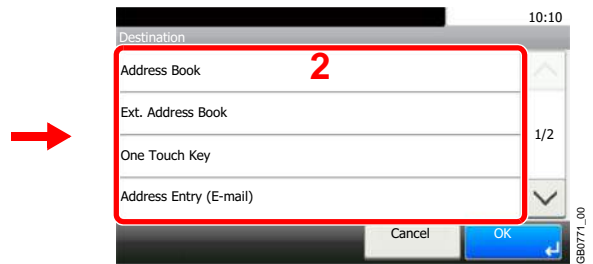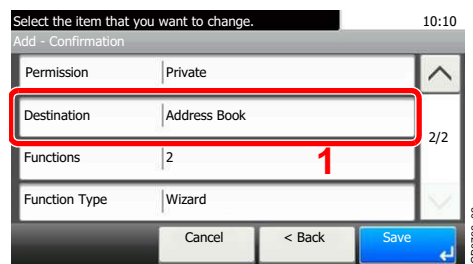



When the job type is [Send] or [FAX], selects the Destination Recall Method.

**[Functions]**

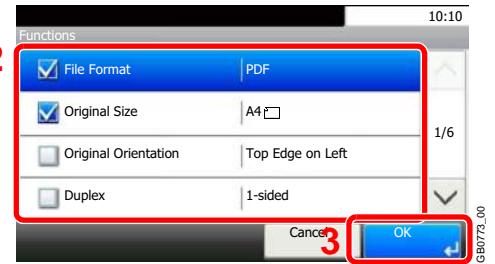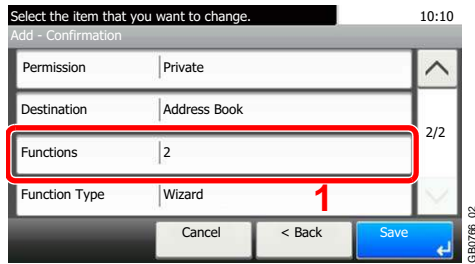


If you selected wizard mode, check the function and make changes as necessary.

**[Function Type]**

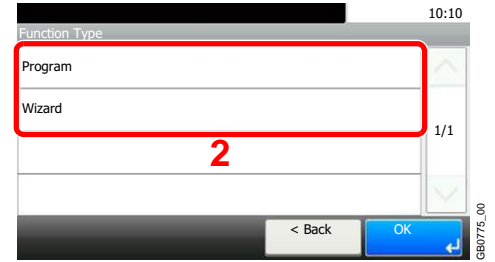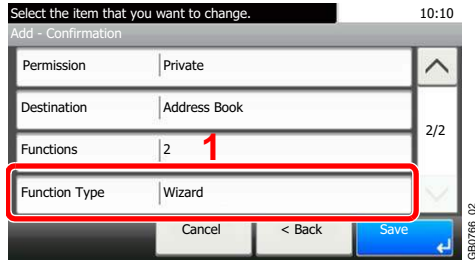

**6 Register the favorite.**

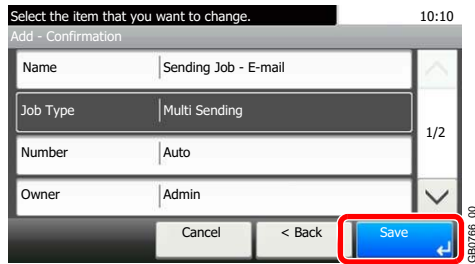

## Editing and Deleting Favorites

This section describes how to edit name and permission of the registered favorites and how to delete favorites.

### 1 Display the screen.


Favorites/  
Application



1





2

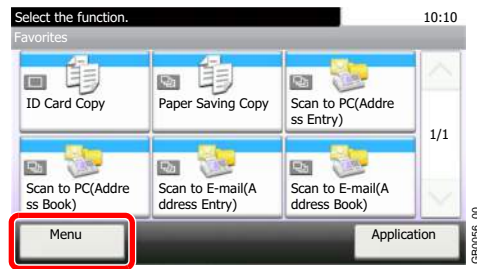

### 2 Edit or delete a favorite.



To edit a favorite

#### 1 Select the favorite you wish to edit.

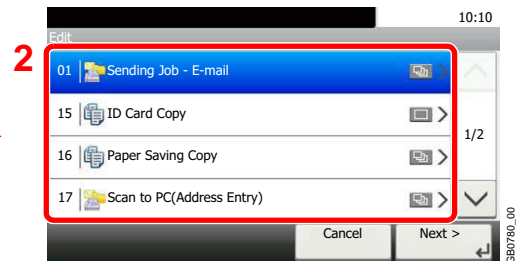
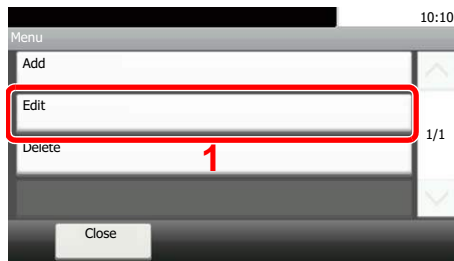


#### 2 Edit the favorite.



[Name]

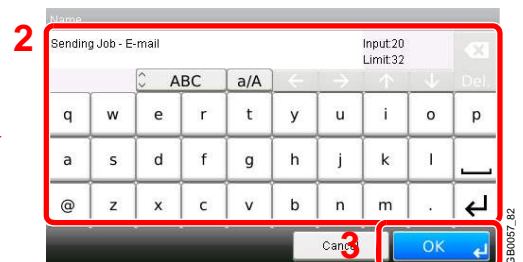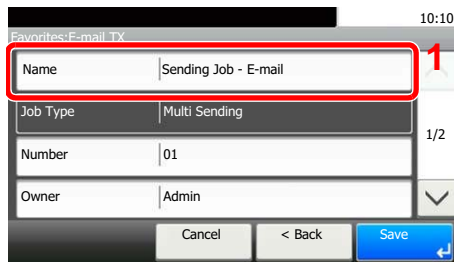

[Number]

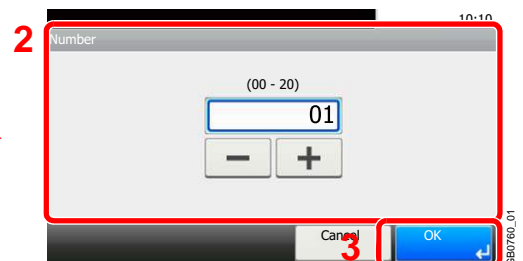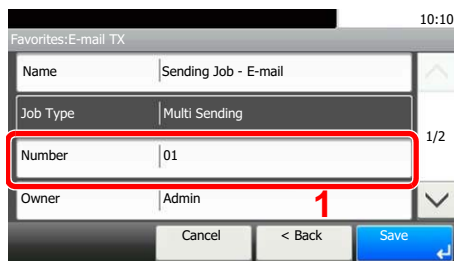


**[Permission]**

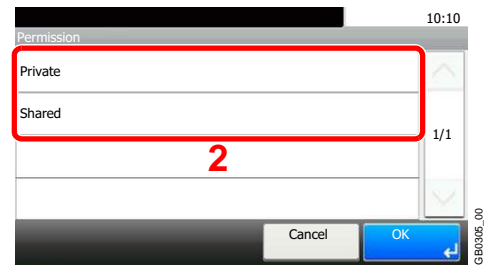
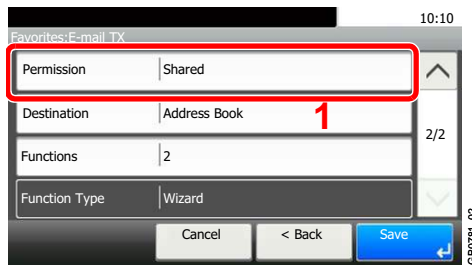


Configures permission settings for favorites to determine how they are shared with other users.

**3 Register the favorite.**

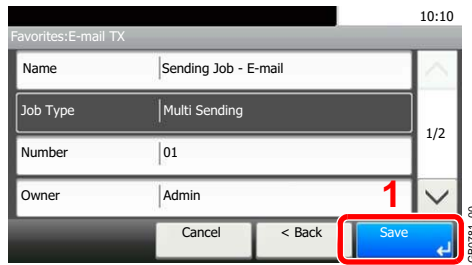

**To delete**

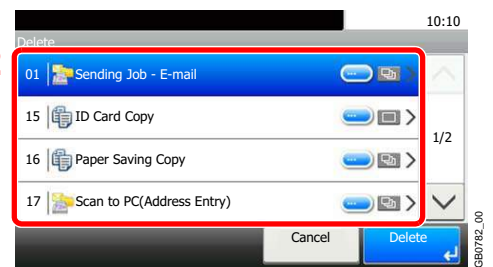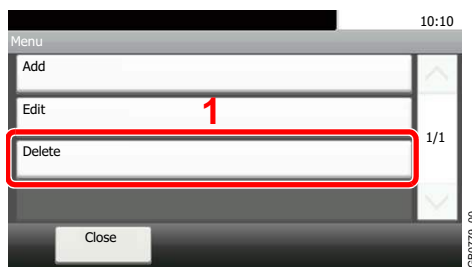

Select the favorite you wish to delete.

# Using Favorites


Call up settings from a favorite.

## 1 Display the screen.

### Favorites/ Application




## 2 Select a favorite.

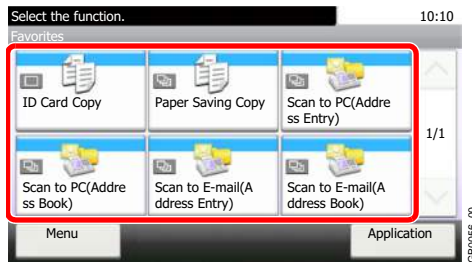


### When using the wizard mode

#### 1 The registered screens are displayed in order. Make the desired settings.

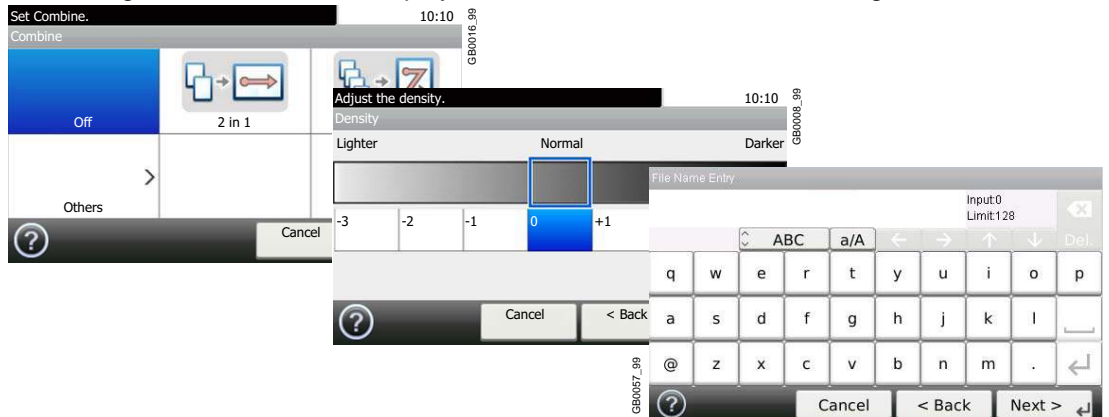

#### 2 Confirm the settings and start the job.

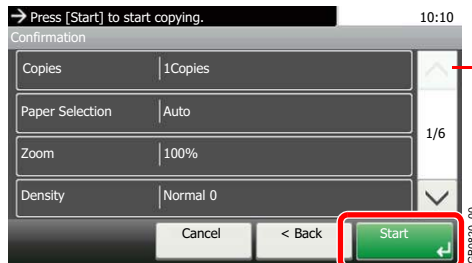

Use [∨] or [∧] to scroll up and down.



### NOTE


To edit the settings, press [<Back] and make changes as desired.

**When using the program mode**

Select a favorite to call up registered settings.

Press the **Start** key to start the job.

**Start**



# Shortcuts

Frequently used function screens can be registered as shortcuts so that they can be called up easily.


## Registering Shortcuts

You can register up to 2 shortcuts for copying functions, sending functions, and functions set for document box.

The following types of shortcuts are available:


Private Shortcut	Private shortcuts are only available for use by the logged in user. They can only be set while using user login administration.
Shared Shortcut	Shared shortcuts can be used by all machine users. When using user login administration, shared shortcuts can only be set by users who have logged in as administrators.

### 1 Display the screen.

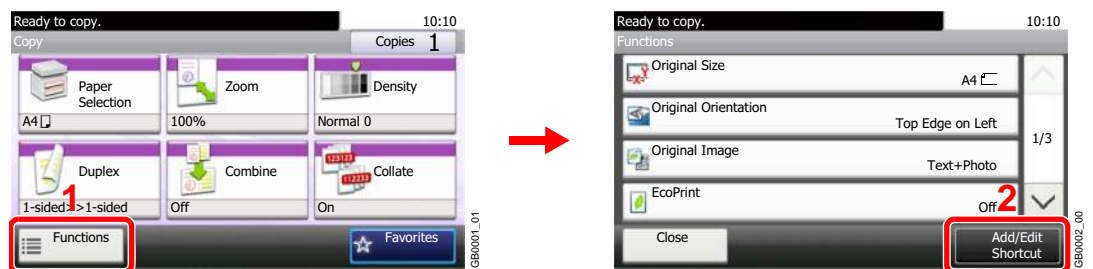


Press [Functions] on the Copy, Send, or Document Box screen and then [Add/Edit Shortcut].

### 2 Select [Add].

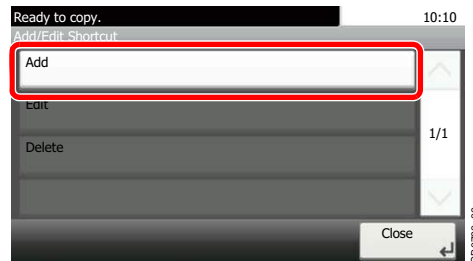

### 3 Select the key.

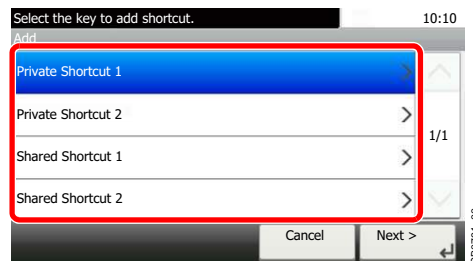


Select the key to which you wish to register the shortcut.



#### NOTE


If you select a shortcut number already registered, the currently registered shortcut can be replaced with a new one.

## 4 Select the function.

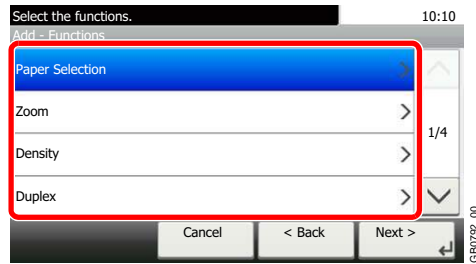

Select the function screen to display with the shortcut.

## 5 Enter the shortcut name.

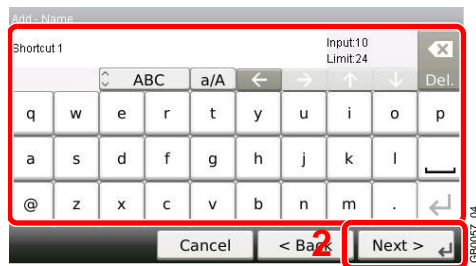


Up to 24 characters can be entered.



Refer to *Character Entry Method* on page 11-7 for details on entering characters.

## 6 Register the shortcut.

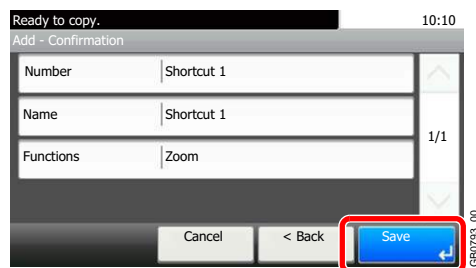


Confirm the settings and press [Save]



# Editing and Deleting Shortcuts

Change shortcut number/name or delete shortcut.

## 1 Display the screen.

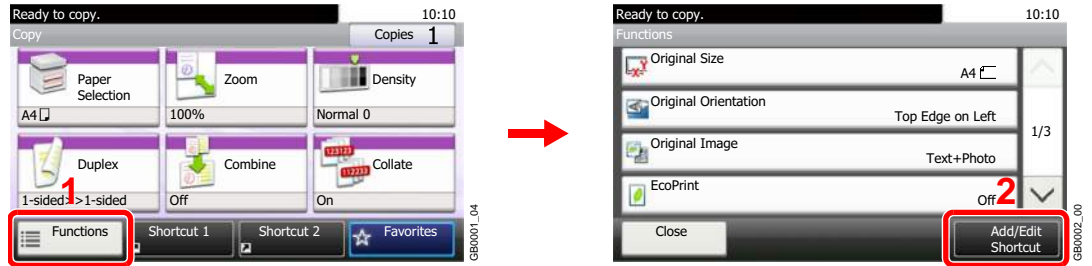


Press [Functions] on the Copy, Send, or Document Box screen and then [Add/Edit Shortcut].

## 2 Edit or delete a shortcut.


### To edit a shortcut

#### 1 Select the shortcut type and number you wish to edit.

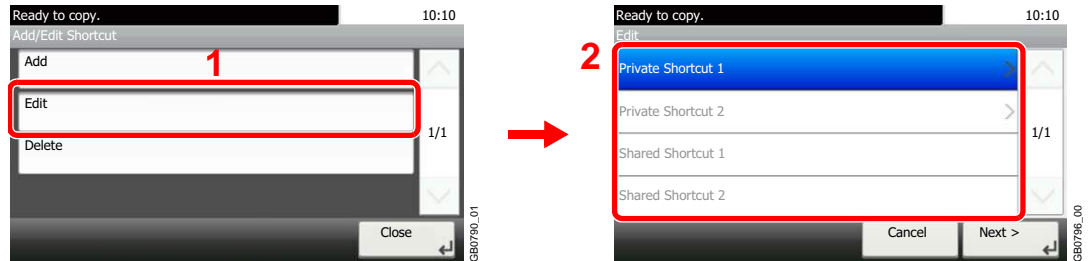


#### 2 Edit the shortcut.


##### [No.]

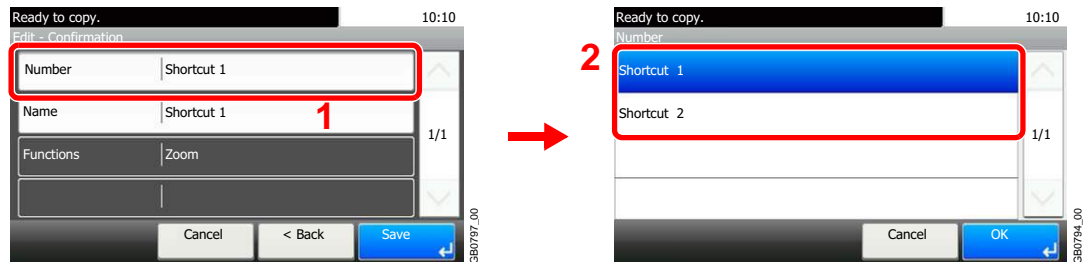



##### [Name]

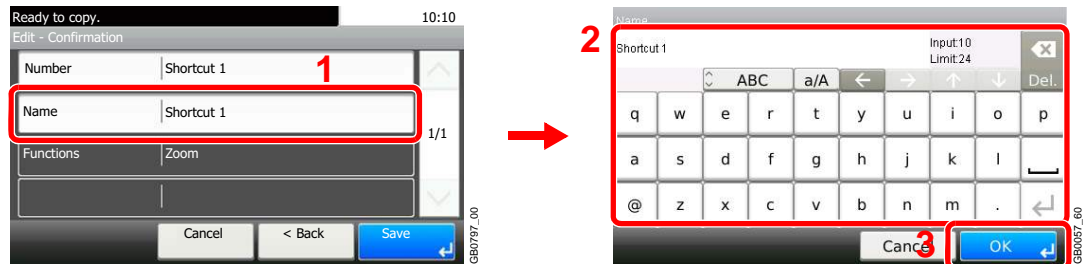

### 3 Register the shortcut.

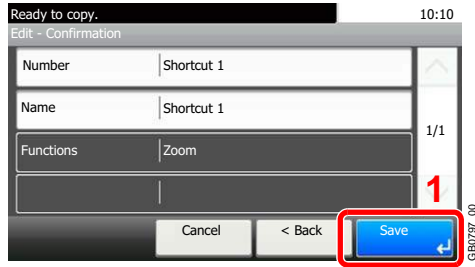

### To delete

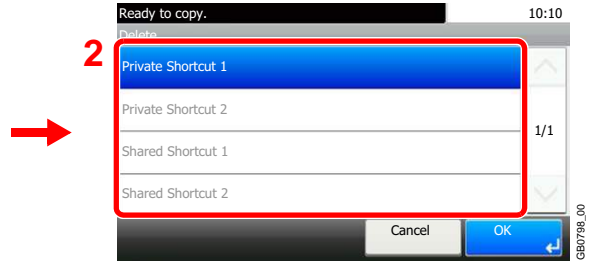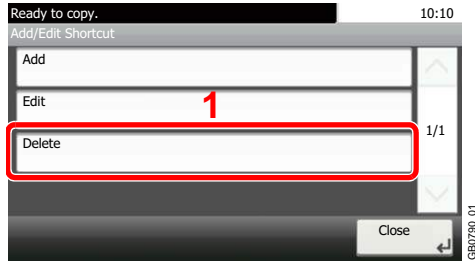

Select the shortcut you wish to delete.

## Using Shortcuts

The registered shortcut will be displayed on the Copy, Send, FAX\*, Print from USB Memory, or Save to USB Memory or Polling Box\* initial screen. Pressing [Shortcut] will switch to the registered function's screen.

\* Only on products with the fax function installed.



# Quick Setup Wizard

Make the following basic settings as instructed by the Wizard:

Paper Setup	Sets the paper size and media type for the paper cassettes and the multi purpose tray.	
	1. Cassette 1	Cassette 1 - Paper Size*, Cassette 1 - Media Type
	2. Cassette 2**	Cassette 2 - Paper Size*, Cassette 2 - Media Type
	3. Cassette 3**	Cassette 3 - Paper Size*, Cassette 3 - Media Type
	4. Cassette 4**	Cassette 4 - Paper Size*, Cassette 4 - Media Type
	5. MP Tray	MP Tray - Paper Size, MP Tray - Media Type
Energy Saver Setup	Configures sleep mode.	
	1. Sleep Mode	Sleep Mode - Sleep Timer
FAX Setup***	Configures basic fax settings.	
	1. Dialing/RX Mode	Dialing/RX Mode - Dialing Mode Dialing/RX Mode - Reception Mode Dialing/RX Mode - Auto (DRD)****
	2. Local FAX Info.	Local FAX Info. - Local FAX Name Local FAX Info. - Local FAX Number Local FAX Info. - Local FAX ID Local FAX Info. - Print Position
	3. Sound Volume	Speaker Volume, Monitor Volume
	4. Rings	Normal, Answering Machine, FAX/TEL Switch*****
	5. Redial	Redial - Retry Times

\* This function is displayed when the size dial on the cassette is set to Other.

\*\* This function is displayed when the optional paper feeder is installed.


\*\*\* Only on products with the fax function installed.

\*\*\*\* Auto (DRD) is available for some countries.

\*\*\*\*\*For FAX/TEL Switch, this change is possible with some countries.

## 1 Display the screen.


◆ System Menu / Counter

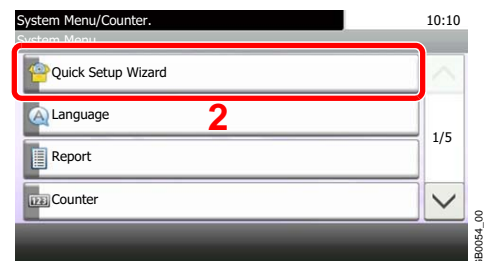


## 2 Select a function.



### 3 Configure the function.

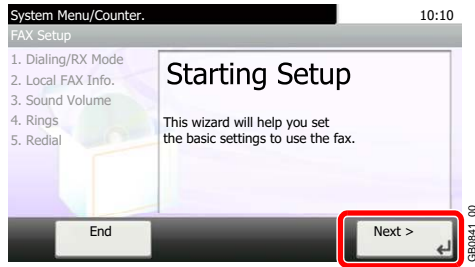

Start the wizard. Follow the instructions on the screen to configure settings.

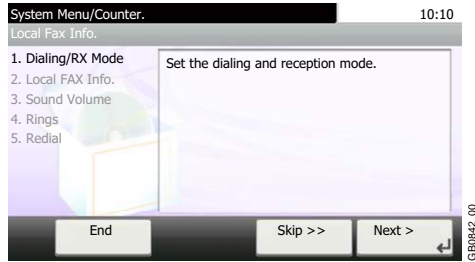


#### NOTE

If you experience difficulty configuring the settings, refer to *Help Screen on page 3-33*.

[End]	Exits the wizard. Settings configured so far are applied.
[<< Previous]	Returns to the previous item.
[Skip >>]	Advances to the next item without setting the current item.
[Next >]	Advances to the next screen.
[< Back]	Returns to the previous screen.
[Finish]	Register the settings and exit the wizard.

# Help Screen

If you have difficulty operating the machine, you can check how to operate it using the touch panel. When the [?] (help) is displayed on the touch panel, you can press it to display the Help screen.

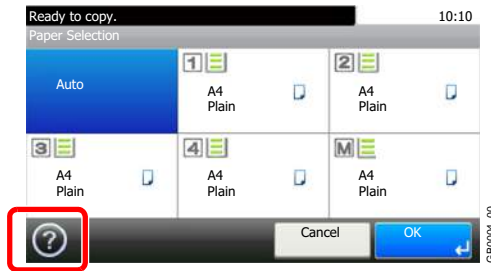

## How to read the screen

A screenshot of the 'Paper Selection' help screen. The screen displays the following text: 'Paper Selection', 'Select the cassette or multi purpose tray with the desired paper size.', 'Auto: Automatically selects the appropriate paper size.', 'Cassette 1: Selects the paper in cassette 1.', 'Cassette 2: Selects the paper in cassette 2.', 'Cassette 3: Selects the paper in cassette 3.' At the bottom left, there is a close button (a circle with an 'X'). At the bottom right, there is a scroll bar with '1/2' in the middle, indicating the page number. Red lines and boxes highlight these elements, with corresponding text labels. The status bar at the top shows 'Ready to copy.' and '10:10'. A small code 'GH10001\_00' is visible on the right side.

Help titles

Displays information about functions and machine operation.

Closes the Help screen and returns to the original screen.

Scrolls up and down when the help text cannot be displayed in its entirety on a single screen.

# Canceling Jobs

Cancel any print or send job being executed.


- 1 Press the Stop key.

## Stop




- 2 Cancel a job.

**When there is a job is being scanned**

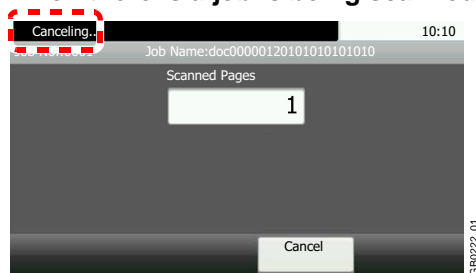

*Canceling...* will be displayed, and the current job will be canceled.

**When there is a job printing or on standby**

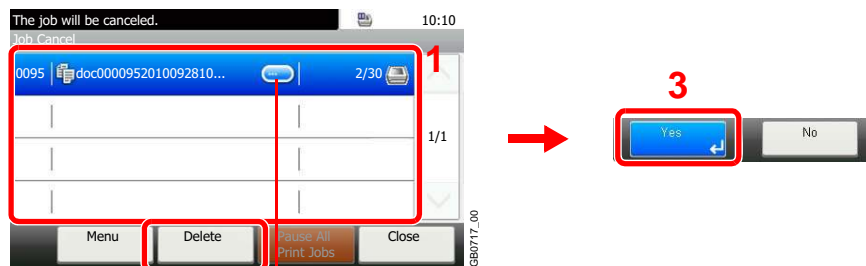

- 2 Displays details for individual jobs.

Select the job you wish to cancel and press [Delete].




### NOTE

The current print job is temporarily interrupted. Continues without temporarily interrupting jobs being sent.

You can also cancel executing jobs and jobs on standby after checking their status. Refer to *Status / Job Cancel* on page 8-1.

## Canceling printing from a computer

To cancel a print job executed using the printer driver before the printer begins printing, do the following:

- 1 Double-click the printer icon (  ) displayed on the taskbar at the bottom right of the Windows desktop to display a dialog box for the printer.
- 2 Click the file for which you wish to cancel printing and select **Cancel** from the **Document** menu.

# Using Various Functions

This section describes common functionality that can be configured for copying, sending, and the document box.

## 1 Display the screen.


Copy



Send



Press the key of each function.

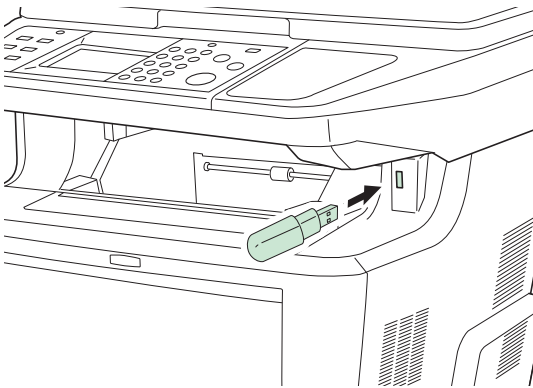

When using USB memory, plug it into the USB memory slot .

Press [Yes] on the displayed screen.

When printing from USB memory, select the file to be printed and press [Print].

When storing a document to USB memory, select the folder where the file will be stored and press [Menu] and then [Store File].




For details, refer to *Printing Documents Stored in Removable USB Memory* on page 7-2 or *Saving Documents to USB Memory (Scan to USB)* on page 7-5.



### NOTE

If the touch panel is turned off, press the **Power** key and wait for the machine to warm up.

## 2 Select the functions.

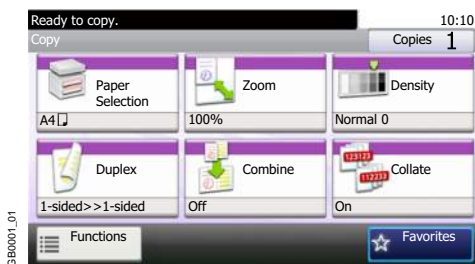

Select the functions to use.

Press [Functions] to display all the functions.



Refer to *Common Functionality* on page 3-36.

## Common Functionality

### Functionality related to originals

What do you want to do?	Reference Page
Specify the original size.	Original Size ► page 3-37
Specify the original orientation to scan in the correct direction.	Original Orientation ► page 3-38
Automatically scan 2-sided originals.	Duplex ► page 3-39
Scan a large number of originals separately and then produce as one job.	Continuous Scan ► page 3-41

### Functionality related to document quality

What do you want to do?	Reference Page
Specify the paper size and type.	Paper Selection ► page 3-43
Collate the output documents in page order.	Collate ► page 3-44
Adjust the density.	Density ► page 3-45
Set the resolution at which to scan originals.	Scan Resolution ► page 3-46
Select original image type for best results.	Original Image ► page 3-47
Emphasize the outline of texts or lines. Blur the image outline.	Sharpness ► page 3-48
Darken or lighten the background (i.e., the area with no text or images) of originals.	Background Density Adjust ► page 3-49
Enlarge or shrink originals according to the sending or storing size.	Zoom ► page 3-50
Select the file format for images being sent or stored.	File Format ► page 3-51
Change the color mode for images being sent or stored.	Color Selection ► page 3-53
Send notice by e-mail when a job is complete.	Job Finish Notice ► page 3-54
Add a file name to the job to easily check its status.	File Name Entry ► page 3-56
Suspend the current job and override it to give a new job top priority.	Priority Override ► page 3-57



# Original Size



Specify the original size to be scanned.

Metric	Select from A4, A5, A6, B5, B6, or Folio.
inch	Select from Letter, Legal, Statement, Executive, or Oficio II.
Others	Select from 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Hagaki, Ofukuhagaki, Youkei 4, Youkei 2, or Custom*

\* For instructions on how to specify the custom original size, refer to *Custom Original Size on page 9-9*.


**NOTE**

Be sure to always specify the original size when using custom size originals.


## 1 Display the screen.

1 Referring to *Using Various Functions on page 3-35*, display the screen.

2 Press [Functions] and then [Original Size].

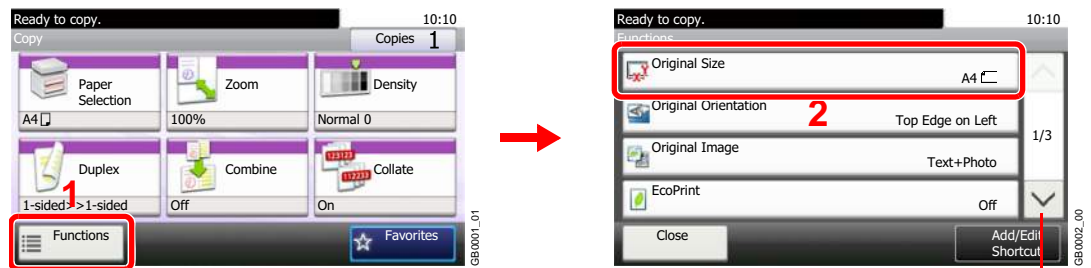

## 2 Select the original size.

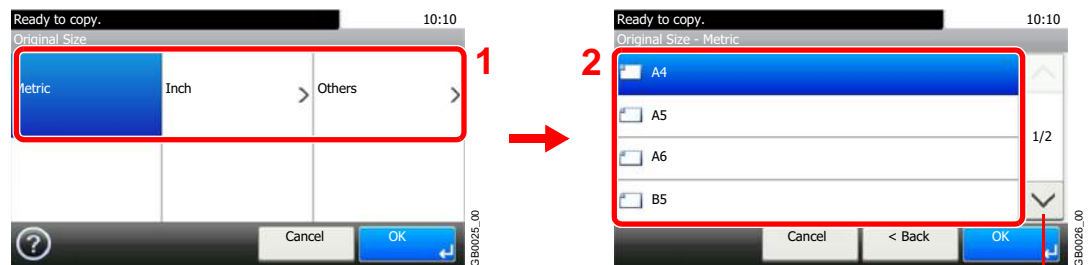

Select the original size.

# Original Orientation




Select the orientation of the original document top edge to scan correct direction.

To use any of the following functions, the document's original orientation must be set.


- Duplex
- Combine

## When placing originals on the platen

Top Edge on Top




Top Edge on Left




## When placing originals on the document processor

Top Edge on Top




Top Edge on Left



## 1 Display the screen.


1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Functions] and then [Original Orientation].

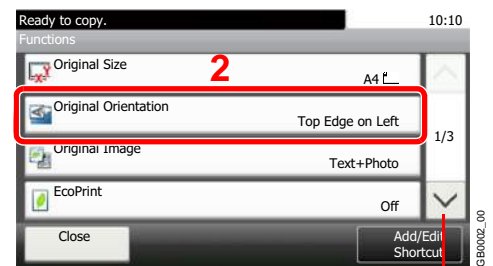

Use [∨] or [∧] to scroll up and down.

## 2 Select the function.

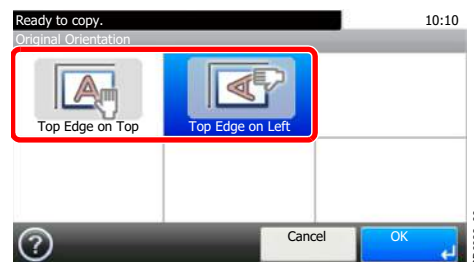

Select the original orientation.

# Duplex



Select the type and orientation of the binding based on the original.

1-sided			Set when using a 1-sided sheet original.
2-sided			Set when using a 2-sided sheet original that will be bound on the left or right.
Other Settings	Duplex	1-sided	Set when using a 1-sided sheet original.
		2-sided (Binding Left/Right)	Set when using a 2-sided sheet original that will be bound on the left or right.
		2-sided (Binding Top)	Set when using a 2-sided sheet original that will be bound at the top.
	Original Orientation*		Select the orientation of the original document top edge to scan correct direction.


\* This function is displayed when [2-sided (Binding Left/Right)] or [2-sided (Binding Top)] is selected.

## 1 Display the screen.


1 Referring to *Using Various Functions* on page 3-35, display the screen.

## 2

### Send

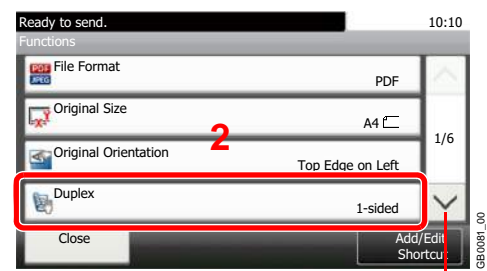


### Scan to USB

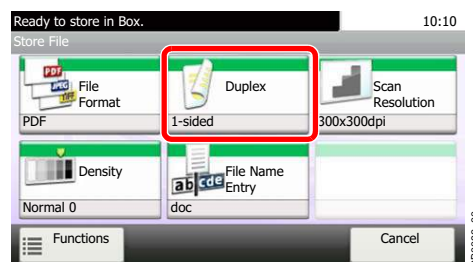


## 2 Select the type of original.



[2-sided]

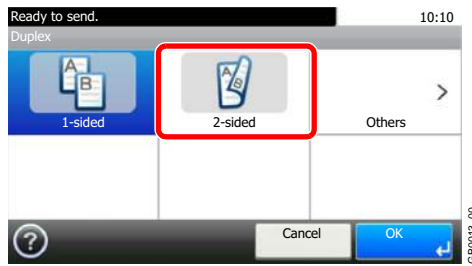

[Others]

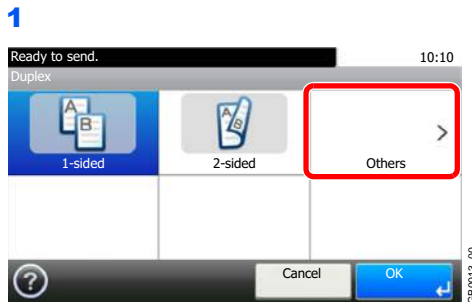



### 2 Select the type of original.

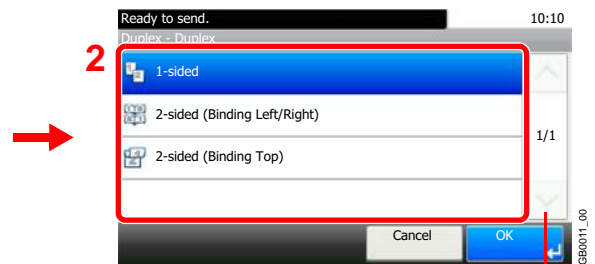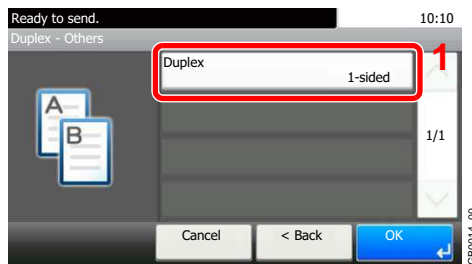

Use [∨] or [∧] to scroll up and down.

The document processor is required in order to use 2-sided sheet originals.


### 3 Select the original orientation.

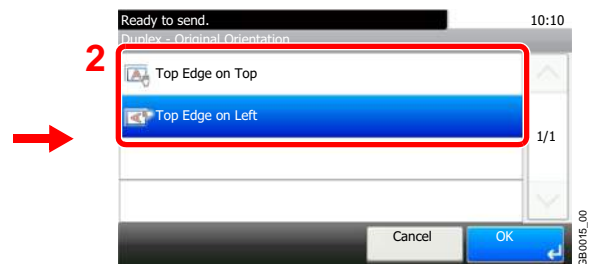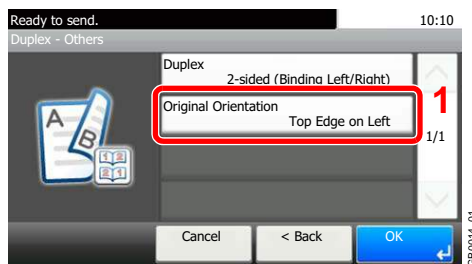

# Continuous Scan




Scan a large number of originals in separate batches and then produce as one job. Originals will be scanned continuously until you press [Finish Scan].

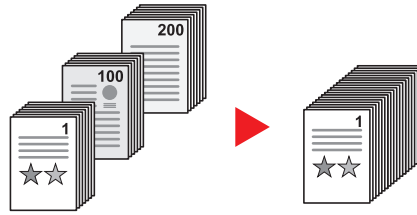

## 1 Display the screen.


1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Functions] and then [Continuous Scan].

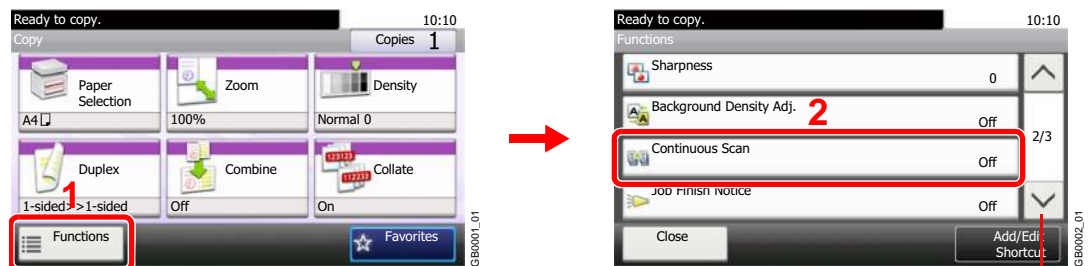


Use [∨] or [∧] to scroll up and down.

## 2 Select the function.

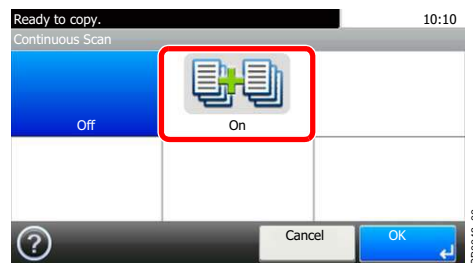


## 3 Scan the originals.

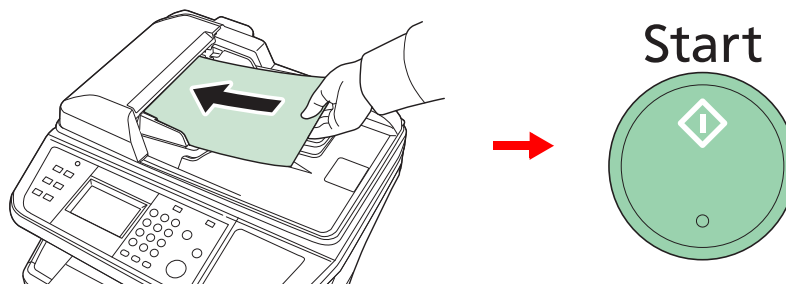

Load the original and press the **Start** key to start scanning.

Once the original has been scanned, load the next original and press the **Start** key. Use the same procedure to scan any remaining originals.

## 4 Finish scanning.

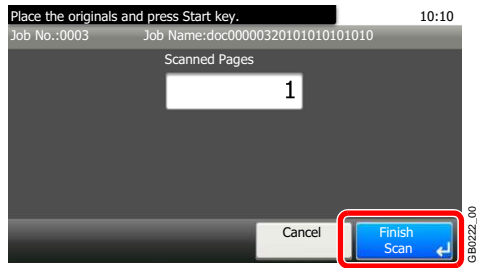

Start copying, sending, or storing.

# Paper Selection



Select the cassette or multi-purpose tray that contains the required paper size.


## NOTE

Specify in advance the size and type of the paper loaded in the cassette (refer to *Quick Setup Wizard* on page 3-31).


### 1 Display the screen.

1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Paper Selection].

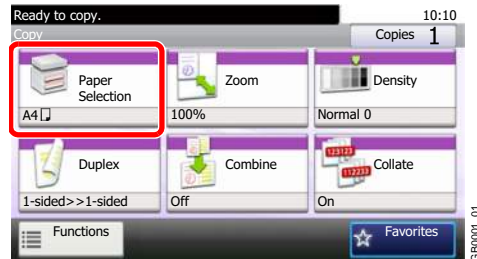

### 2 Select the paper source.

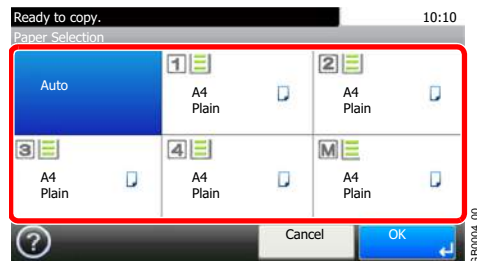

If [Auto] is selected, the paper matching the size of the original is selected automatically.

[2] (Cassette 2), [3] (Cassette 3) and [4] (Cassette 4) are displayed when the optional paper feeder is installed. [M] indicates the MP tray.

# Collate



Collate the output by page.

## Collate




Scan multiple originals and deliver complete sets of copies as required according to page number.


### 1 Display the screen.

1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Collate].

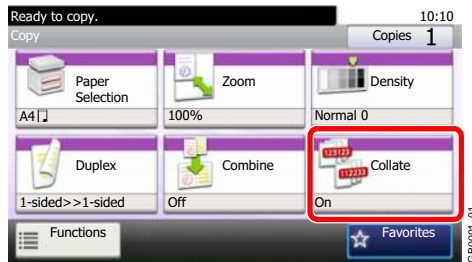

### 2 Select the function.

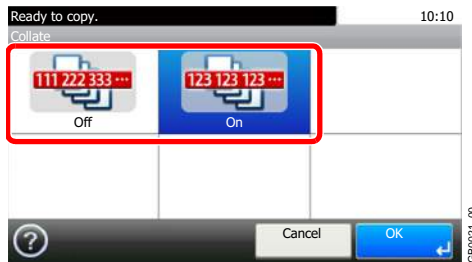



# Density

Adjust density using 7 levels.




## 1 Display the screen.


1 Referring to *Using Various Functions* on page 3-35, display the screen.

### 2


#### Copy

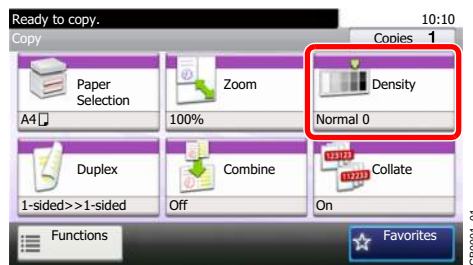

#### Scan to USB

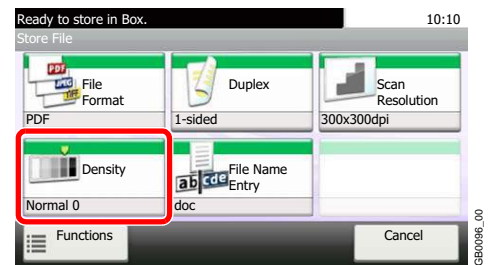


#### Send

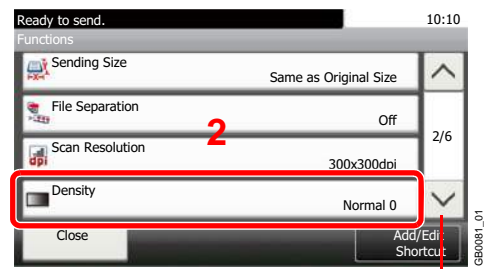

Use [∨] or [∧] to scroll up and down.

## 2 Adjust density.

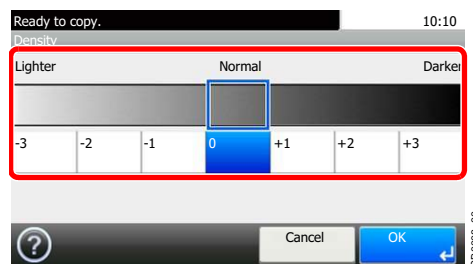


Press [-3] to [+3] (*Lighter - Darker*) to adjust density.

# Scan Resolution



Select fineness of scanning resolution.

The selectable resolution is [200 × 100dpi], [200 × 200dpi Fine], [200 × 400dpi Super], [300 × 300dpi], [400 × 400dpi Ultra], or [600 × 600dpi].



## NOTE


The larger the number, the better the image resolution. However, better resolution also means larger file sizes and longer send times.

## 1 Display the screen.

1 Referring to *Using Various Functions on page 3-35*, display the screen.


## 2

### Send

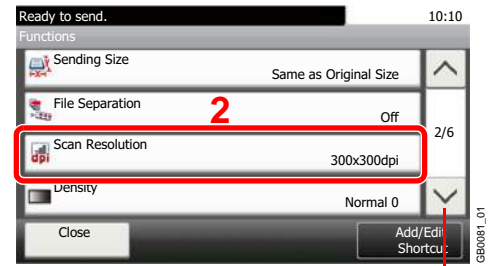


Use [∨] or [∧] to scroll up and down.

### Scan to USB

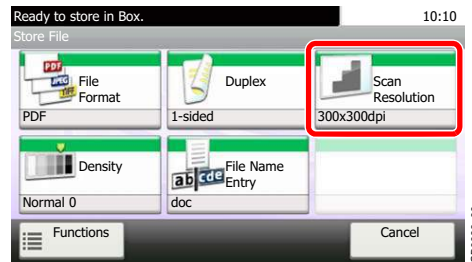

## 2 Select the resolution.

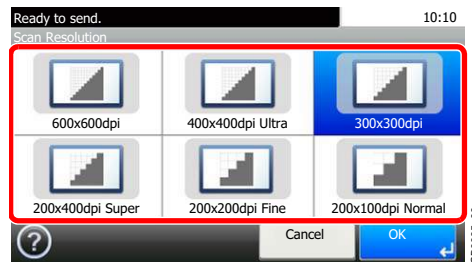

# Original Image



Select original image type for best results.

Text+Photo		Best for originals which contain a mixture of text and photos.
Photo		Best for photographs.
Text		Sharply renders pencil text and fine lines.
Graphic/Map*		Best for graphics and maps.
Printer Output*		Best for documents printed on this machine originally.
Text (for OCR)**		For documents to be read by OCR.



\* This function is displayed while copying.

\*\* This function is displayed when the color mode is [Auto (Color/B & W)] or [Black & White] (when sending or storing).

## 1 Display the screen.

1 Referring to *Using Various Functions* on page 3-35, display the screen.


2 Press [Functions] and then [Original Image].

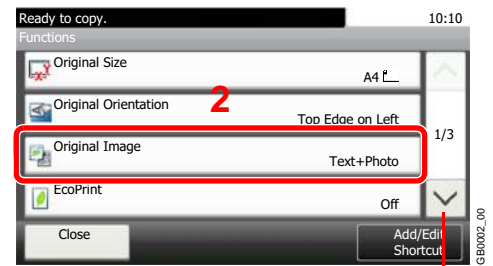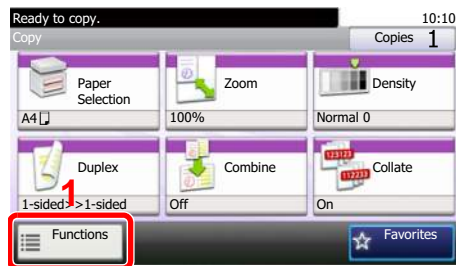

Use [∨] or [∧] to scroll up and down.

## 2 Select the image quality.

### Copy

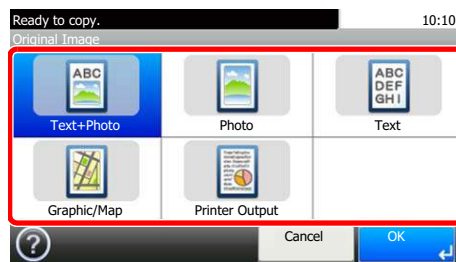

### Send/Scan to USB



# Sharpness



Adjust the sharpness of the image.


When copying penciled originals with rough or broken lines, clear copies can be taken by adjusting sharpness toward [Sharpen]. When copying images made up of patterned dots such as magazine photos, in which moire\* patterns appear, edge softening and weakening of the moire effect can be obtained by setting the sharpness toward [Blur].

\* Patterns that are created by irregular distribution of halftone dots.

## 1 Display the screen.


1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Functions] and then [Sharpness].

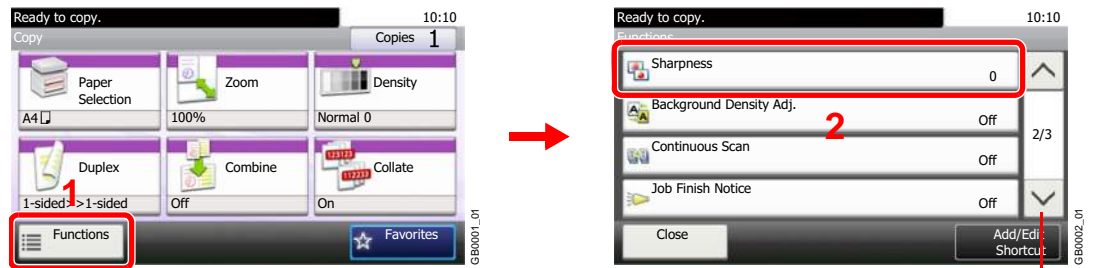

Use [∨] or [∧] to scroll up and down.

## 2 Adjust the sharpness.

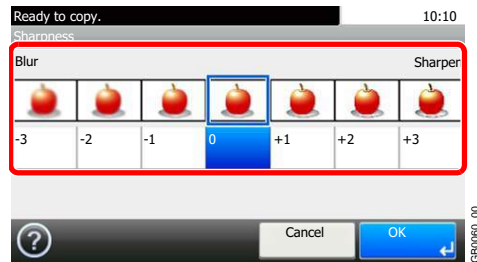

Press [-3] to [+3] (*Blur - Sharpen*) to adjust the sharpness.

# Background Density Adjust




Remove dark background from originals, such as newspapers.

Off	Do not use this function.
Auto	Adjusts the density automatically based on the original.
Manual	Manually adjust the density.


## 1 Display the screen.

- 1 Referring to *Using Various Functions* on page 3-35, display the screen.
- 2 Press [Functions] and then [Background Density Adj.].

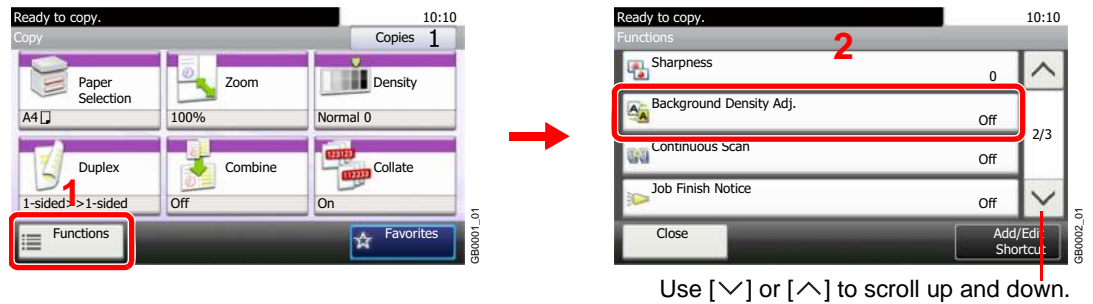


## 2 Adjusts the background density.

### [Auto]

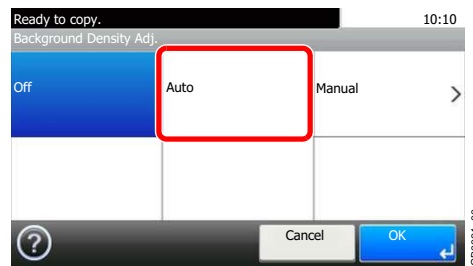

### [Manual]

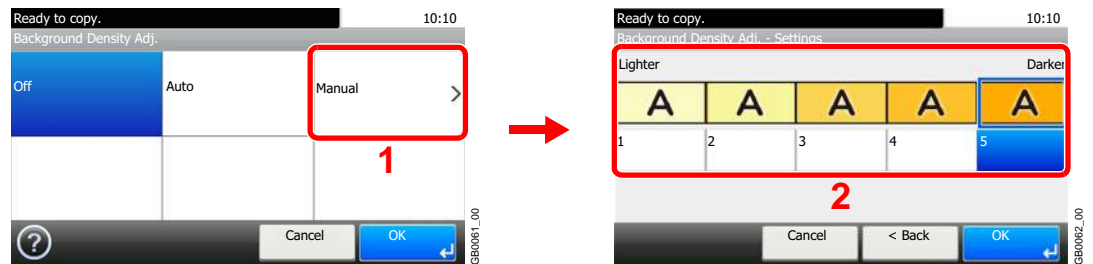

Press [1] to [5] (*Lighter - Darker*) to adjust the background density.

# Zoom



Reduce or enlarge original to send or store size.

100%	Reproduces the original size.
Auto	Adjust the image to match the send or store size.


**NOTE**  
*Original Size* (page 3-37), *Sending Size* (page 6-37), *Storing Size* (page 7-14), and *Zoom* are related to each other.

Refer to *Sending Size on page 6-37* and *Storing Size on page 7-14*.

## 1 Display the screen.

1 Referring to *Using Various Functions on page 3-35*, display the screen.


### 2

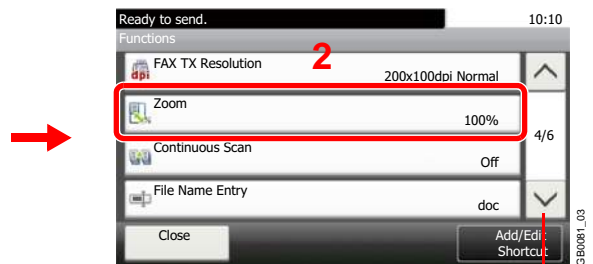

Use [∨] or [∧] to scroll up and down.

Press [Functions] and then [Zoom].


## 2 Select the function.

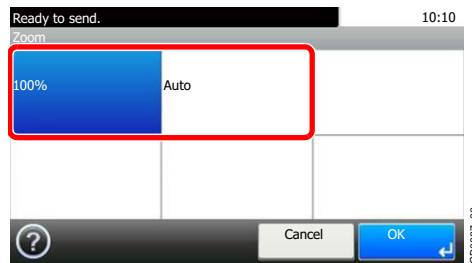

# File Format



Specify the image file format. In addition, you can adjust the image quality level.

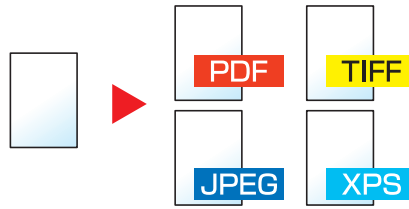


PDF		Saves or sends a PDF file. You can specify the format that comply with PDF/A.
TIFF		Saves or sends a TIFF file.
JPEG		Saves or sends a JPEG file. Each page will be saved individually.
XPS		Saves or sends a file in XPS.
Others	File Format	Select from PDF, TIFF, JPEG, and XPS.
	Image Quality	Set the image quality from [1] to [5] ( <i>Low Quality - High Quality</i> ).
	PDF/A*	Set PDF/A from [PDF/A-1a] and [PDF/A-1b].

\* This setting is displayed only when [PDF] has been selected as the file format.

## 1 Display the screen.


1 Referring to *Using Various Functions on page 3-35*, display the screen.

### 2 Send

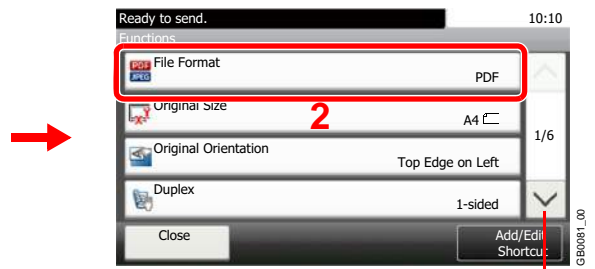


Use [∨] or [∧] to scroll up and down.

### Scan to USB

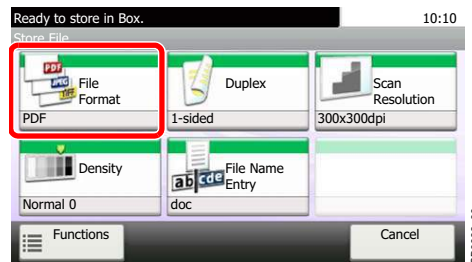


## 2 Select the file format.

[PDF], [TIFF], [JPEG], or [XPS]


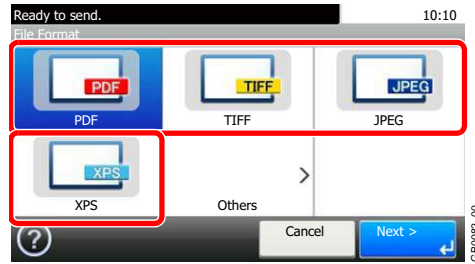


[Others]



1

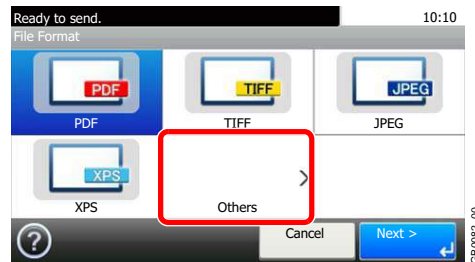



### 2 Select the file format.

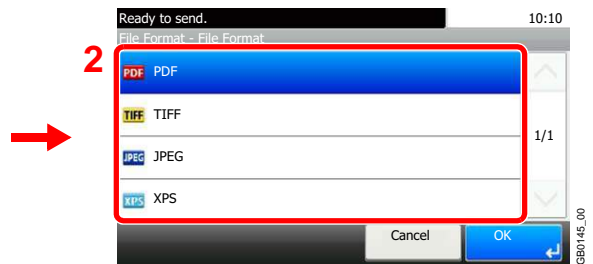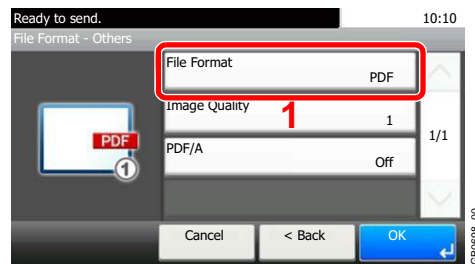

### 3 Set the image quality.

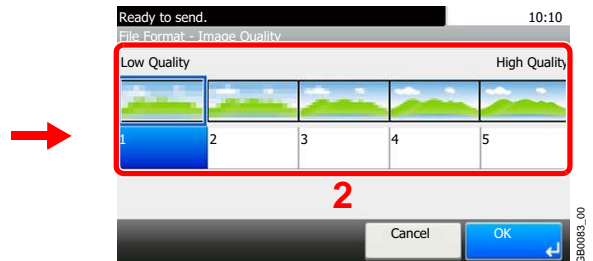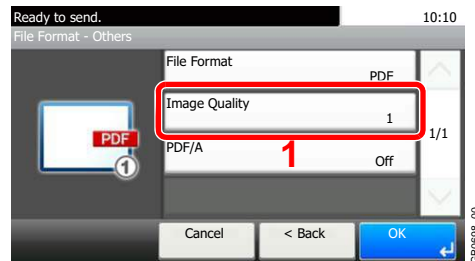


### 4 Set PDF/A.

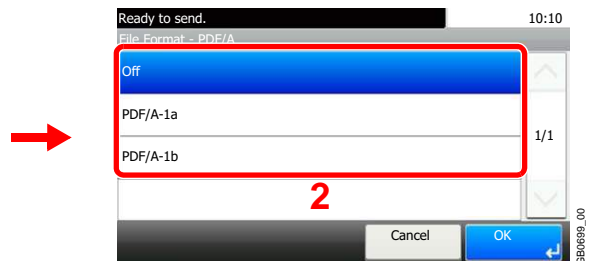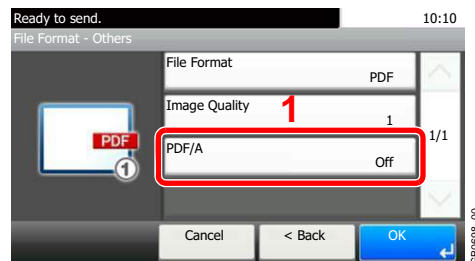



# Color Selection




Select the color mode setting.

Auto (Color/Gray)	Automatically detects whether the document is color or black and white, and scan color documents in Full Color and black and white documents in Grayscale.
Auto (Color/B & W)	Automatically recognize whether the document is color or black and white, and scan color documents in Full Color and black and white documents in Black and White.
Full Color	Scan document in full color.
Grayscale	Scan document in grayscale for smoother and finer finish.
Black & White	Scan document in black and white. File size is smaller than Full Color or Grayscale.

## 1 Display the screen.


1 Referring to *Using Various Functions on page 3-35*, display the screen.

2 Press [Functions] and then [Color Selection].

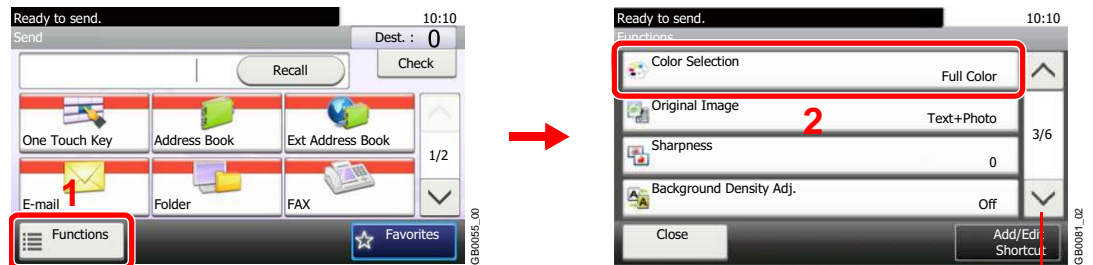

Use [∨] or [∧] to scroll up and down.

## 2 Select the color mode.

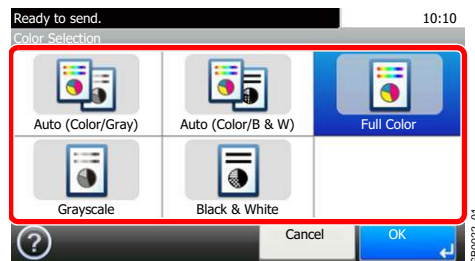

# Job Finish Notice



Send e-mail notice when a job is complete.

User can be notified of the completion of a copy job while working at a remote desk, saving the time spent waiting beside the machine for copying to finish.



## NOTE



PC should be configured in advance so that E-mail can be used.

Email can be sent to a single destination.

### 1 Display the screen.



1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Functions] and then [Job Finish Notice].

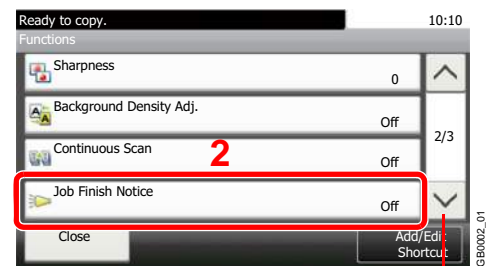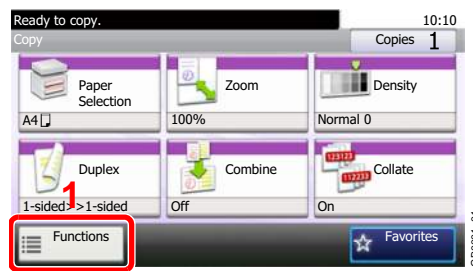

Use [∨] or [∧] to scroll up and down.


### 2 Select the function.

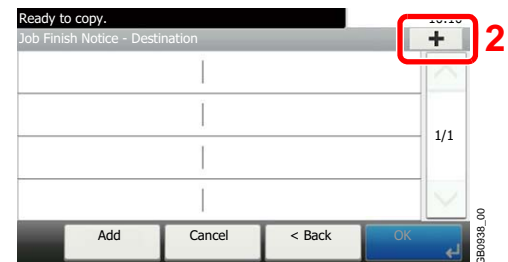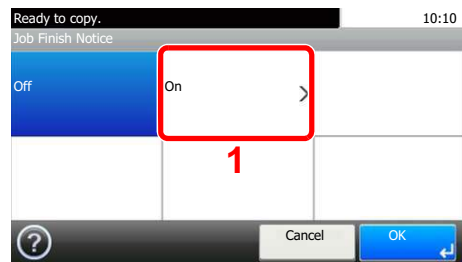

### 3 Select the destination.

Select an e-mail address from the address book.


Searches by destination name.

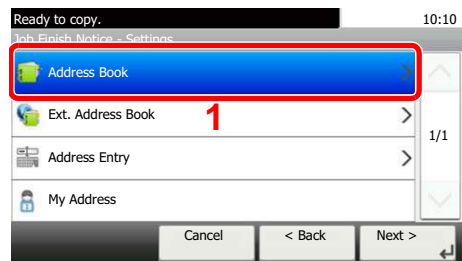

Allows you to search for and sort destinations.


Displays details for individual destinations.

### Select the e-mail address from an external address book.

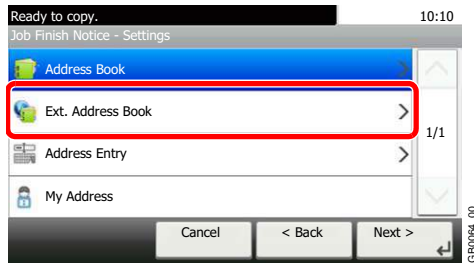

For details on the External Address Book, refer to *KYOCERA COMMAND CENTER Operation Guide*.


### Enter the e-mail address directly.

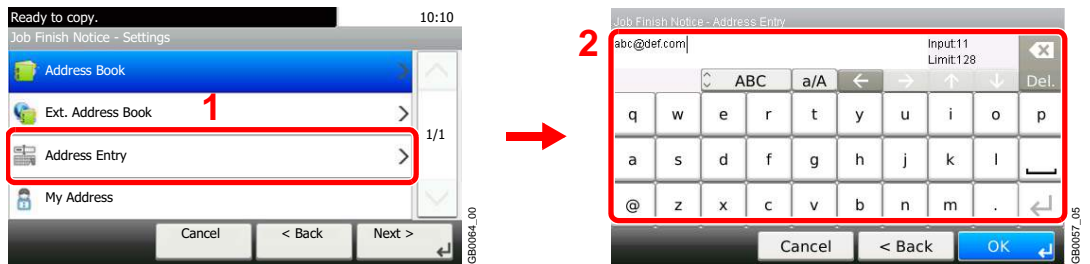

Up to 128 characters can be entered.

Refer to *Character Entry Method on page 11-7* for details on entering characters.

### Uses the e-mail address of the logged in user.

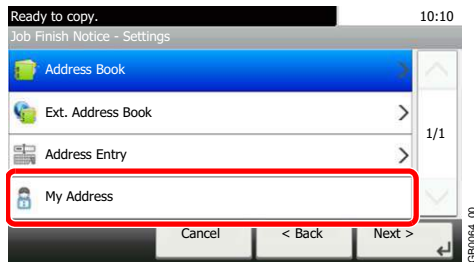

This setting is displayed when using user login administration.

## 4 Accept the destinations.

Press [OK].

# File Name Entry




Add a file name. Additional information such as Job No. and Date and Time can also be set. You can check a job history or job status using the job name, date and time, or job number specified here.

## 1 Display the screen.


1 Referring to *Using Various Functions on page 3-35*, display the screen.

### 2 Copy/Send

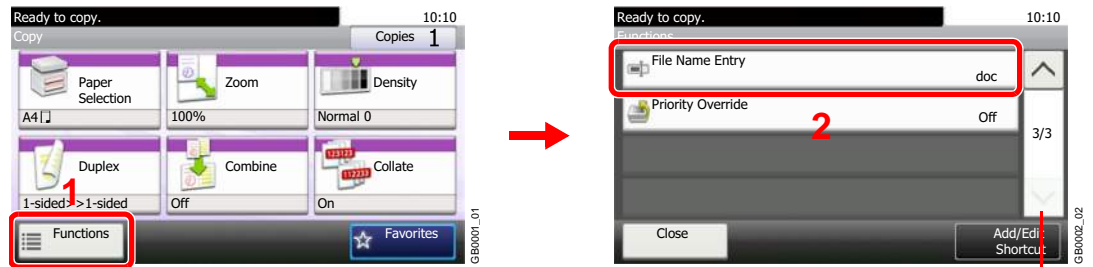


Use [▽] or [△] to scroll up and down.


### Scan to USB

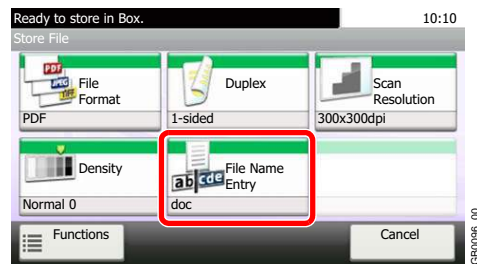


## 2 Enter the name.

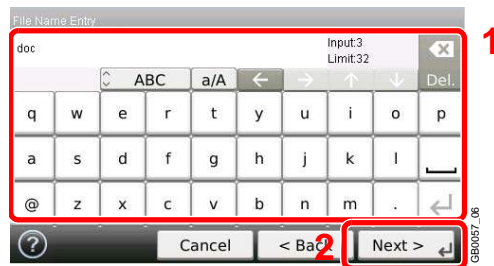

Up to 32 characters can be entered.

 Refer to *Character Entry Method on page 11-7* for details on entering characters.

## 3 Add other information.

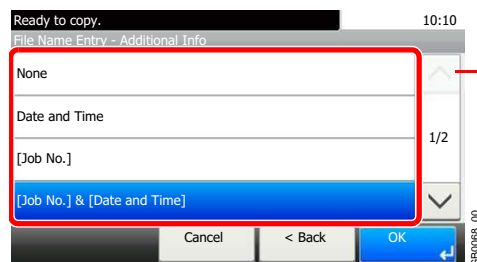

Use [▽] or [△] to scroll up and down.

# Priority Override



Suspend the current job and give a new job top priority. The suspended job resumes after the other job is finished.

**NOTE**


This function is not available if current job was an override.

Priority override may not be available depending on the status of the current print job and memory usage.

## 1 Display the screen.


1 Referring to *Using Various Functions* on page 3-35, display the screen.

2 Press [Functions] and then [Priority Override].

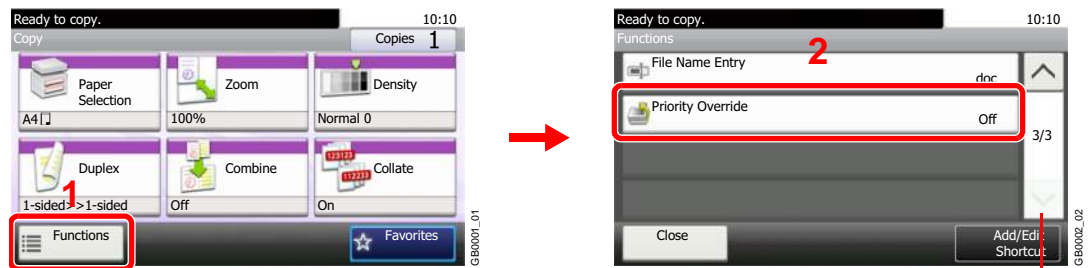

Use [∨] or [∧] to scroll up and down.

## 2 Select the function.

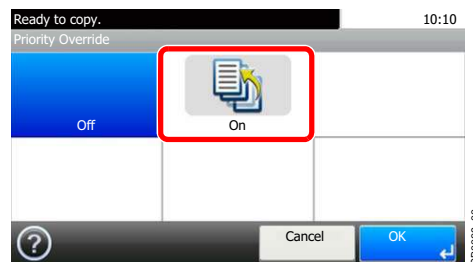



# 4 Copying

This chapter explains the following topics:

Basic Operation .....	4-2
Copying Functions .....	4-4
Zoom .....	4-5
Duplex .....	4-7
Combine .....	4-10
EcoPrint .....	4-13

# Basic Operation


## 1 Press the Copy key



### NOTE


If the touch panel is turned off, press the **Power** key and wait for the machine to warm up.

## 2 Place the originals

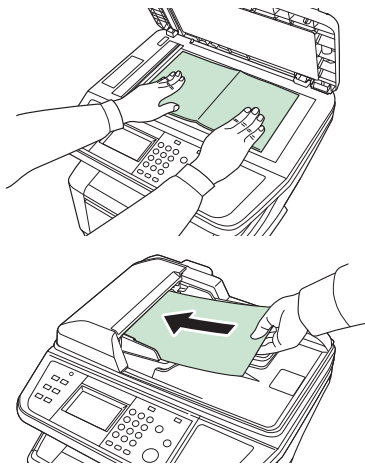

For details, refer to *Loading Originals* on page 3-12.

## 3 Selecting the functions

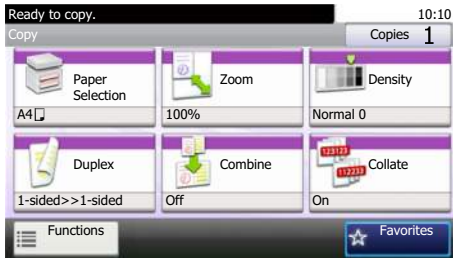

Select the copier's functions to use.

Press [Functions] to display other functions.



Refer to *Copying Functions* on page 4-4.

## 4 Entering the copy quantity




### NOTE

Press the **Clear** key to change the copy quantity.



## 5 Start copying

Start



Press the **Start** key to start copying.

# Copying Functions


Copy screen shows the commonly used functions. By pressing [Functions], other selectable functions will be shown as a list. Use [∨] or [^] to select the function.

What do you want to do?	Reference Page
Specify the paper size and type.	Paper Selection ▶ page 3-43
Reduce or enlarge the original.	Zoom ▶ page 4-5
Adjust the density.	Density ▶ page 3-45
Copy on both sides of the paper.	Duplex ▶ page 4-7
Combine 2 or 4 originals into 1 sheet.	Combine ▶ page 4-10
Collate the output documents in page order.	Collate ▶ page 3-44
Specify the original size.	Original Size ▶ page 3-37
Specify the original orientation to scan in the correct direction.	Original Orientation ▶ page 3-38
Select original image type for best results.	Original Image ▶ page 3-47
Save toner when printing.	EcoPrint ▶ page 4-13
Emphasize the outline of texts or lines. Blur the image outline.	Sharpness ▶ page 3-48
Darken or lighten the background (i.e., the area with no text or images) of originals.	Background Density Adjust ▶ page 3-49
Scan a large number of originals separately and then produce as one job.	Continuous Scan ▶ page 3-41
Send notice by e-mail when a job is complete.	Job Finish Notice ▶ page 3-54
Add a file name to the job to easily check its status.	File Name Entry ▶ page 3-56
Suspend the current job and override it to give a new job top priority.	Priority Override ▶ page 3-57

# Zoom

Adjust the zoom to reduce or enlarge the image.

## Auto



Adjusts the image to match the paper size.

## Standard Zoom


Adjusts the image to match present sizes.

Model	Zoom Level (Original Copy)	Model	Zoom Level (Original Copy)
Inch Models	400% (Max.) 200% 129% (STMT >> Letter) 100% 78% (Legal >> Letter) 64% (Letter >> STMT) 50% 25% (Min.)	Metric Models	400% (Max.) 200% 141% (A5 >> A4) 100% 90% (Folio >> A4) 70% (A4 >> A5) 50% 25% (Min.)

## Standard Zoom (Other)

Model	Zoom Level (Original Copy)	Model	Zoom Level (Original Copy)
Inch Models	141% (A5 >> A4) 115% (B5 >> A4) 90% (Folio >> A4) 86% (A4 >> B5) 70% (A4 >> A5)	Metric Models	129% (STMT >> Letter) 115% (B5 >> A4) 86% (A4 >> B5) 78% (Legal >> Letter) 64% (Letter >> STMT)

## Zoom Entry




Specify the image size in 1% increment between 25% - 400% of the original.

### 1 Display the screen.


1 Referring to *Basic Operation on page 4-2*, display the screen.

2


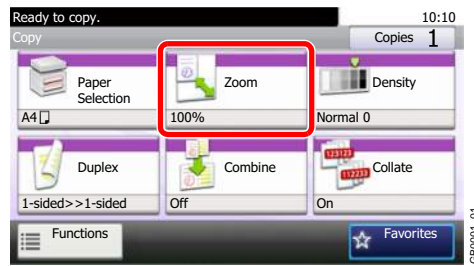


2 Select the function.

[Auto]

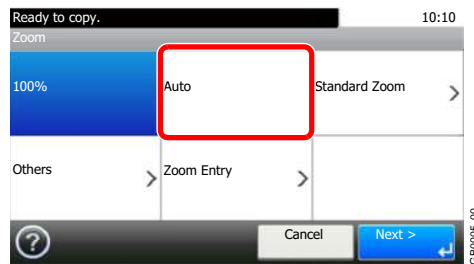



[Standard Zoom], [Others]

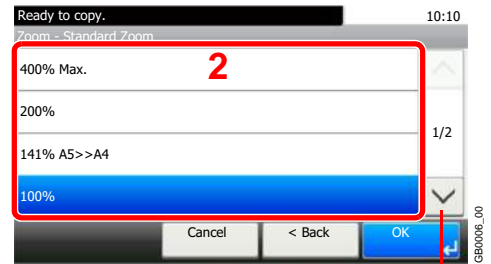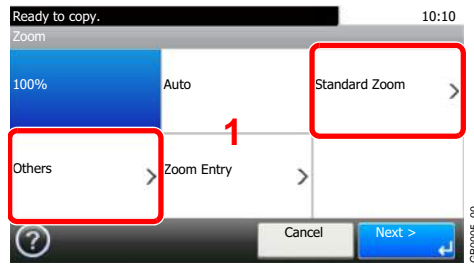

Use [∨] or [∧] to scroll up and down.

Select the zoom level.

[Zoom Entry]

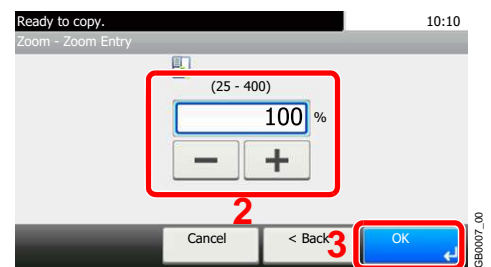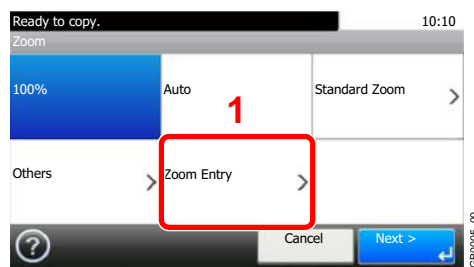

Enter the magnification.

## Duplex

Copy 2-sided documents.

1-sided>>1-sided		Prints 1-sided to 1-sided.	
1-sided>>2-sided		Prints 1-sided to 2-sided.	
2-sided>>1-sided		Prints 2-sided to 1-sided.	
2-sided>>2-sided		Prints 2-sided to 2-sided.	
Others	Duplex	1-sided>>1-sided	Prints 1-sided to 1-sided.
		1-sided>>2-sided	Prints 1-sided to 2-sided.
		2-sided>>1-sided	Prints 2-sided to 1-sided.
		2-sided>>2-sided	Prints 2-sided to 2-sided.
	Binding in Original		If you choose a 2-sided sheet original, select the binding edge of the originals.
	Binding in Finishing		If you choose a 2-sided copy, select the binding edge of the finished copies.
Original Orientation*		Select the orientation of the original document top edge to scan correct direction.	

\* This item is not displayed when [1-sided>>1-sided] is selected.




### NOTE

The paper sizes supported in Two-sided to Two-sided are Letter, Legal, Executive, Statement, Oficio II, A4, A5, B5 and Folio.

## 1 Display the screen.


- 1 Referring to *Basic Operation* on page 4-2, display the screen.

2

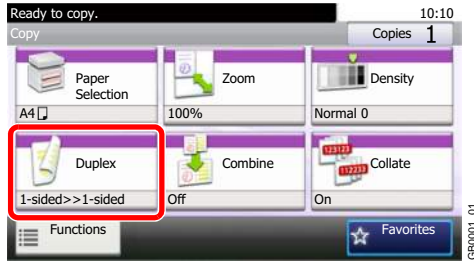


2 Select the function.

[1-sided>>1-sided], [1-sided>>2-sided], [2-sided>>1-sided], or [2-sided>>2-sided]


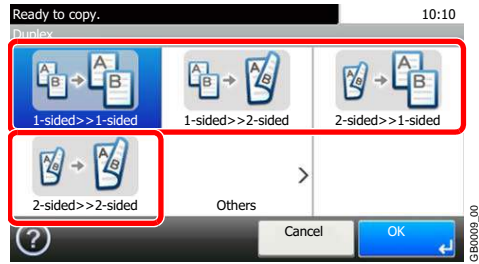


[Others]

1


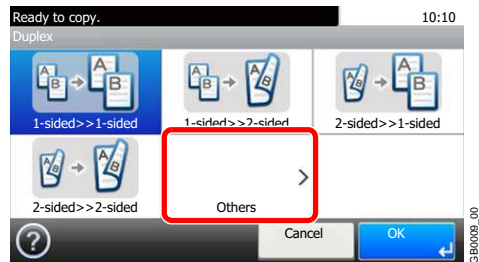


2 Select the desired Duplex option.

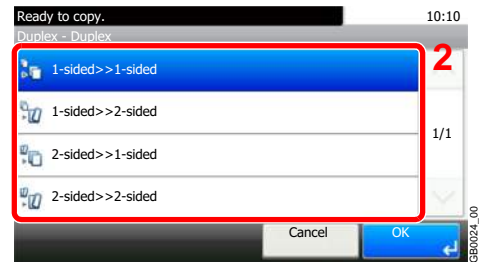
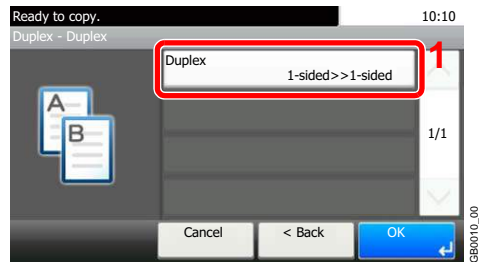


If you choose a 2-sided sheet, proceed to Step 3. If you choose duplex, proceed to Step 4.



3 Select the binding edge of the originals.

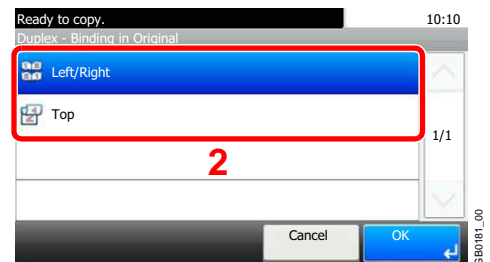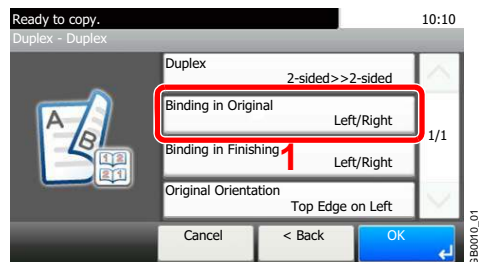

4 Select the binding edge of the finished copies.

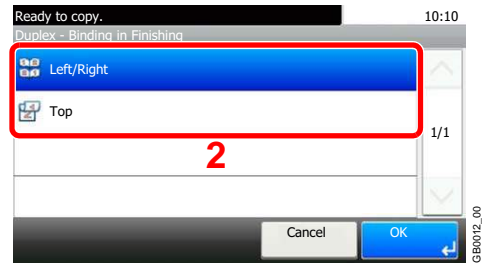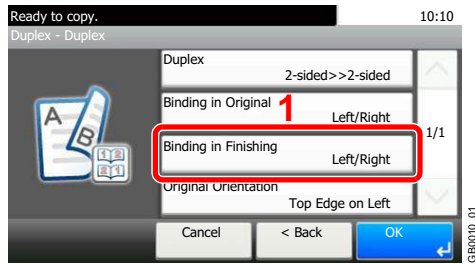
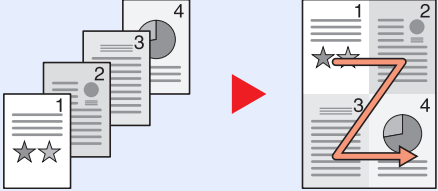

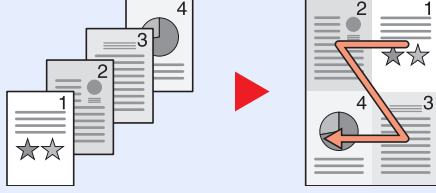
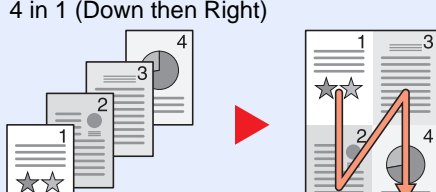
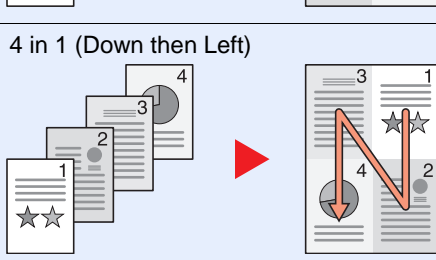


5 Select the original orientation.

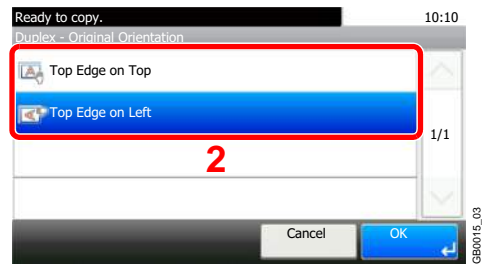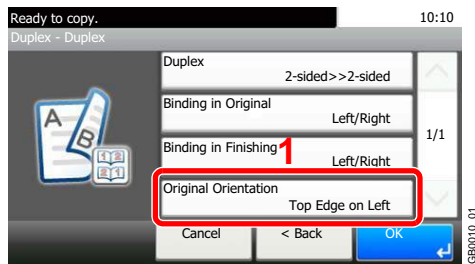

## Combine

Combine 2 or 4 original sheets into 1 copied page. You can select the page layout or the type of boundary lines around the pages.

2 in 1		Copies 2 originals onto each page.	
4 in 1		Copies 4 originals onto each page.	
Other Settings	Combine	Copies 2 originals onto each page.	
	2 in 1 (L to R/T to B)		
	2 in 1 (R to L/B to T)		
	4 in 1 (Right then Down)	Copies 4 originals onto each page.	
	4 in 1 (Left then Down)		
	4 in 1 (Down then Right)		
	4 in 1 (Down then Left)		
4 in 1 (Down then Right)			
Border Line	Sets the boundary line type to a solid line, dotted line, or positioning mark.		
Original Orientation	Select the orientation of the original document top edge to scan correct direction.		



### NOTE


Combine mode is available for the copy paper sizes of A4, A5, B5, Folio, Letter, Legal, Statement, Oficio II and 16K. When placing the original on the platen, be sure to copy the originals in page order.



## 1 Display the screen.


1 Referring to *Basic Operation on page 4-2*, display the screen.

2

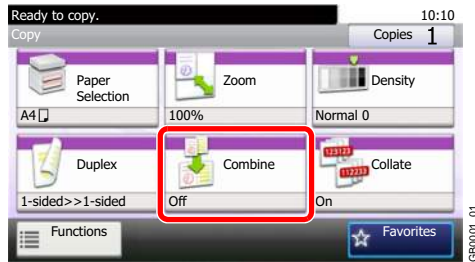


## 2 Select the function.

[2 in 1] or [4 in 1]


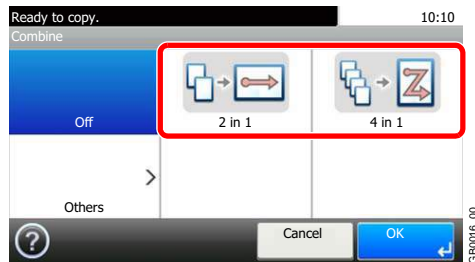


[Others]

1


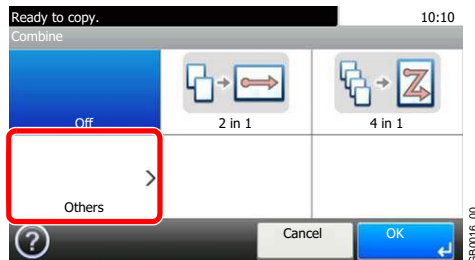


2 Select the desired Combine option.

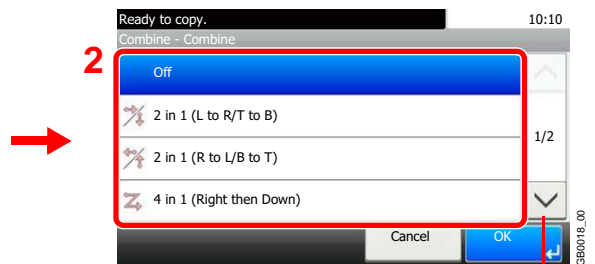
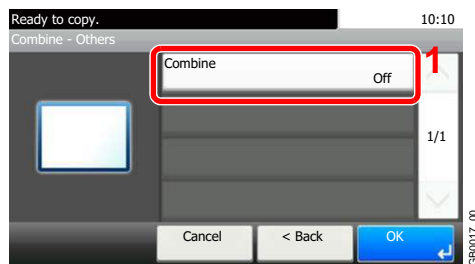


Use [∨] or [∧] to scroll up and down.

**3** Sets the boundary line type.

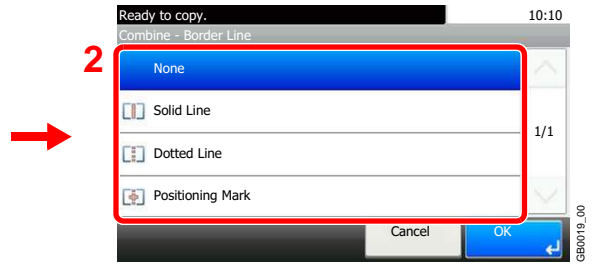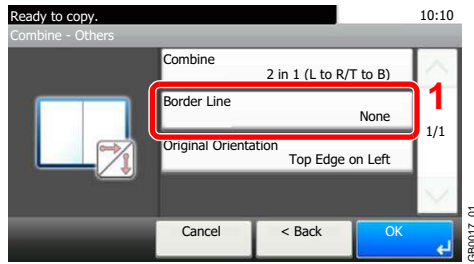


**4** Select the original orientation.

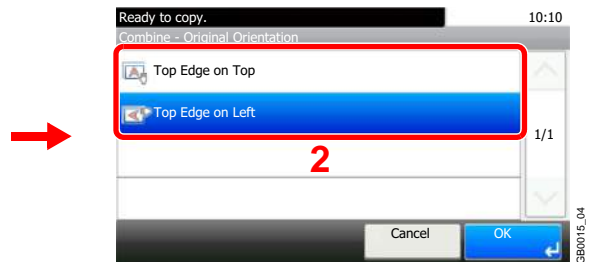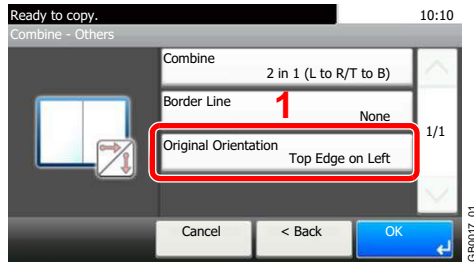

## EcoPrint

Use EcoPrint to save toner when printing. Use this function for test copies or any other occasion when high quality print is not required.

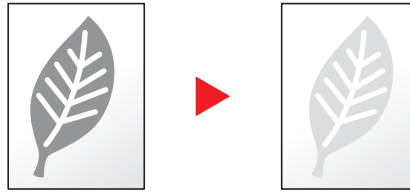


### 1 Display the screen.

1 Referring to *Basic Operation on page 4-2*, display the screen.

2



### 2 Select the function.

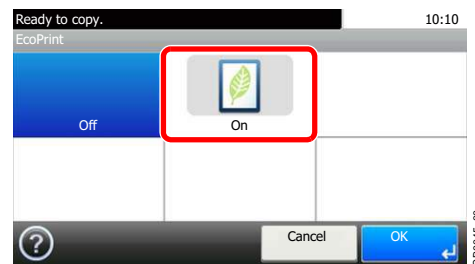



# 5 Printing

This chapter explains the following topics:

Printing from Applications .....	5-2
Printing Data Saved on the Printer .....	5-5
Private Print .....	5-5
Proof and Hold .....	5-7
Automatic Delete Setting for Temporary Documents .....	5-10

# Printing from Applications


This section provides basic instructions for printing documents. Instructions are based on interface elements as they appear in Windows 7.

You can print documents created on your computer once you install the printer driver from the included DVD (Product Library).

 Refer to *Installing Software* on page 2-13.


For more information about how to configure advanced printer driver settings and print documents, refer to the *Printer Driver Operation Guide* on the DVD.

## 1 Display the window.

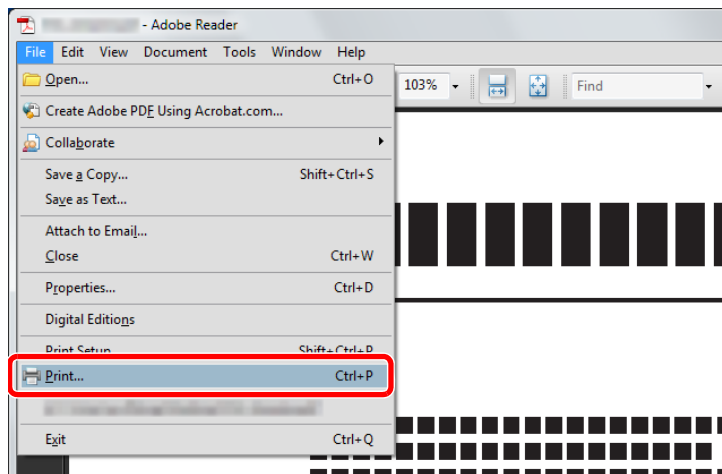


Click **File** and select **Print** in the application.

## 2 Configure the printer.

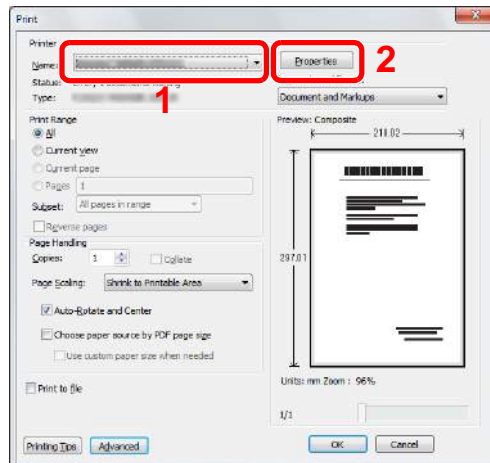

1 Select the printer.

2 Click **Properties** button.

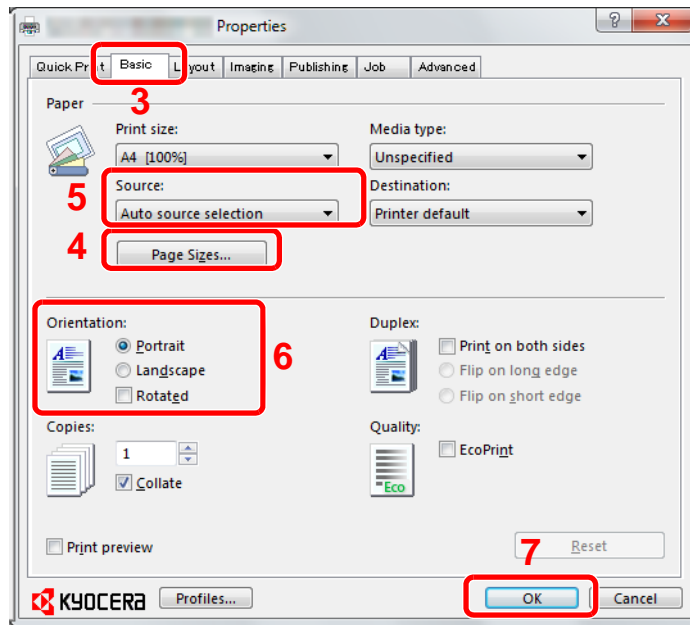

**3** Select the **Basic** tab.

**4** Click **Page Sizes** button to select the paper size.

To print on the special paper such as recycled paper, click the **Media Type** menu and select the media type.

**5** Click **Source** and select the paper source.



**NOTE**


If you choose **Auto Select**, papers are supplied automatically from the paper source loaded with paper of optimum size and type.

To print on special paper such as envelope or labels, place it on the multi purpose tray and select **MP Tray**.

**6** Select paper orientation, either **Portrait** or **Landscape**, to match the orientation of the document. Selecting **Rotate** will print the document rotated 180°.

**7** Click **OK** button to return to the **Print** dialog box.

### 3 Start printing.

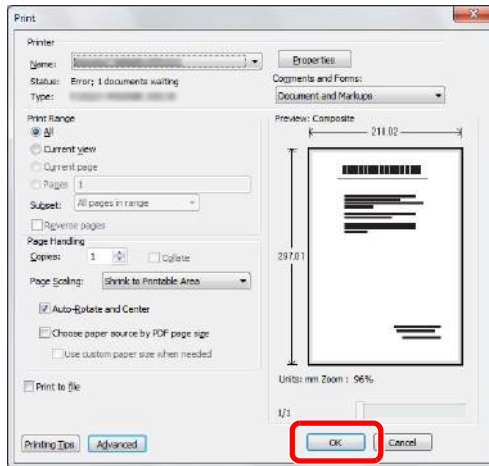

Click **OK** button.



#### NOTE


Click the tabs on the print settings screen and configure the print settings as necessary. For more information, refer to the *Printer Driver Operation Guide*.

## Printing Using Half Speed Mode

When printing on a paper with a smooth surface or thick paper, adjust the printing speed using the printer driver. For details, refer to *Printer Driver Operation Guide*.

## Printer Driver Help

The printer driver includes Help. To learn more about print settings, display the printer driver print settings screen and display Help using either of the methods explained below.

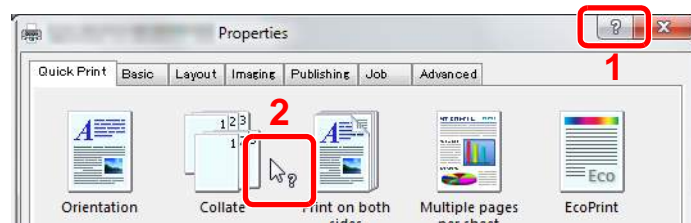

- Click the ? button in the upper right corner of the screen and then click the item you want to know about.
- Click the item you want to know about and press the [F1] key on your keyboard.



# Printing Data Saved on the Printer

Print data can be saved in the machine's Job Box and printed when needed.

## Private Print

Private Print stores the print data which is printed by using the printer driver as a Private Print. Refer to the *Printer Driver Operation Guide* on how to print a job as Private Print using the printer driver.



### NOTE

RAM disk mode must be enabled.




For details, refer to *RAM Disk Setting* on page 9-22.

### 1 Display the screen.


Document Box




1

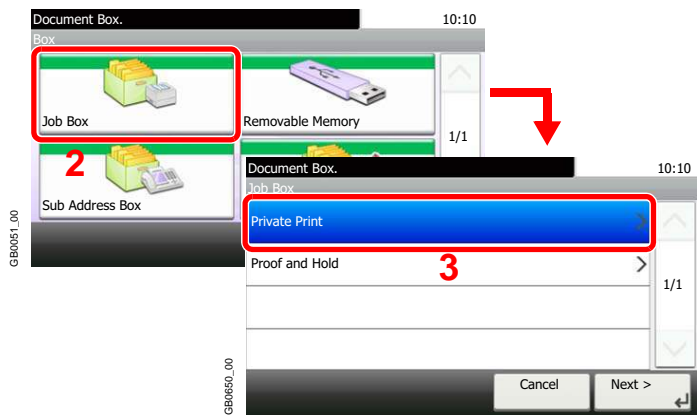

### 2 Select the creator of the document to print.

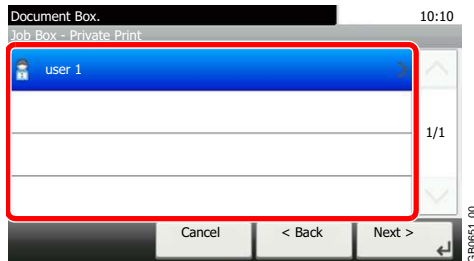

### 3 Select the document.

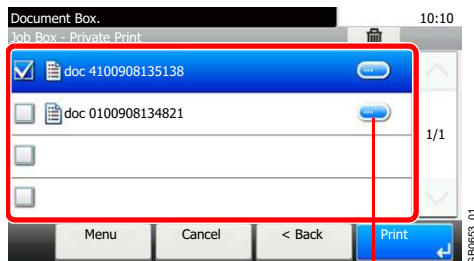


Displays details for individual documents.

## 4 Print and delete the document.

### To print the document


1

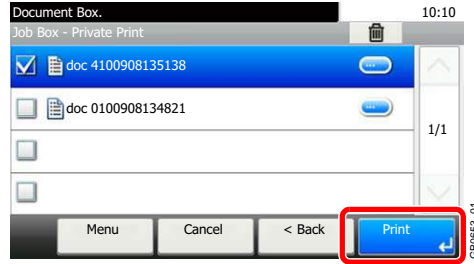

### NOTE

The password entry screen will be displayed. Enter the password using the numeric keys.


2

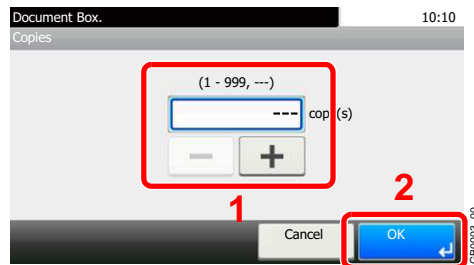

Specify the number of copies to print as desired. When using the number of copies specified with print job, select “---”.

Upon completion of printing, the Private Print job is automatically deleted.

### To delete

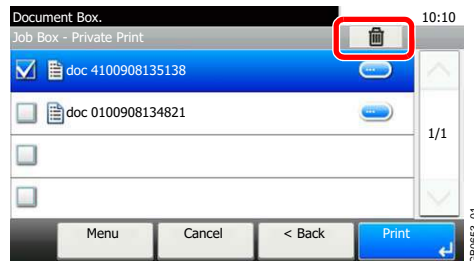

Select the document you wish to delete and press [(Delete)] (the trash can icon).



### NOTE

The password entry screen will be displayed. Enter the password using the numeric keys.

## Proof and Hold

Proof and Hold stores the print data which is printed by using the printer driver as a Proof and Hold Print job. Refer to the *Printer Driver Operation Guide* on how to print a job as Proof and Hold Print job using the printer driver.

### NOTE

RAM disk mode must be enabled.

 For details, refer to *RAM Disk Setting* on page 9-22.

## Setting the Number of Stored Jobs

To maintain free space on the RAM disk, you can set the maximum number of stored jobs.

### 1 Display the screen.


◆ System Menu / Counter



1



### 2 Enter the maximum number of stored jobs.

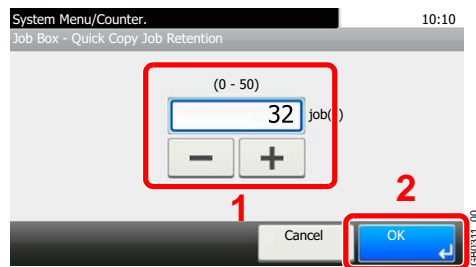

You can enter any number between 0 and 50.

### NOTE


If you enter a value of 0 (zero), you cannot use the Proof and Hold function.

## Printing and Deleting the Document


You can print and delete documents stored in the Proof and Hold box.

### 1 Display the screen.


Document Box

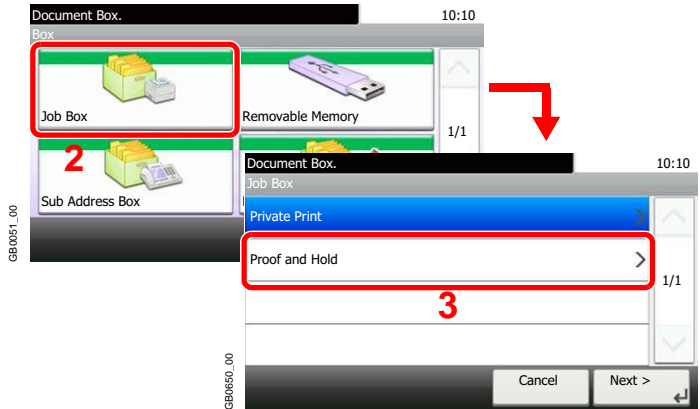

### 2 Select the creator of the document.

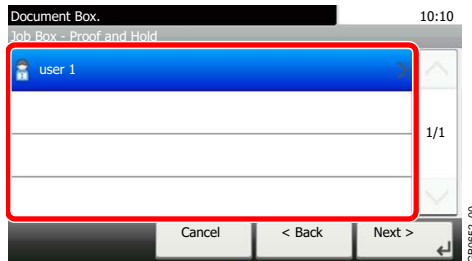



### 3 Select the document.

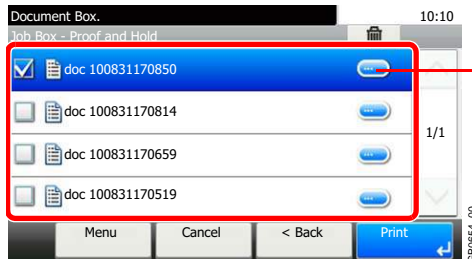

Displays details for individual documents.


### 4 Print and delete the document.

To print the document

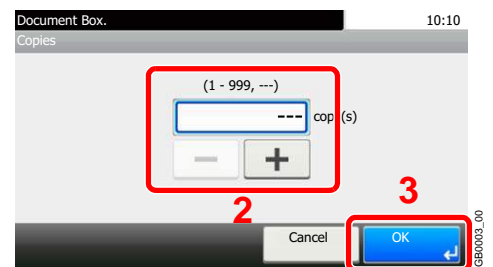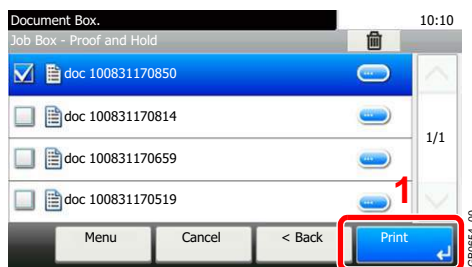

Specify the number of copies to print as desired. When using the number of copies specified with print job, select "---".

### To delete

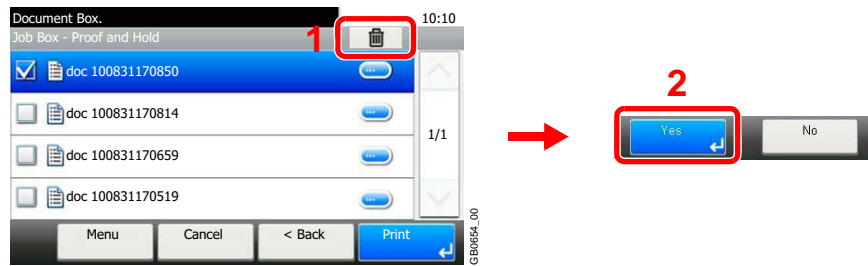


Select the document you wish to delete and press [(Delete)] (the trash can icon).

## Automatic Delete Setting for Temporary Documents

This setting specifies that documents, such as Private Printing, or Proof and Hold Printing, saved temporarily in the job box are automatically deleted after they have been saved for a set time.

Off	Temporary documents are not automatically deleted. However, the temporary documents will be deleted when the power is turned off.
1 hour	Documents are deleted after 1 hour.
4 hours	Documents are deleted after 4 hours.
1 day	Documents are deleted after 1 day.
1 week	Documents are deleted after 1 week.

 **NOTE**

This function is valid for documents saved after the function is set.


Regardless of this function setting, temporary documents are deleted when the main power switch is turned off.

### 1 Display the screen.


◆ System Menu / Counter



1

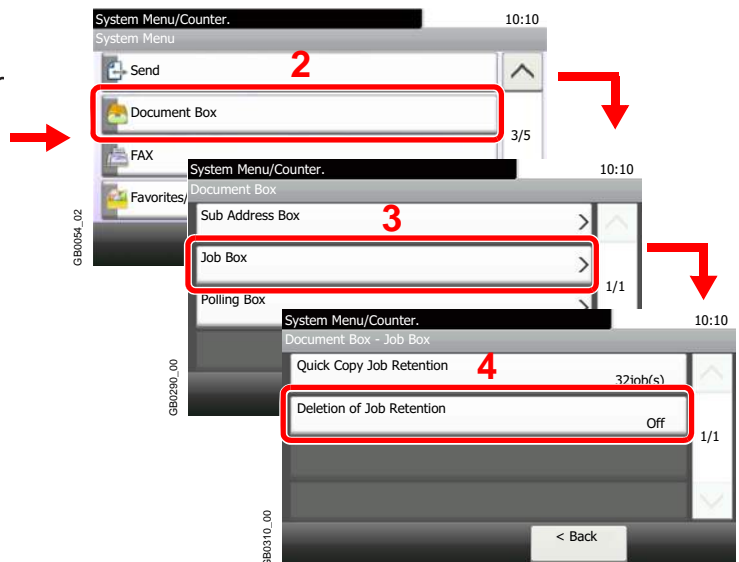

### 2 Select the time.

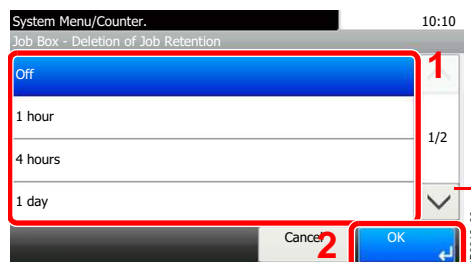

Use [∨] or [∧] to scroll up and down.

# 6 Sending

This chapter explains the following topics:

Basic Operation .....	6-2
Preparation for Sending a Document to a PC .....	6-5
Checking What to Enter for [Host Name] .....	6-5
Checking What to Enter for [Login User Name] .....	6-6
Creating a Shared Folder .....	6-7
Checking the [Path] .....	6-10
Configuring Windows Firewall (for Windows 7) .....	6-11
Specifying Destination .....	6-15
Choosing from the Address Book .....	6-15
Choosing by One Touch Key .....	6-17
Entering a New E-mail Address .....	6-18
Specifying a New PC Folder .....	6-19
Checking and Editing Destinations .....	6-22
Sending to Different Types of Destinations (Multi Sending) .....	6-23
Registering Destinations in the Address Book .....	6-24
Adding a Contact .....	6-24
Adding a Group .....	6-28
Editing and Deleting Address Book Entries .....	6-31
Adding a Destination on One Touch Key .....	6-33
Adding a Destination .....	6-33
Editing and Deleting One Touch Key .....	6-35
Sending Functions .....	6-36
Sending Size .....	6-37
File Separation .....	6-39
E-mail Subject/Body .....	6-40
FTP Encrypted TX .....	6-41
WSD Scan .....	6-42
Scanning using TWAIN .....	6-45

## Basic Operation

This machine can send a scanned image as an attachment to an E-mail message or to a PC linked to the network. In order to do this, it is necessary to register the sender and destination (recipient) address on the network.

A network environment which enables the machine to connect to a mail server is required in order to send e-mail. It is recommended that a Local Area Network (LAN) be used to assist with transmission speed and security issues.


To use the transmission function, verify the following:

- Program the settings, including the E-mail setting on the machine.
- Use COMMAND CENTER (the internal HTML web page) to register the IP address, the host name of the SMTP server, and the recipient.
- Register the destination in the Address Book or One Touch keys.
- Create a share folder in the destination computer, when a folder (SMB/FTP) is selected as the destination. Consult your network administrator concerning destination folder sharing settings.

### Basic Sending

#### Send as E-mail

Sends a scanned original image as an E-mail attachment. (page 6-18)

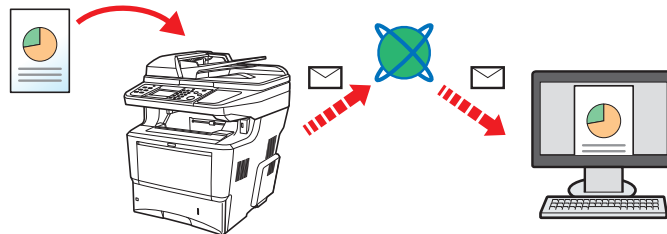


#### Send to Folder (SMB)

Stores a scanned original image in a shared folder of any PC. (page 6-19)


#### Send to Folder (FTP)

Stores a scanned original image in a folder of an FTP server. (page 6-19)

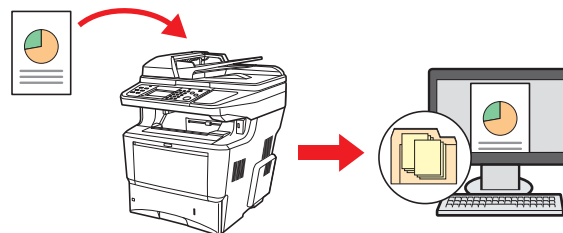

#### Image Data Scanning with TWAIN/WIA

Scan the document using a TWAIN or WIA compatible application program. (page 6-45)

 **NOTE**  
 Different sending options can be specified in combination. Refer to *Sending to Different Types of Destinations (Multi Sending)* on page 6-23.

This function can only be used on products equipped with fax capability. For details about this function, refer to the *FAX Operation Guide*.



## 1 Press the Send key


Send



### NOTE


If the touch panel is turned off, press the **Energy Saver** key or the **Power** key and wait for the machine to warm up.

## 2 Place the originals

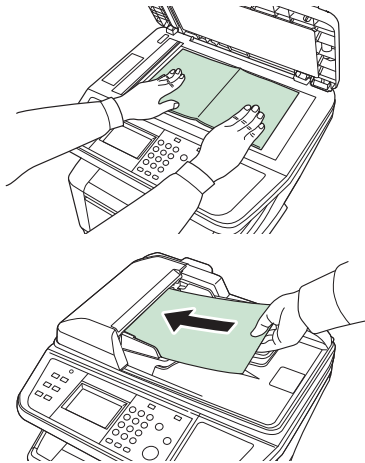

For details, refer to *Loading Originals* on page 3-12.

## 3 Specifying destination

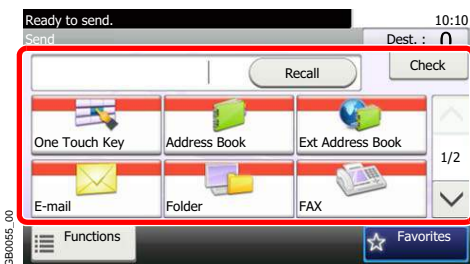

Select the destination to which to send an image.



For details, refer to *Specifying Destination* on page 6-15.

## 4 Selecting the functions




Press [Functions] to display the sending functions to use.



For details, refer to *Sending Functions* on page 6-36.

## 5 Start sending

Start



Press the **Start** key to start sending.

# Preparation for Sending a Document to a PC

Check the information that needs to be set on the machine and create a folder to receive the document on your computer. Screens of Windows 7 are used in the following explanation. The details of the screens will vary in other versions of Windows.



## NOTE

Log on to Windows with administrator privileges.

## Checking What to Enter for [Host Name]

Check the name of the destination computer.

### 1 Display the window.

From the Start menu, select **Computer** and then **System Properties**.

In Windows XP, right-click **My Computer** and select **Properties**. The **System Properties** dialog box appears. Click the **Computer Name** tab in the window that appears.

### 2 Check the computer name.

Check the computer name in the window that appears.

#### If there is a workgroup



All characters appearing in "Full computer name" should be entered in [Host Name]. (Example: PC001)

#### If there is a domain



The characters to the left of the first dot (.) in "Full computer name" should be entered in [Host Name]. (Example: pc001)

After checking the computer name, click the  (Close) button to close the **System Properties** screen.

In Windows XP, after checking the computer name, click the **Cancel** button to close the **System Properties** screen.

## Checking What to Enter for [Login User Name]

Check the domain name and user name for logging onto Windows.


### 1 Display the window.

From the Start menu, select **All Programs** (or **Programs**), **Accessories** and then **Command Prompt**.

The **Command Prompt** window appears.

### 2 Check the domain name and user name.

At the Command Prompt, enter "net config workstation" and then press [Enter].

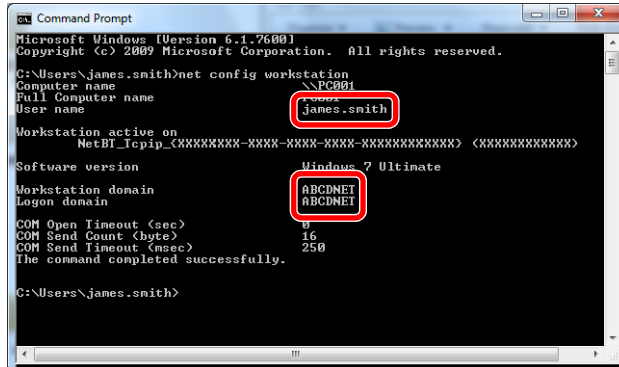

```
Microsoft Windows [Version 6.1.7600]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\james.smith>net config workstation
Computer name                \\PC001
Full Computer name          james.smith
User name                    james.smith
Workstation active on
NetBI_Tcpip_{XXXXXXXX-XXXX-XXXX-XXXXXXXX} <XXXXXXXXXXXX>
Software version            Windows 7 Ultimate
Workstation domain          ABCDNET
Logon domain                 ABCDNET
COM Open Timeout (sec)     0
COM Send Count (byte)      16
COM Send Timeout (msec)    250
The command completed successfully.

C:\Users\james.smith>
```

Screen example: user name "james.smith" and domain name "ABCDNET"


## Creating a Shared Folder

Create a shared folder to receive the document in the destination computer.

### NOTE


If there is a workgroup in System Properties, configure the settings below to limit folder access to a specific user or group.

- 1 From the Start menu, select **Control Panel, Appearance and Personalization**, and then **Folder Options**.

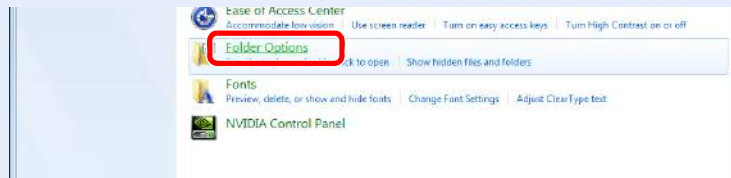

Windows XP, click **My Computer** and select **Folder Options** in **Tools**.

2

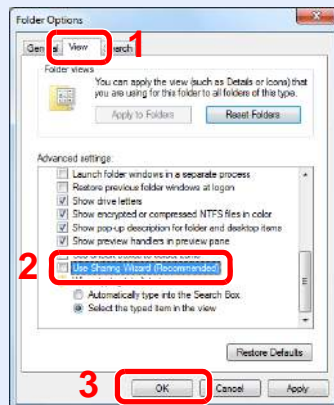

Remove the checkmark from **Use Sharing Wizard (Recommended)** in **Advanced settings**.

In Windows XP, click the **View** tab and remove the checkmark from **Use Simple File Sharing (Recommended)** in **Advanced settings**.

### 1 Create a folder.

- 1 Create a folder on the local disk (C).


For example, create a folder with the name "scannerdata" on the local disk (C).

- 2 Right-click the scannerdata folder and click **Share** and **Advanced** sharing. Click the **Advanced Sharing** button.

In Windows XP, right-click the scannerdata folder and select **Sharing and Security...** (or **Sharing**).


## 2 Configures permission settings.

1

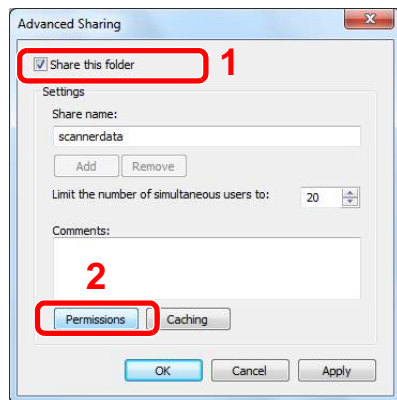


In Windows XP, select **Share this folder** and click the **Permissions** button.

2

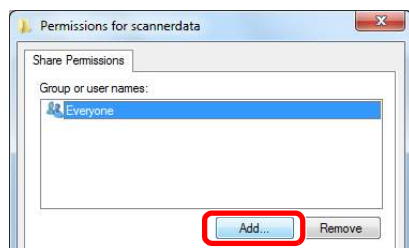


3

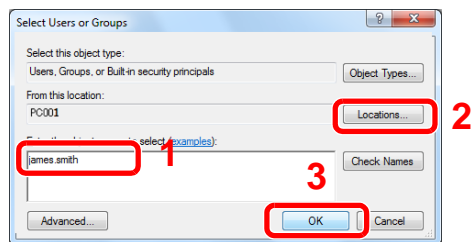

Enter the user name in the text box.

Click the [Location] button and select the desired location. To select the search target, click a location to select it. When you are a member of a domain, your current domain will be set as the search target by default.

4

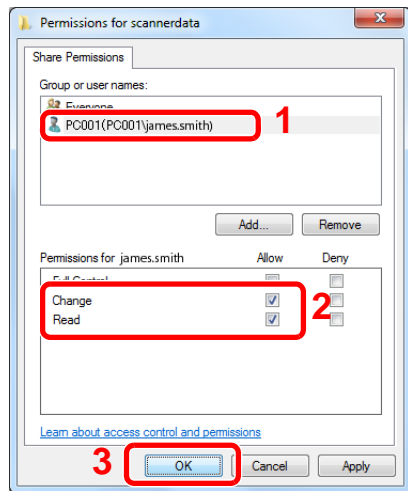

Select the entered user, select the **Change** and **Read** permissions.

In Windows XP, go to step **6**.




### NOTE

"Everyone" gives sharing permission to everyone on the network. To strengthen security, it is recommended that you select Everyone and remove the **Read** permission checkmark.

**5** Click the **OK** button in the **Advanced Sharing** screen to close the screen.


6

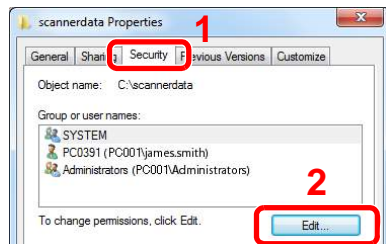

In Windows XP, click the **Security** tab and then click the **Add** button.

**7** Proceed in the same way as in step **3** to add a user to **Group or user names**.

8

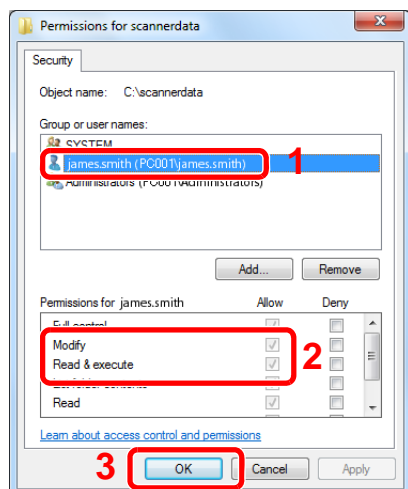


Select the added user, select the **Modify** and **Read & execute** permissions.

## Checking the [Path]

Check the share name of the shared folder that will be the destination for the document.

### 1 Display the window.

- 1 Enter "\\pc001" in "Program and File Search" in the Start menu.

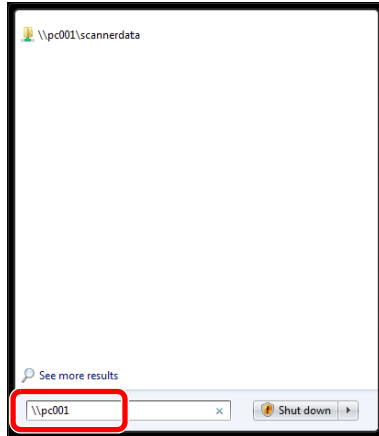

In Windows XP, click **Search** in the Start menu, select **All files and folders**, and search for the destination computer to which the file will be sent.


In Search Companion, click **Computers or people** and then **A computer on the network**.

In the "Computer name:" text box, enter the name of the computer that you checked (pc001) and then click **Search**.

- 2 Click "\\pc001\scannerdata" that appears in the search results.

In Windows XP, double-click the computer ("pc001") that appears in the search results.

### 2 Check the folder that appears.

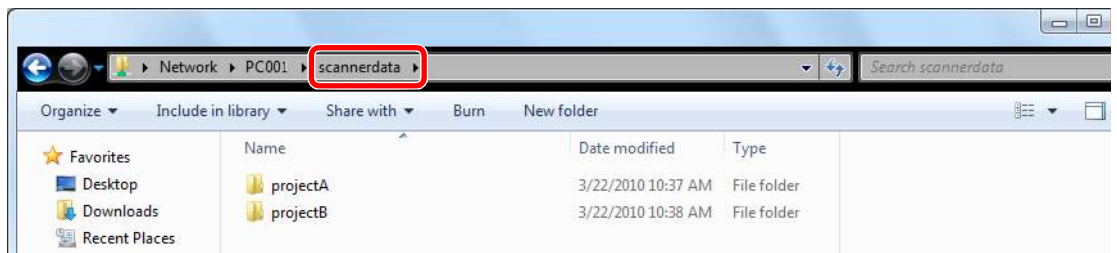

Check the address bar. The third and following text strings (►) should be entered for the path.

In Windows XP, double-click the scannerdata folder and check the address bar. The text string to the right of the third backslash (\) should be entered in **Path**.

(Example: scannerdata)



#### NOTE

You can also specify a subfolder in the shared folder as the location where data is to be sent. In this case, "share name\name of folder in the shared folder" should be entered for the **Path**. In the example window above, "scannerdata\projectA" is the **Path**.



## Configuring Windows Firewall (for Windows 7)

Permit sharing of files and printers and set the port used for SMB transmission.




### NOTE

Log on to Windows with administrator privileges.

## 1 Check file and printer sharing.


- 1 From the Start menu, select **Control Panel**, **System and Security**, and **Allow a program through Windows Firewall**.

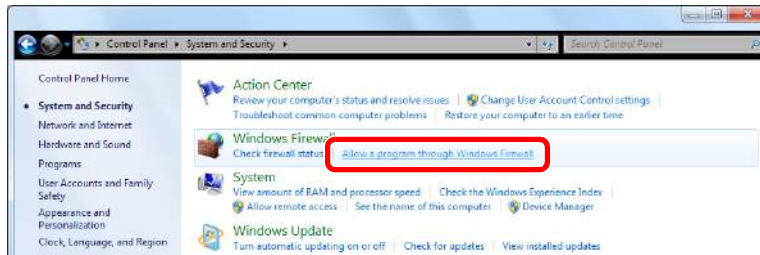

### NOTE

If the **User Account Control** dialog box appears, click the **Continue** button.


## 2

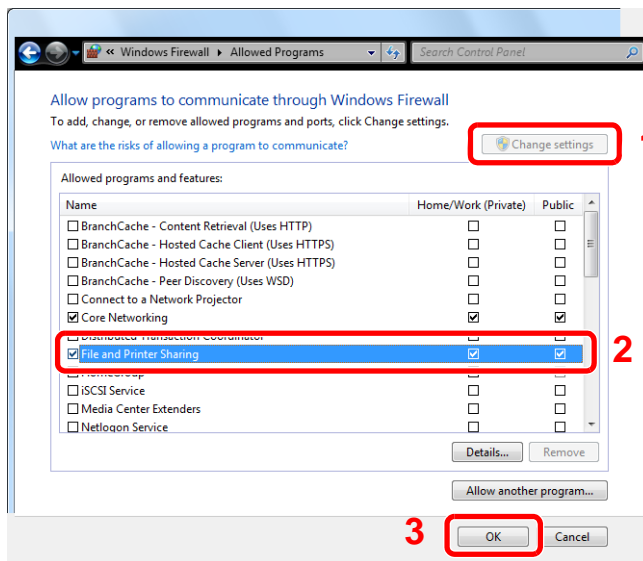

Select the **File and Printer Sharing** checkbox.

## 2 Add a port.

- 1 From the Start menu, select **Control Panel**, **System and Security**, and **Check firewall status**.

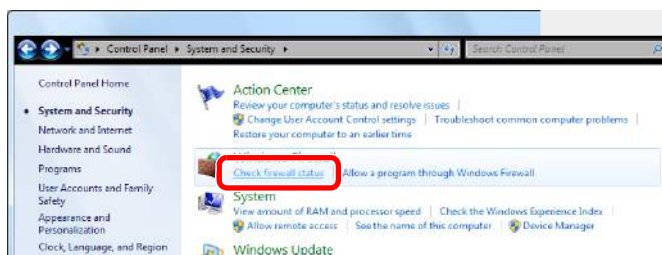


2




3




4

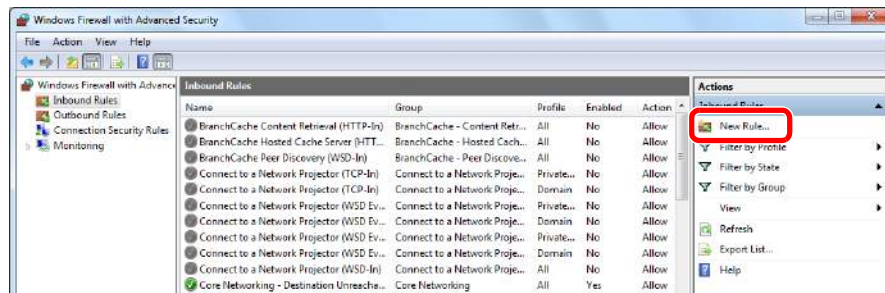

5

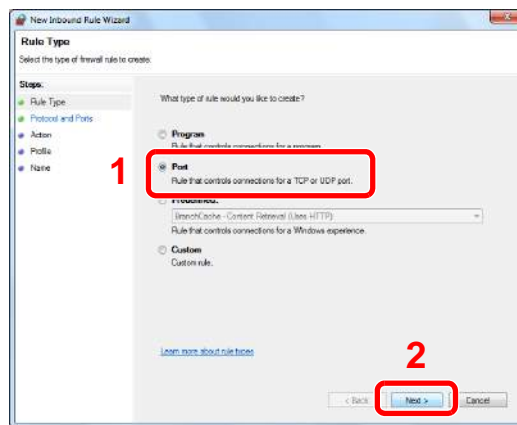


6

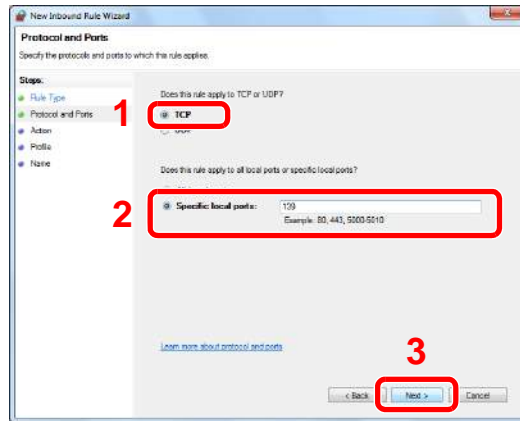


Select **Specific local ports**, and enter "139".


7

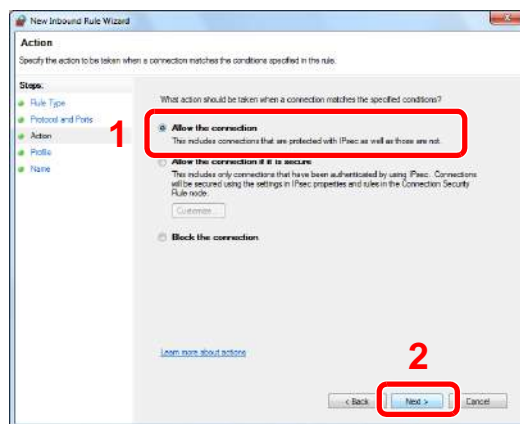

8

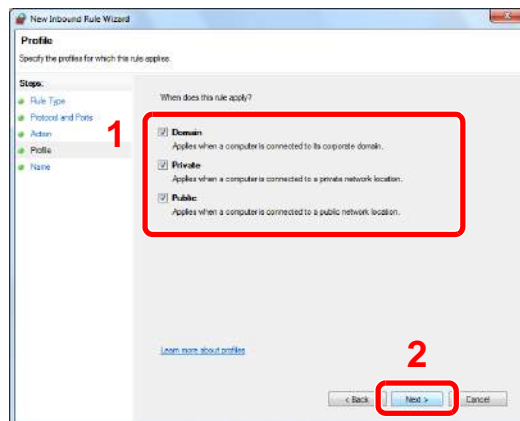

Make sure all checkboxes are selected.

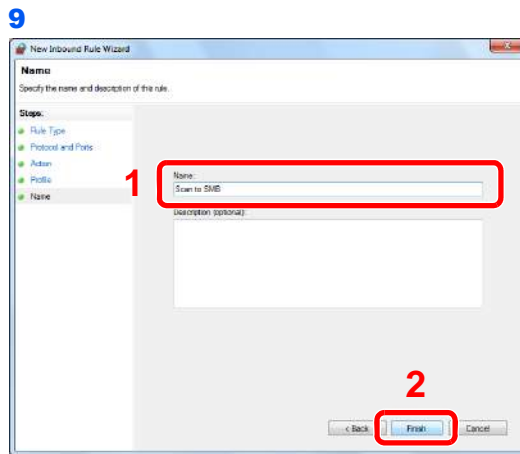

Enter "Scan to SMB" in "Name" and click **Finish**.

### In Windows XP or Windows Vista


- 1 From the Start menu, select **Control Panel, System and Security** (or **Security Center**), and then **Check Firewall Status** (or **Windows Firewall**).  
If the **User Account Control** dialog box appears, click the **Continue** button.
- 2 Click the **Exceptions** tab and then the **Add port...** button.
- 3 Specify **Add a Port** settings.  
Enter any name in "Name" (example: Scan to SMB). This will be the name of the new port.  
Enter "139" in "Port Number". Select **TCP** for "Protocol".
- 4 Click the **OK** button to close the **Add a Port** dialog box.

# Specifying Destination

Select the destination to which to send an image.

Select the destination using either of the following methods.


- *Choosing from the Address Book* (page 6-15)
- *Choosing by One Touch Key* (page 6-17)
- *Entering a New E-mail Address* (page 6-18)
- *Specifying a New PC Folder* (page 6-19)

 **NOTE**

If you are using the products equipped with the fax function, you can specify the fax destination. Enter the other party's number using the numeric keypad.

## Choosing from the Address Book

Select a destination registered in the Address Book.


 **NOTE**

For more information about how to register destinations in the Address Book, refer to *Registering Destinations in the Address Book* on page 6-24.


For details on the External Address Book, refer to *KYOCERA COMMAND CENTER Operation Guide*.

### 1 Display the screen.

- 1 Referring to *Basic Operation* on page 6-2, display the screen.

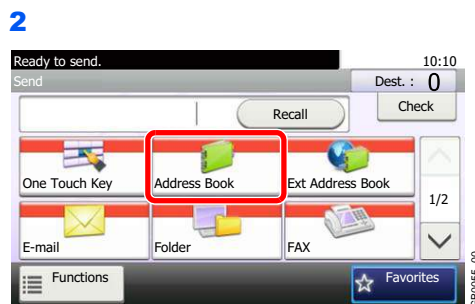


### 2 Select the destination.

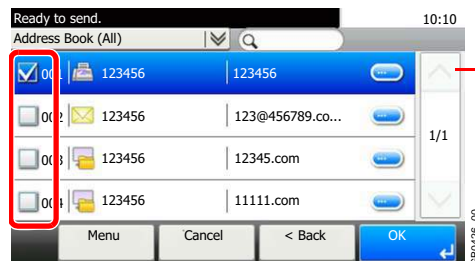

Use [∨] or [∧] to scroll up and down.

Press the checkbox to select the desired destination from the list. The selected destinations are indicated by a checkmark in the check box.

### Destination Search

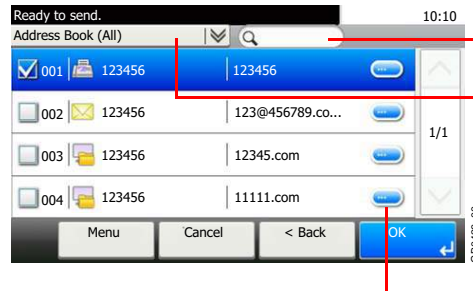



Searches by destination name.

Advanced search by type of registered destination (E-mail, Folder (SMB/FTP), FAX or Group).

Displays details for individual destinations.

You can specify a destination by address number by pressing the **Quick No. Search** key.

You can also press [Menu] to perform a more detailed search.

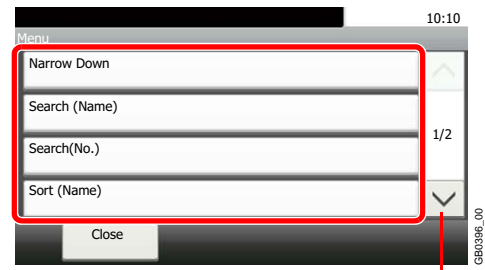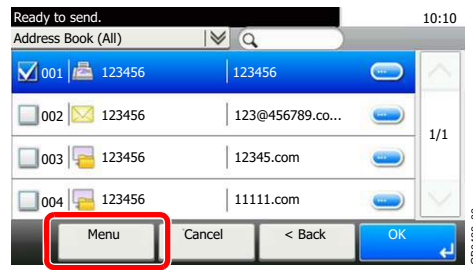

Use [∨] or [∧] to scroll up and down.

**Narrow Down:** Advanced search by type of registered destination (E-mail, Folder (SMB/FTP), FAX or Group).

**Search (Name)** and **Search (No.):** Searches by destination name or address number.

**Sort (Name)** and **Sort (No.):** Sorts the list by destination name or address number.




#### NOTE

You may choose multiple destinations.

To cancel a selection, press the corresponding checkbox to clear the check mark.

### 3 Accept the destinations.

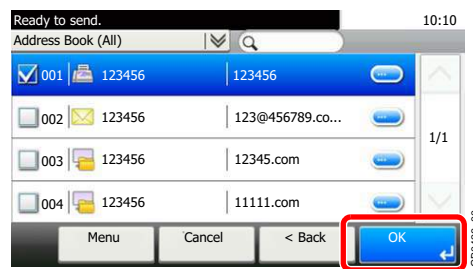

Destinations can be changed later. Refer to *Checking and Editing Destinations* on page 6-22.

## Choosing by One Touch Key

Select the destination using the One Touch Keys.



### NOTE

For more information on adding One Touch keys, refer to *Adding a Destination on One Touch Key on page 6-33*.


## 1 Display the screen.

1 Referring to *Basic Operation on page 6-2*, display the screen.

2



## 2 Select the destination.

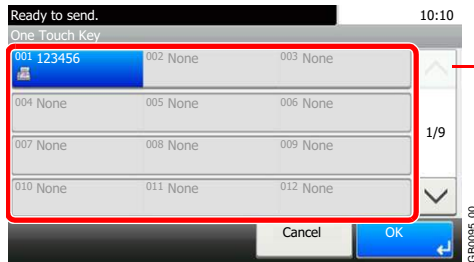


Use [∨] or [∧] to scroll up and down.

Press the One Touch Keys where the destination is registered. Multiple One Touch Keys can be selected.

You can specify a one-touch key by one-touch number by pressing the **Quick No. Search** key.

## 3 Accept the destination.

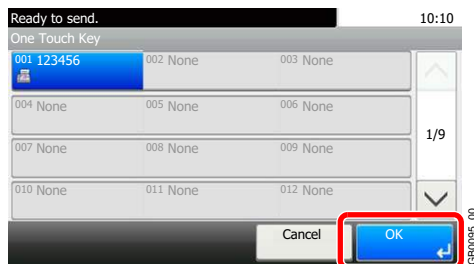

Destinations can be changed later. Refer to *Checking and Editing Destinations on page 6-22*.


## Entering a New E-mail Address

Enter the desired e-mail address.

**NOTE**  
 Access the COMMAND CENTER beforehand and specify the settings required for sending e-mail. For details, refer to *COMMAND CENTER (Settings for E-mail)* on page 2-21.

### 1 Display the screen.

1 Referring to *Basic Operation* on page 6-2, display the screen.

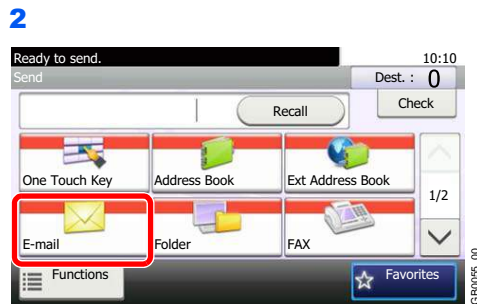

### 2 Enter destination E-mail address.




Up to 128 characters can be entered.

Refer to *Character Entry Method* on page 11-7 for details on entering characters.

To enter multiple destinations, press [Next Destination] and enter the next destination. Up to 100 E-mail addresses can be specified.

You can register the entered email address in the Address Book by pressing [Menu] and then [Add to Address Book]. You can also replace the information for a previously registered destination.

### 3 Accept the destinations.

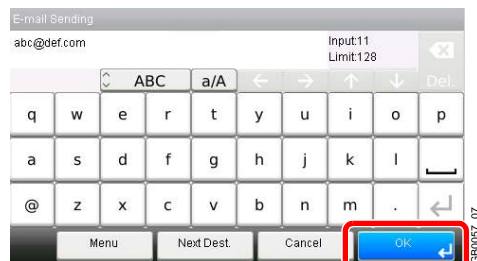

Destinations can be changed later. Refer to *Checking and Editing Destinations* on page 6-22.



## Specifying a New PC Folder

Specify either the desired shared folder on a computer or an FTP server as the destination.

### NOTE

Refer to *Creating a Shared Folder on page 6-7* for details on how to share a folder.

Be sure that **SMB Protocol** or **FTP** in the COMMAND CENTER is On. For details, refer to the *KYOCERA COMMAND CENTER Operation Guide*.


### 1 Display the screen.

1 Referring to *Basic Operation on page 6-2*, display the screen.


### 2



### 2 Select the folder type.

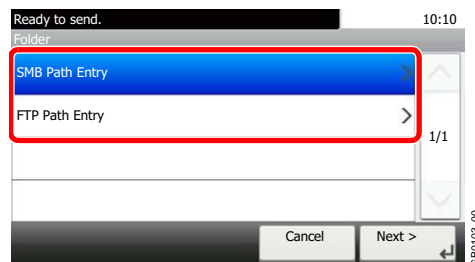

### 3 Enter the destination information.

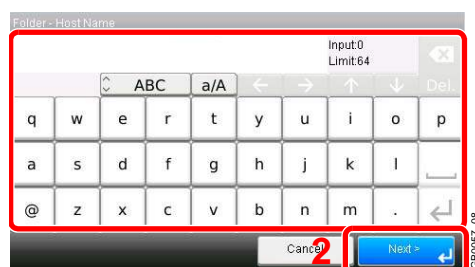

Enter the next information. Once you have entered one item, press [Next] to advance to the next item.


#### For send to folder (SMB)

Item	Data to be entered	Max. characters
Host Name	Host name or IP address of the PC to receive the data.	Up to 64 characters
Path	Path to the receiving folder such as follows. For example, <i>\User\ScanData</i> .	Up to 128 characters

Item	Data to be entered	Max. characters
Login User Name	User name to access the PC Domain name/User name For example, <i>abcdnet\james.smith</i> . User name@Domain name For example, <i>james.smith@abcdnet</i>	Up to 64 characters
Login Password	Password to access the PC	Up to 64 characters


**For send to folder (FTP)**

Item	Data to be entered	Max. characters
Host Name	Host name or IP address of FTP server	Up to 64 characters
Path	Path to the receiving folder. For example, <i>\User\ScanData</i> . Otherwise the data will be saved in the home directory.	Up to 128 characters
Login User Name	FTP server login user name	Up to 64 characters
Login Password	FTP server login password	Up to 64 characters

 Refer to *Character Entry Method* on page 11-7 for details on entering characters.

**4 Confirm the information.**

Check the information. Change the information as needed by pressing the item in question.

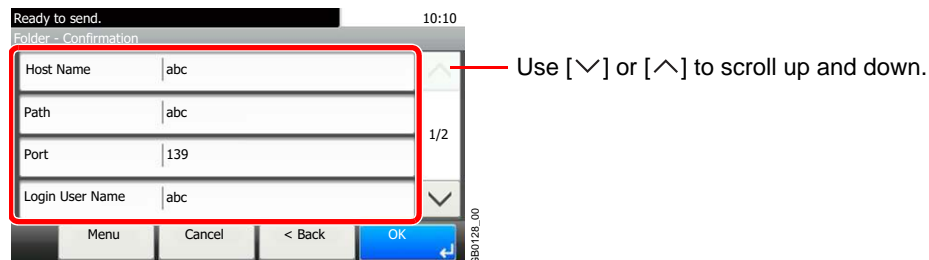

When specifying a computer or server port number as the destination, press [Port] and enter the port number. You can enter a number from 1 to 65,535 with a maximum of 5 digits.

Confirm the connection status.



*Connected.* appears when connection to the destination is correctly established. If *Cannot connect.* appears, review the entry.

To enter multiple destinations, press [Next Destination] and enter the next destination. You can specify a combined total of up to 5 FTP and SMB destination folders.

You can register the entered information in the Address Book by pressing [Menu] and then [Add to Address Book].

## 5 Accept the destinations.


Ready to send. 10:10

Folder - Confirmation

Host Name	abc
Path	abc
Port	139
Login User Name	abc

1/2

Menu Cancel < Back OK

 Destinations can be changed later. Refer to *Checking and Editing Destinations* on page 6-22.


## Checking and Editing Destinations

Check and edit a selected destination.


### 1 Display the screen.

1 Referring to *Specifying Destination* on page 6-15, specify the destination.

### 2

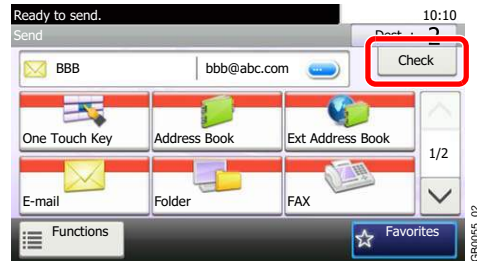


### 2 Check and edit the destination.

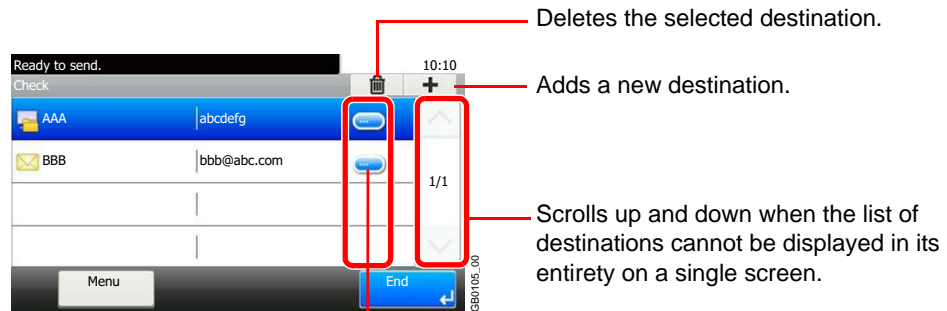

Displays details for the destinations. New E-mail addresses and PC folders can be edited if they have been specified.

## Sending to Different Types of Destinations (Multi Sending)

You can specify destinations that combine e-mail addresses, folders (SMB or FTP) and fax numbers\*. This is referred to as *Multi Sending*. This is useful for sending to different types of destination (e-mail addresses, folders, etc.) in a single operation.

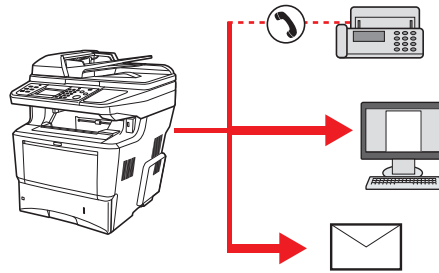

\* Fax functionality can only be used on products equipped with fax capability.

No. of broadcast items

E-mail: Up to 100

Folders (SMB, FTP): Total of 5 SMB and FTP

FAX: Up to 100

Also, depending on the settings, you can send and print at the same time.

Procedures are the same as used in specifying the destinations of respective types. Continue to enter E-mail address or folder path so that they appear in the destination list. Press the **Start** key to launch transmission to all destinations at one time.



### NOTE


If the destinations include a fax, the images sent to all destinations will be black and white.

# Registering Destinations in the Address Book

Add a new destination to the Address Book. There are two registering methods, contacts and groups. When adding a group, enter the group name and select group members from the Address Book.

## Adding a Contact

A maximum of 200 contact addresses can be registered. Each address can include the information such as destination name, E-mail address, FTP server folder path, computer folder path, and FAX No. (Only on products with the fax function installed).


 **NOTE**

If user login administration is enabled, you can only edit destinations in the Address Book by logging in with administrator privileges.


Contact addresses can also be registered in the system menu.

**1 Display the screen.**

Send

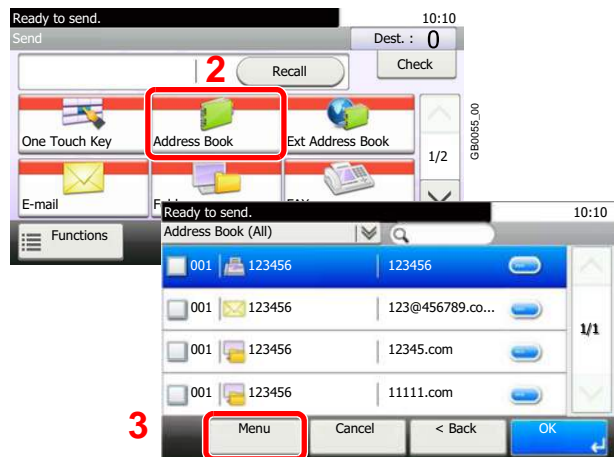


**2 Adds a new destination.**

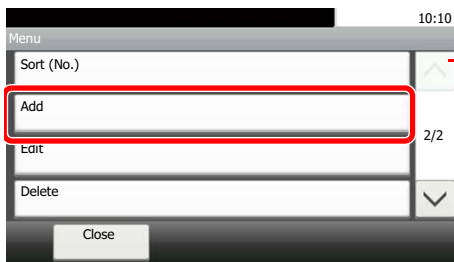


Use [v] or [^] to scroll up and down.

**3 Select the registration method.**

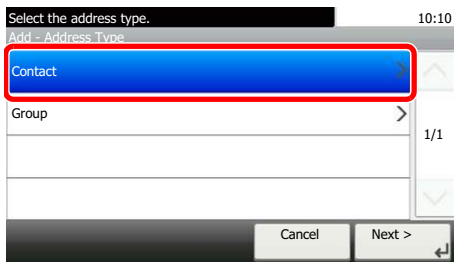

#### 4 Enter the destination name.

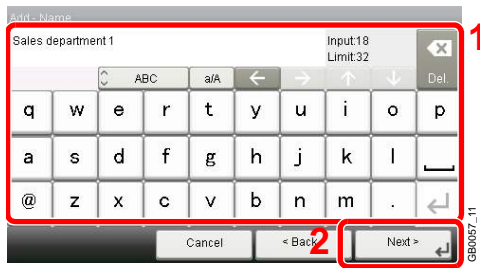

Up to 32 characters can be entered.

Refer to *Character Entry Method* on page 11-7 for details on entering characters.

#### 5 Enter the address number.




Press [+], [-] or numeric keys to enter a particular Address Number (1-250).

Address Number is an ID for a destination. You can select any available number out of 200 numbers for contacts and 50 numbers for groups.

If you set "000" as the address number, the address is registered under the lowest available number.

#### 6 Enter the destination.

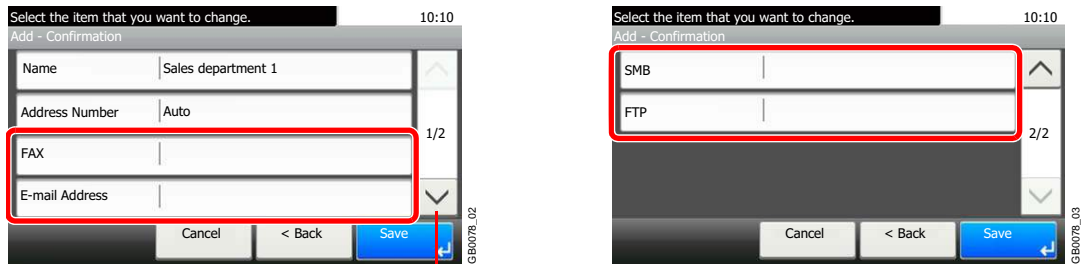


Use [∨] or [∧] to scroll up and down.


Select the type of destination to register.

For details on FAX, refer to *FAX Operation Guide*.

#### E-mail Address

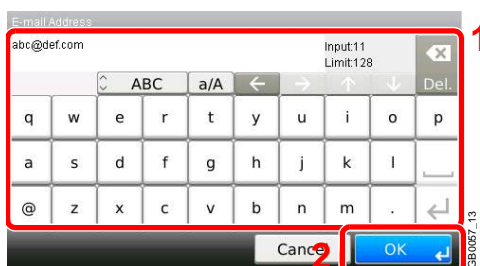


Enter the E-mail address. Up to 128 characters can be entered.


 Refer to *Character Entry Method* on page 11-7 for details on entering characters.

### The Folder (SMB) Address


**1** Enter *Host Name*, *Path*, *Port*, *Login User Name* and *Login Password*.

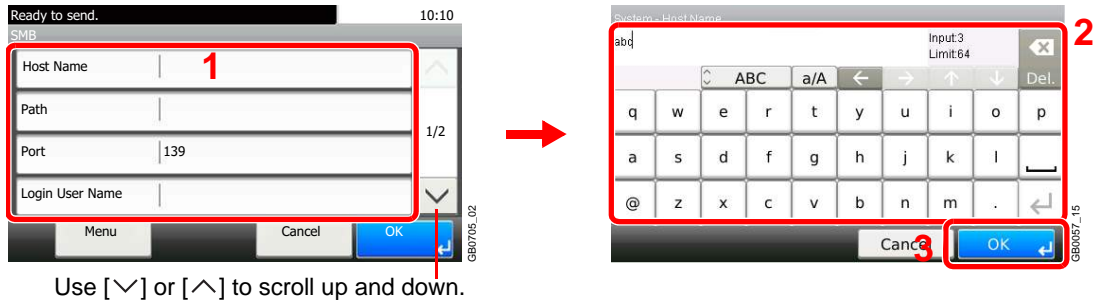

Use [∨] or [∧] to scroll up and down.


 For more information, refer to *Specifying a New PC Folder* on page 6-19.

**2** Confirm the connection status.

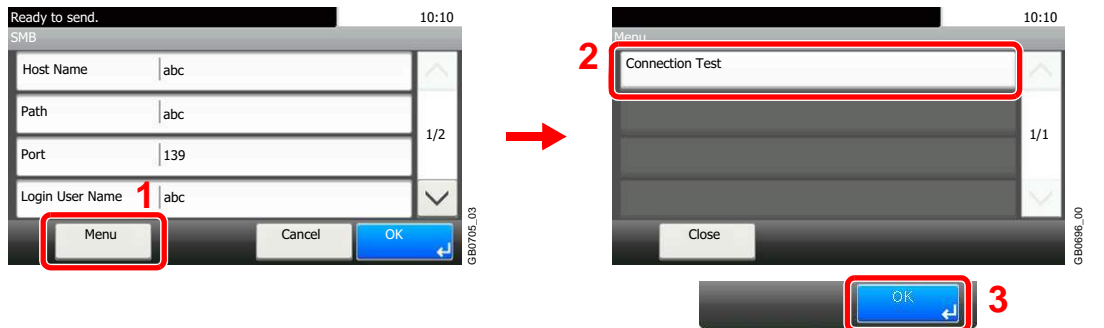


*Connected.* appears when connection to the destination is correctly established. If *Cannot connect.* appears, review the entry.

**3**

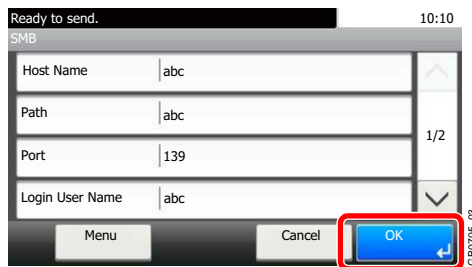

### The Folder (FTP) Address

**1** Enter *Host Name*, *Path*, *Port*, *Login User Name* and *Login Password*.

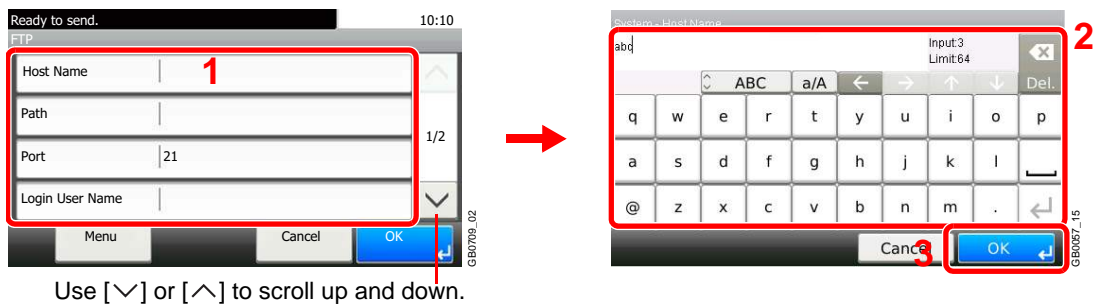

Use [∨] or [∧] to scroll up and down.

 For more information, refer to *Specifying a New PC Folder* on page 6-19.



**2** Confirm the connection status.

Ready to send. 10:10  
FTP  
Host Name | abc  
Path | abc  
Port | 21  
Login User Name | abc  
Menu Cancel OK



Menu 10:10  
Connection Test  
Close

OK

*Connected.* appears when connection to the destination is correctly established. If *Cannot connect.* appears, review the entry.

**3**

Ready to send. 10:10  
FTP  
Host Name | abc  
Path | abc  
Port | 21  
Login User Name | abc  
Menu Cancel OK

**7** Register the destination.

Select the item that you want to change. 10:10  
Add - Confirmation  
Name | Sales department 1  
Address Number | Auto  
FAX |  
E-mail Address |  
Cancel < Back Save

## Adding a Group

Compile two or more contacts into a group. Designations in the group can be added at the same time. When adding a group, a maximum of 50 groups can be added in the Address Book.

Before adding a group in the Address Book, the contacts to be included in the group must be added first.



### NOTE

If user login administration is enabled, you can only edit destinations in the Address Book by logging in with administrator privileges.


Designations in the group can also be registered in the system menu.

### 1 Display the screen.


Send



1

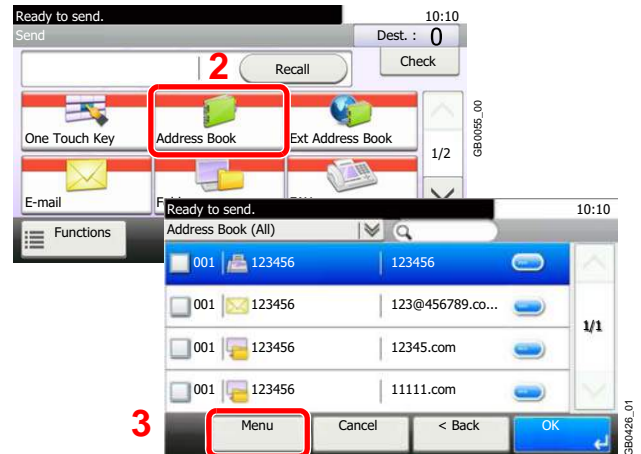


### 2 Adds a new destination.

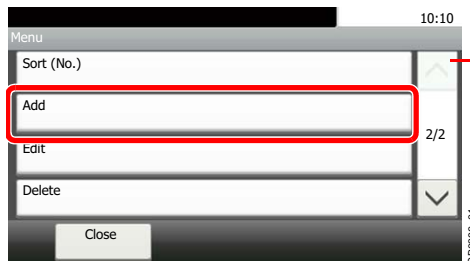


Use [∨] or [∧] to scroll up and down.

### 3 Select the registration method.

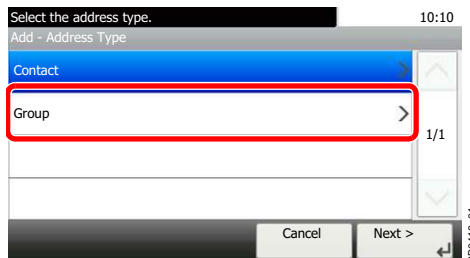

## 4 Enter the group name.

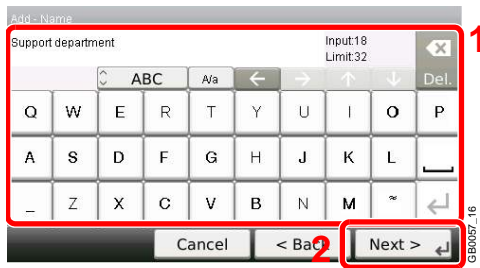

Up to 32 characters can be entered.

Refer to *Character Entry Method* on page 11-7 for details on entering characters.

## 5 Enter the address number.




Press [+], [-] or numeric keys to enter a particular Address Number (1-250).

Address Number is an ID for a destination. You can select any available number out of 200 numbers for contacts and 50 numbers for groups.


If you set "000" as the address number, the address is registered under the lowest available number.

## 6 Select the members (destinations).

1 Display the screen.

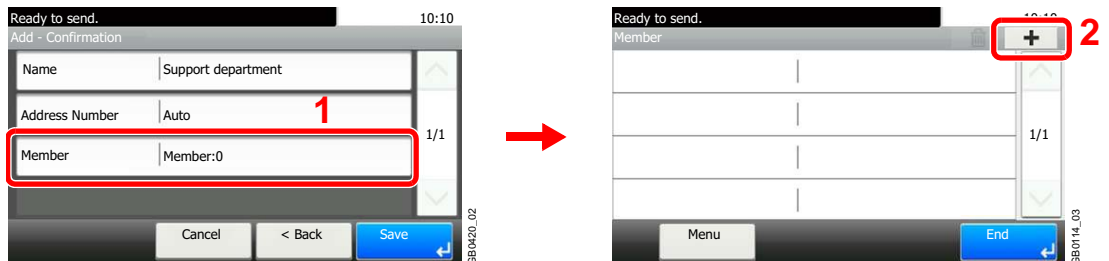



2 Press the checkbox to select the desired destination from the list. The selected destinations are indicated by a checkmark in the check box.

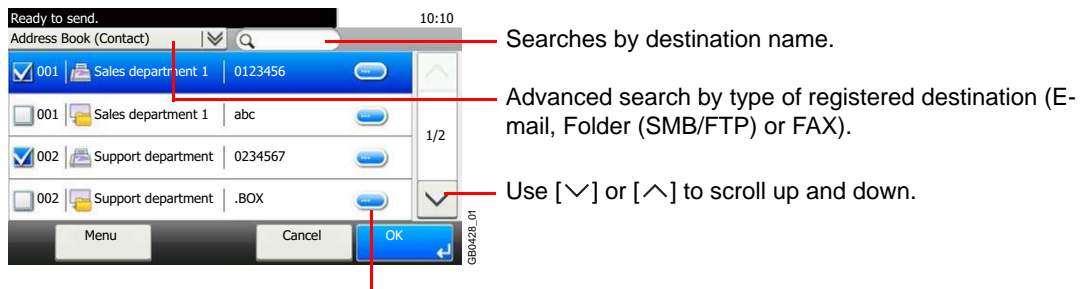

Displays details for individual destinations.

You can specify a destination by address number by pressing the **Quick No. Search** key.

You can also press [Menu] to perform a more detailed search.

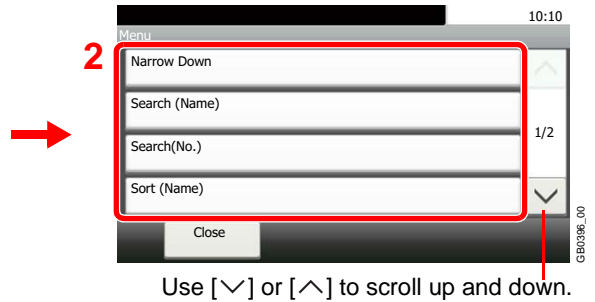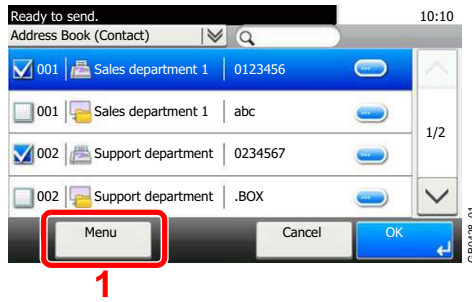

**Narrow Down:** Advanced search by type of registered destination (E-mail, Folder (SMB/FTP) or FAX).

**Search (Name)** and **Search (No.):** Searches by destination name or address number.



**Sort (Name)** and **Sort (No.):** Sorts the list by destination name or address number.




**NOTE**

To cancel a selection, press the corresponding checkbox to clear the check mark.

**7 Accept the members.**

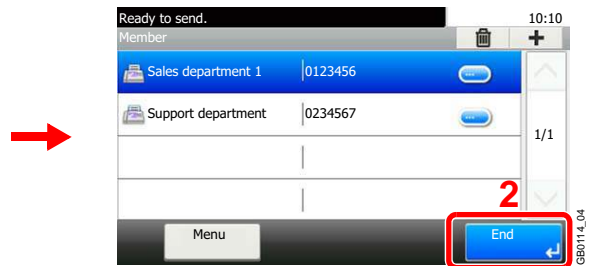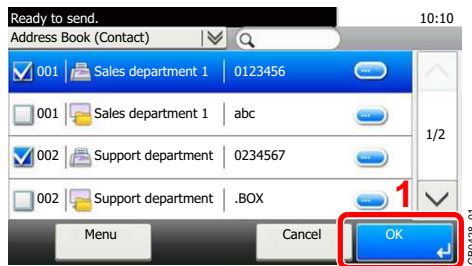


**8 Register the group.**

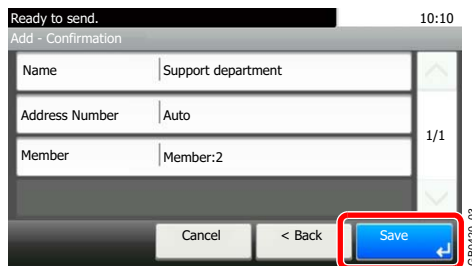

## Editing and Deleting Address Book Entries

Edit and delete the destinations (contacts) you added to the Address Book.


### 1 Display the screen.

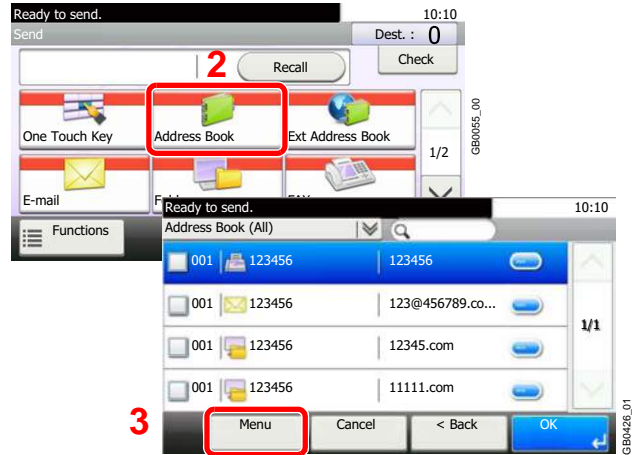

### 2 Edit or delete the destination.


To edit the destination

1

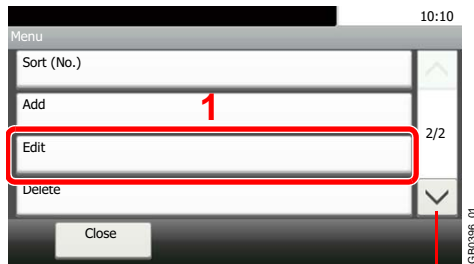

Use [∨] or [∧] to scroll up and down.


2

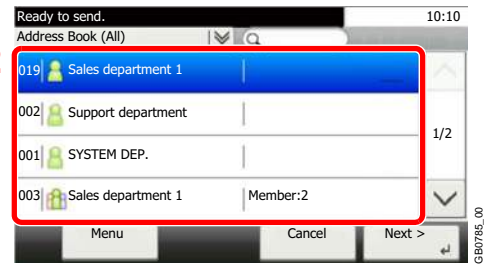

Select the destination (contacts) or group to edit.

You can specify a destination by address number by pressing the **Quick No. Search** key.


2

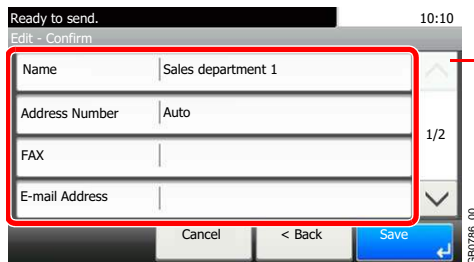

Use [∨] or [∧] to scroll up and down.





Change the information as needed by pressing the item in question.

3

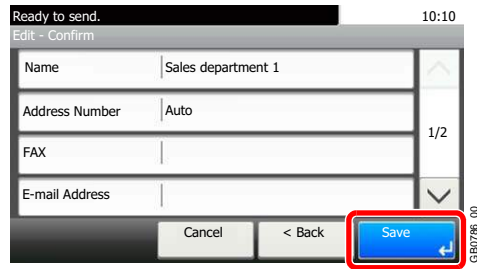


### To delete a member (group)


To delete a member from a group, select the destination you wish to delete and press [(Delete)] (the trash can icon).

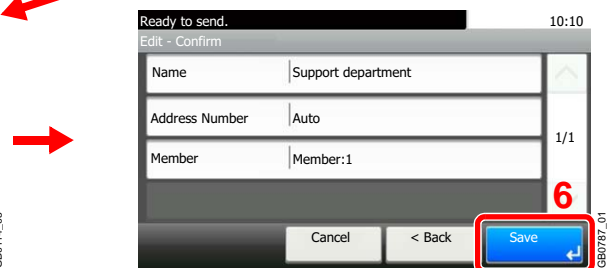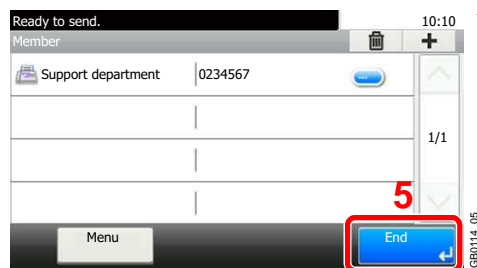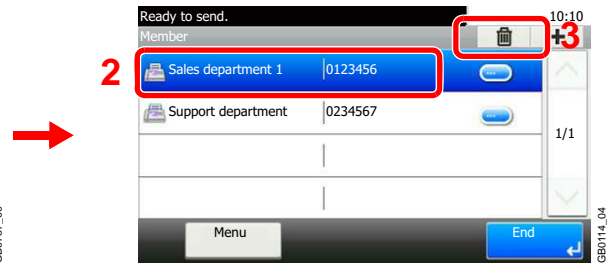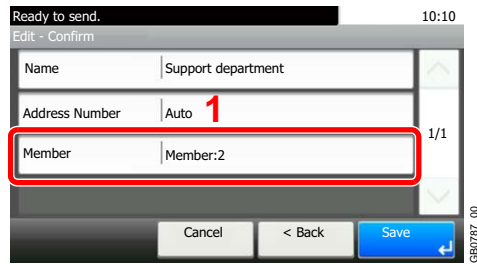

### To delete

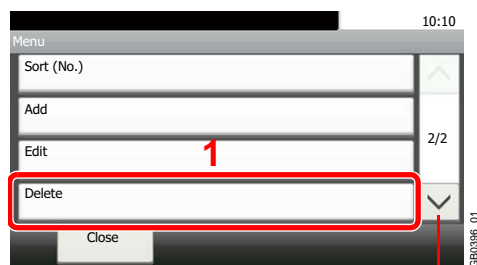

Use [∨] or [∧] to scroll up and down.

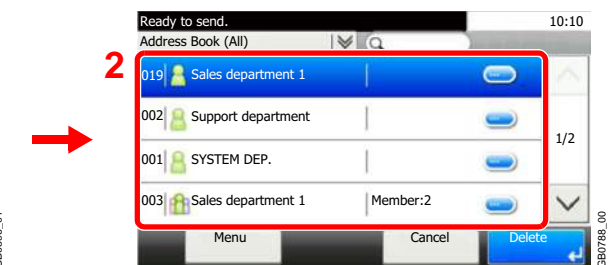

Select the destination (contacts) or group to delete.

# Adding a Destination on One Touch Key

Add a new destination (contact or group) on One Touch Key.


## Adding a Destination

Add a new destination (contact or group). A maximum of 100 destinations can be registered.


To register a destination to a One Touch Key, it must first be registered in the Address Book. Register one or more destinations as needed before proceeding.

### 1 Display the screen.

◆ System Menu / Counter

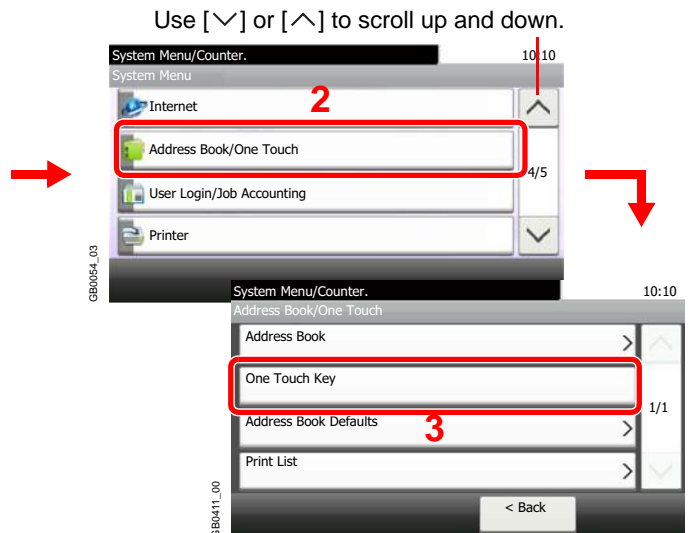


### 2 Adds a One Touch Key.

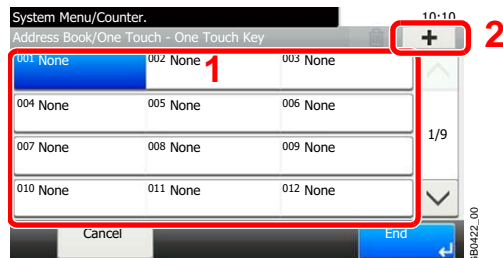

Select a One Touch Key with no registered destination, and press [+].

### 3 Select the destinations.


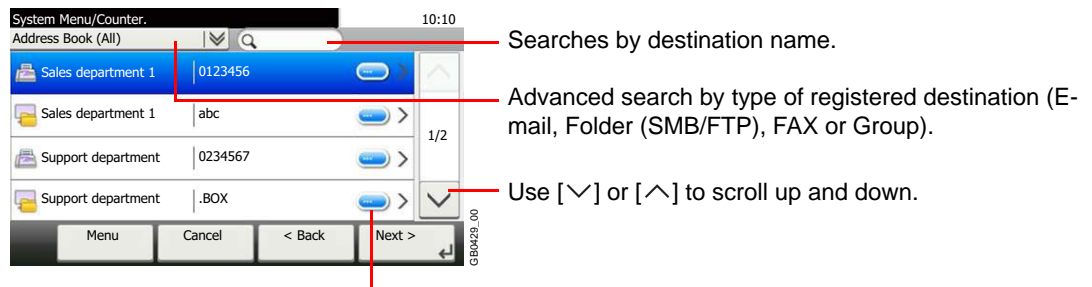


Displays details for individual destinations.

Select one destination (contact or group) from the Address Book.

You can specify a destination by address number by pressing the **Quick No. Search** key.

You can also press [Menu] to perform a more detailed search.

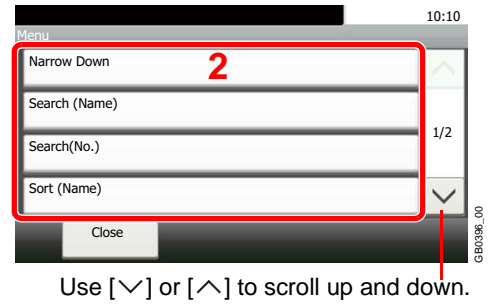
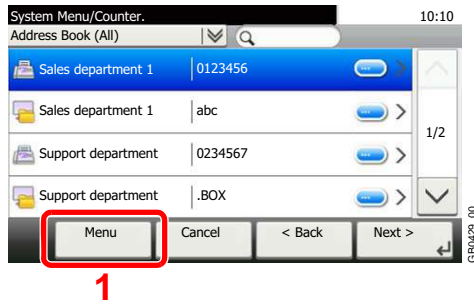


**Narrow Down:** Advanced search by type of registered destination (E-mail, Folder (SMB/FTP), FAX or Group).


**Search (Name)** and **Search (No.):** Searches by destination name or address number.

**Sort (Name)** and **Sort (No.):** Sorts the list by destination name or address number.


#### 4 Enter the One Touch Key name.

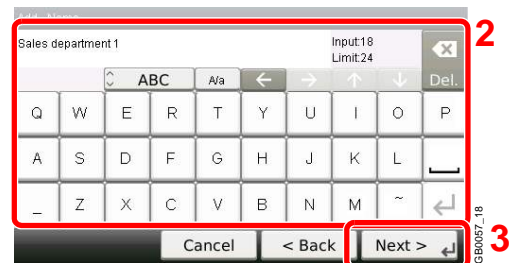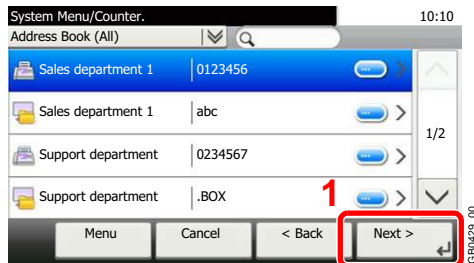

Up to 24 characters can be entered.

 Refer to *Character Entry Method* on page 11-7 for details on entering characters.

#### 5 Register the destination.


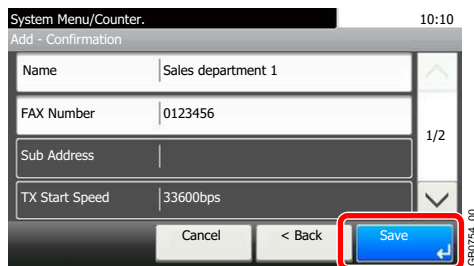




## Editing and Deleting One Touch Key



Edit and delete the destinations you added to One Touch Key.

### 1 Display the screen.

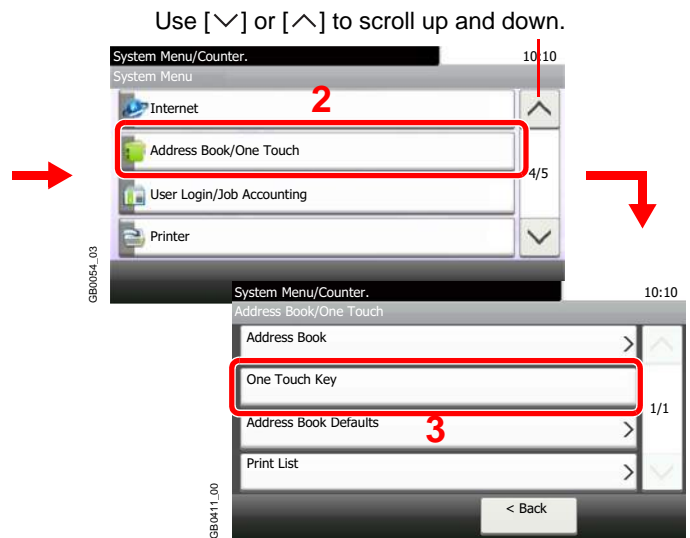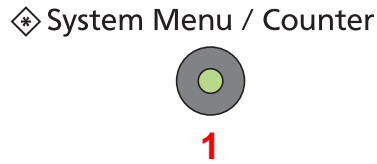


### 2 Edit or delete the destination.

To edit the destination

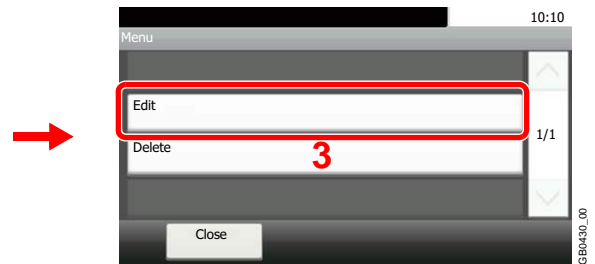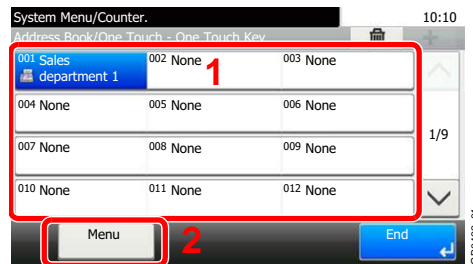

Select the One Touch Key you wish to edit and press [Menu] followed by [Edit].

To delete

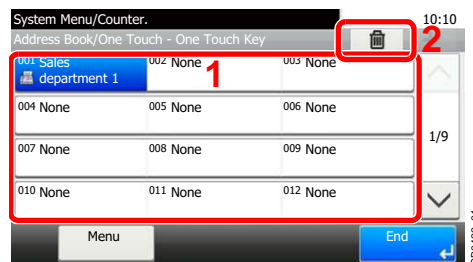

Select the One Touch Key you wish to delete and press [(Delete)] (the trash can icon).

# Sending Functions

Send screen shows the commonly used functions. By pressing [Functions], other selectable functions will be shown as a list. Use [∨] or [∧] to select the function.

What do you want to do?	Reference Page
Select the file format for images being sent.	File Format ▶ page 3-51
Specify the original size.	Original Size ▶ page 3-37
Specify the original orientation to scan in the correct direction.	Original Orientation ▶ page 3-38
Automatically scan 2-sided originals.	Duplex ▶ page 3-39
Change the size of the image being sent.	Sending Size ▶ page 6-37
Send each page in a separate file.	File Separation ▶ page 6-39
Set the resolution at which to scan originals.	Scan Resolution ▶ page 3-46
Adjust the density.	Density ▶ page 3-45
Change the color mode for images being sent.	Color Selection ▶ page 3-53
Select original image type for best results.	Original Image ▶ page 3-47
Emphasize the outline of texts or lines. Blur the image outline.	Sharpness ▶ page 3-48
Darken or lighten the background (i.e., the area with no text or images) of originals.	Background Density Adjust ▶ page 3-49
Enlarge or shrink originals according to the sending size.	Zoom ▶ page 3-50
Scan a large number of originals separately and then produce as one job.	Continuous Scan ▶ page 3-41
Add a file name to the job to easily check its status.	File Name Entry ▶ page 3-56
Add an E-mail subject and body (when sending E-mail).	E-mail Subject/Body ▶ page 6-40
Send notice by e-mail when a job is complete.	Job Finish Notice ▶ page 3-54
Encrypt your message.	FTP Encrypted TX ▶ page 6-41
Send a image to a WSD-compatible computer.	WSD Scan ▶ page 6-42



## NOTE

This section does not include fax settings. For details on fax operation, refer to the *FAX Operation Guide*. Fax functionality can only be used on products equipped with fax capability.

# Sending Size


Select size of image to be sent.

Same as Original Size	Automatically sends the same size as the original.
Metric	Select from A4, A5, A6, B5, B6 or Folio.
inch	Select from Letter, Legal, Statement, Executive or Oficio II.
Others	Select from 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Hagaki, Oufukuhagaki, Youkei 4 or Youkei 2

## Relationship between Original Size, Sending Size, and Zoom

Original Size (page 3-37), Sending Size, and Zoom (page 3-50) are related to each other. Refer to the following table.

Original Size and the size you wish to send as are	the same	different
Original Size	Specify as necessary	Specify as necessary
Sending Size	Select [Same as Original]	Select the required size
Zoom	Select [100%] (or [Auto])	Select [Auto]


 **NOTE**

When you select Sending Size that is different from Original Size, and select the Zoom [100%], you can send the image as the actual size (No Zoom).

### 1 Display the screen.

1 Referring to *Basic Operation* on page 6-2, display the screen.


#### 2

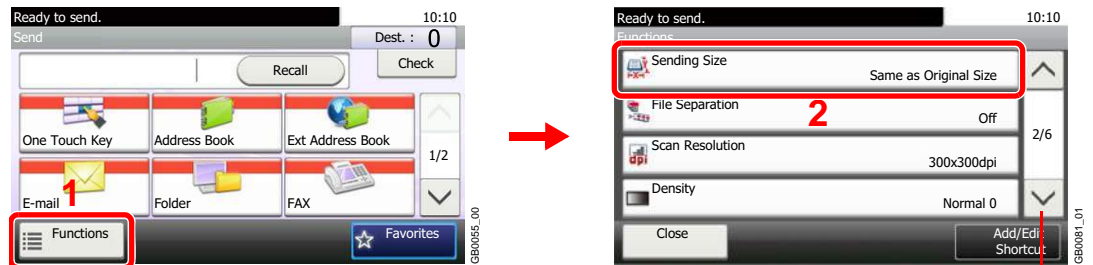



Use [∨] or [∧] to scroll up and down.

### 2 Select the sending size.

#### [Same as Original Size]

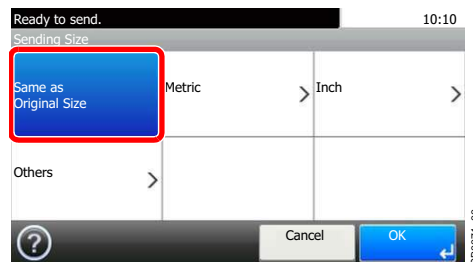

**[Metric], [Inch] or [Others]**

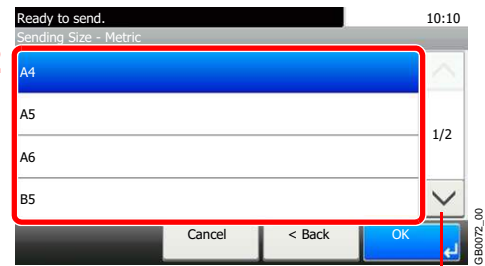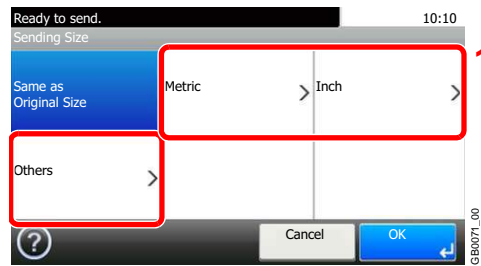


Use [∨] or [∧] to scroll up and down.

Select the desired size.

## File Separation

Create several files by dividing scanned original data page by page, and send the files.




### NOTE

Three-digit serial number such as abc\_001.pdf, abc\_002.pdf... is attached to the end of the file name.

## 1 Display the screen.


1 Referring to *Basic Operation on page 6-2*, display the screen.

2

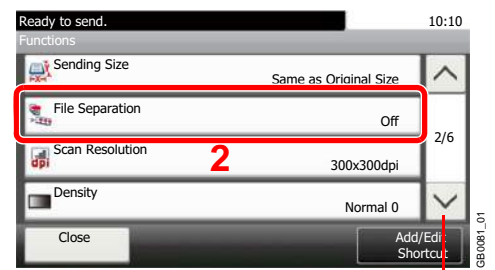


Use [∨] or [∧] to scroll up and down.

## 2 Select the function.

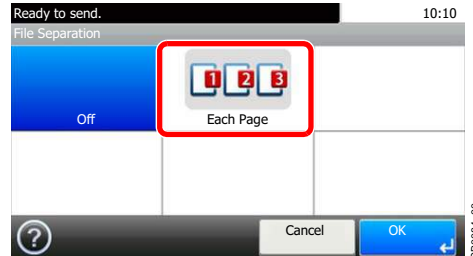

## E-mail Subject/Body

Add subject and body when sending a document.

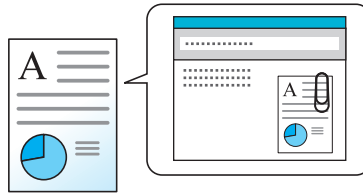


### NOTE

The subject can include up to 60 characters, and the body can include up to 500 characters.

## 1 Display the screen.



1 Referring to *Basic Operation* on page 6-2, display the screen.

2

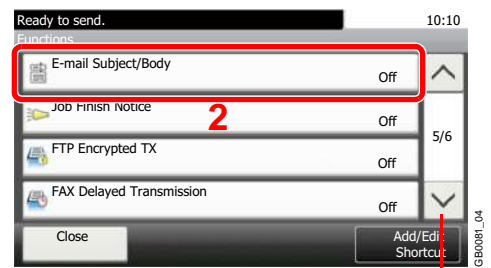



Use [∨] or [∧] to scroll up and down.

## 2 Enter the subject.

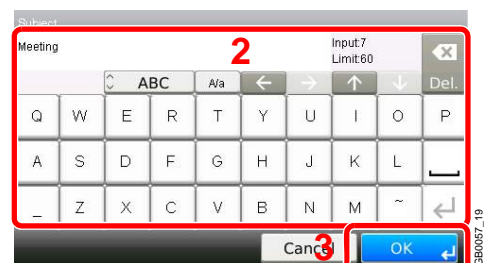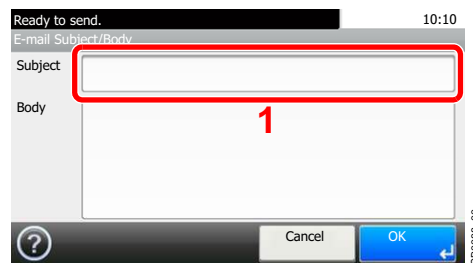

Refer to *Character Entry Method* on page 11-7 for details on entering characters.

## 3 Enter the body.

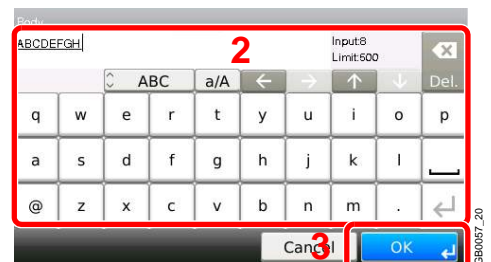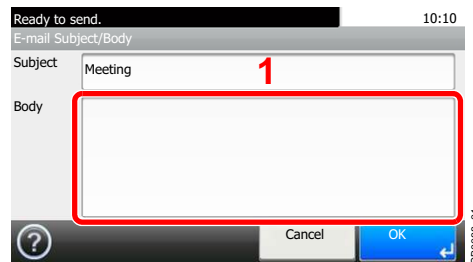

## 4 Press [OK].

# FTP Encrypted TX


Encrypt images when using FTP. Encryption secures the document transmission.

**NOTE**  
To use FTP encryption, set SSL to [On] in the Secure Protocol settings. For details, refer to *Secure Protocol on page 9-21*.

## 1 Display the screen.


1 Referring to *Basic Operation on page 6-2*, display the screen.

### 2

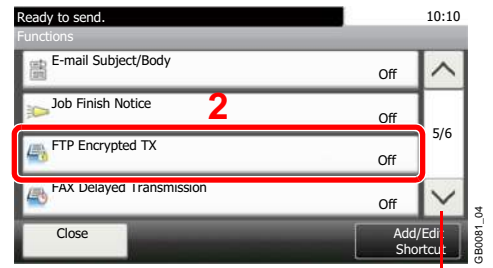


Use [∨] or [∧] to scroll up and down.

## 2 Select the function.

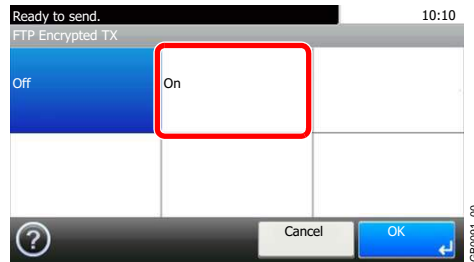

# WSD Scan


WSD Scan saves images of originals scanned on this machine as files on a WSD-compatible computer.

 **NOTE**  
To use WSD Scan, confirm that the computer used for WSD scanning and the machine is network-connected, and *WSD Scan* (page 9-20) is set to [On] in the network settings.  
For information on operating the computer, refer to the computer's help or the operation guide of your software.

## Installing Driver Software (for Windows 7)

- 1 Display the window.**  
From the Start menu, select **Network**.

- 2 Install the driver.**  
Right-click the machine's icon and then click **Install**.

 **NOTE**  
If the **User Account Control** window appears, click **Continue**.  
If the **Found New Hardware** window appears, click **Cancel**.

During the installation, double-click the icon shown on the task bar to display the **Driver Software Installation** screen. When **Your devices are ready to use** is displayed on the screen, the installation is completed.


## Using WSD


- 1 Press the Send key.**

# Send




- 2 Place the originals.**

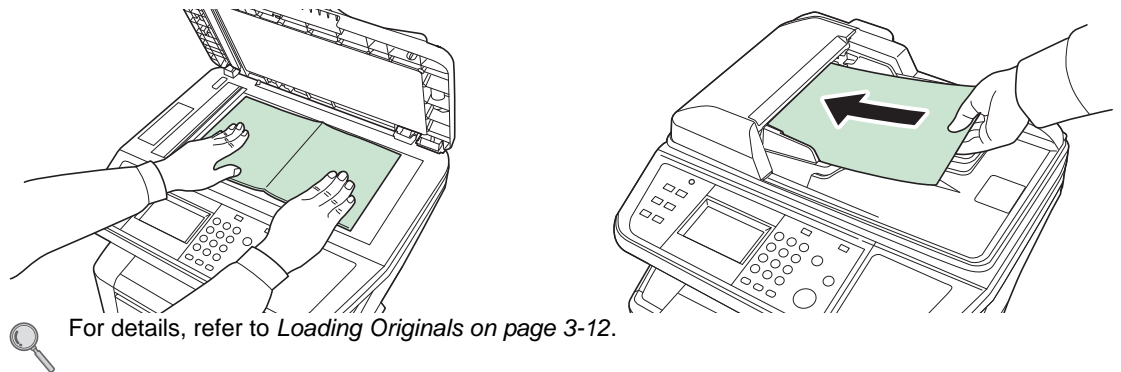

 For details, refer to *Loading Originals* on page 3-12.




### 3 Display the screen.

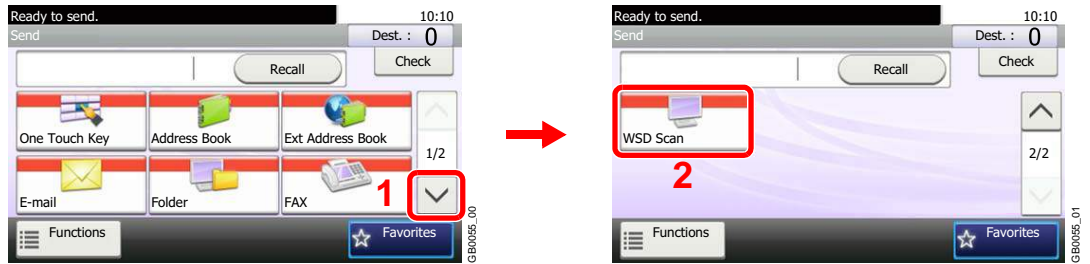


### 4 Scan the originals.

#### Procedure using this machine

1

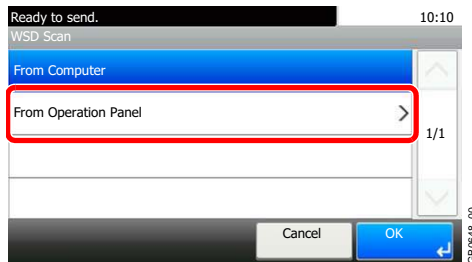

2 Select the destination computer.

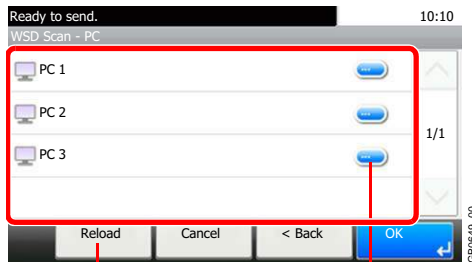


Updates the list.

Displays information for individual destination computers.

3 Press the **Start** key.


## Start



Sending begins and the software installed on the computer is activated.

## Procedure from Your Computer

1

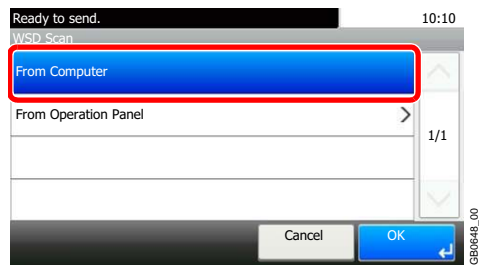

2 Use the software installed on the computer to send the images.

# Scanning using TWAIN

This section explains how to scan an original using TWAIN.

The procedure for scanning using the TWAIN driver is explained as an example. The WIA driver is used in the same way.

## 1 Display the window.

- 1 Activate the TWAIN compatible application.
- 2 Select the machine using the application and display the TWAIN dialog box.




### NOTE

For selecting the machine, see the Operation Guide or Help for each application software.

## 2 Configure the function.

Select scanning settings in the TWAIN dialog box that opens.


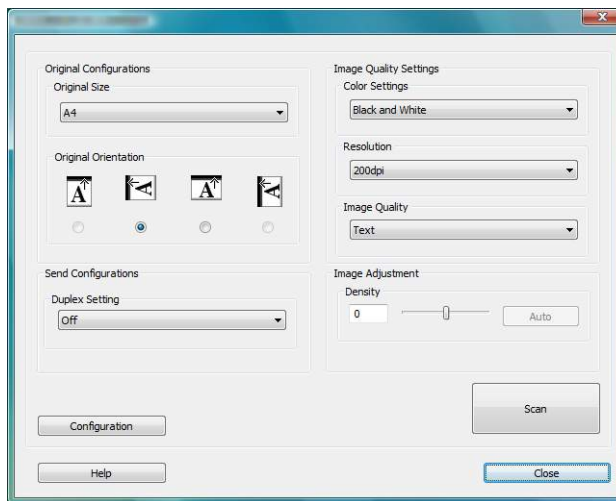


The settings that appear in the TWAIN dialog box are as follows.

Item		Detail
Original Configurations	Original Size	Select the scan size of the original.
	Original Orientation	Specify the type of binding.
Send Configurations	Duplex Setting	Specify whether the original is one-sided or two-sided.
Image Quality Settings	Color Settings	Select the color mode.
	Resolution	Select the resolution.
	Image Quality	Select the image quality according to the type of original.
Image Adjustment	Density	Select the exposure. Select the <b>Auto</b> button to have the exposure set automatically based on the original.

Item	Detail
<b>Configuration</b>	This is used to check current settings and store frequently used settings. When the <b>Configuration</b> button is clicked, a setting screen opens with buttons for <b>Details</b> , <b>Add current configuration</b> , and <b>Delete selected configuration</b> .
<b>Details</b>	Current settings can be checked.
<b>Add current configuration</b>	Save current settings with a name and comment.
<b>Delete selected configuration</b>	Delete saved settings.

### 3 Place the originals.

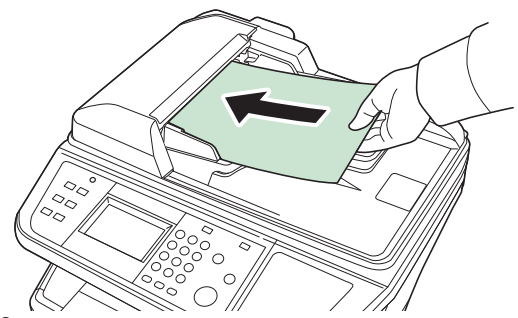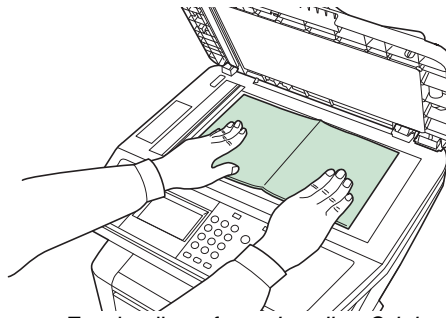

For details, refer to *Loading Originals* on page 3-12.

### 4 Scan the originals.

Click the **Scan** button. The document data is scanned.

# 7 Document Box

This chapter explains the following topics:

Printing Documents Stored in Removable USB Memory .....	7-2
Saving Documents to USB Memory (Scan to USB) .....	7-5
Removing USB Memory .....	7-8
Functions for Document Box .....	7-9
Duplex .....	7-10
Encrypted PDF Password .....	7-11
JPEG/TIFF Print .....	7-12
XPS Fit to Page .....	7-13
Storing Size .....	7-14

# Printing Documents Stored in Removable USB Memory

Plugging USB memory directly into the machine enables you to quickly and easily print the files stored in the USB memory without having to use a computer.

The following file types can be printed:

- PDF file (Version 1.5)
- TIFF file (TIFF V6/TTN2 format)
- JPEG file
- XPS file
- Encrypted PDF file


PDF files you wish to print should have an extension (.pdf).

Files to be printed should be saved no further down than the top 3 folder levels.

Use USB memory properly formatted by this machine.

Plug the USB memory directly into the USB memory slot. We do not guarantee that USB memory printing is error free if a USB hub is used.

## 1 Plug the USB memory.

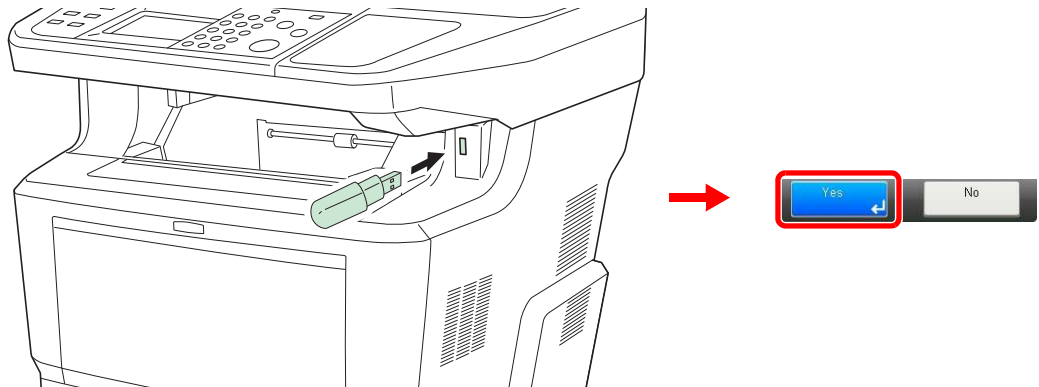

Plug the USB memory into the USB memory slot.

When the message *Removable Memory is recognized. Displaying files. Are you sure?* is displayed, press [Yes].




### IMPORTANT

**Use USB memory formatted by this machine. If a USB memory formatted by any other device is used, *The removable memory is not formatted.* may appear.**



Refer to *Check of Device Status* on page 8-12.

## 2 Display the screen.

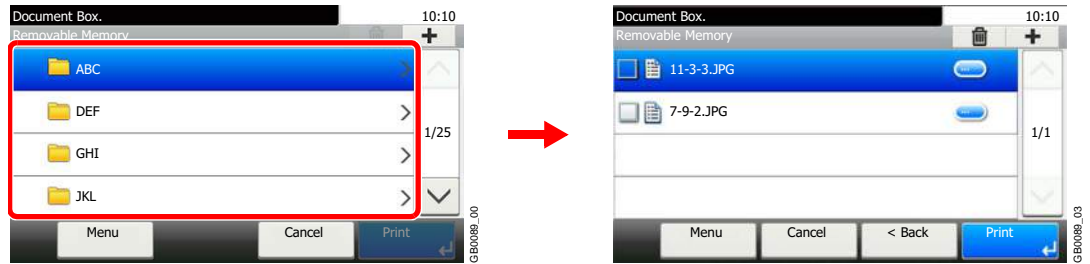

1 When the machine reads the USB memory, *Removable Memory* screen may appear.




### NOTE

If the screen does not appear, press the **Document Box** key and then [Removable Memory].

2 Select and open the folder in which the file you wish to print is stored.

The machine will display documents in the top 3 folder levels, including the root folder. To return to a higher level folder, press [< Back].

## 3 Select the file.

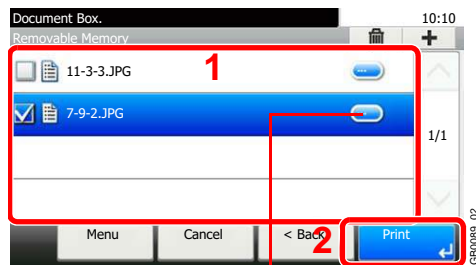

Displays details for individual files.

Select the file to be printed and press [Print].


## 4 Enter the quantity.



### NOTE


Press the **Clear** key to change the copy quantity.

## 5 Select the functions.

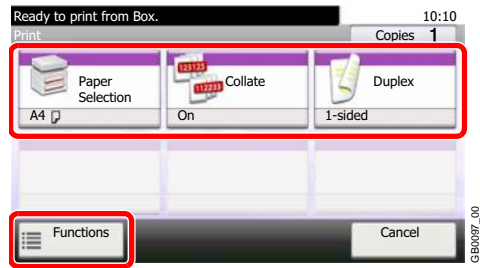


Select the function to use for Document Box.

Press [Functions] to display other functions.

 For details, refer to *Functions for Document Box* on page 7-9.


## 6 Start printing.

# Start



Press the **Start** key to start printing.

Remove the USB memory.


 For details, refer to *Removing USB Memory* on page 7-8.




# Saving Documents to USB Memory (Scan to USB)


This function allows you to store scanned image files in USB memory connected to the machine. You can store files in PDF, TIFF, JPEG or XPS format.

## 1 Place the originals.

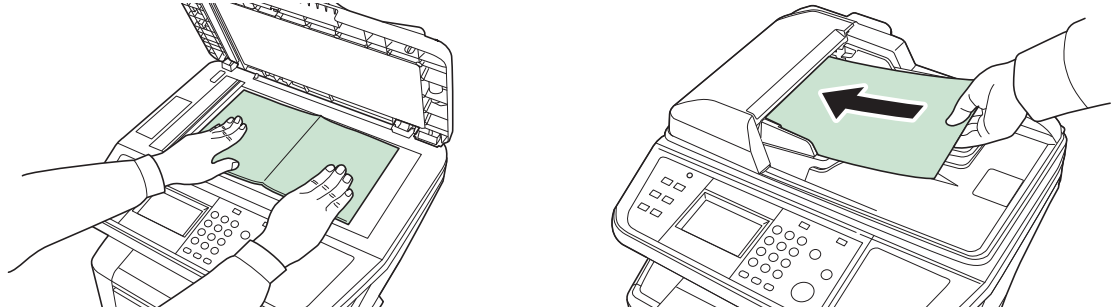

 For details, refer to *Loading Originals* on page 3-12.

## 2 Plug the USB memory.

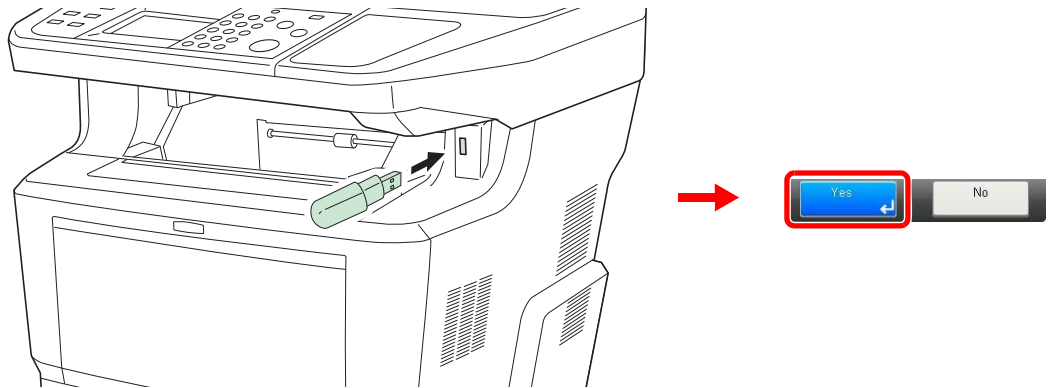

Plug the USB memory into the USB memory slot.

When the message *Removable Memory is recognized. Displaying files. Are you sure?* is displayed, press [Yes].

### **IMPORTANT**

**Use USB memory formatted by this machine. If a USB memory formatted by any other device is used, *The removable memory is not formatted.* may appear.**

 Refer to *Check of Device Status* on page 8-12.

### 3 Display the screen.



When the machine reads the USB memory, *Removable Memory* screen may appear.



#### NOTE

If the screen does not appear, press the **Document Box** key and then [Removable Memory].

### 4 Select the folder.



Select the folder where the file will be stored and press [Menu] and then [Store File].


The machine will display the top 3 folder levels, including the root folder. To return to a higher level folder, press [< Back].



#### NOTE

Up to 100 documents and folders can be displayed for each directory. If the number of documents and folders in a directory exceeds 100, you will be unable to save additional documents.

### 5 Select the functions.

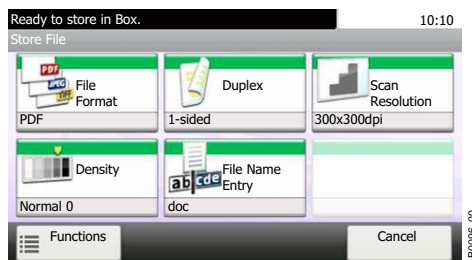

Select the function to use for Document Box.


Press [Functions] to display other functions.



For details, refer to *Functions for Document Box* on page 7-9.

## 6 Start storing.

# Start



Press the **Start** key to start storing.

Remove the USB memory.



For details, refer to *Removing USB Memory* on page 7-8.

# Removing USB Memory

Certain operations must be performed on the screen before USB memory can be removed.




## IMPORTANT


Be sure to follow the proper procedure to avoid damaging the data or USB memory.

### 1 Display the screen.


Document Box

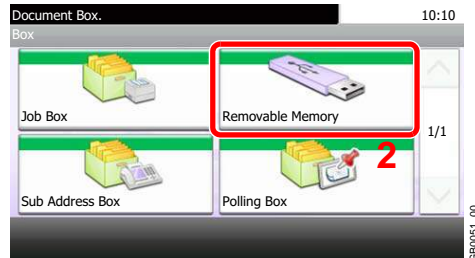


### 2 Select [Remove Memory].

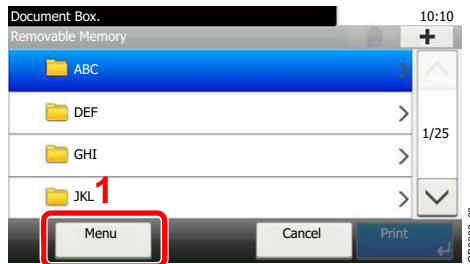

Use [∨] or [∧] to scroll up and down.

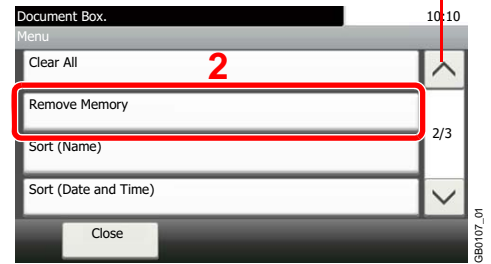

### 3 Remove the USB memory.

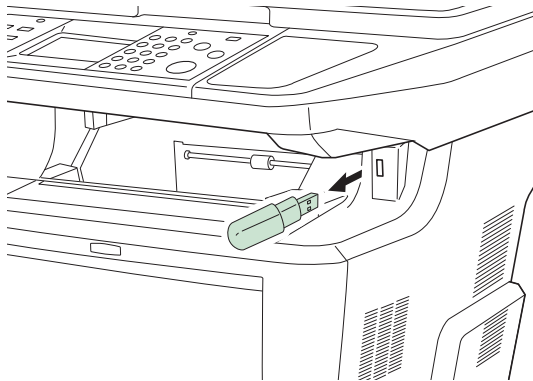

After *Removable Memory can be safely removed.* is displayed, press [OK] and remove the USB memory.



## NOTE

USB memory can also be removed after checking the status of the device.



For details, refer to *Check of Device Status* on page 8-12.

## Functions for Document Box

Print or Store file screen in Document Box shows the commonly used functions. By pressing [Functions], other selectable functions will be shown as a list. Use [∨] or [∧] to select the function.

### When printing from USB memory



What do you want to do?	Reference Page
Specify the paper size and type.	Paper Selection ▶ page 3-43
Collate the output documents in page order.	Collate ▶ page 3-44
Print on both sides of the paper.	Duplex ▶ page 7-10
Send notice by e-mail when a job is complete.	Job Finish Notice ▶ page 3-54
Suspend the current job and override it to give a new job top priority.	Priority Override ▶ page 3-57
Password-protect a PDF file.	Encrypted PDF Password ▶ page 7-11
Set the image size (resolution) when printing a JPEG or TIFF file.	JPEG/TIFF Print ▶ page 7-12
Print an XPS file so that it fits the paper size.	XPS Fit to Page ▶ page 7-13

### When storing a document to USB memory

What do you want to do?	Reference Page
Select the file format for images being stored.	File Format ▶ page 3-51
Automatically scan 2-sided originals.	Duplex ▶ page 3-39
Set the resolution at which to scan originals.	Scan Resolution ▶ page 3-46
Adjust the density.	Density ▶ page 3-45
Add a file name to the job to easily check its status.	File Name Entry ▶ page 3-56
Specify the original size.	Original Size ▶ page 3-37
Specify the original orientation to scan in the correct direction.	Original Orientation ▶ page 3-38
Change the size at which to store an image	Storing Size ▶ page 7-14
Change the color mode for images being stored.	Color Selection ▶ page 3-53
Select original image type for best results.	Original Image ▶ page 3-47
Emphasize the outline of texts or lines. / Blur the image outline.	Sharpness ▶ page 3-48
Darken or lighten the background (i.e., the area with no text or images) of originals.	Background Density Adjust ▶ page 3-49
Enlarge or shrink originals according to the storing size.	Zoom ▶ page 3-50
Scan a large number of originals separately and then produce as one job.	Continuous Scan ▶ page 3-41
Send notice by e-mail when a job is complete.	Job Finish Notice ▶ page 3-54

# Duplex


Print a document 1-sided or 2-sided. Select the original binding orientation and desired final binding orientation.

 <p>2-sided</p>	<p>Print a 2-sided document so that the sheets are aligned properly for binding on the left or right</p>
 <p>2-sided</p>	<p>Print a 2-sided document so that the sheets are aligned properly for binding on the top.</p>


## 1 Display the screen.

- 1 Referring to *Printing Documents Stored in Removable USB Memory on page 7-2*, display the screen.

## 2

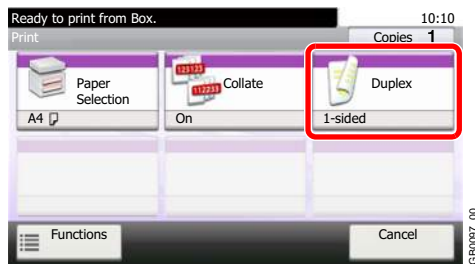

## 2 Select the function.

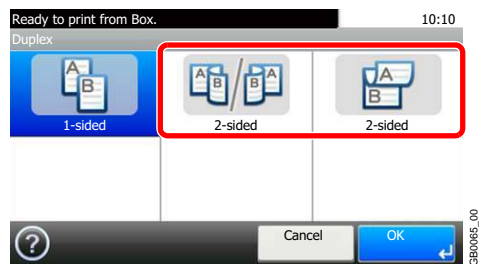



# Encrypted PDF Password

Enter the preassigned password to print the PDF data.

## 1 Display the screen.

1 Referring to *Printing Documents Stored in Removable USB Memory on page 7-2*, display the screen.

### 2

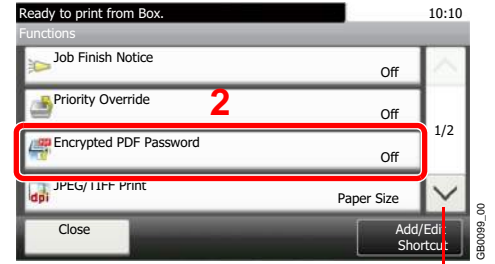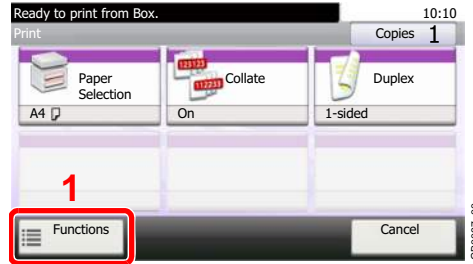


Use [∨] or [∧] to scroll up and down.

## 2 Enter the password.



Up to 256 characters can be entered.

 Refer to *Character Entry Method on page 11-7* for details on entering characters.

## JPEG/TIFF Print


Select the image size when printing JPEG or TIFF files.

Paper Size	Fit the image size to the selected paper size.
Image Resolution	Print at resolution of the actual image.
Print Resolution	Fit the image size to the print resolution.

### 1 Display the screen.


- 1 Referring to *Printing Documents Stored in Removable USB Memory on page 7-2*, display the screen.

### 2

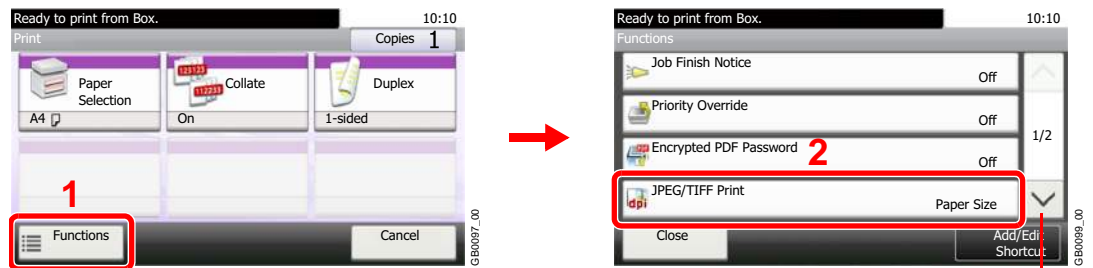

Use [∨] or [∧] to scroll up and down.

### 2 Select the function.

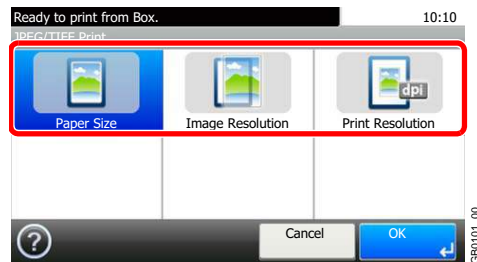




## XPS Fit to Page

Reduces or enlarges the image size to fit to the selected paper size when printing XPS files.

### 1 Display the screen.


- 1 Referring to *Printing Documents Stored in Removable USB Memory on page 7-2*, display the screen.

### 2

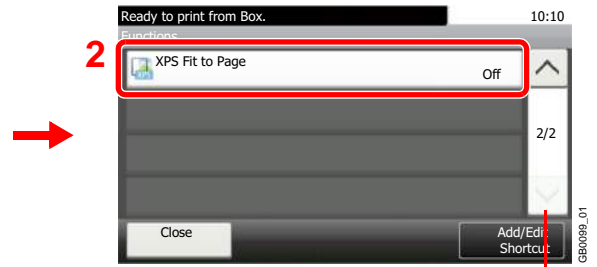

Use [∨] or [∧] to scroll up and down.

### 2 Select the function.

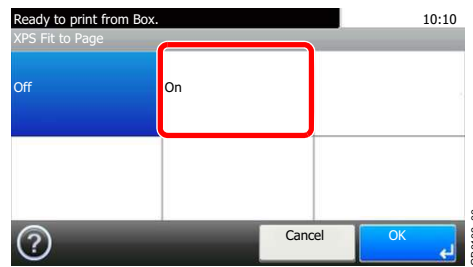

## Storing Size

Select size of image to be stored.

Same as Original Size	Store an image the same size as the original.
Metric	Select from A4, A5, A6, B5, B6 or Folio.
Inch	Select from Letter, Legal, Statement, Executive or Oficio II.
Others	Select from 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Hagaki, Oufukuhagaki, Youkei 4 or Youkei 2.

### Relationship between Original Size, Storing Size, and Zoom

Original Size (page 3-37), Storing Size, and Zoom (page 3-50) are related to each other. Refer to the following table.


Original Size and the size you wish to store as are	the same	different
Original Size	Specify as necessary	Specify as necessary
Storing Size	Select [Same as Original]	Select the required size
Zoom	Select [100%] (or [Auto])	Select [Auto]

**NOTE**  
When you select Storing Size that is different from Original Size, and select the Zoom [100%], you can store the image as the actual size (No Zoom).

### 1 Display the screen.

1 Referring to *Saving Documents to USB Memory (Scan to USB)* on page 7-5, display the screen.


#### 2

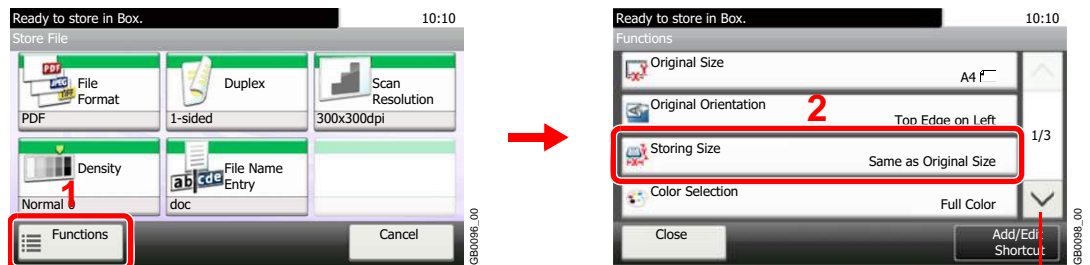



Use [∨] or [∧] to scroll up and down.

### 2 Select the storing size.

#### [Same as Original Size]

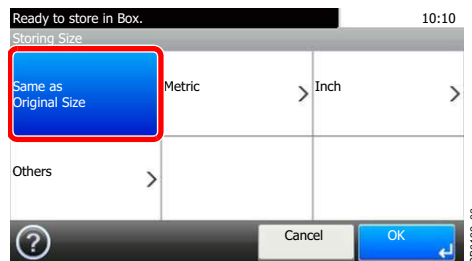

**[Metric], [Inch] or [Others]**

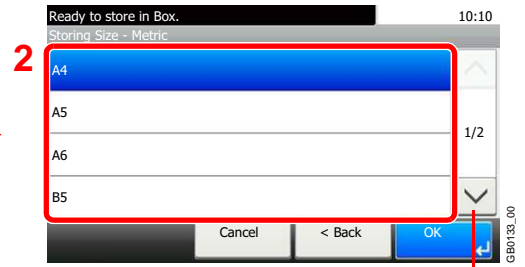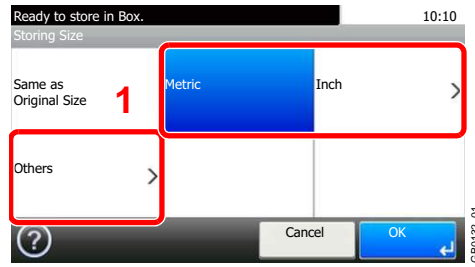

Use [∨] or [^] to scroll up and down.

Select the desired size.



# 8 Status / Job Cancel

This chapter explains the following topics:

Checking Job Status .....	8-2
Details of the Status Screens .....	8-3
Checking Job History .....	8-7
Sending the Log History .....	8-8
Setting the Destination .....	8-9
Automatic Log History Transmission .....	8-10
Manual Log History Transmission .....	8-10
Setting E-mail Subject .....	8-11
Check of Device Status .....	8-12
Checking the Remaining Amount of Toner and Paper .....	8-14


# Checking Job Status

Check the status of jobs being processed or waiting to be printed.

## Available Status Screens

The processing and waiting statuses of jobs are displayed as a list on the touch panel in four different screens - Printing Jobs, Sending Jobs, Storing Jobs, and Scheduled Jobs. The following job statuses are available.


Print Job Status	Copy Printer Printing from Document Box FAX reception	E-mail reception Job Report /List Printing data from removable memory Application
Send Job Status	FAX transmission Folder (SMB/FTP) transmission E-mail	Application Mixed (Multiple destination)
Store Job Status	Scan FAX	Printer
Scheduled Job	Sending Job FAX using Delayed transmission	

 **NOTE**

FAX functions are available only on products with the fax function installed.


### 1 Display the screen.


Status/  
Job Cancel

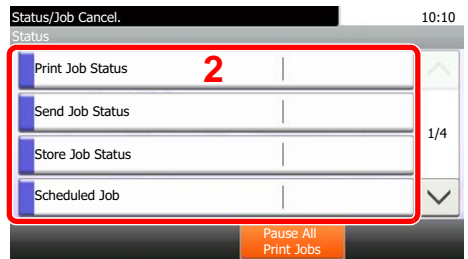

Press either of [Print Job Status], [Send Job Status], [Store Job Status] or [Scheduled Job] to check the status.


### 2 Check the status.

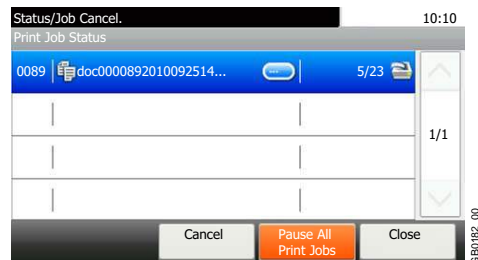

 Refer to *Print Job Status Screen* on page 8-3, *Send Job Status screen* on page 8-4, *Store Job Status screen* on page 8-5, and *Scheduled Job screen* on page 8-6.

## Details of the Status Screens

### Print Job Status Screen

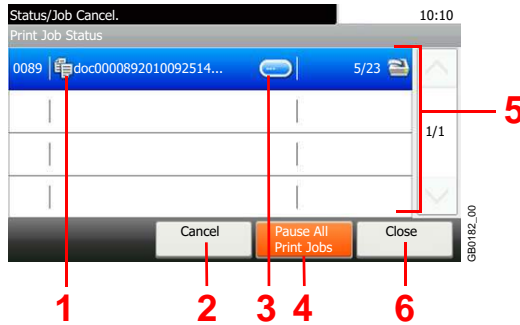


No.	Item/Key	Detail
1	—	<p>Icons that indicate the job type</p> <ul style="list-style-type: none"> <li> Copy job</li> <li> Printer job</li> <li> Job from Document Box</li> <li> FAX reception</li> <li> E-mail reception</li> <li> Report/List</li> <li> Data from removable memory</li> <li> Application</li> </ul>
2	<b>[Cancel]</b>	Select the job to be canceled from the list, and press this key.
3	<b>[...]</b>	Press [...] for the job for which you wish to display detailed information.
4	<b>[Pause All Print Jobs]</b>	Pauses all the printing jobs. By pressing this key again, the printing jobs will be resumed.
5	—	<p>Status of job</p> <ul style="list-style-type: none"> <li> Printing</li> <li> Printing (priority override)</li> <li> Print Waiting</li> <li> Print Waiting (priority override)</li> <li> Pausing print job or error</li> <li> Canceling the job</li> <li> The status before starting to print.</li> <li> The status before starting to print. (priority override)</li> <li> Printing has been suspended due to priority override.</li> </ul>
6	<b>[Close]</b>	Closes the Print Job Status screen.



**NOTE**

FAX functions are available only on products with the fax function installed.

## Send Job Status screen

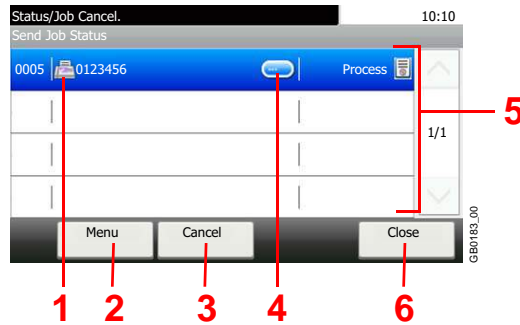

No.	Display/Key	Detail
1	—	Icons that indicate the job type Sending Job FAX Sending Job Folder (SMB/FTP) Sending Job E-mail Sending Job Application Sending Job Mixed (Multiple)
2	<b>[Menu]</b>	Pressing this key displays [Priority Override]. This function allows you to give a particular fax job priority. Select the fax job you wish to send immediately and then press [Menu], followed by [Priority Override].
3	<b>[Cancel]</b>	Select the job you want to cancel from the list, and press this key.
4	<b>[...]</b>	Press [...] for the job for which you wish to display detailed information.
5	—	Status of job Sending Sending Waiting A job for which immediate transmission was specified is waiting for transmission to start. Pausing the job or error Canceling the job The status before starting sending such as during scanning originals
6	<b>[Close]</b>	Closes the Send Job Status screen.




### NOTE

FAX functions are available only on products with the fax function installed.



## Store Job Status screen

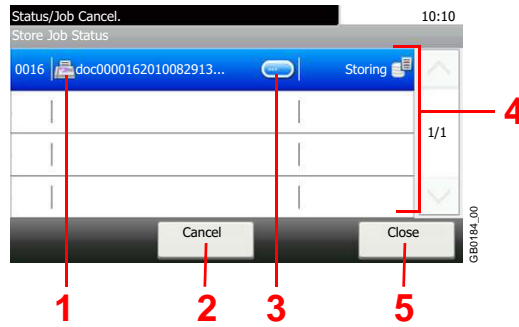


No.	Display/Key	Details
1	—	Icons that indicate the job type Storing Job Scan Storing Job Printer Storing Job FAX
2	<b>[Cancel]</b>	Select the job you want to cancel from the list, and press this key.
3	<b>[...]</b>	Press [...] for the job for which you wish to display detailed information.
4	—	Status of job Storing Data Pausing the job or error Canceling the job The status before starting to save such as during scanning originals
5	<b>[Close]</b>	Closes the Store Job Status screen.



### NOTE

FAX functions are available only on products with the fax function installed.

## Scheduled Job screen

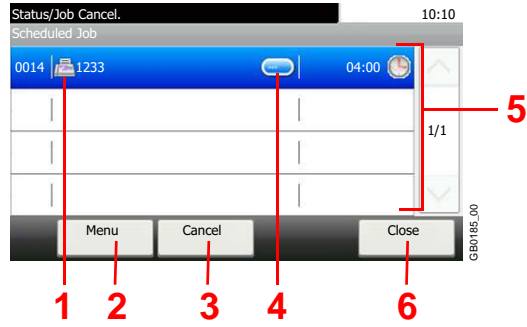

No.	Display/Key	Details
1	—	Icons that indicate the job type Sending Job FAX
2	<b>[Menu]</b>	Pressing this key displays [Start Now]. Select the job you wish to send immediately and then press [Menu], followed by [Start Now].
3	<b>[Cancel]</b>	Select the job you want to cancel from the list, and press this key.
4	<b>[...]</b>	Press [...] for the job for which you wish to display detailed information.
5	—	Status of job Sending Waiting
6	<b>[Close]</b>	Closes the Scheduled Job screen.



### NOTE

FAX functions are available only on products with the fax function installed.

# Checking Job History

Check the history of completed jobs.

## Available Job History Screens

The job histories are displayed separately in three screens - Printing Jobs, Sending Jobs, and Storing Jobs. The following job histories are available.

Print Job Log	Copy	Send Job Log	FAX
	Printer	Store Job Log	Folder (SMB/FTP)
FAX reception	Scan		
E-mail reception	Application	FAX	
Printing from Document Box	Mixed (Multiple destination)	Printer	
Job Report/List			
Printing data from removable memory			
Application			




**NOTE**

FAX functions are available only on products with the fax function installed.

**1 Display the screen.**


Status/  
Job Cancel

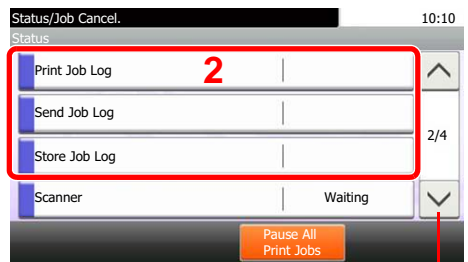

Use [∨] or [∧] to scroll up and down.

Press either of [Print Job Log], [Send Job Log], or [Store Job Log] to check the log.

**2 Check the log.**

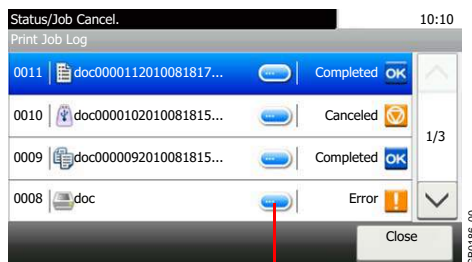

Displays details for individual jobs.

Press [Close] to exit the screen.



**NOTE**

The job history can be sent by E-mail.



For details, refer to *Sending the Log History on page 8-8*.


# Sending the Log History

You can send the log history by e-mail. You can either send it manually as needed or have it sent automatically whenever a set number of jobs is reached.


**NOTE**  
To send the log history by e-mail, select [On] of the SMTP settings on the COMMAND CENTER. Refer to *Sending E-mail on page 2-22*.

## 1 Display the screen.

◆ System Menu / Counter

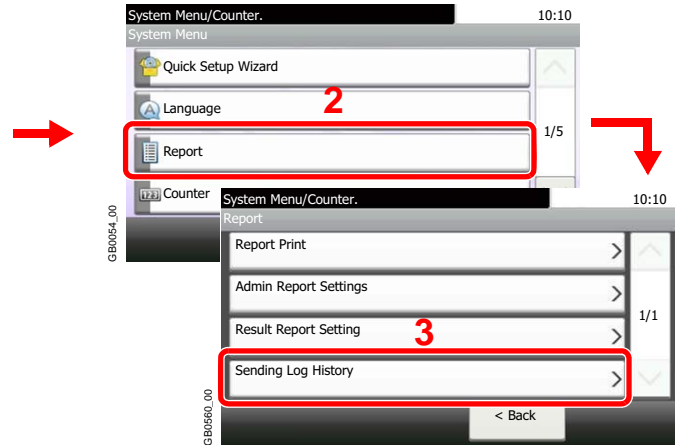

**NOTE**  
If user login administration is enabled, you can only change the settings by logging in with administrator privileges.

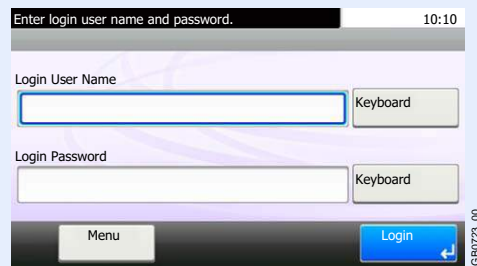

## 2 Configure the function.



Refer to *Setting the Destination on page 8-9*, *Automatic Log History Transmission on page 8-10*, *Manual Log History Transmission on page 8-10* and *Setting E-mail Subject on page 8-11*.


# Setting the Destination

Set the destination to which log histories are sent.

## 1 Display the screen.


1 Referring to *Sending the Log History* on page 8-8, display the screen.

### 2

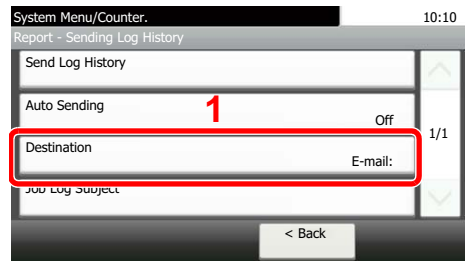


## 2 Select the destination.

Select from the Address Book.


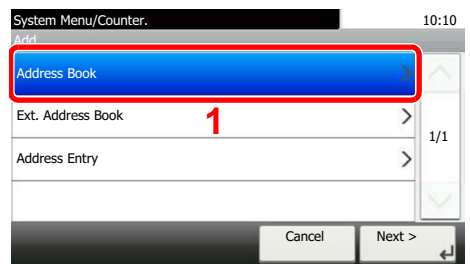


Searches by destination name.

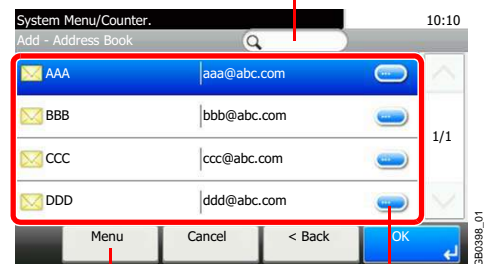


Allows you to search for and sort destinations.  
Displays details for individual destinations.


Enter a new e-mail address.

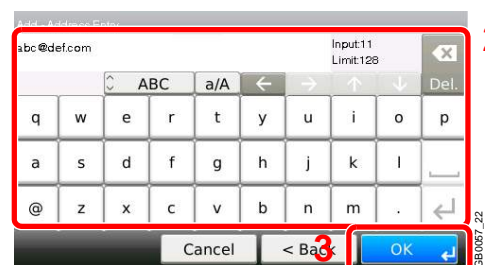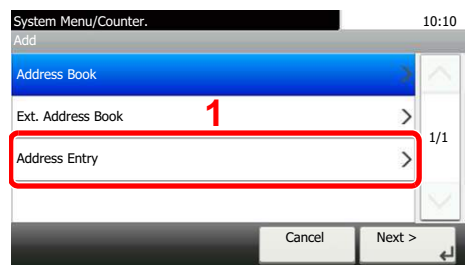

Up to 128 characters can be entered.

 Refer to *Character Entry Method* on page 11-7 for details on entering characters.

## 3 Accept the destination.

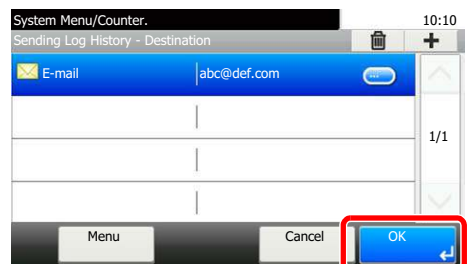


## Automatic Log History Transmission

This function automatically sends the log history to the specified destinations whenever a set number of jobs has been logged.



### 1 Display the screen.

1 Referring to *Sending the Log History* on page 8-8, display the screen.

### 2

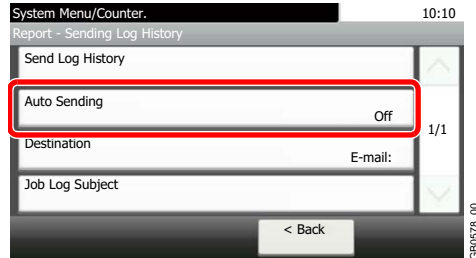

### 2 Select the function.

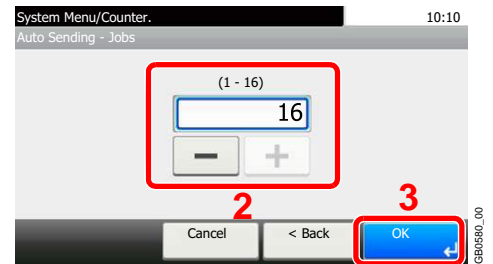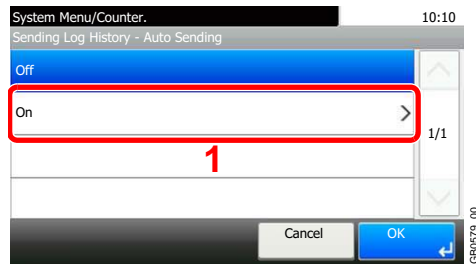

Press [On] and enter the number of jobs in the log history print. You can enter any number between 1 and 16.


## Manual Log History Transmission

You can also send the log history to the specified destinations manually.

### 1 Display the screen.

Referring to *Sending the Log History* on page 8-8, display the screen.

### 2 Send the log history.

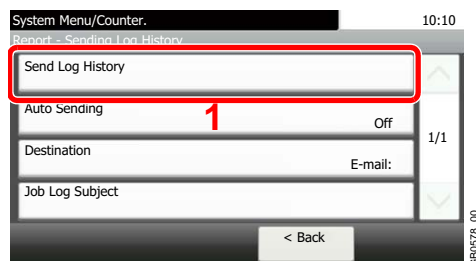


## Setting E-mail Subject

Set the subject automatically entered when sending log histories by E-mail.

### 1 Display the screen.

1 Referring to *Sending the Log History on page 8-8*, display the screen.


### 2

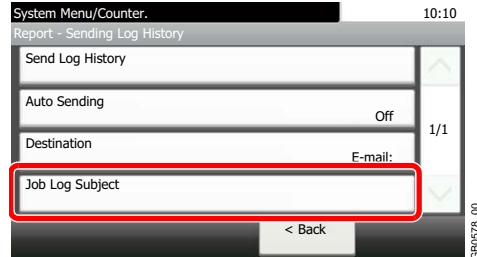

### 2 Enter an E-mail subject.



Up to 60 characters can be entered.


 Refer to *Character Entry Method on page 11-7* for details on entering characters.

# Check of Device Status

Configure the devices/lines installed or connected to this machine or check their status. You can also control devices depending on their status.

## 1 Display the screen.

Status/  
Job Cancel

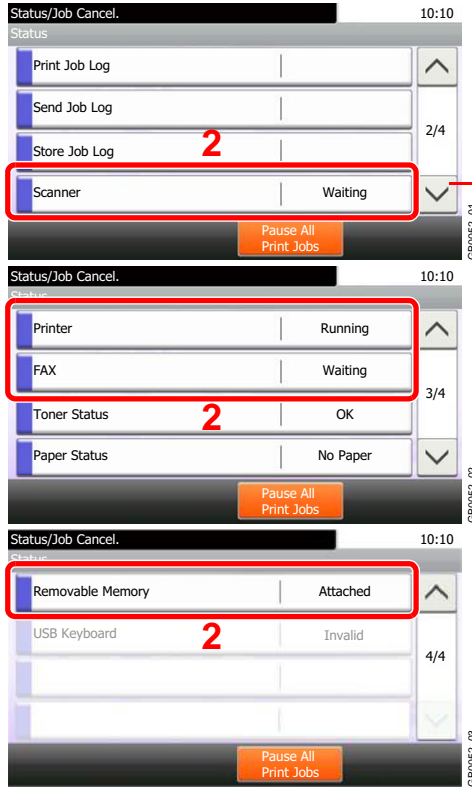


Use [∨] or [∧] to scroll up and down.

Select the device you wish to check.

## 2 Check the status.

### Scanner

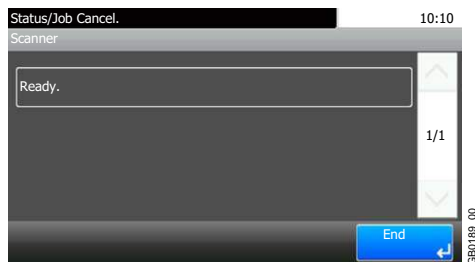

The status of an original scanning in the document processor or the error information (paper jam, opened cover, etc.) is displayed.



## Printer



Error information such as paper jam, out of toner, or out of paper, and status such as waiting or printing are displayed.

## FAX



- The information such as sending/receiving and dialing is displayed.
- Press [Line Off] to cancel a fax in sending/receiving.

For details, refer to the *FAX Operation Guide*.



### NOTE

FAX functions are available only on products with the fax function installed.

## Removable Memory




- The usage and capacity of the external media connected to this machine are displayed.
- Press [Menu] and then [Format] to format external media.
- Press [Remove Memory] to safely remove the external media. This operation is the same as that for *Removing USB Memory on page 7-8*.

# Checking the Remaining Amount of Toner and Paper

Check the remaining amount of toner and paper on the touch panel.


## 1 Display the screen.

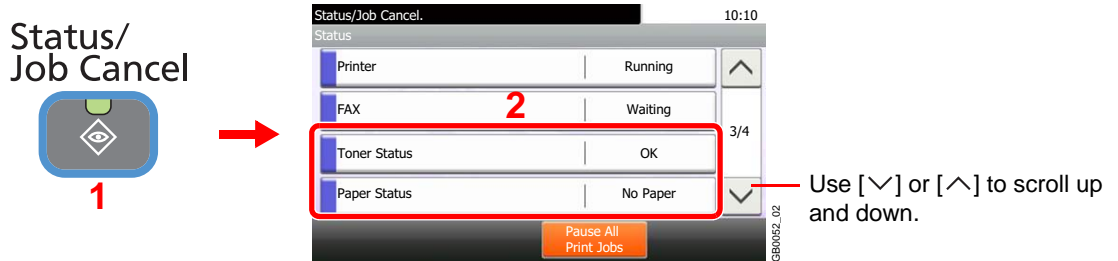

Select the consumable you wish to check.

## 2 Check the status.

### Toner Status

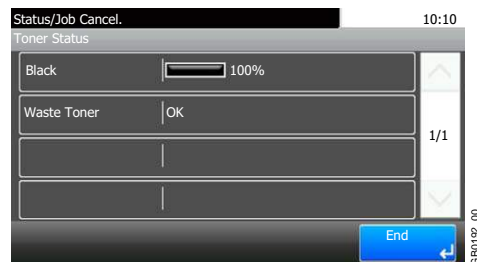

You can check the remaining amount of toner as one of 11 levels from 100 to 0%, and check the status of waste toner box.

### Paper Status



Use [∨] or [∧] to scroll up and down.

You can check the size, orientation, type, and remaining amount of paper in each paper source. The remaining amount of paper is shown by four levels as 100%, 70%, 30%, and 0% (none), however, the paper in the multi purpose tray is shown by two levels as 100% and 0%. If there is no paper in either cassette, the paper status will be shown as *No Paper*.

# 9 Setup, Registration, and User Management

This chapter explains the following topics:

System Menu .....	9-2
Operation Method .....	9-2
System Menu Settings .....	9-3
Report .....	9-5
User Property .....	9-7
Cassette/MP Tray Settings .....	9-7
Common Settings .....	9-9
Copy .....	9-13
Send .....	9-14
Favorites/Application .....	9-15
Internet .....	9-15
Printer .....	9-16
System .....	9-17
Date/Timer .....	9-22
Adjustment/Maintenance .....	9-23
User Login Administration .....	9-25
First User Login Administration .....	9-25
User Login Settings .....	9-26
Enabling/Disabling User Login Administration .....	9-27
Local User Authorization .....	9-33
Adding a User .....	9-29
Editing and Deleting Users .....	9-35
Simple Login .....	9-38
Group Authorization .....	9-44
Obtain Network User Property .....	9-48
Job Accounting .....	9-50
First Job Accounting Setup .....	9-50
Job Accounting Settings .....	9-52
Enabling/Disabling Job Accounting .....	9-53
Login/Logout .....	9-54
Adding an Account .....	9-55
Editing and Deleting Accounts .....	9-57
Restricting the Use of the Machine .....	9-59
Counting the Number of Pages Printed .....	9-61
Printing an Accounting Report .....	9-63
Job Accounting Default Setting .....	9-64
Unknown Login User Name Job .....	9-65

# System Menu

Configure settings related to overall machine operation.

## Operation Method

The system menu is operated as follows:

### 1 Display the screen.

◆ System Menu / Counter



### 2 Configure the function.

Displays available functions.

Scrolls up and down when the list of values cannot be displayed in its entirety on a single screen.

Displays available functions.

Return to the previous screen.

Selecting a value it to be accepted.

Returns to the original screen without making any changes.

Accepts the settings and exits.




#### NOTE

In order to change settings that require administrator privileges, you must log in with administrator privileges. Refer to *Adding a User* on page 9-29 for the default login user name and password.

Refer to *System Menu Settings* on the following page and configure as needed.

## System Menu Settings

System Menu include;

Item	Description	Reference Page
<b>Quick Setup Wizard</b>	The Quick Setup Wizard configures fax, cassette, and Energy Saver settings.	3-31
<b>Language</b>	Select the language displayed on the touch panel.	9-5
<b>Report</b>	Print reports to check the machine settings and status. Default settings for printing the result reports can also be configured.	9-5
<b>Counter</b>	This counts the number of pages printed or scanned.	3-16
<b>User Property</b>	Allows you to view information about logged in users and edit some of that information.	9-7
<b>Cassette/MP Tray Settings</b>	Select paper size and media type for Cassette 1 to 3 and multi purpose tray.	9-7
<b>Common Settings</b>	Configures overall machine operation.	9-9
<b>Default Screen</b>	Select the screen appearing right after start-up (default screen).	9-9
<b>Sound</b>	Set options for buzzer sound during the machine operations.	9-9
<b>Original Settings</b>	Configures settings for originals.	9-9
<b>Paper Settings</b>	Configures settings for paper.	9-10
<b>Function Defaults</b>	<p>Defaults are the values automatically set after the warm-up is completed or the <b>Reset</b> key is pressed.</p> <p>Set the defaults for available settings such as copying and sending. Setting the frequently-used values as defaults makes subsequent jobs easier.</p> <p> <b>IMPORTANT:</b> If you want to enable the changed defaults immediately, move to the function screen and press the <b>Reset</b> key.</p>	9-11
<b>Preset Limit</b>	Restrict the number of copies that can be made at one time.	9-12
<b>Error Handling</b>	Select whether to cancel or continue the job when error has occurred.	9-13
<b>Measurement</b>	Select inch or metric for the unit for paper dimensions.	9-13
<b>Keyboard Layout</b>	Change the layout of the touch panel keyboard used to enter characters.	9-13
<b>USB Keyboard Type</b>	Select the type of USB keyboard that you want to use.	9-13
<b>Copy</b>	Configures settings for copying functions.	9-13
<b>Send</b>	Configures settings for sending functions.	9-14
<b>Document Box</b>	Configures settings related to the Job Box and Sub Address Box. For details on Job Box, refer to <i>Printing on page 5-1</i> and for details on Sub Address Box, refer to the <i>Fax Operation Guide</i> .	—
<b>FAX</b>	Configures settings for fax functions. Refer to the <i>Fax Operation Guide</i> .	—
<b>Favorites/Application</b>	You can install and use applications that will make your day-to-day use of this machine more efficient.	9-15
<b>Internet</b>	This procedure sets up the Internet browser application.	9-15
<b>Address Book/One Touch</b>	Configures Address Book and One Touch Key settings. For details on Address Book, refer to <i>Registering Destinations in the Address Book on page 6-24</i> and for details on One Touch Key, refer to <i>Adding a Destination on One Touch Key on page 6-33</i> .	—

Item	Description	Reference Page
<b>User Login/Job Accounting</b>	Configures settings related to machine management. For details on User Login, refer to <i>User Login Administration</i> on page 9-25, and for details on Job Accounting, refer to <i>Job Accounting</i> on page 9-50.	—
<b>Printer</b>	Printing from computers, settings are generally made on the application software screen. However, the following settings are available for configuring the defaults to customize the machine.	9-16
<b>System</b>	Configures machine system settings.	9-17
<b>Network</b>	Configures network settings.	9-17
<b>Interface Block Setting</b>	This allows you to protect this machine by blocking the interface with external devices such as USB host or optional interfaces.	9-21
<b>Security Level</b>	The Security Level setting is primarily a menu option used by service personnel for maintenance work. There is no need for customers to use this menu.	—
<b>Restart</b>	Restart the CPU without turning the main power switch off. Use this to deal with any unstable operation by the machine. (Same as the computer restart.)	—
<b>RAM Disk Setting</b>	A RAM disk can be created and its size can be set. Creating a RAM disk makes it possible to print from a Job Box.	9-22
<b>Optional Memory</b>	When optional memory is installed, select the memory allocation scheme based on the application in which you are using the equipment.	9-22
<b>Optional Function</b>	You can use the optional applications installed on this machine.	11-5
<b>Date/Timer</b>	Configures settings related to the date and time.	9-22
<b>Adjustment/Maintenance</b>	Adjust printing quality and conduct machine maintenance.	9-23


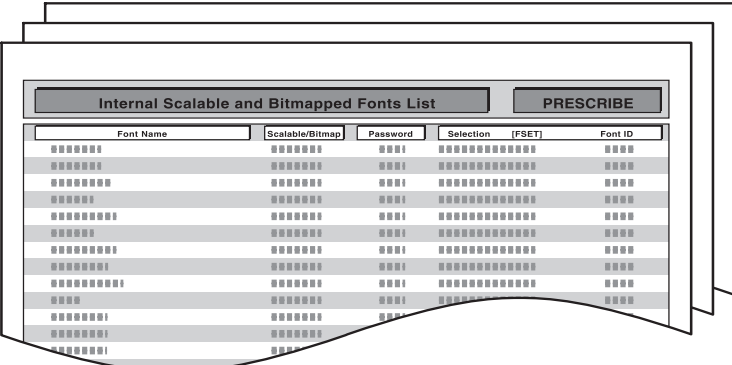
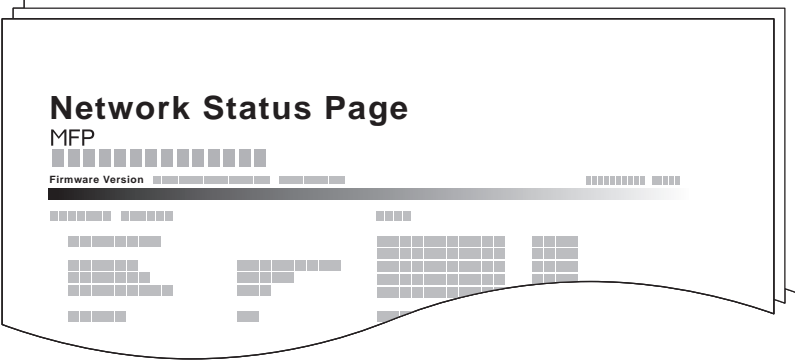
## Language

Item	Description
Language	Select the language displayed on the touch panel. Value: English, Deutsch, Français, Español, Italiano, Nederlands, Русский, Português

## Report

Print reports to check the machine settings and status. Default settings for printing the result reports can also be configured.

### Report Print

Item	Description
<b>Status Page</b>	<p>Prints the status page, allowing you to check the information including current settings and optional equipment installed.</p> 
<b>Font List</b>	<p>Prints the font list, allowing you to check the font samples installed in the machine.</p> 
<b>Network Status</b>	<p>Prints the network status, allowing you to check the information including network address and protocol.</p> 





## User Property

Allows you to view information about logged in users and edit some of that information.



For details on User Login, refer to *User Login Administration on page 9-25*.

Item	Description
<b>User Name</b>	Changes the name shown on the user list. Up to 32 characters can be entered.
<b>Login User Name</b>	Displays the login user name that is entered at login.
<b>Login Password</b>	Changes the password that is entered at login. Up to 64 characters can be entered.
<b>Access Level</b>	Displays the user's access level.
<b>Account Name</b>	Displays the account to which the user belongs.
<b>E-mail Address</b>	Changes the user's e-mail address. Up to 128 characters can be entered.
<b>Simple Login</b>	When simple login is enabled, changes associated settings.
<b>My Panel</b>	Registers settings for individual users. Settings registered here can be applied simply by logging in. Network users are not displayed.
<b>Group Name</b>	When group authorization is enabled, displays the name shown in the group list.
<b>Group ID</b>	When group authorization is enabled, displays the ID shown in the group list.



## Cassette/MP Tray Settings

Select paper size and media type for Cassette 1 to 3 and multi purpose tray.



### Cassette 1

Item	Description
<b>Paper Size</b>	<p>Set the paper size to load in Cassette 1.</p> <p><b>Value</b></p> <p>Metric: Select from A4, A5, A6, B5 or Folio            Inch: Select from Letter, Legal, Statement, Executive or Oficio II.            Others: Select from 16K, ISO B5, Envelope C5 or Custom.</p> <p> <b>NOTE:</b> [Paper Size] is only displayed when the Cassette 1 size dial is set to Other.            For instructions on how to specify the custom paper size, refer to <i>Custom Paper Size on page 9-10</i>.</p>
<b>Media Type</b>	<p>Set the media type to load in Cassette 1.</p> <p><b>Value:</b> Plain (105 g/m<sup>2</sup> or less), Rough, Recycled, Preprinted, Bond, Color, Prepunched, Letterhead, High Quality, Custom 1-8</p> <p> <b>NOTE:</b> To print on preprinted or prepunched paper or on letterhead, refer to <i>Special Paper Action on page 9-10</i>.</p> <p>To change to a media type other than [Plain], refer to <i>Media Type Setting on page 9-10</i>.            Refer to <i>Media Type Setting on page 9-10</i> for selecting Custom 1- 8.</p>

**Cassette 2 to 4**

Item	Description
<b>Paper Size</b>	Set the paper size to load in optional paper feeders (Cassette 2 to 4). <b>Value</b> Metric: Select from A4, A5, B5 or Folio Inch: Select from Letter, Legal, Statement, Executive or Oficio II. Others: Select from 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Oufukuhagaki, Youkei 4, Youkei 2 or Custom.  <b>NOTE:</b> [Paper Size] is only displayed when the size dial on the cassette is set to Other. For instructions on how to specify the custom paper size, refer to <i>Custom Paper Size on page 9-10</i> .
<b>Media Type</b>	Set the media type to load in optional paper feeders (Cassette 2 to 4). <b>Value:</b> Plain (105 g/m <sup>2</sup> or less), Rough, Recycled, Preprinted, Bond, Color, Prepunched, Letterhead, High Quality, Custom 1-8  <b>NOTE:</b> To print on preprinted or prepunched paper or on letterhead, refer to <i>Special Paper Action on page 9-10</i> . To change to a media type other than [Plain], refer to <i>Media Type Setting on page 9-10</i> . Refer to <i>Media Type Setting on page 9-10</i> for selecting Custom 1- 8.

**Multi Purpose Tray**

Item	Description
<b>Paper Size</b>	Set the paper size for multi-purpose tray. <b>Value</b> Metric: Select from A4, A5, A6, B5, B6 or Folio. Inch: Select from Letter, Legal, Statement, Executive or Oficio II. Others: Select from 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Hagaki, Oufukuhagaki, Youkei 4, Youkei 2 or Custom.  <b>NOTE:</b> For instructions on how to specify the custom paper size, refer to <i>Custom Paper Size on page 9-10</i> .
<b>Media Type</b>	Set the media type for multi-purpose tray. <b>Value:</b> Plain (105 g/m <sup>2</sup> or less), Transparency, Rough, Vellum (64 g/m <sup>2</sup> or less), Labels, Recycled, Preprinted, Bond, Cardstock, Color, Prepunched, Letterhead, Envelope, Thick (106 g/m <sup>2</sup> and more), High Quality, Custom 1-8  <b>NOTE:</b> To print on preprinted or prepunched paper or on letterhead, refer to <i>Special Paper Action on page 9-10</i> . Refer to <i>Media Type Setting on page 9-10</i> for selecting Custom 1- 8.


## Common Settings

Configures overall machine operation.

### Default Screen

Item	Description
<b>Default Screen</b>	Select the screen appearing right after start-up (default screen). <b>Value:</b> Copy, Send, FAX, Document Box, Favorites/Application, Status











### Sound

Item	Description
<b>Buzzer</b>	Set options for buzzer sound during the machine operations.
<b>Volume</b>	Set the buzzer volume level. <b>Value:</b> 0 (Mute), 1 (Minimum) to 5 (Maximum)
<b>Key Confirmation</b>	Emit a sound when the operation panel and touch panel keys are pressed. <b>Value:</b> Off, On
<b>Job Finish</b>	Emit a sound when a print job is normally completed. <b>Value:</b> Off, On, FAX Reception Only  <b>NOTE:</b> FAX functions are available only on products with the fax function installed.
<b>Ready</b>	Emit a sound when the warm-up is completed. <b>Value:</b> Off, On
<b>Warning</b>	Emit a sound when errors occur. <b>Value:</b> Off, On
<b>Key Confirmation (USB Keyboard)</b>	Emit a sound when a key on the optional USB keyboard is pressed. <b>Value:</b> Off, On

### Original Settings

Item	Description
<b>Custom Original Size</b>	Set up frequently-used custom original size. The custom size option is displayed on the screen when selecting original size. <b>Value</b> Inch models – X: 1.97 to 14.02" (in 0.01" increments), Y: 1.97 to 8.50" (in 0.01" increments) Metric models – X: 50 to 356 mm (in 1 mm increments), Y: 50 to 216 mm (in 1 mm increments)
<b>Default Original Size</b>	In the screen for setting the original size, select the paper size to be used as the default value. <b>Value</b> Metric: Select from A4, A5, A6, B5, B6 or Folio. inch: Select from Letter, Legal, Statement, Executive or Oficio II. others: 16K

## Paper Settings

Item	Description
<b>Custom Paper Size</b>	<p>Set up frequently-used custom paper size. The custom size option is displayed on the screen when selecting paper size.</p> <p><b>Value</b></p> <p>Inch models            Cassette 1 size: X 4.13 to 8.50", Y 5.83 to 14.02"            Cassette 2 (to 4) size: X 5.83 to 8.50", Y 8.27 to 14.02"            MP tray size: X 2.76 to 8.50", Y 5.83 to 14.02"</p> <p>Metric models            Cassette 1 size: X 105 to 216 mm, Y 148 to 356 mm            Cassette 2 (to 4) size: X 148 to 216 mm, Y 210 to 356 mm            MP tray size: X 70 to 216 mm, Y 148 to 356 mm</p>
<b>Media Type Setting</b>	<p>Select weight for each media type.</p> <p>For Custom 1-8, settings for duplex printing and media type name can be changed.</p> <p>For details, refer to <i>Media Type Setting on page 9-11</i>.</p>
<b>Default Paper Source</b>	<p>Select the default paper source from Cassette 1-4 and multi purpose tray.</p> <p><b>Value:</b> Cassette 1 to 4, Multi Purpose Tray</p>
<b>Paper Selection</b>	<p>Set the default paper selection.</p> <p><b>Value</b></p> <p>Auto: Automatically select the cassette containing paper in the same size as originals.</p> <p>Default Paper Source: Select paper source set by <i>Default Paper Source</i>.</p>
<b>Media for Auto (B&amp;W)</b>	<p>Select a default media type for auto paper selection when [Auto] is selected of Paper Selection. If Plain is selected, the paper source with plain paper loaded in the specific size is selected. Select [All Media Types] for the paper source with any kind of paper loaded in the specific size.</p> <p><b>Value:</b> All Media Types, Plain, Transparency, Rough, Vellum, Labels, Recycled, Preprinted, Bond, Cardstock, Color, Prepunched, Letterhead, Envelope, Thick, High Quality, Custom 1 to 8</p>
<b>Special Paper Action</b>	<p>When printing on Prepunched, Preprint, and Letterhead, punch-holes might not be aligned or the print direction might be upside-down depending on how originals are set and the combination of copying functions. In such a case, select [Adjust Print Direction] to adjust the print direction. When paper orientation is not important, select [Speed Priority].</p> <p>Example: copying on Letterhead</p> <div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  <p>Original</p> </div> <div style="text-align: center;">  <p>Paper</p> </div> <div style="text-align: center;">  <p>Finished</p> </div> <div style="text-align: center;">  <p>Cassette</p> </div> <div style="text-align: center;">  <p>Multi Purpose Tray</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-end; margin-top: 20px;"> <div style="text-align: center;">  <p>Original</p> </div> <div style="text-align: center;">  <p>Paper</p> </div> <div style="text-align: center;">  <p>Finished</p> </div> <div style="text-align: center;">  <p>Cassette</p> </div> <div style="text-align: center;">  <p>Multi Purpose Tray</p> </div> </div> <p><b>Value:</b> Adjust Print Direction, Speed Priority</p>

## Media Type Setting

Each media type's default weight is indicated.


Media Type	Default	Media Type	Default
Plain	Normal 2	Cardstock	Heavy 3
Transparency	Extra Heavy	Color	Normal 3
Rough	Normal 3	Prepunched	Normal 2
Vellum	Light	Letterhead	Normal 3
Labels	Heavy 1	Thick	Heavy 3
Recycled	Normal 2	Envelope	Heavy 3
Preprinted	Normal 2	High Quality	Normal 2
Bond	Normal 3	Custom 1 - 8	Normal 2

For Custom 1-8, settings for duplex printing and media type name can be changed.

Item	Description
Custom 1-8	<b>Duplex</b> Select the setting for duplex. Value: Prohibit, Permit
	<b>Name</b> Change names for Custom 1-8. Names should be not more than 16 characters. Selecting media type at multi purpose tray, the name after change will be displayed.

## Function Defaults

Item	Description
<b>File Format</b>	Select the default type of the files to be sent. Value: PDF, TIFF, JPEG, XPS
<b>Original Orientation</b>	Set the original orientation defaults. Value: Top Edge on Top, Top Edge on Left
<b>Collate</b>	Set the defaults for Collate. Value: Off, On
<b>File Separation</b>	Select the default file separation setting. Value: Off, Each Page
<b>Scan Resolution</b>	Select the default scanning resolution. Value: 600 × 600dpi, 400 × 400dpi Ultra Fine, 300 × 300dpi, 200 × 400dpi Super Fine, 200 × 200dpi Fine, 200 × 100dpi Normal
<b>Color Selection</b>	Select the default color mode for scanning documents. Value: Auto (Color/Gray), Auto (Color/B & W), Full Color, Grayscale, Black & White
<b>Original Image</b>	Set the default original document type. Value: Text+Photo, Photo, Text, Graphic/Map, Text (for OCR), Printer Output
<b>Background Density Adj.</b>	Select the default value for background density adjustment. Value: Off, Auto, Manual (Darker 5)
<b>EcoPrint</b>	Select the EcoPrint default. Value: Off, On
<b>Zoom</b>	Select the enlarged/reduced default when paper size/sending size changed after the originals set. Value: 100%, Auto

Item	Description
<b>Continuous Scan</b>	Set the continuous scan defaults. Value: Off, On
<b>File Name Entry</b>	Set an automatically entered name (default) for jobs. Additional information such as Date and Time and Job No. can also be set. Value File Name: Up to 32 characters can be entered. Additional Info: None, Date and Time, Job No., Job No. & Date and Time, Date and Time & Job No.
<b>E-mail Subject/Body</b>	Set the subject and body automatically entered (default subject and body) when sending the scanned originals by E-mail. Value Subject: Up to 60 characters can be entered. Body: Up to 500 characters can be entered.
<b>FTP Encrypted TX</b>	Set the default value for document encryption during transmission. Value: Off, On  <b>NOTE:</b> This setting is displayed when the secure protocol [SSL] setting is [On].
<b>JPEG/TIFF Print</b>	Select the image size (resolution) when printing JPEG or TIFF file. Value: Paper Size, Image Resolution, Print Resolution
<b>XPS Fit to Page</b>	Set the default value for the XPS fit to page function. Value: Off, On
<b>Detail Settings</b>	—
<b>Image Quality</b>	Set the default value for the image quality adjustment range when selecting the file format with which to send and store images. Value: 1 Low (High Comp.), 2, 3, 4, 5 High (Low Comp.)
<b>PDF/A</b>	Set the default value for PDF/A when selecting the file format with which to send and store images. Value: Off, PDF/A-1a, PDF/A-1b

\* If you want to enable the changed defaults immediately, move to the function screen and press the **Reset** key.

## Preset Limit

Item	Description
<b>Preset Limit</b>	Restrict the number of copies that can be made at one time. Value: 1 to 999 copies.

## Error Handling

Item	Description
<b>Duplexing Error</b>	Select what to do when duplex printing is not possible for the selected paper size and media type. <b>Value</b> 1-sided: Printed in 1-sided Display Error: Error message to cancel printing is displayed.
<b>Paper Mismatch Error</b>	Select what to do when the selected paper size or type does not match paper size or type loaded in the specified paper source while printing from the computer by specifying the cassette or multi-purpose tray. <b>Value</b> Ignore: The setting is ignored and the job is printed. Display Error: Error message to cancel printing is displayed.

## Measurement

Item	Description
<b>Measurement</b>	Select inch or metric for the unit for paper dimensions. <b>Value:</b> mm, Inch

## Keyboard Layout

Item	Description
<b>Keyboard Layout</b>	Change the layout of the touch panel keyboard used to enter characters. <b>Value:</b> QWERTY, QWERTZ, AZERTY

## USB Keyboard Type

Item	Description
<b>USB Keyboard Type</b>	Select the type of USB keyboard that you want to use. <b>Value:</b> US-English, US-English with Euro

## Copy


Configures settings for copying functions.

Item	Description
<b>Auto Paper Selection</b>	If [Auto] is selected for Paper Selection, set the paper size selection method when the zoom changes.* <b>Value</b> Most Suitable Size: Select paper based on the current zoom and the size of the original. Same as Original Size: Select paper that matches the size of the original, regardless the zoom.
<b>Auto % Priority</b>	When a paper source of different size from the original is selected, select whether automatic zoom (reduce/zoom) is performed.* <b>Value:</b> Off, On

\* If you want to enable the changed defaults immediately, move to the function screen and press the **Reset** key.

## Send


Configures settings for sending functions.

Item	Description
<b>Dest. Check before Send</b>	When performing sending jobs, display the confirmation screen of destinations after pressing the <b>Start</b> key. <b>Value:</b> Off, On
<b>Entry Check for New Dest.</b>	When adding new destination, display the entry check screen to check the entered destination. <b>Value:</b> Off, On
<b>Send and Forward</b>	Set whether to send the original to another destination and store it when sending images.
<b>Forward</b>	Set the rule to send the original. Multiple rules can be selected. <b>Value</b> Forward: Off, On Rule: FAX, E-mail, Folder(SMB), Folder(FTP)  <b>NOTE:</b> FAX functions are available only on products with the fax function installed.
<b>Destination</b>	Set the destination to use when storing originals. Select the destination using either of the following methods: <ul style="list-style-type: none"> <li>• Address Book</li> <li>• Ext. Address Book</li> <li>• Address Entry (E-mail)</li> <li>• Address Entry (Folder)</li> </ul>
<b>Color TIFF Compression</b>	Select the compression method for TIFF images handled on this machine. <b>Value:</b> TIFF V6, TTN2
<b>Default Screen</b>	Use this procedure to set the default screen displayed when you press the <b>Send</b> key. <b>Value:</b> Destination, Address Book, Ext Address Book, One Touch



## Favorites/Application

You can install and use applications that will make your day-to-day use of this machine more efficient. Please contact your dealer or service representative information on applications.

Item		Description
<b>Default Screen</b>		Use this procedure to set the default screen displayed when you press the Favorites/ Application key. <b>Value:</b> Favorites, Application, Application 1 - 5 (applications being used)
<b>Application</b>		You can install, activate, deactivate, and delete applications. A list of installed applications is shown. You can view detailed information on the selected application by pressing [Detail].
<b>Menu</b>	<b>Add</b>	You can install new applications. You can view detailed information on the selected application by pressing [Detail].  <b>NOTE:</b> To install the applications, insert the USB memory containing the application to be installed into the USB Port. If <i>Removable Memory is recognized. Displaying files.</i> appears, press [No]. To remove the USB memory, press [Remove Memory] and wait until the <i>Removable Memory can be safely removed</i> message appears. Then remove the USB memory.
	<b>Activate</b>	Activates the application selected on the list. Enter the license key as necessary.
	<b>Deactivate</b>	Deactivates the application selected on the list.
	<b>Print Report</b>	Prints information on the installed applications. The Application Name, ID (Application ID), Version, and other information can be checked.
	<b>Delete</b>	Deletes the application selected on the list.

## Internet

This procedure sets up the Internet browser application.

Item		Description
<b>Proxy</b>		Specify the proxy settings. <b>Value:</b> Off, On
	<b>Use Same Proxy</b>	Set whether or not the same proxy server is used for all protocols. If the same proxy server is not used, select [Off]. <b>Value:</b> Off, On
	<b>HTTP Proxy Server</b>	Set a proxy server (HTTP). <b>Value:</b> (Enter the proxy address and port number.)
	<b>HTTPS Proxy Server</b>	Set a proxy server (HTTPS). <b>Value:</b> (Enter the proxy address and port number.)
	<b>No Proxy Domains</b>	Set domains for which no proxy is used. <b>Value:</b> (Enter the domain name.)

## Printer

Printing from computers, settings are generally made on the application software screen. However, the following settings are available for configuring the defaults to customize the machine.

Item	Description
<b>Emulation</b>	Select the emulation for operating this machine by commands oriented to other types of printers. <b>Value:</b> Line Printer, IBM Proprinter, DIABLO 630, EPSON LQ-850, PCL6, KPDL, KPDL (Auto)
<b>Alt Emulation</b>	If you use the KPDL (Auto) emulation mode, KPDL and another emulation mode can be automatically switched according to the data (alternative emulation). <b>Value:</b> Line Printer, IBM Proprinter, DIABLO 630, EPSON LQ-850, PCL6
<b>KPDL Error Report</b>	When an error has occurred during printing in KPDL emulation mode, set whether or not the error report is output. <b>Value:</b> Off, On
<b>EcoPrint</b>	EcoPrint conserves toner when printing. This is recommended for test copies where faded printing is not a problem. <b>Value:</b> Off, On
<b>Override A4/Letter</b>	Select whether to treat A4 size and Letter, which are similar in size, as the same size when printing. <b>Value</b> Off: A4 and Letter are not regarded as the same in size. On: A4 and Letter are regarded as the same in size. The machine will use whichever size is in the paper source.
<b>Duplex</b>	Select binding orientation for duplex mode. <b>Value:</b> 1-sided, 2-sided Bind LongEdge, 2-sided Bind ShortEdge
<b>Copies</b>	Set the default number of copies, from 1 to 999. <b>Value:</b> 1 to 999 copies
<b>Orientation</b>	Set the default orientation, [Portrait] or [Landscape]. <b>Value:</b> Portrait, Landscape
<b>Wide A4</b>	Turn this to on to increase the maximum number of characters that can be printed in a line for an A4 page (78 characters at 10 pitch) and Letter size page (80 characters at 10 pitch). This setting is only effective in PCL 6 emulation. <b>Value:</b> Off, On
<b>Form Feed TimeOut</b>	Receiving print data from the computer, the machine may sometimes wait if there is no information signaling that the last page does not have any more data to be printed. When the preset timeout passes, the machine automatically prints paper. The options are between 5 and 495 seconds. <b>Value:</b> 5 to 495 seconds
<b>LF Action</b>	Set the line feed action when the machine receives the line feed code (character code 0AH). <b>Value:</b> LF Only, LF and CR, Ignore LF
<b>CR Action</b>	Set the character return action when the machine receives the character return code (character code 0DH). <b>Value:</b> CR Only, LF and CR, Ignore CR
<b>Paper Feed Mode</b>	While printing from the computer, select how to feed paper when the paper source and type are specified. <b>Value</b> Auto: Search the paper source that matches the selected paper size and type. Fixed: Print on paper loaded in the specified paper source.

Item	Description
<b>Resolution</b>	Set the resolution used for printing. Value: 600 dpi, Fast1200
<b>KIR</b>	The machine is equipped with the smoothing function, which realizes an excellent output resolution of about 2400 dpi × 600 dpi. Value: Off, On

## System

Configures machine system settings.

### Network

Configures network settings.


#### Host Name

Item	Description
<b>Host Name</b>	Check the host name of the machine.

#### TCP/IP Settings

Item	Description
<b>TCP/IP</b>	Set up TCP/IP to connect to the Windows network.* Value: Off, On
<b>IPv4 Settings</b>	Set up TCP/IP (IPv4) to connect to the network. The IPv4 setting is available when selecting [On] for [TCP/IP].*
<b>DHCP</b>	Select whether or not to use the DHCP (IPv4) server. Value: Off, On
<b>Bonjour</b>	Select whether or not to use Bonjour. Value: Off, On
<b>Auto-IP</b>	Select whether or not to use Auto-IP. Value: Off, On
<b>IP Address</b>	Set the IP addresses. When the DHCP setting is [On], the current IP address is displayed and cannot be changed. When setting an IP address, set the DHCP setting to [Off]. Value: ###.###.###.###
<b>Subnet Mask</b>	Set the IP subnet masks. When the DHCP setting is [On], the current Subnet Mask is displayed and cannot be changed. When setting an Subnet Mask, set the DHCP setting to [Off]. Value: ###.###.###.###
<b>Default Gateway</b>	Set the IP gateway addresses. When the DHCP setting is [On], the current Default Gateway is displayed and cannot be changed. When setting an Default Gateway, set the DHCP setting to [Off]. Value: ###.###.###.###

\* After changing the setting, restart the system or turn the machine OFF and then ON.

Item	Description
<b>IPv6 Settings</b>	Set up TCP/IP (IPv6) to connect to the network. The IPv6 setting is available when selecting [On] for [TCP/IP].*
<b>IPv6</b>	Sets whether to use IPv6. <b>Value:</b> Off, On
<b>Manual Setting</b>	Manually specify the IP address, prefix length, and gateway address of TCP/IP (IPv6). The Manual Setting is available when selecting [On] for [IPv6]. <b>Value</b> IP Address (Manual): (numbers (128 bit in total) separated by colons) Prefix Length: 0 to 128 Default Gateway: ###.###.###.###  <b>NOTE:</b> [Default Gateway] is displayed when selecting [Off] for [RA (Stateless)].
<b>RA (Stateless)</b>	Select whether or not to use RA (Stateless). The RA (Stateless) setting is available when selecting [On] for [IPv6]. When selecting [On], [IP Address 1 (to 5)] appears under [IP Address (Stateless)/Prefix Length]. <b>Value:</b> Off, On
<b>DHCP</b>	Select whether or not to use the DHCP (IPv6) server. The DHCP (IPv6) setting is available when selecting [On] for [IPv6]. <b>Value:</b> Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

Item	Description
<b>Protocol Detail</b>	The table below lists the network related function settings. The network related functions are available when [TCP/IP] is [On].
<b>NetBEUI</b>	Selects whether or not to receive documents using NetBEUI.* Value: Off, On
<b>LPD</b>	Select whether or not to receive documents using LPD as the network protocol.* Value: Off, On
<b>SMTP (E-mail TX)</b>	Select whether or not to send e-mail using SMTP. Value: Off, On
<b>POP3 (E-mail RX)</b>	Select whether or not to receive e-mail using POP3. Value: Off, On
<b>FTP Client (Transmission)</b>	Select whether or not to send documents using FTP. When selecting [On], set the FTP Port Number. Use the FTP default port 21. Value: Off, On, Port: 1 - 65535
<b>FTP Server (Reception)</b>	Select whether or not to receive documents using FTP.* Value: Off, On
<b>SMB Client (Transmission)</b>	Select whether or not to send documents using SMB. When selecting [On], set the SMB default Port Number. Use the SMB default port 139. For Windows Vista, use 445. Value: Off, On, Port: 1 - 65535
<b>LDAP</b>	Select whether or not to use LDAP. Value: Off, On
<b>SNMP</b>	Select whether or not to communicate using SNMP.* Value: Off, On
<b>SNMPv3</b>	Select whether or not to communicate using SNMPv3.* Value: Off, On
<b>HTTP</b>	Select whether or not to communicate using HTTP.* Value: Off, On
<b>HTTPS</b>	Select whether or not to communicate using HTTPS. SSL must be set to [On] in <i>SSL on page 9-21</i> .* Value: Off, On
<b>IPP</b>	Select whether or not to communicate using IPP. When selecting [On], set the IPP default Port Number. Use the IPP default port 631.* Value: Off, On, Port: 1 - 65535
<b>IPP over SSL</b>	Select whether or not to use IPP over SSL. When selecting [On], set the IPP over SSL default Port Number. Use the IPP over SSL default port 443. SSL must be set to [On] in <i>SSL on page 9-21</i> .* Value: Off, On, Port:1 - 65535
<b>Raw Port</b>	Select whether or not to receive documents using Raw Port.* Value: Off, On
<b>ThinPrint (UG-33)</b>	Select whether or not to use ThinPrint. When selecting [On], set the default ThinPrint Port Number. Use the ThinPrint default port 4000.* Value: Off, On, Port: 1 - 65535
<b>ThinPrintOverSSL (UG-33)</b>	Select whether or not to use ThinPrintOverSSL. SSL must be set to [On] in <i>SSL on page 9-21</i> . Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**NetWare**

Item	Description
<b>NetWare</b>	Select the NetWare network connection. After that, select frame types for NetWare network from Auto, Ethernet-II, 802.3, 802.2, or SNAP.*  Value Off, On, Frame Type: Auto, 802.3, Ether-II, 802.2, SNAP

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**AppleTalk**

Item	Description
<b>AppleTalk</b>	Select the Apple Talk network connection.*  Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**WSD Scan**

Item	Description
<b>WSD Scan</b>	Select whether or not to use WSD Scan.*  Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**WSD Print**

Item	Description
<b>WSD Print</b>	Select whether or not to use WSD Print.*  Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**Enhanced WSD**

Item	Description
<b>Enhanced WSD</b>	Set whether to use Kyocera's proprietary web services.* Selecting [Off] will disable the functionality of WIA and TWAIN drivers. If you want to disable KMnet Viewer functionality, Enhanced WSD, Enhanced WSD (SSL), SNMP and SNMPv3 (refer to <i>Protocol Detail on page 9-19</i> ) must be set to [Off].  Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**Enhanced WSD (SSL)**

Item	Description
<b>Enhanced WSD (SSL)</b>	Set whether to use Kyocera's proprietary web services over SSL.*  Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**IPSec**

Item	Description
<b>IPSec</b>	Make this setting when you use IPSec.* Value: Off, On

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**Secure Protocol**

Item	Description
<b>SSL</b>	Select whether or not to use SSL.* Value: Off, On
<b>IPP Security</b>	Select the IPP security level. This setup is available when SSL is [On].* Value: IPP/IPP over SSL, IPPoverSSL only
<b>HTTP Security</b>	Select the HTTP security level. This setup is available when SSL is [On].* Value: HTTP/HTTPS, HTTPS Only
<b>LDAP Security (Ext. Address Book)</b>	Select the type of encryption according to the type of security employed by the LDAP server. This setup is available when SSL is [On].*, ** Value: Off, LDAPv3/TLS, LDAP over SSL
<b>LDAP Security (User Property)</b>	

\* After changing the setting, restart the system or turn the machine OFF and then ON.

\*\* LDAP must be set to [On] in *Protocol Detail on page 9-19*.

**LAN Interface**

Item	Description
<b>LAN Interface</b>	Specify the settings for the LAN interface to be used.* Value: Auto, 10Base-Half, 10Base-Full, 100Base-Half, 100Base-Full, 1000BASE-T

\* After changing the setting, restart the system or turn the machine OFF and then ON.

**Interface Block Setting**

This allows you to protect this machine by blocking the interface with external devices such as USB hosts or optional interfaces.

Item	Description
<b>USB Host</b>	This locks and protects the USB memory slot. Value: Unblock, Block
<b>USB Device</b>	This locks and protects the USB interface connector. Value: Unblock, Block
<b>Optional Interface*</b>	This locks and protects the optional interface slot. Value: Unblock, Block

\* Only on products with the fax function installed.

## RAM Disk Setting

Item	Description
<b>RAM Disk Setting</b>	<p>A RAM disk can be created and its size can be set. Creating a RAM disk makes it possible to print from a Job Box.*</p> <p><b>Value</b></p> <p>RAM Disk Setting: Off, On</p> <p>RAM Disk Size: Setting range varies with Optional Memory settings.</p>

\* After changing the setting, restart the system or turn the machine OFF and then ON.




## Optional Memory

Item	Description
<b>Optional Memory</b>	<p>When optional memory is installed, select the memory allocation scheme based on the application in which you are using the equipment.*</p> <p><b>Value:</b> Printer Priority, Normal, Copy Priority</p>

\* After changing the setting, restart the system or turn the machine OFF and then ON.

## Date/Timer

Configures settings related to the date and time.



Item	Description
<b>Date/Time</b>	<p>Set the date and time for the location where you use the machine. If you perform Send as E-mail, the date and time set here will be displayed on the header.</p> <p><b>Value:</b> Year (2000 to 2037), Month (1 to 12), Day (1 to 31), Hour (00 to 23), Minute (00 to 59), Second (00 to 59)</p>
<b>Date Format</b>	<p>Select the display format of year, month, and date. The year is displayed in Western notation.</p> <p><b>Value:</b> Month/Day/Year, Day/Month/Year, Year/Month/Day</p>
<b>Time Zone</b>	<p>Set the time difference from GMT. Choose the nearest listed location from the list.</p>
<b>Auto Panel Reset</b>	<p>If no jobs are run for a certain period of time, automatically reset settings and return to the default setting. Select to use Auto Panel Reset or not.</p> <p><b>Value:</b> Off, On</p> <p> <b>NOTE:</b> The time allowed to elapse before the panel is reset is set with the <i>Panel Reset Timer</i>.</p>
<b>Auto Error Clear</b>	<p>If an error occurs during processing, processing stops to wait for the next step to be taken by the user. In the Auto Error Clear mode, automatically clear the error after a set amount of time elapses. For details, refer to <i>Responding to Error Messages on page 10-13</i>.</p> <p><b>Value:</b> Off, On</p>
<b>Panel Reset Timer</b>	<p>If you select [On] for Auto Panel Reset, set the amount of time to wait before Auto Panel Reset.</p> <p><b>Value:</b> 5 to 495 seconds (every five seconds)</p> <p> <b>NOTE:</b> If you select [Off] for [Auto Panel Reset], the time display does not appear.</p>
<b>Sleep Timer</b>	<p>Set amount of time before entering Sleep.</p> <p><b>Value:</b> 1 to 240 minutes (1 minute increments)</p>
<b>Error Clear Timer</b>	<p>If you select [On] for Auto Error Clear, set the amount of time to wait before automatically clearing errors.</p> <p><b>Value:</b> 5 to 495 seconds (every five seconds)</p> <p> <b>NOTE:</b> If you select [Off] for [Auto Error Clear], the time display does not appear.</p>



## Adjustment/Maintenance

Adjust printing quality and conduct machine maintenance.

Item	Description
<b>Density Adjustment</b>	Adjust density.
<b>Copy</b>	Adjust copy density. Adjustment can be made in 7 levels. <b>Value:</b> -3 (Lighter), -2, -1, 0 (Normal), +1, +2, +3 (Darker)
<b>Send/Box</b>	Adjust scan density when sending or storing the data in Document Box. Adjustment can be made in 7 levels. <b>Value:</b> -3 (Lighter), -2, -1, 0 (Normal), +1, +2, +3 (Darker)
<b>Background Density Adj.</b>	Darkens or lightens overall background density adjustment.
<b>Copy (Auto)</b>	Darkens or lightens overall background density adjustment during copying. Adjustment can be made in 7 levels. <b>Value:</b> -3 (Lighter), -2, -1, 0 (Normal), +1, +2, +3 (Darker)
<b>Send/Box (Auto)</b>	Darkens or lightens overall background density when sending images or storing them in the Document Box. Adjustment can be made in 7 levels. <b>Value:</b> -3 (Lighter), -2, -1, 0 (Normal), +1, +2, +3 (Darker)
<b>Toner Save Level (EcoPrint)</b>	Set the toner-saving level when using EcoPrint.
<b>Copy</b>	Lowers or raises the toner-saving level during copying. Adjustment can be made in 5 levels.* <b>Value:</b> 1 to 5
<b>Printer</b>	Lowers or raises the toner-saving level during printing. Adjustment can be made in 5 levels. <b>Value:</b> 1 to 5
<b>Print Density</b>	Adjust print density. Adjustment can be made in 5 levels. <b>Value:</b> 1 to 5
<b>Auto Color Correction</b>	This setting allows you to adjust the detection level used by the machine to determine whether the original is color or black and white during Auto Color Mode. Setting a lower value will result in more originals being identified as color, while a larger value will tend to increase the number of originals being identified as black and white. <b>Value:</b> 5 (B & W), 4, 3, 2, 1 (Color)
<b>Correcting Black Line</b>	Correct fine lines (streaks caused by contamination), which may appear on the image, when the document processor is used. <b>Value</b> Off: No correction performed. On (Low): Correction performed. The reproduction of fine lines on the original may become lighter than when using [Off]. On (High): Select this item if a streak remains after using [On (Low)]. The reproduction of fine lines on the original may become lighter than when using [On (Low)].
<b>Display Brightness</b>	Set the brightness of the touch panel. <b>Value:</b> 1 (Darker), 2, 3, 4 (Lighter)

Item	Description
<b>Drum Refresh</b>	Perform Drum Refresh when images show streaking with white lines. Takes about 90 seconds. Press [Start] to perform Drum Refresh.  <b>NOTE:</b> Drum Refresh cannot be performed while printing. Execute Drum Refresh after the printing is done.
<b>Auto Drum Refresh</b>	Auto Drum Refresh may be executed when the machine is turned on the power or recovered from the low power mode or sleep mode. Auto Drum Refresh is executed automatically to keep the best image quality by monitoring its peripheral temperature and humidity. <b>Value</b> Off: Do not perform Auto Drum Refresh. Standard: Perform Auto Drum Refresh as Standard (maximum 360 seconds). Long: Perform Auto Drum Refresh as Long (maximum 450 seconds).  <b>NOTE:</b> When an error state such as condensation is detected, [Normal] and [Long] may take a maximum of 630 seconds.

\* If you want to enable the changed defaults immediately, move to the function screen and press the **Reset** key.

# User Login Administration


User login administration specifies how the user access is administered on this machine. Enter correct login user name and password for user authentication to login.

Access are in three levels - User, Administrator, and Machine Administrator. The security levels can be modified only by the machine administrator.


## First User Login Administration

Follow these steps for the first user login administration. For details about the configuration method, refer to *User Login Settings* on page 9-26.

### 1 Enable user login administration.

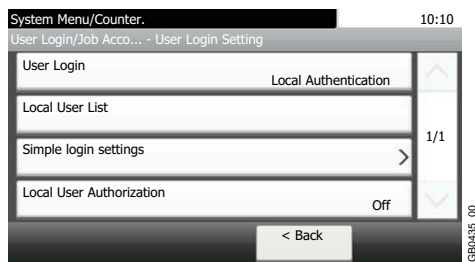

### 2 Add a user.

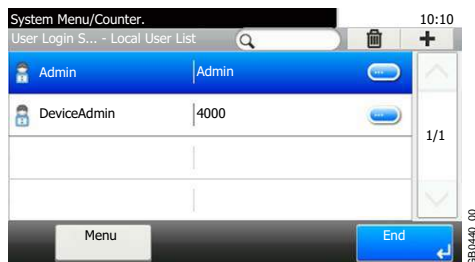

### 3 Log out.

Logout



### 4 The registered user logs in for operations.




# User Login Settings

## 1 Display the screen.

◆ System Menu / Counter




1

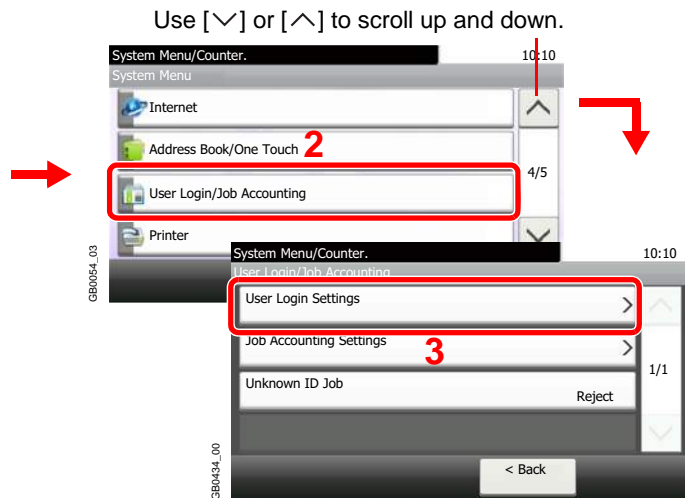


### NOTE

You can only change the settings by logging in with administrator privileges. Refer to *Adding a User on page 9-29* for the default login user name and password.

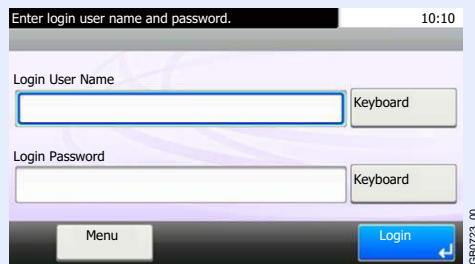

## 2 Configure the function.

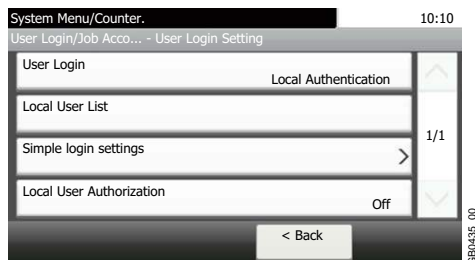

Enabling/Disabling User Login Administration ► page 9-27

Adding a User ► page 9-29

Local User Authorization ► page 9-33

Editing and Deleting Users ► page 9-35

Simple Login ► page 9-38

Group Authorization ► page 9-44

Obtain Network User Property ► page 9-48

## Enabling/Disabling User Login Administration


This enables user login administration. Select one of the following authentication methods:

Local Authentication	User authentication based on user properties on the local user list stored in the machine.
Network Authentication	User authentication based on Authentication Server. Use a user property stored in Authentication Server to access the network authentication login page.


### 1 Display the screen.

1 Referring to *User Login Settings* on page 9-26, display the screen.

2


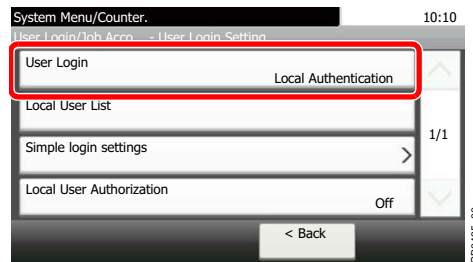


### 2 Select the authentication method.


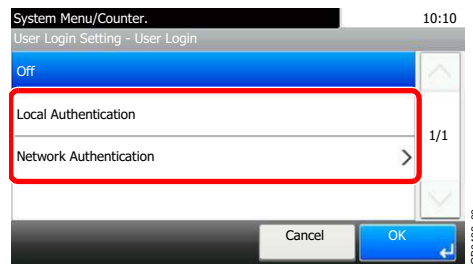


### When selecting [Network Authentication]


#### Select the server type.

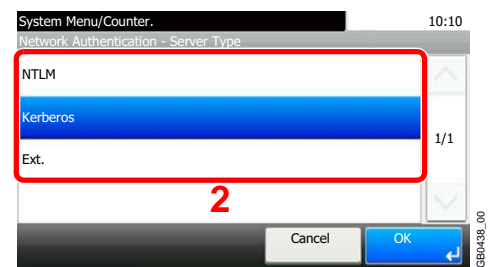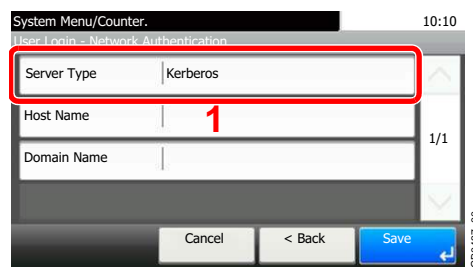


#### Enter the host name.

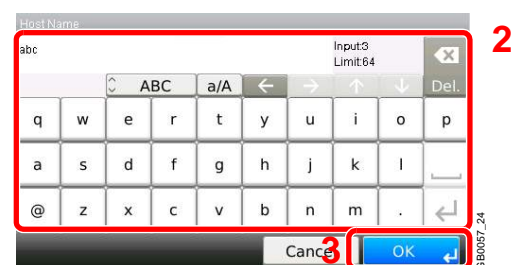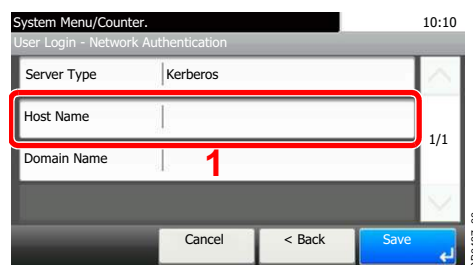

Up to 64 characters can be entered.


 Refer to *Character Entry Method* on page 11-7 for details on entering characters.

**Enter a domain name.**

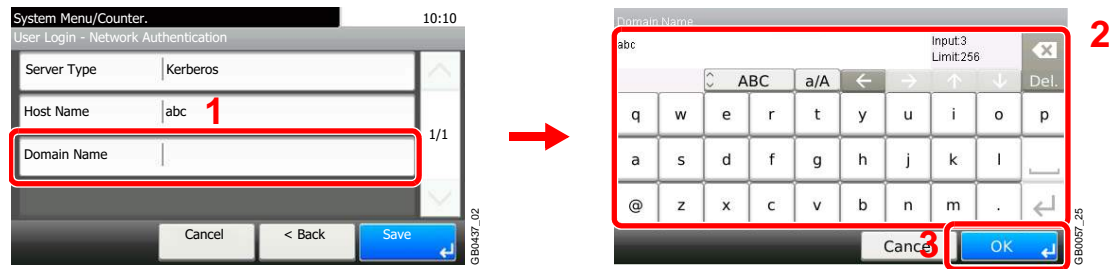


When selecting [NTLM] or [Kerberos] as the server type, enter a domain name of 256 characters or less.

**Enter the port number.**

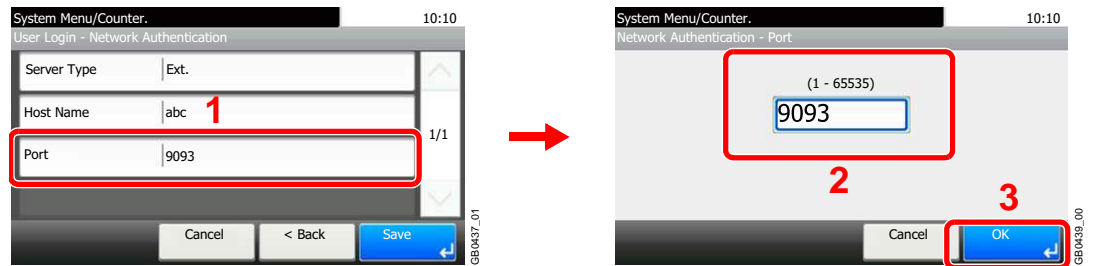

When selecting [Ext.] as the server type, enter the port number.

**Press [Save].**

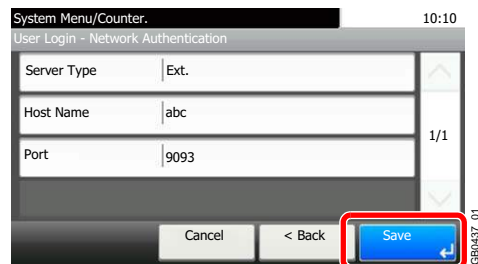

**NOTE**

If the login user name and password are rejected, check the following settings.

- Network Authentication setting of the machine
- User property of the Authentication Server
- Date and time setting of the machine and the Authentication Server

If you cannot login because of the setting of the machine, login with any administrator registered in the local user list and correct the settings. If the server type is [Kerberos], only domain names entered in uppercase will be recognized.

## Adding a User

This adds a new user. You can add up to 100 users (including the default login user name).

The table below explains the user information to be registered.

User Name*	Enter the name displayed on the user list (up to 32 characters).
Login User Name*	Enter the login user name to login (up to 64 characters). The same login user name cannot be registered.
Login Password	Enter the password to login (up to 16 characters).
Account Name	Add an account where the user belongs. The user, who registered his/her account name, can login without entering the account ID. Refer to <i>Job Accounting on page 9-50</i> .
E-mail Address	The user can register his/her E-mail address (up to 128 characters). The registered address will be automatically selected for subsequent operations that need any E-mail function.
Access Level*	Select Administrator or User for user access privileges.
My Panel	Registers settings for individual users. Settings registered here can be applied simply by logging in.
Local Authorization	Restricts the use of the machine by user. Local user authorization must be enabled to use this function (see page 9-33). The following restriction items are available: Printer: Select whether or not to reject usage of print functions for the printer. Copy: Select whether or not to reject usage of copy functions. Send: Select whether or not to reject usage of send functions other than faxing. FAX Transmission: Select whether or not to reject usage of the FAX transmissions. Storing in Box: Select whether or not to reject usage of storing in the document boxes. Storing in Memory: Select whether or not to reject usage of storing in the removable memory.

\* Mandatory at user registration.



### NOTE

By default, one of each default user with machine administrator rights and administrator privileges is already stored. Each user's properties are:

#### Machine Administrator

- User Name: DeviceAdmin
- Login User Name: 4000
- Login Password: 4000
- Access Level: Machine Administrator


#### Administrator

- User Name: Admin
- Login User Name: Admin
- Login Password: Admin
- Access Level: Administrator

It is recommended to periodically change the user name, login user name and login password regularly for your security.


## 1 Display the screen.

- 1 Referring to *User Login Settings on page 9-26*, display the screen.

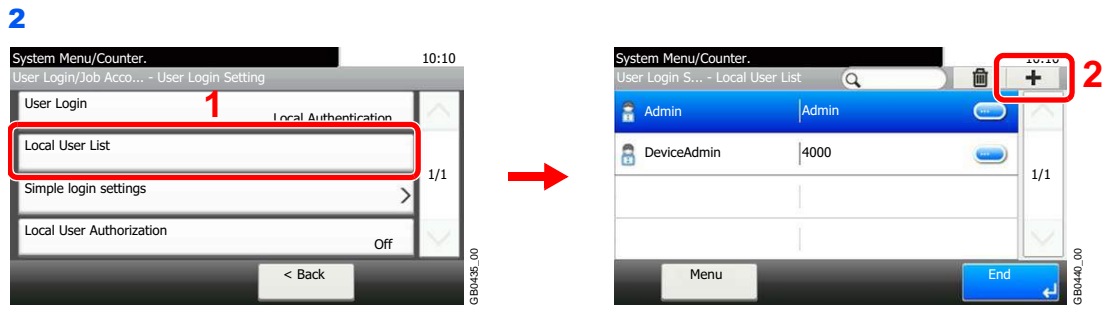


**2 Enter the user information.**


**[User Name]**

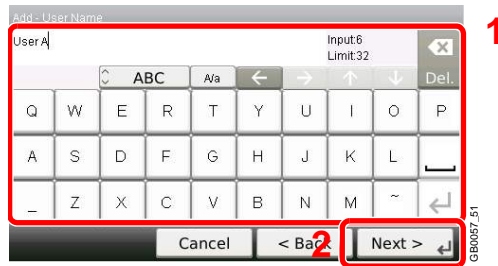

**[Login User Name]**

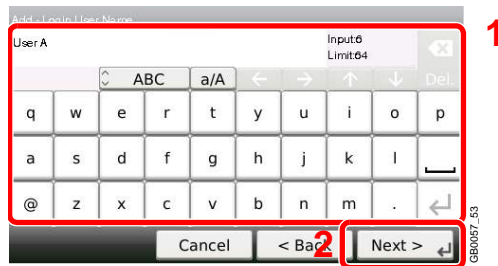

**[Access Level]**

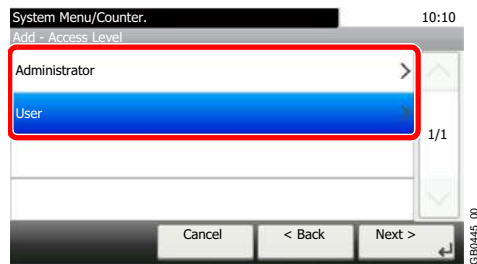

Select the user access privilege.

**3 Check the settings.**


Check the settings and change or add information as needed.

**[User Name]**







**[Login User Name]**


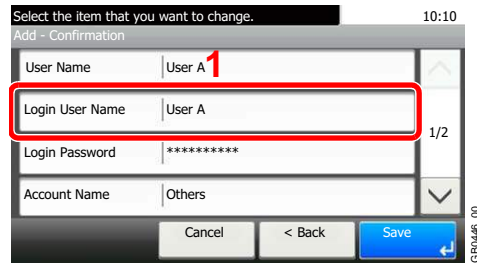


**[Login Password]**

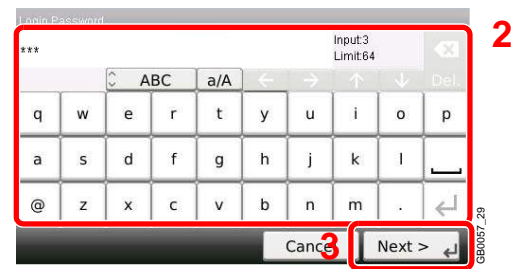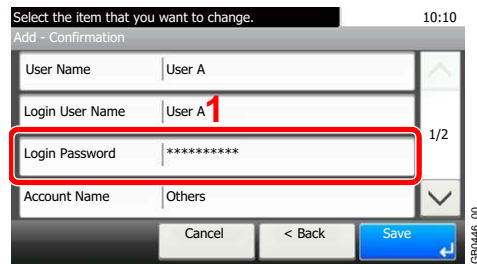

Enter the same login password twice for confirmation purposes.



**[Accounting Name]**

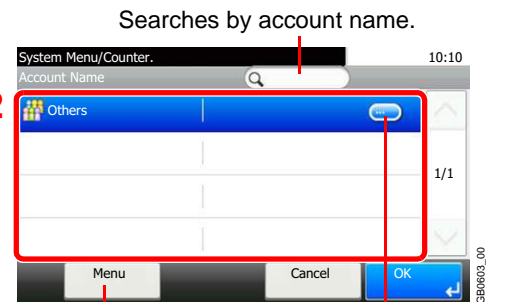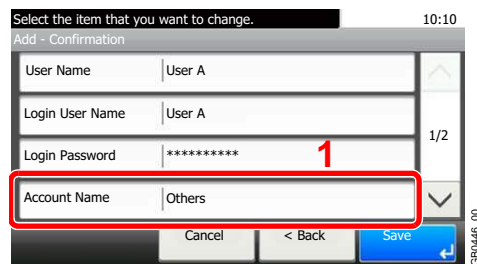



Allows you to search for an account name and sorts results.

Displays details for individual account names.

**[E-mail Address]**

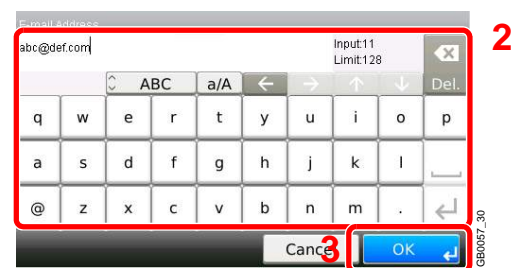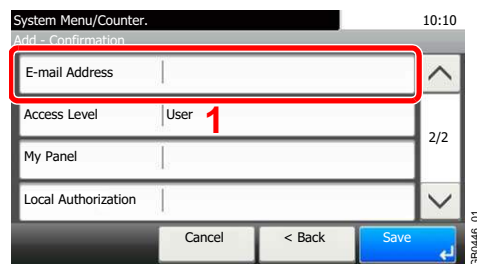

**[Access Level]**

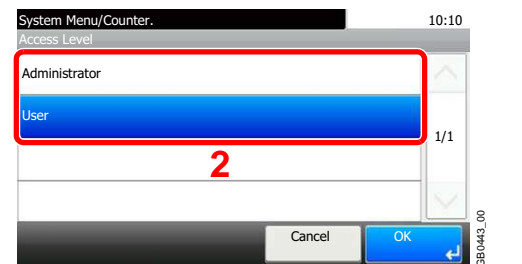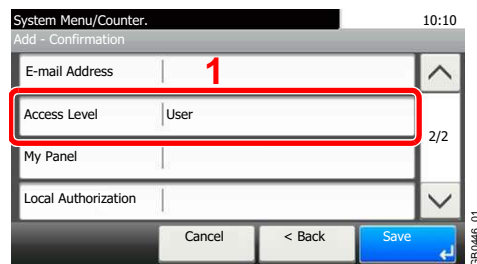

Select the user access privilege.

**[My Panel]**

System Menu/Counter. 10:10  
Add - Confirmation

E-mail Address		2/2
Access Level	User	1
My Panel		2/2
Local Authorization		


Cancel < Back Save



System Menu/Counter. 10:10  
My Panel

Language	English	2
Default Screen	Copy	1/1
Shortcut	Shared Shortcut	

End

 For details on My Panel, refer to *My Panel on page 9-34*.

**[Local Authorization]**

System Menu/Counter. 10:10  
Add - Confirmation

E-mail Address		2/2
Access Level	User	
My Panel		1
Local Authorization		

Cancel < Back Save



System Menu/Counter. 10:10  
Local Authorization

Printer	Off	2
Copy	Off	1/2
Send	Off	
FAX Transmission	Off	

Cancel OK

Use [∨] or [^] to scroll up and down.

Change the limitations as needed.

**4 Register the user.**

Select the item that you want to change. 10:10  
Add - Confirmation

User Name	User A	
Login User Name	User A	1/2
Login Password	*****	
Account Name	Others	

Cancel < Back Save


## Local User Authorization

Enables local user authorization. Job use can be prohibited for specific users. Set when adding a user (see page 9-29) or editing and deleting users (see page 9-35).


### 1 Display the screen.

1 Referring to *User Login Settings* on page 9-26, display the screen.

### 2

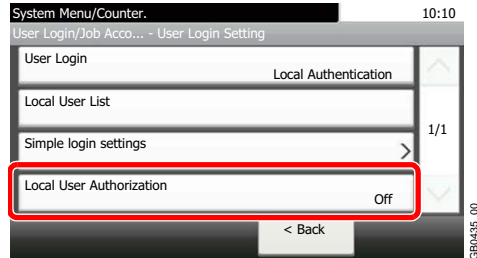

### 2 Select [On].

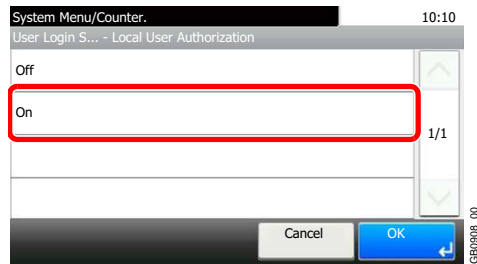



## My Panel

Registers settings for individual users. Settings registered here can be applied simply by logging in. Set when *Adding a User* (see page 9-29) or *Editing and Deleting Users* (see page 9-35).

### Environments in which shortcut can be configured



Language	Select the language displayed on the touch panel.
Default Screen	Set the screen appearing right after the user logs in (default screen).
Shortcut	Select either [Shared Shortcut] or [Private Shortcut].

#### [Language]

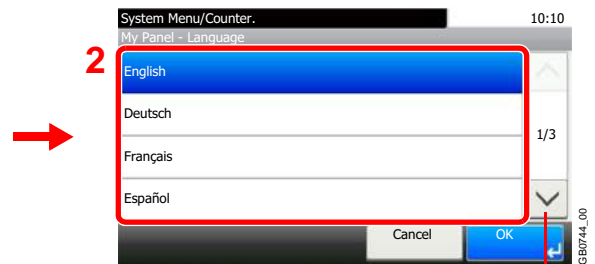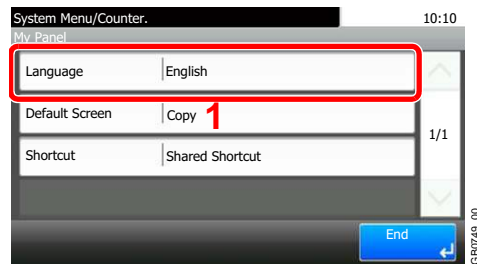


Use [∨] or [∧] to scroll up and down.

#### [Default Screen]

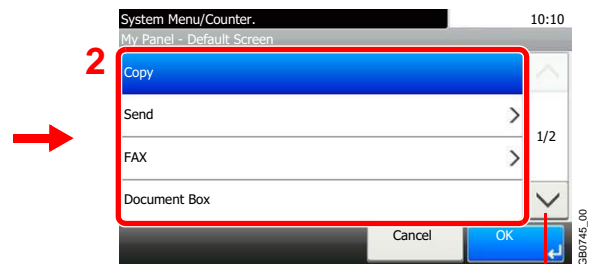
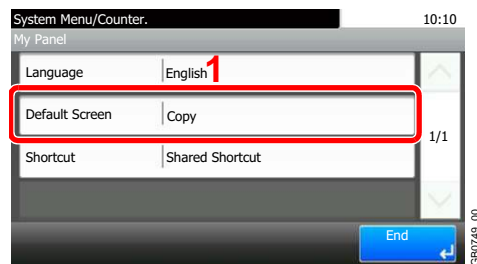


Use [∨] or [∧] to scroll up and down.

When [Send] or [FAX] has been selected, sets which screen to use as the default screen.

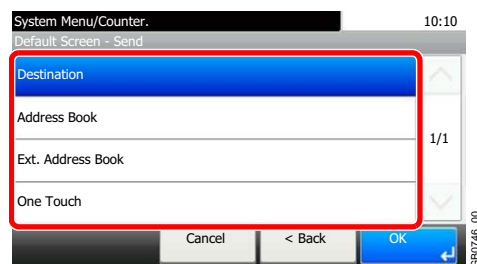

#### [Shortcut]

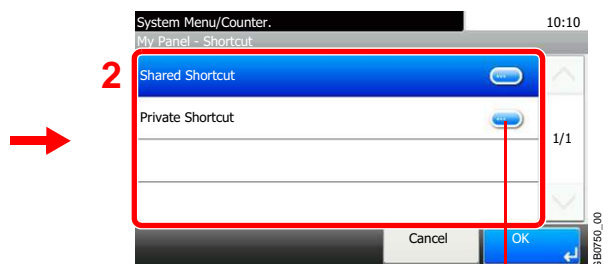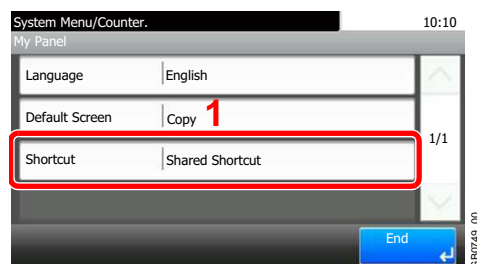

Displays details for individual shortcuts.


# Editing and Deleting Users

User properties can be changed and users can be deleted.

## 1 Display the screen.

1 Referring to *User Login Settings* on page 9-26, display the screen.


## 2

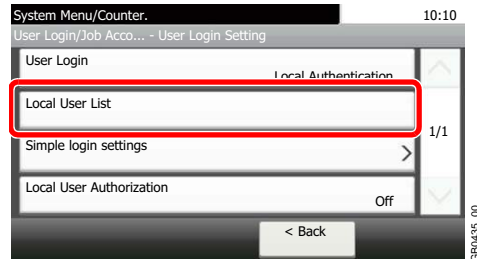

## 2 Edit or delete a user.


To edit a user

1 Press [...] for the user whose settings you wish to edit.

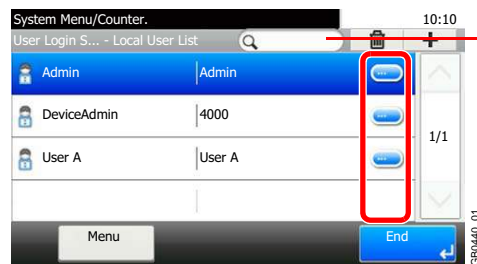


Searches by user name.


2 Edit the user.

 For more information about individual settings, refer to *Adding a User* on page 9-29.

[User Name]

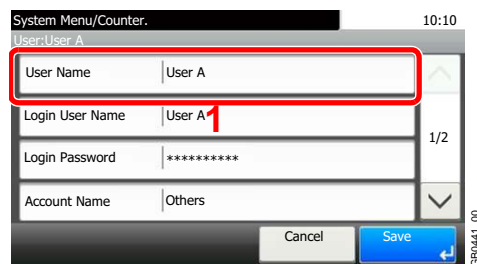

[Login User Name]

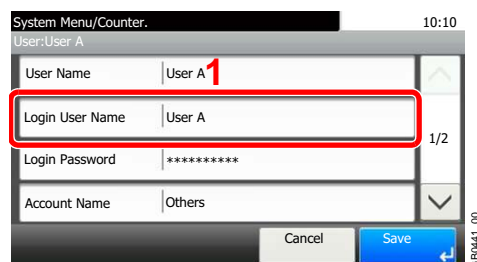

### [Login Password]

System Menu/Counter. 10:10  
User:User A

User Name	User A
Login User Name	User A <b>1</b>
Login Password	*****
Account Name	Others

Cancel Save

Login Password

Input:3 Limit:64

ABC a/A

q w e r t y u i o p  
a s d f g h j k l  
@ z x c v b n m .

Cancel **Next >** **3**

Enter the same login password twice for confirmation purposes.

### [Account Name]

System Menu/Counter. 10:10  
User:User A

User Name	User A
Login User Name	User A
Login Password	*****
Account Name	Others <b>1</b>

Cancel Save

Searches by account name.

System Menu/Counter. 10:10

Account Name

Searches by account name.

**Others**

Menu Cancel **OK**

Allows you to search for an account name and sorts results.

Displays details for individual account names.

### [E-mail Address]

System Menu/Counter. 10:10  
User:User A

E-mail Address	
Access Level	Administrator
My Panel	
Local Authorization	

Cancel Save

E-mail address

abc@def.com

Input:11 Limit:128

ABC a/A

q w e r t y u i o p  
a s d f g h j k l  
@ z x c v b n m .

Cancel **OK** **3**

### [My Panel]

System Menu/Counter. 10:10  
User:User A

E-mail Address	
Access Level	Administrator
My Panel	
Local Authorization	


Cancel Save

System Menu/Counter. 10:10



My Panel

Language	English <b>2</b>
Default Screen	Copy
Shortcut	Shared Shortcut

End


 For details on My Panel, refer to *My Panel* on page 9-34.

**[Local Authorization]**

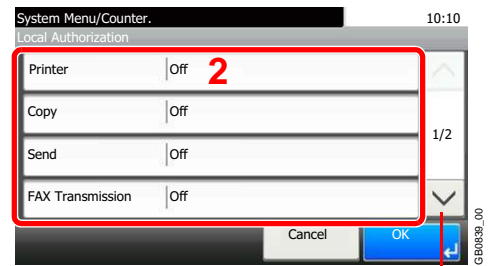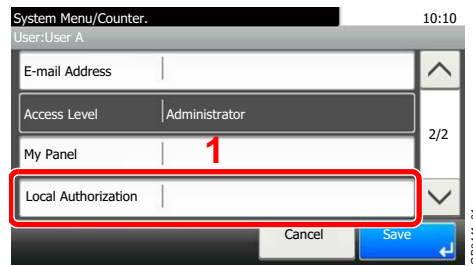


Use [∨] or [^] to scroll up and down.


[Local Authorization] is displayed when selecting [On] for [Local User Authorization].

 Refer to *Local User Authorization* on page 9-33.


**3 Register the user.**

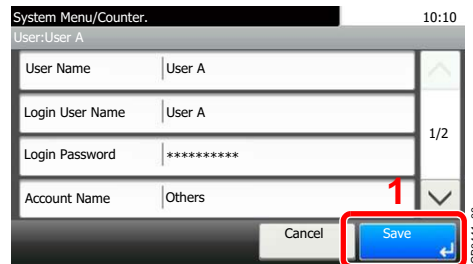

**To delete**

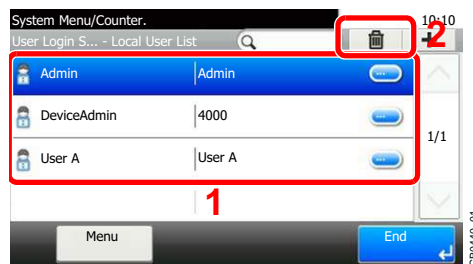


Select the user you wish to delete and press [(Delete)] (the trash can icon).

 **NOTE**

Also, you can delete the user by selecting the user, press [Menu] and then [Delete].

## Simple Login

The simple login function allows users to log in simply by selecting a user name. Users must be registered in advance to use this functionality.

 For details, refer to *Adding a User on page 9-29*.


### Simple Login Settings

Enable simple login.



#### 1 Display the screen.

1 Referring to *User Login Settings on page 9-26*, display the screen.

#### 2

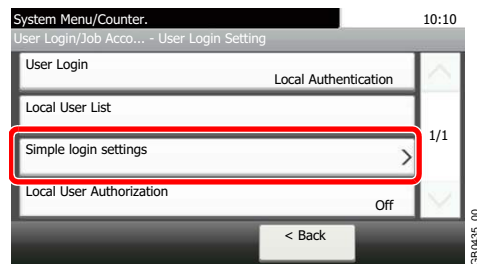

#### 2 Enable simple login.

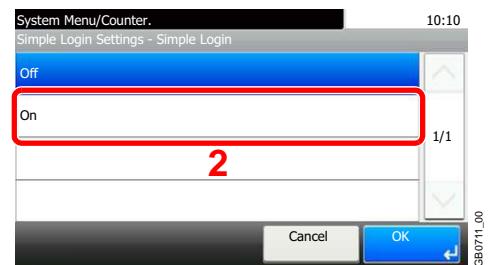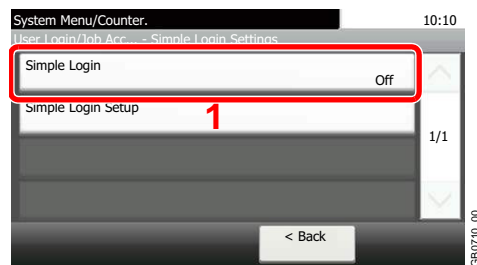

### Register a User

Register users to use simple login. Up to 20 users can be registered.

The table below explains the user information to be registered.


Name	Set the user name to display on the Simple Login screen.
User	Select which registered users can use simple login.
Password Login	Set whether to require entry of a login password at login.
Icon	Select the icon to display on the Simple Login screen.

#### 1 Display the screen.

1 Referring to *User Login Settings on page 9-26*, display the screen.




2

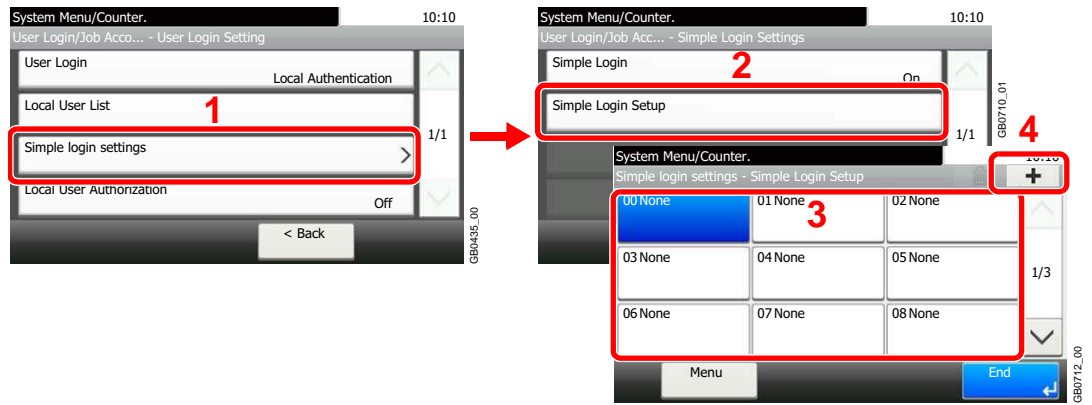

Select a key with no registered user, and press [+].


## 2 Enter the user information.

1 Select the type of user.

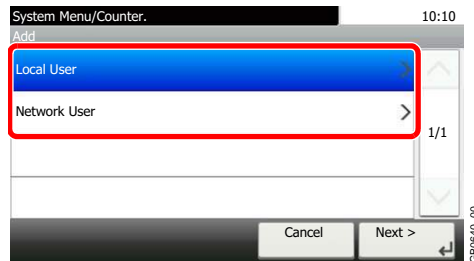

2 Select a user.

### Local user

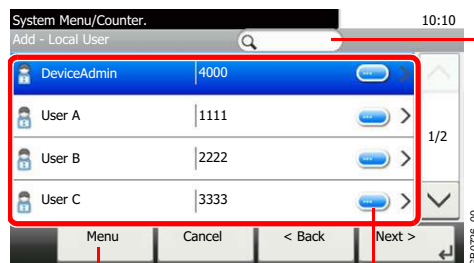


Searches by user name.

Allows you to search for a user and sorts results.


Displays details for individual users.

### Network user

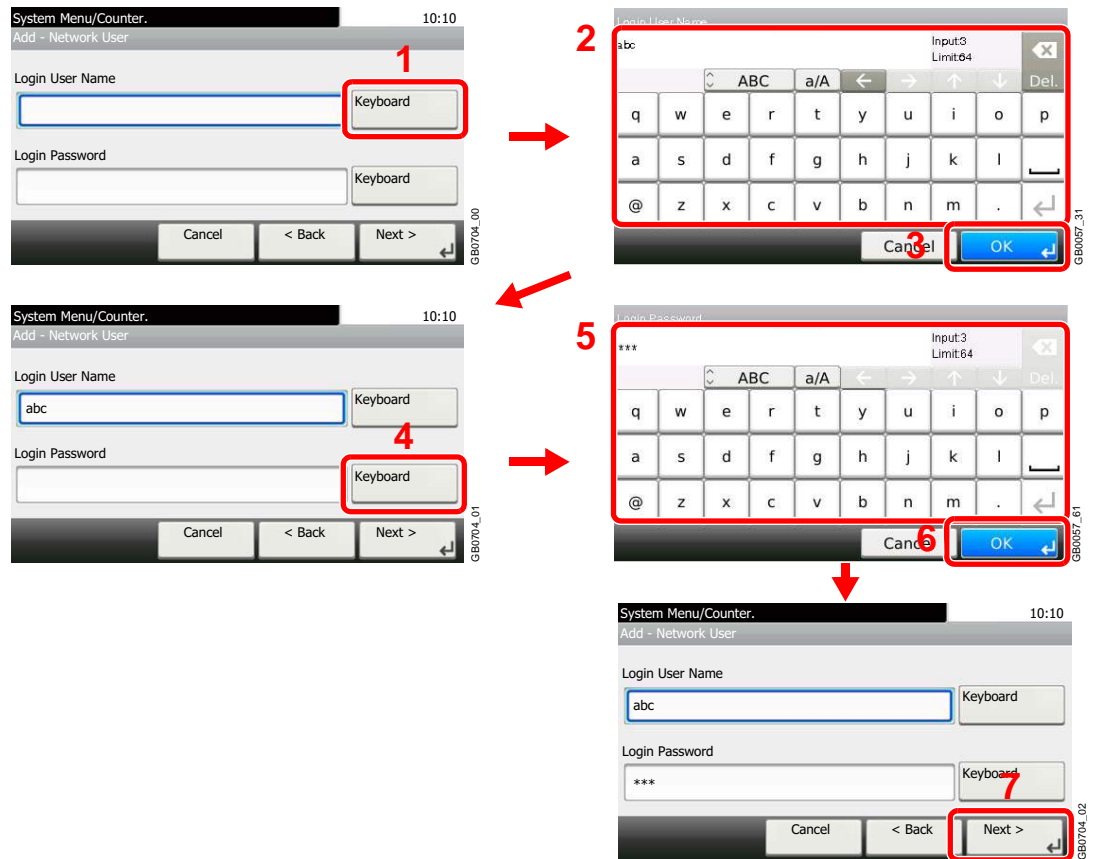

Enter the Login User Name and Login Password.

**3** Enter the login user name to use with simple login.

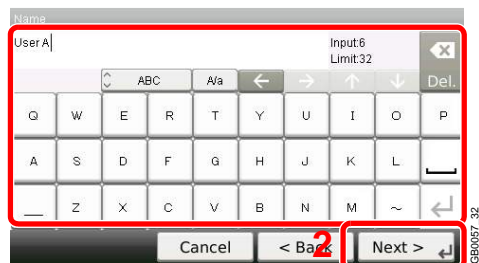



**3** Check the settings.

Check the settings and change or add information as needed.

[Name]





**[User]**

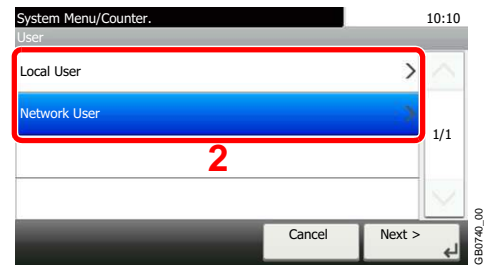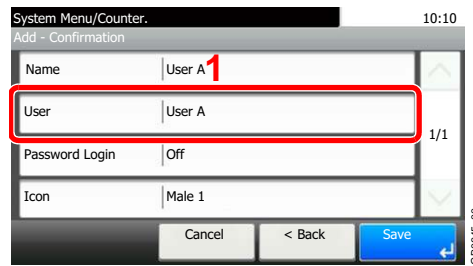


Select the user to use for simple logins from [Local User] or [Network User].

**[Password Login]**

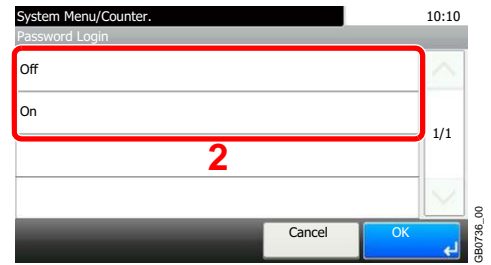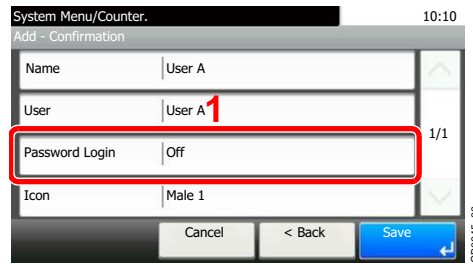


**[Icon]**

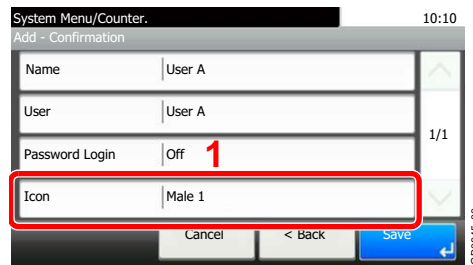

Use [v] or [^] to scroll up and down.

**4 Register the user.**

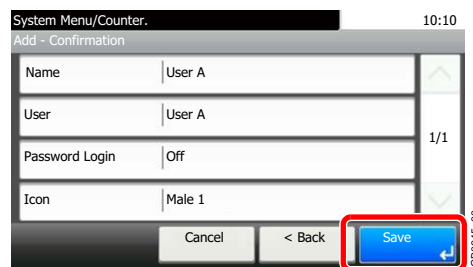


**Editing and Deleting Users**

User properties can be changed and users can be deleted.

**1 Display the screen.**


1 Referring to *User Login Settings* on page 9-26, display the screen.

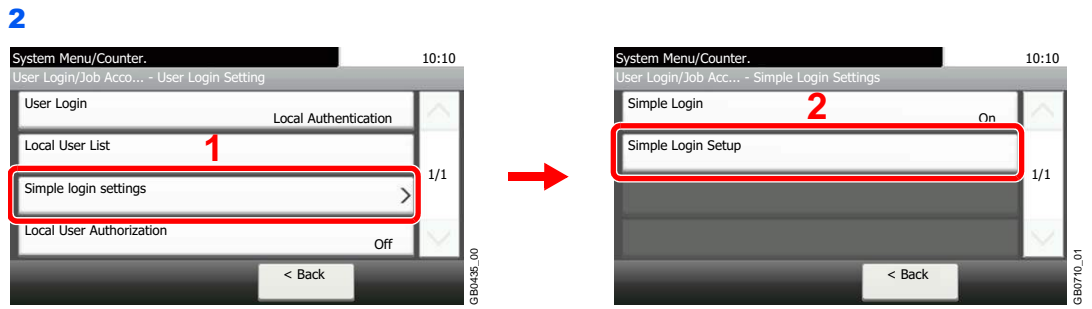

**2 Edit or delete a user.**


**To edit a user**

**1** Select the user whose information you wish to edit and press [Menu] and then [Edit].

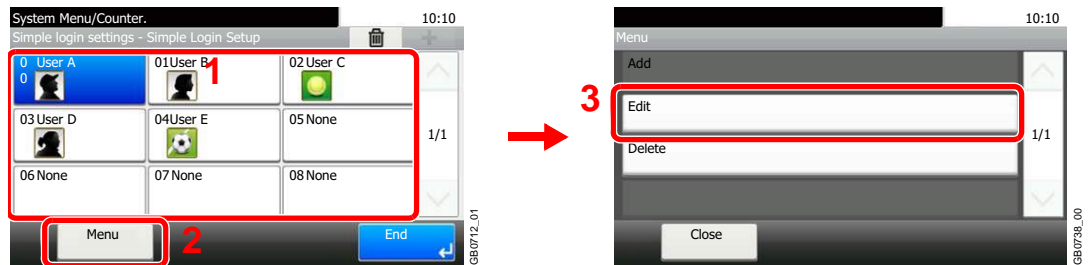


**2** Edit the user.

**[Name]**

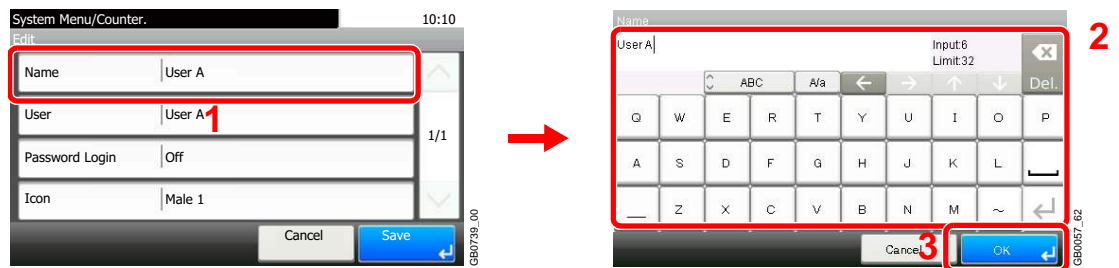


**[User]**

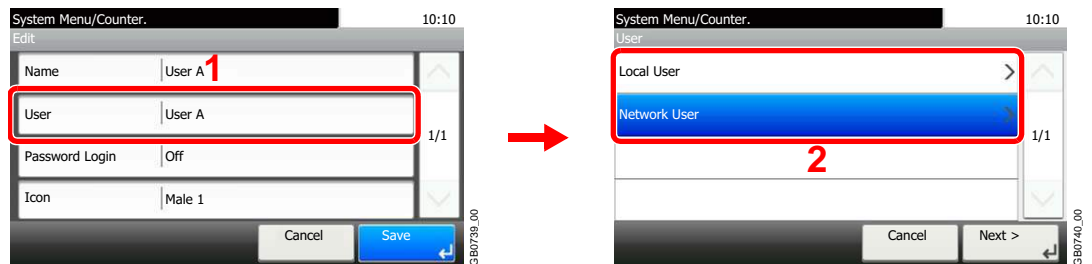


Select the user to use for simple logins from [Local User] or [Network User].

**[Password Login]**

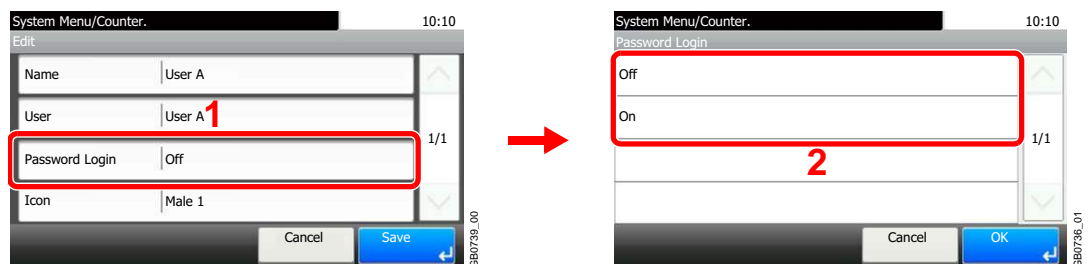


**[Icon]**

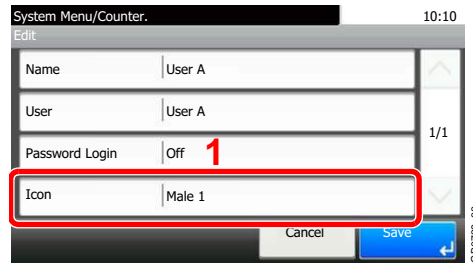


Use [∨] or [∧] to scroll up and down.

**3 Register the user.**

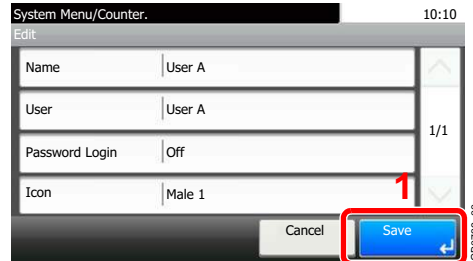

**To delete**

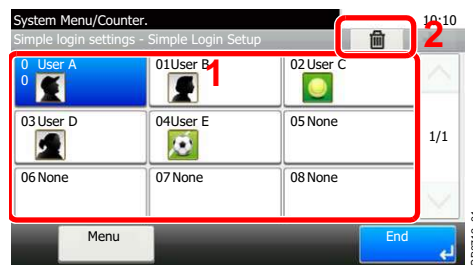

Select the user you wish to delete and press [(Delete)] (the trash can icon).




**NOTE**

You can also delete a user by selecting the name, pressing [Menu], and then pressing [Delete].

## Group Authorization

Set restrictions of the machine usage by each individual group registered in the authentication server.

 **NOTE**

To use the group authorization settings, [Network Authentication] must be selected for the authentication method and [NTLM] or [Kerberos] must be selected as the server type in *Enabling/Disabling User Login Administration on page 9-27*. Select [On] for LDAP in *Protocol Detail on page 9-19*.


### Group Authorization Settings

Use the group authorization.


#### 1 Display the screen.

1 Referring to *User Login Settings on page 9-26*, display the screen.


#### 2

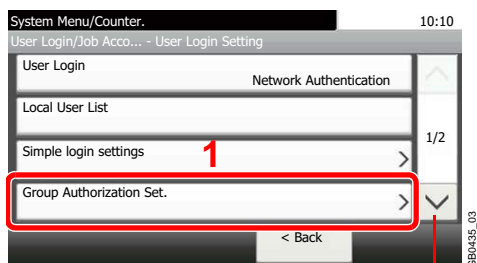

Use [∨] or [∧] to scroll up and down.

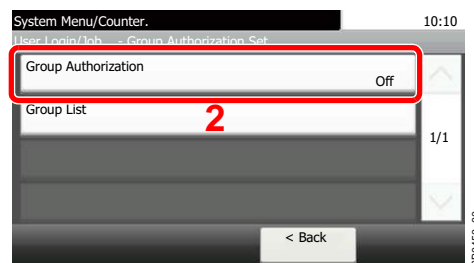

#### 2 Select [On].

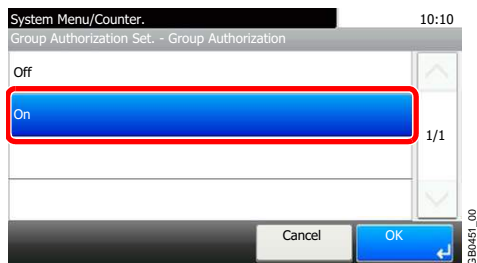

### Add a Group

Register the groups that is restricted the machine usage. Up to 20 groups can be individually registered. Other users and groups belong to Others.


Group ID*	Enter the ID displayed on the group list (between 1 and 4294967295).
Group Name	Enter the name displayed on the group list (up to 32 characters).
Access Level	Select Administrator or User for group access privileges.
Printer	Select whether or not to reject usage of print functions for the printer.
Copy	Select whether or not to reject usage of copy functions.
Send	Select whether or not to reject usage of the send functions.
FAX Transmission**	Select whether or not to reject usage of the FAX transmissions.
Storing in Box	Select whether or not to reject usage of storing in the document boxes.
Storing in Memory	Select whether or not to reject usage of storing in the removable memory.

- \* For Group ID, specify PrimaryGroupID assigned by ActiveDirectory of Windows. If you are using Windows Server 2008, check Attribute Editor tab of user properties. If you are using Windows Server 2000/2003, check ADSIEdit. ADSIEdit is a support tool included on the installation CD-ROM for Windows Server OS (under \SUPPORT\TOOLS).
- \*\* FAX functions are available only on products with the fax function installed.

## 1 Display the screen.


1 Referring to *User Login Settings* on page 9-26, display the screen.

2

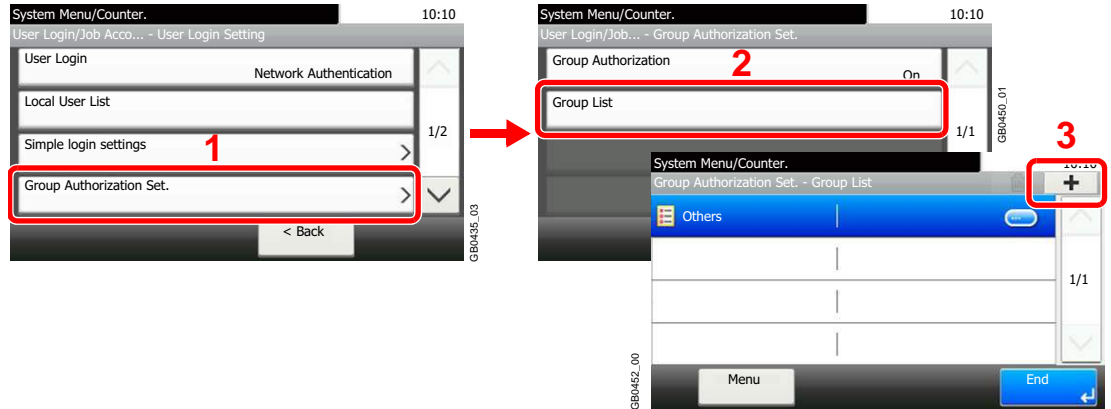


## 2 Enter the group information.


### [Group ID]

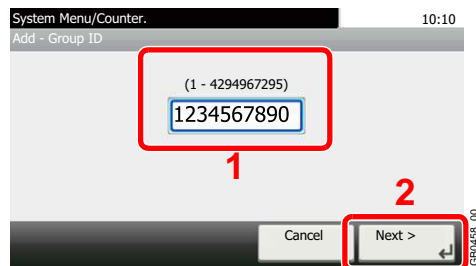

### [Group Name]

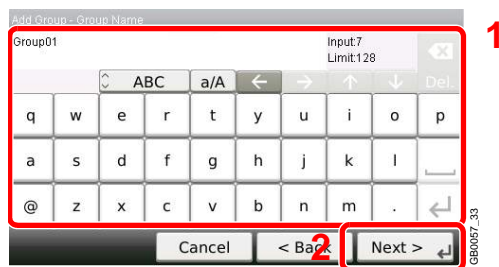

### [Access Level]

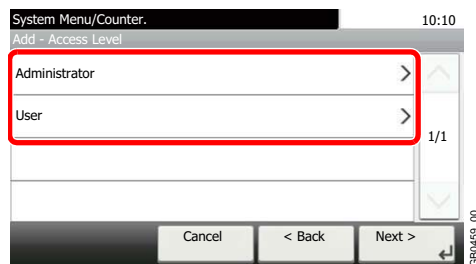

### 3 Check the settings.

Check the settings and change or add information as needed.

#### [Group ID]

System Menu/Counter. 10:10  
Add - Confirmation  
Group ID 1234567890  
Group Name Group 01  
Access Level Administrator  
Printer Off  
Cancel < Back Save



System Menu/Counter. 10:10  
Group ID  
(1 - 4294967295)  
1234567890  
Cancel OK

#### [Group Name]

System Menu/Counter. 10:10  
Add - Confirmation  
Group ID 1234567890  
Group Name Group 01  
Access Level Administrator  
Printer Off  
Cancel < Back Save



System Menu/Counter. 10:10  
Group Name  
Group01  
Input:7 Limit:128  
q w e r t y u i o p  
a s d f g h j k l  
@ z x c v b n m .  
Cancel OK

#### [Access Level]


System Menu/Counter. 10:10  
Add - Confirmation  
Group ID 1234567890  
Group Name Group 01  
Access Level Administrator  
Printer Off  
Cancel < Back Save



System Menu/Counter. 10:10  
Access Level  
Administrator  
User  
Cancel OK




**[Printer], [Copy], [Send], [FAX Transmission], [Storing in Box], [Storing in Memory]**

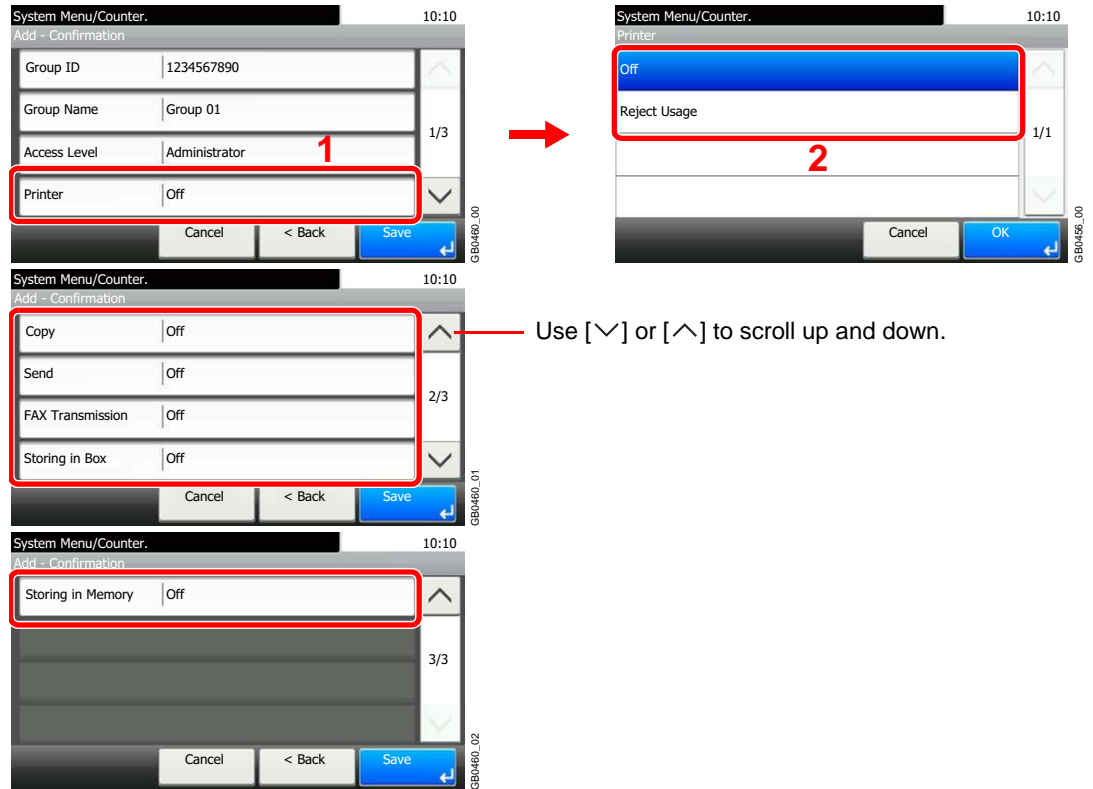


Change the restrictions as needed.

**4 Register the group.**

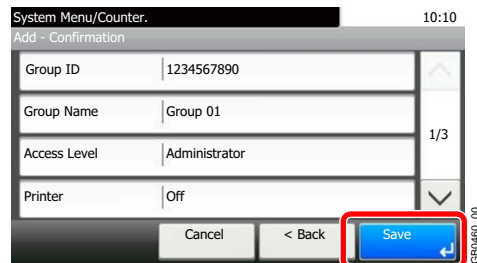

## Obtain Network User Property

Set the required information to obtain the network user property from the LDAP server.

 **NOTE**

To obtain the network user property from the LDAP server, [Network Authentication] must be selected for the authentication method and [NTLM] or [Kerberos] must be selected as the server type in *Enabling/Disabling User Login Administration on page 9-27*.


Server Name*	Enter the LDAP server name or the IP address (up to 64 characters).
Port	Set the LDAP port number or use the default port 389.
Name 1**	Enter the LDAP Attribute to obtain the user name to be displayed from the LDAP server (up to 32 characters).
Name 2***	
E-mail Address****	Enter the LDAP Attribute to obtain the e-mail address from the LDAP server (up to 128 characters).
Search Timeout	Set the amount of time to wait before time-out in seconds (from 5 to 255 seconds).

- \* If using Active Directory of Windows, the server name may be same as the server name entered in the network authentication.
- \*\* If using Active Directory of Windows, **displayName** of Attribute may be used as *Name 1*.
- \*\*\* Name 2 can be left out. When you assign **displayName** in *Name 1* and **department** in *Name 2*, and if the value of **displayName** is "Mike Smith" and the value of **department** is "Sales" in Active Directory of Windows, the user name appears as *Mike Smith Sales*.
- \*\*\*\* If using Active Directory of Windows, **mail** of Attribute may be used as E-mail Address.

### 1 Display the screen.

1 Referring to *User Login Settings on page 9-26*, display the screen.


#### 2

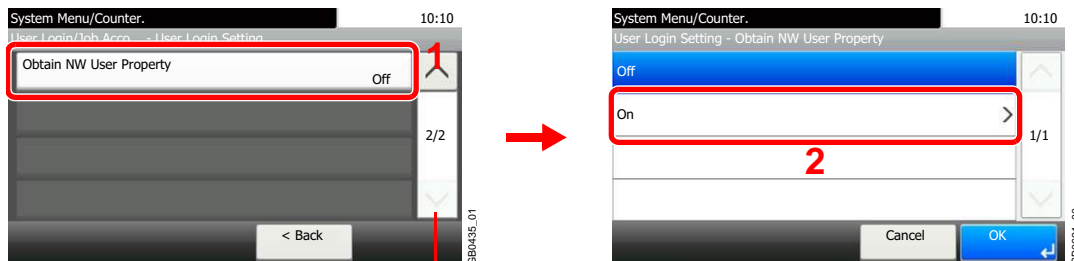


Use [∨] or [∧] to scroll up and down.

### 2 Configure the function.



#### [Server Name]

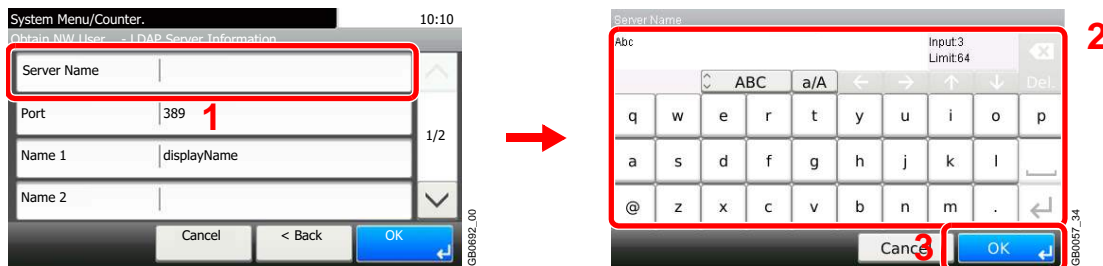



Up to 64 characters can be entered.

 Refer to *Character Entry Method on page 11-7* for details on entering characters.

**[Port]**

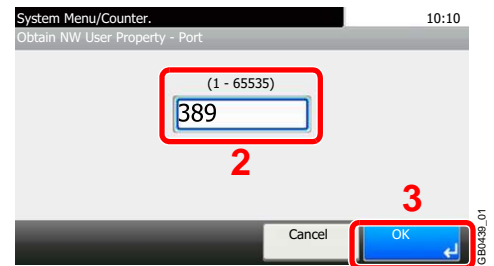
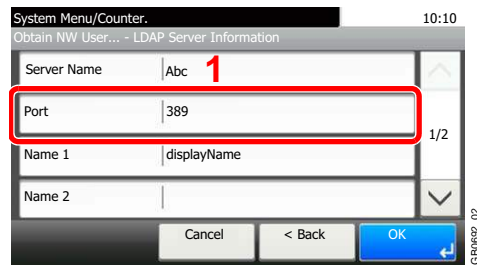


**[Name 1] and [Name 2]**

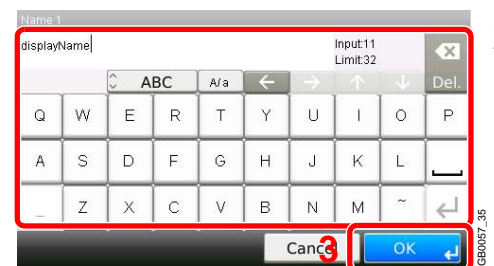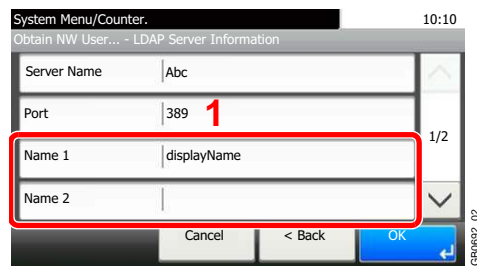



Up to 32 characters can be entered.

**[E-mail Address]**

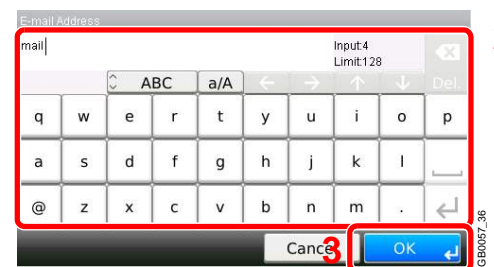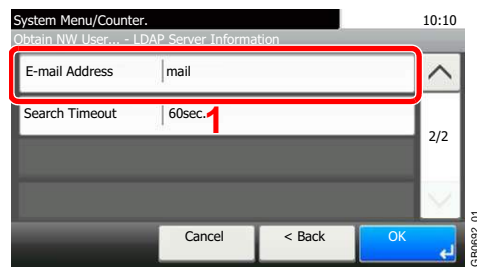

Up to 128 characters can be entered.

**[Search Timeout]**

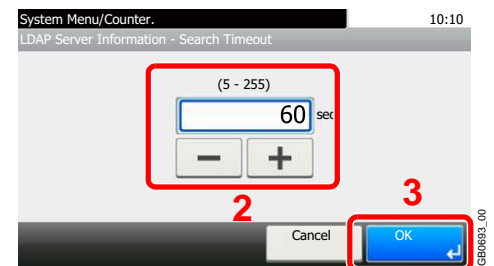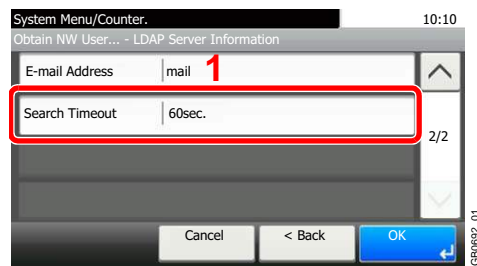

**3** Press [OK].

# Job Accounting


Job accounting Manages the copy/print count accumulated by individual accounts by assigning an ID to each account. Job accounting helps the following activities in business organizations.

- Manageability of up to 100 individual accounts.
- Availability for account IDs with as many as eight digits (between 0 and 99999999) for security.
- Integrated management of printing and scanning statistics through the use of an identical account ID.
- Tracking the print volume for each account and for all accounts combined.
- Restricting the print counter in one-page increments up to 9,999,999 copies.
- Resetting the print counter for each account or for all accounts combined.


## First Job Accounting Setup

Follow these steps for the first job accounting setup. For details about the configuration method, refer to *Job Accounting Settings* on page 9-52.

### 1 Enable job accounting.

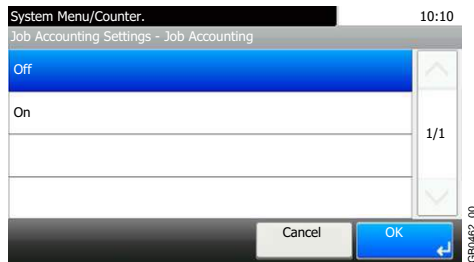

### 2 Add an account.

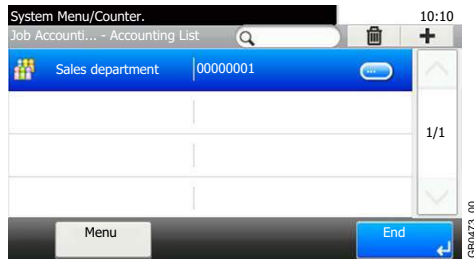

### 3 Log out.

Logout



## 4 Other users login for operations.




# Job Accounting Settings

## 1 Display the screen.

◆ System Menu / Counter




1

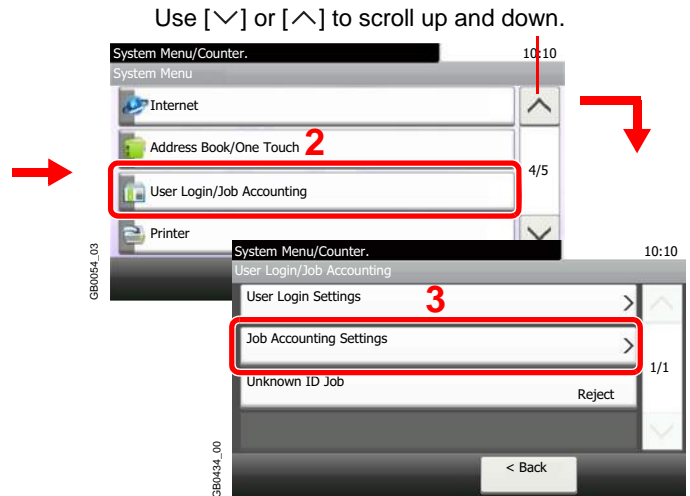


### NOTE

You can only change the settings by logging in with administrator privileges. Refer to *Adding a User on page 9-29* for the default login user name and password.

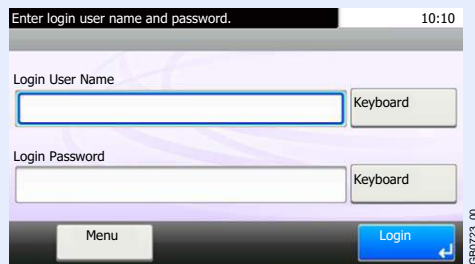

## 2 Configure the function.

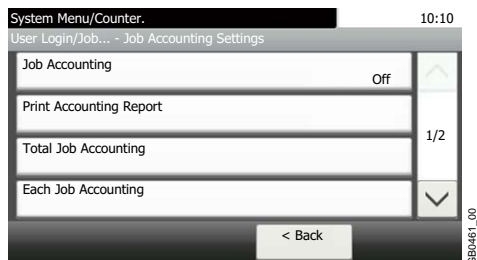

- Enabling/Disabling Job Accounting ▶ page 9-53
- Login/Logout ▶ page 9-54
- Adding an Account ▶ page 9-55
- Editing and Deleting Accounts ▶ page 9-57
- Restricting the Use of the Machine ▶ page 9-59
- Counting the Number of Pages Printed ▶ page 9-61
- Printing an Accounting Report ▶ page 9-63
- Job Accounting Default Setting ▶ page 9-64
- Unknown Login User Name Job ▶ page 9-65


## Enabling/Disabling Job Accounting

Enable job accounting.


### 1 Display the screen.

1 Referring to *Job Accounting Settings on page 9-52*, display the screen.

### 2

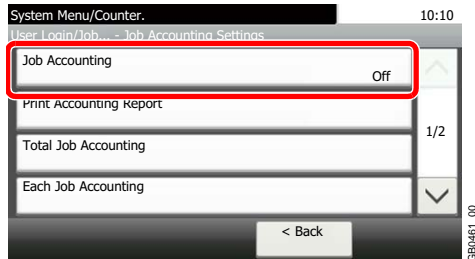

### 2 Enable job accounting.

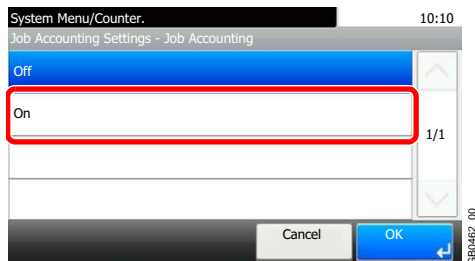

#### NOTE


When the display returns to the System Menu default screen, logout is automatically executed and the screen to enter the Account ID appears. To continue the operation, enter the Account ID.

## Login/Logout

If job accounting is enabled, an account ID entry screen appears each time you use this machine.

### Login

#### 1 Enter the account ID.

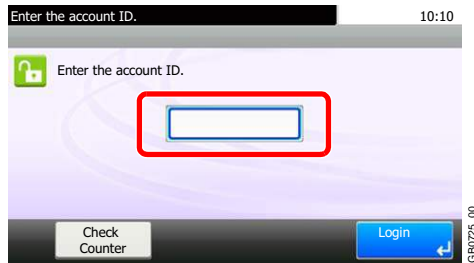

If this screen is displayed during operations, enter the account ID.




#### NOTE

If you entered a wrong character, press the **Clear** key and enter the account ID again.

If the entered account ID does not match the registered ID, a warning beep will sound and login will fail. Enter the correct account ID.

By pressing [Check Counter], you can refer to the number of pages printed and the number of pages scanned.

#### 2 Log in.

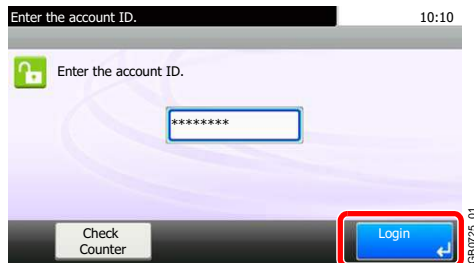

#### When the screen to enter the login user name and password appears

If user login administration is enabled, the screen to enter the login user name and password appears. Enter a login user name and password to login. (Refer to *Login/Logout on page 3-17*.) If the user has already registered the account information, the account ID entry would be skipped. (Refer to *Adding a User on page 9-29*.)

### Logout

When the operations are complete, press the **Logout** key to return to the account ID entry screen.

#### Logout





## Adding an Account

This section explains how to add a new account. The following entries are required.

Account Name	Enter the account name (up to 32 characters).
Account ID	Enter the account ID as many as eight digits (between 0 and 99999999).
Restriction	This Prohibits printing/scanning or restricts the number of sheets to load. Refer to <i>Restricting the Use of the Machine on page 9-59</i> .




### NOTE

Any account ID that has already registered cannot be used. Enter any other account ID.


## 1 Display the screen.

1 Referring to *Job Accounting Settings on page 9-52*, display the screen.

2

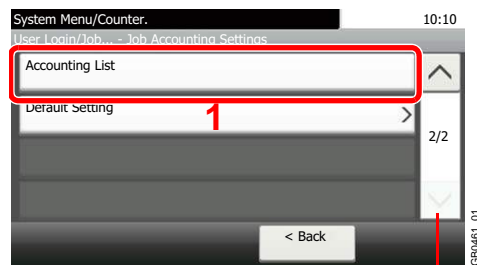


Use [∨] or [∧] to scroll up and down.

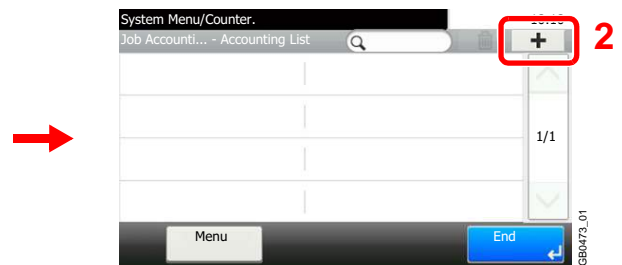


## 2 Enter the account information.

### [Account Name]

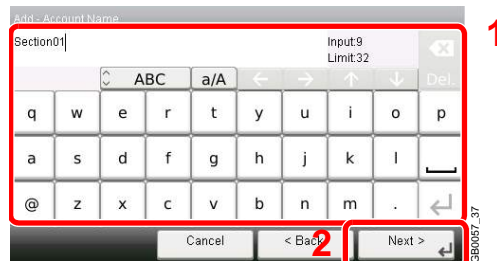


### [Account ID]

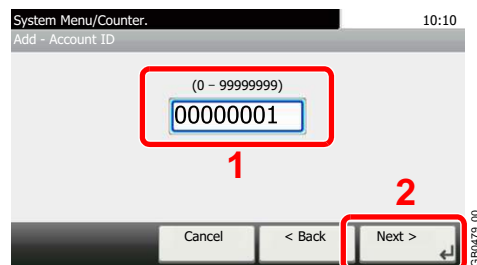

### 3 Check the settings.



Check the settings and change or add information as needed.

#### [Account Name]



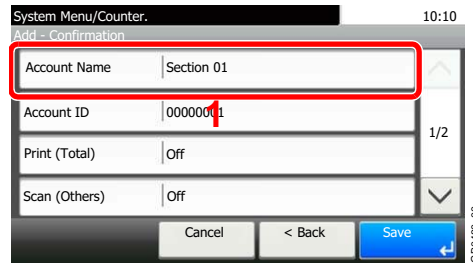


Refer to *Character Entry Method* on page 11-7 for details on entering characters.

#### [Account ID]

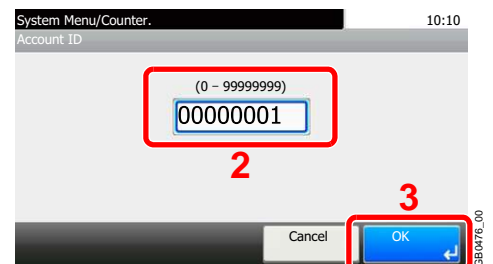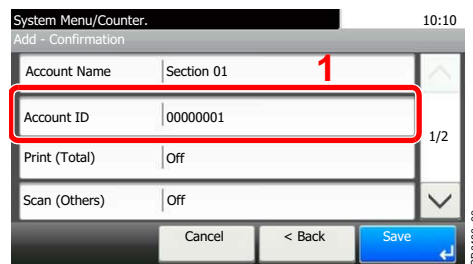


#### Restrictions

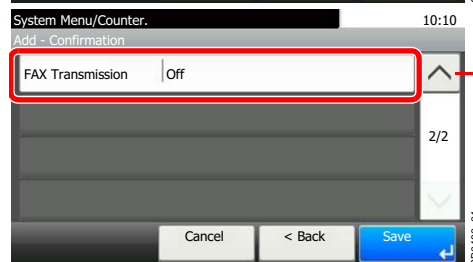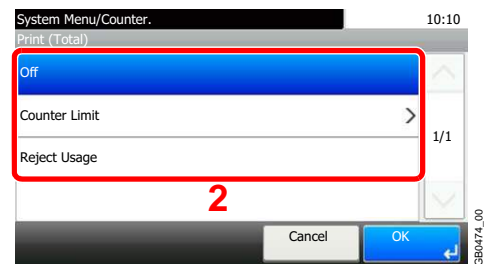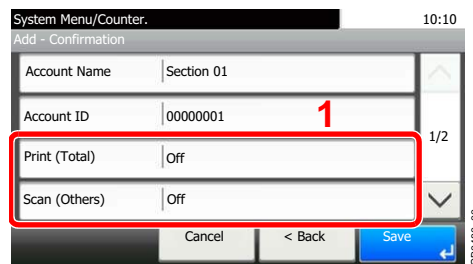

Use [∨] or [∧] to scroll up and down.

For details, refer to *Restricting the Use of the Machine* on page 9-59.

### 4 Register the account.

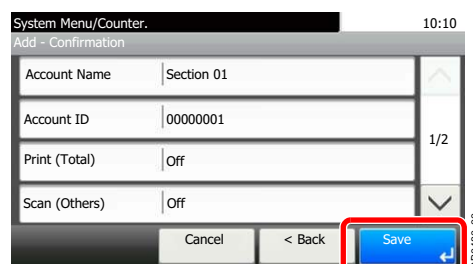


# Editing and Deleting Accounts

This changes the registered account information or deletes the account.

## 1 Display the screen.

1 Referring to *Job Accounting Settings* on page 9-52, display the screen.

### 2

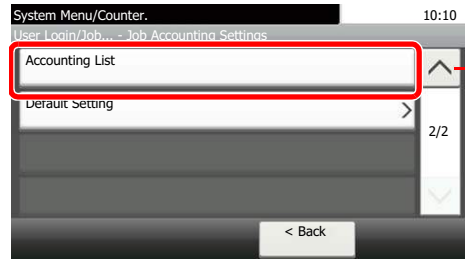


Use [∨] or [∧] to scroll up and down.

## 2 Edit or delete an account.

### To edit an account

1 Press [...] for the account name you wish to edit.

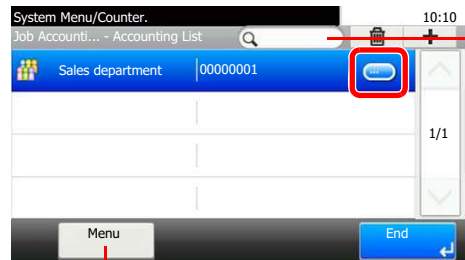



Searches by account name.

Allows you to search for an account name and sorts results.



You can specify an account name by account ID by pressing the **Quick No. Search** key.

2 Edit the account.


### [Account Name]

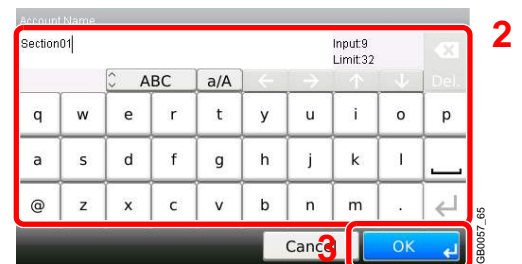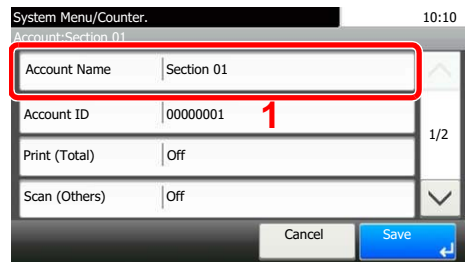

### [Account ID]

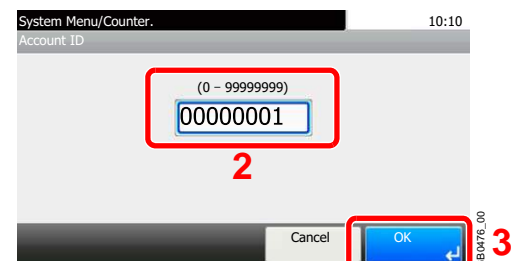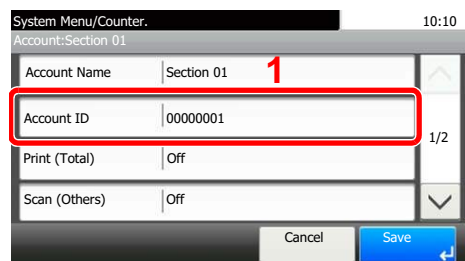


### Restriction

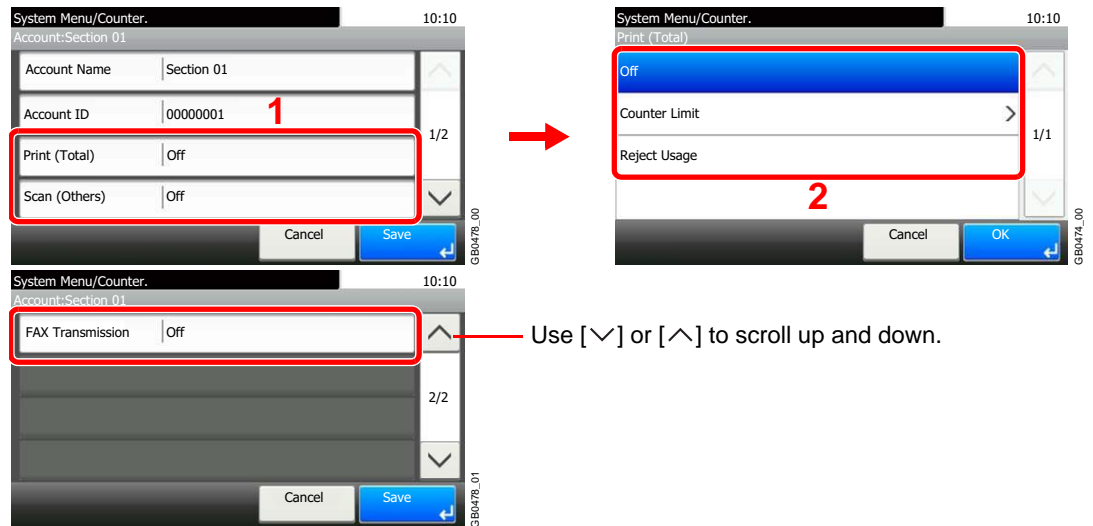

For details, refer to *Restricting the Use of the Machine* on page 9-59.

### 3 Register the account.

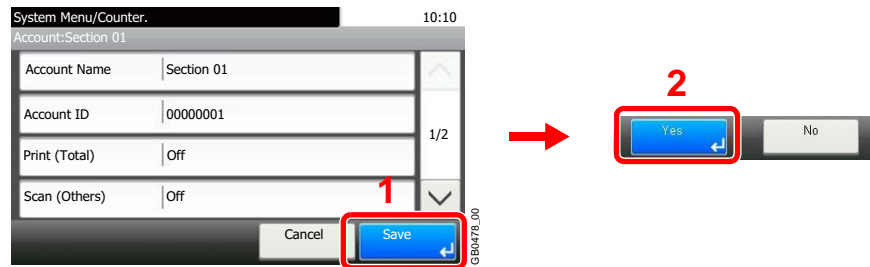

### To delete



Select the account name you wish to delete and press [(Delete)] (the trash can icon).

## Restricting the Use of the Machine

This section explains how to restrict the use of the machine by account or the number of pages available.

Set when *Adding an Account* (see page 9-55) or *Editing and Deleting Accounts* (see page 9-57).

The items that can be restricted differ depending on whether [Individual] or [Total] is selected for *Copier/Printer Count* on page 9-64.

### Restriction Items

#### [Individual] selected for Copier/Printer Count

Copy (Total)	Limits the total number of pages used for copying.
Printer (Total)	Limits the total number of pages used for printing.
Scan (Others)	Limits the number of pages scanned (excludes copying).
FAX Transmission*	Limits the number of pages sent by fax.

\* FAX functions are available only on products with the fax function installed.


#### [Total] selected for Copier/Printer Count

Print (Total)	Limits the total number of pages used for copying and printing.
Scan (Others)	Limits the number of pages scanned (excludes copying).
FAX Transmission*	Limits the number of pages sent by fax.

\* FAX functions are available only on products with the fax function installed.

### Applying Restriction

Off	No restriction given.
Counter Limit	Restricts the print counter in one-page increments up to 9,999,999 pages.
Reject Usage	Restriction is applied.

 For details on the machine behaves when the counter has reached the limit of restriction, refer to *Apply Limit* on page 9-64.

## 1 Select the item to limit.

### [Total] selected for Copier/Printer Count

System Menu/Counter. 10:10  
Add - Confirmation

Account Name	Section 01
Account ID	00000001
Print (Total)	Off
Scan (Others)	Off

Cancel < Back Save

GB0480\_00

Use [∨] or [∧] to scroll up and down.

System Menu/Counter. 10:10  
Add - Confirmation

FAX Transmission	Off
------------------	-----

2/2

Cancel < Back Save

GB0480\_01

### [Individual] selected for Copier/Printer Count

System Menu/Counter. 10:10  
Add - Confirmation

Account Name	Section 01
Account ID	00000001
Copy (Total)	Off
Printer (Total)	Off

Cancel < Back Save

GB0480\_02

Use [∨] or [∧] to scroll up and down.

System Menu/Counter. 10:10  
Add - Confirmation

Scan (Others)	Off
FAX Transmission	Off

2/2

Cancel < Back Save

GB0480\_03

## 2 Select a restriction method.

System Menu/Counter. 10:10  
Print (Total)

Off	
Counter Limit	>
Reject Usage	

1/1

Cancel OK

GB0474\_00

If [Counter Limit] is selected, press [+], [-] or numeric keys to select the number of pages, and press [OK].

## Counting the Number of Pages Printed

This counts the number of pages printed. Counts are classified into Total Job Accounting and Each Job Accounting. A new count can also be started after resetting the count data which was stored for a certain period of time. Types of the counts are as follows.


Printed Pages	Displays the number of pages copied and printed, and the total number of pages used. You can also use [by Paper Size], [by Duplex] and [by Combine] to check the number of pages used. <ul style="list-style-type: none"> <li>You can use [by Duplex] to check the number of pages used in Duplex (1-sided) mode, Duplex (2-sided) mode and the total for both.</li> <li>You can use [by Combine] to check the number of pages used in Combine (None) mode, Combine (2 in 1) mode, Combine (4 in 1) mode and the total for all three.</li> </ul>
Scanned Pages	Displays the number of pages scanned for copying, faxing* and other functions, as well as the total number of pages scanned.
FAX Transmission Pages*	Displays the number of pages faxed.
FAX Transmission Time*	Displays the total duration of fax transmissions.

\* FAX functions are available only on products with the fax function installed.

### 1 Display the screen.


1 Referring to *Job Accounting Settings* on page 9-52, display the screen.

2

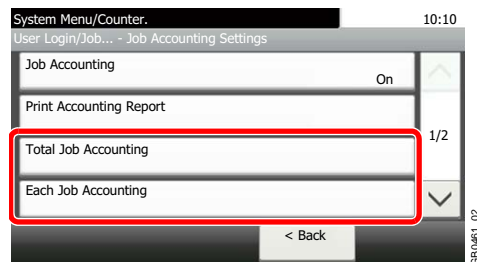

To count the number of pages for all account, select [Total Job Accounting]. To count the number of pages by account, select [Each Job Accounting].



Searches by account name.

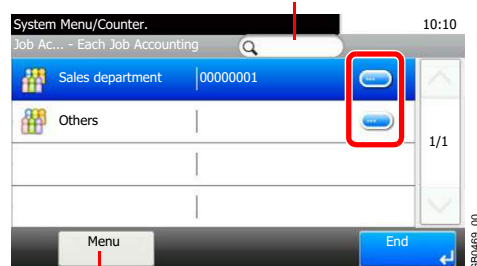

Allows you to search for an account name and sorts results.


To count the number of pages by account name, press [...] for the account name whose usage you wish to view.

## 2 View the number of pages.

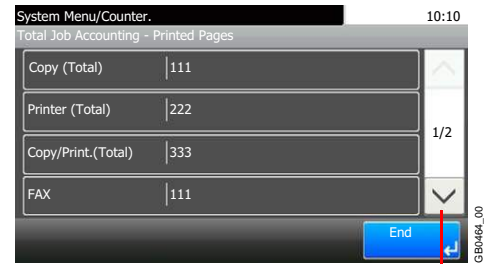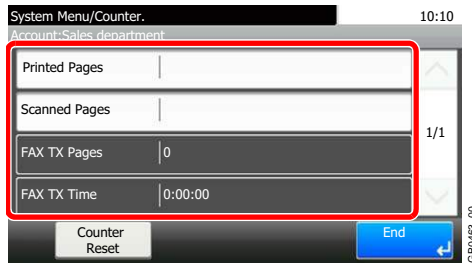

Use [∨] or [∧] to scroll up and down.

### To reset the counter

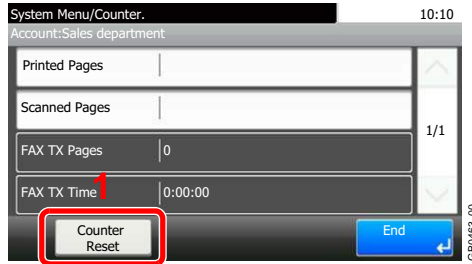



## Printing an Accounting Report

Total pages counted at all relevant accounts can be printed as an accounting report.

Reports have different formats depending on how the count of copiers and printers is administered.

Copier/Printer Count	Format	
When [Total] is selected for Copier/Printer Count	Print (Total)	Total number of pages used for copying and printing
When [Individual] is selected for Copier/Printer Count	Copy	Total number of pages used for copying
	Print	Total number of pages used for printing
Shared statistics	Scan	Total number of pages scanned
		Total number of pages scanned for copying
		Total number of pages faxed
		Total number of other pages scanned
	Fax	Total number of pages received
		Total number of pages sent
		Total duration of fax transmissions
	Other	Total number of duplex pages printed
		Total number of 1-sided pages printed
		Total number of combine (2 in 1) pages
		Total number of combine (4 in 1) pages
Total number of non-combine pages printed		


### 1 Prepare paper.

Check that Letter or A4 paper is loaded in the cassette.

### 2 Display the screen.

Referring to *Job Accounting Settings* on page 9-52, display the screen.

### 3 Print reports.

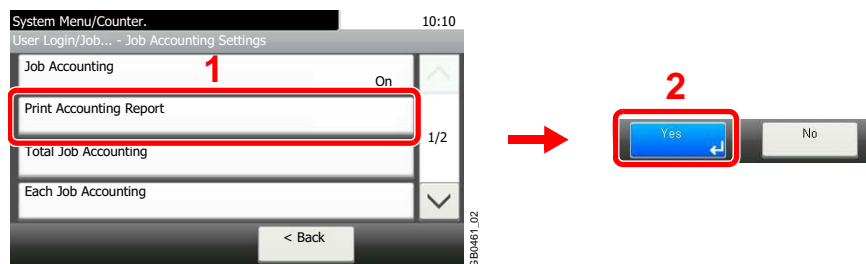


## Job Accounting Default Setting

Sets default settings related to job accounting.

### Display the screen.

1 Referring to *Job Accounting Settings* on page 9-52, display the screen.

2

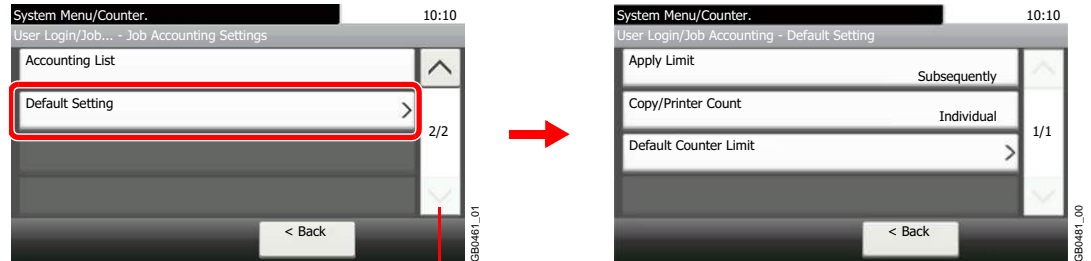

Use [∨] or [∧] to scroll up and down.

### Setting Items

Item	Description
<b>Apply Limit</b>	<p>This specifies how the machine behaves when the counter has reached the limit of restriction.</p> <p><b>Value</b></p> <p>Immediately*: Job stops when the counter reaches its limit.</p> <p>Subsequently: Printing/scanning of the job continues but the subsequent job will be rejected.</p> <p>Alert Only: Job continues while displaying an alert message.</p>
<b>Copier/Printer Count</b>	<p>You can select how the copying and printing page counts are shown - either the total of both or each of copying and printing individually. The selection may influence restriction on the count and count method.</p> <p> Refer to <i>Restricting the Use of the Machine</i> on page 9-59, <i>Counting the Number of Pages Printed</i> on page 9-61 and <i>Printing an Accounting Report</i> on page 9-63 for details.</p> <p><b>Value:</b> Total, Individual</p>
<b>Default Counter Limit</b>	<p>When you add a new account, you can change the default restrictions on the number of pages used.</p> <p> Refer to <i>Restricting the Use of the Machine</i> on page 9-59.</p> <p><b>Value:</b> 1 to 9,999,999 in 1-sheet increments</p>



\* The next job will be prohibited in sending or in storing in the box.

## Unknown Login User Name Job


This specifies the behavior for handling the jobs sent with unknown login user names or User ID (i.e. unsent IDs). If the User Login is set to invalid and Job Accounting is set to valid, follow the procedure when the Account ID is unknown.

### 1 Display the screen.

◆ System Menu / Counter

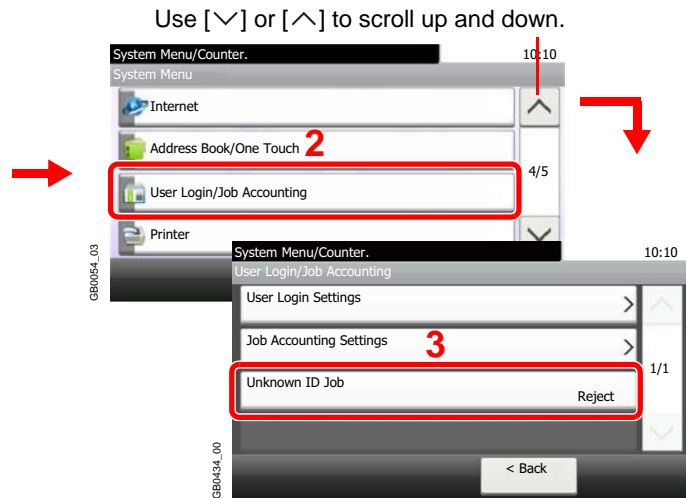

### 2 Select the function.

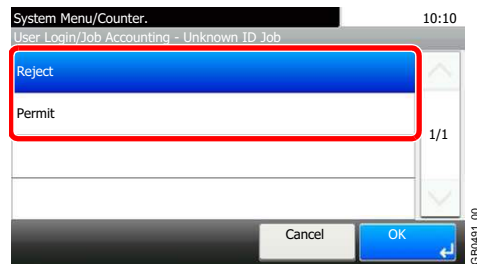



# 10 Troubleshooting

This chapter explains the following topics:

Toner Container Replacement .....	10-2
Waste Toner Box Replacement .....	10-4
Replacing the Maintenance Kit (MK-370) .....	10-6
Cleaning .....	10-7
Glass Platen .....	10-7
Document Processor .....	10-7
Machine .....	10-8
Solving Malfunctions .....	10-10
Responding to Error Messages .....	10-13
Clearing Paper Jams .....	10-22
Paper Jam Location .....	10-22
Multi Purpose Tray .....	10-23
Cassette .....	10-23
Duplexer .....	10-24
Inside the Machine .....	10-25
Rear Unit .....	10-26
Document Processor .....	10-26




# Toner Container Replacement

When the touch panel displays *Toner is empty.*, replace the toner.


## CAUTION

Do not attempt to incinerate the toner container or the waste toner box. Dangerous sparks may cause burns.


### 1 Remove the old toner container.

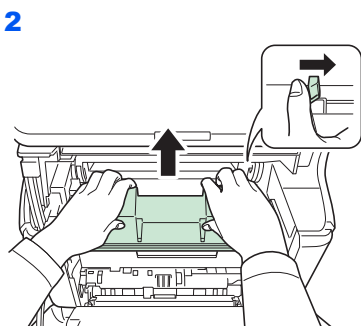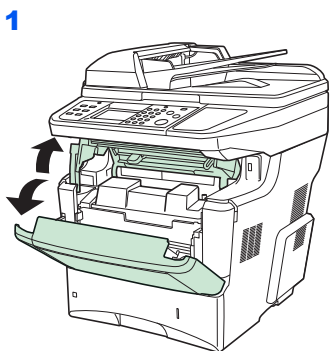

### 2 Prepare the new toner container.




2

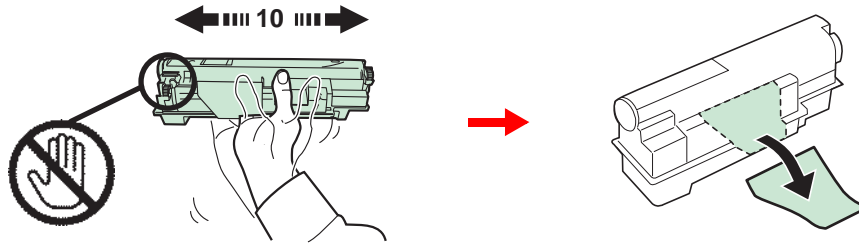


3 Install the new toner container.

1

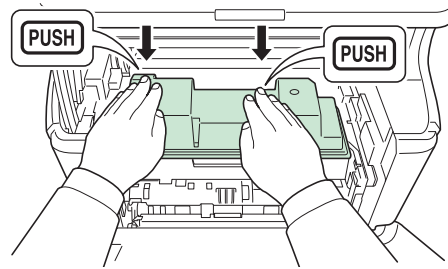

2



**NOTE**


Return the exhausted toner container to your dealer or service representative. The collected toner container will be recycled or disposed in accordance with the relevant regulations

# Waste Toner Box Replacement

When the touch panel displays *Check waste toner box.*, replace the waste toner box.

## 1 Remove the old waste toner box.


1



 **IMPORTANT**


Remove the waste toner box as gently as possible so as not to scatter the toner inside. Do not let the opening of the waste toner box face downward.

2

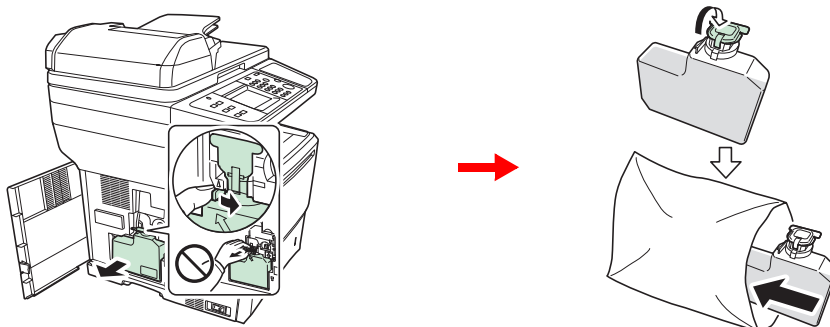


## 2 Install the new waste toner box.

1

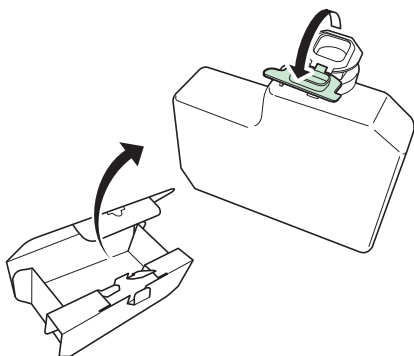



2

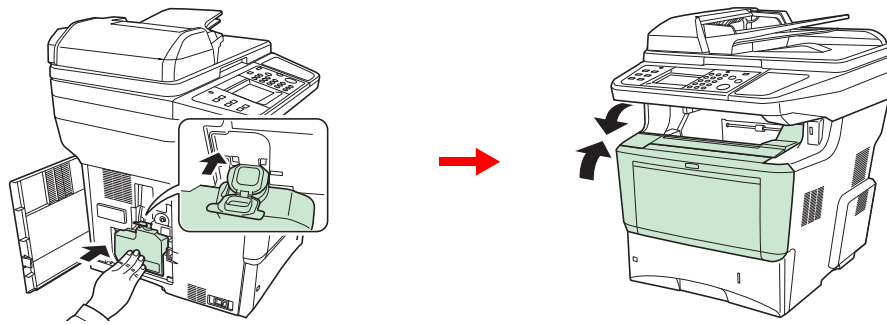

After replacing the toner containers and the waste toner box, clean the internal parts. For instructions, refer to *Cleaning* on page 10-7.




**NOTE**

Return the exhausted waste toner box to your dealer or service representative. The collected waste toner box will be recycled or disposed in accordance with the relevant regulations.


# Replacing the Maintenance Kit (MK-370)

When the print position shifts out of place or originals are not feded, components must be replaced. Contact your Service Representative and purchase the maintenance kit. Follow the procedure below to replace the maintenance kit.

## 1 Remove the paper feed roller.

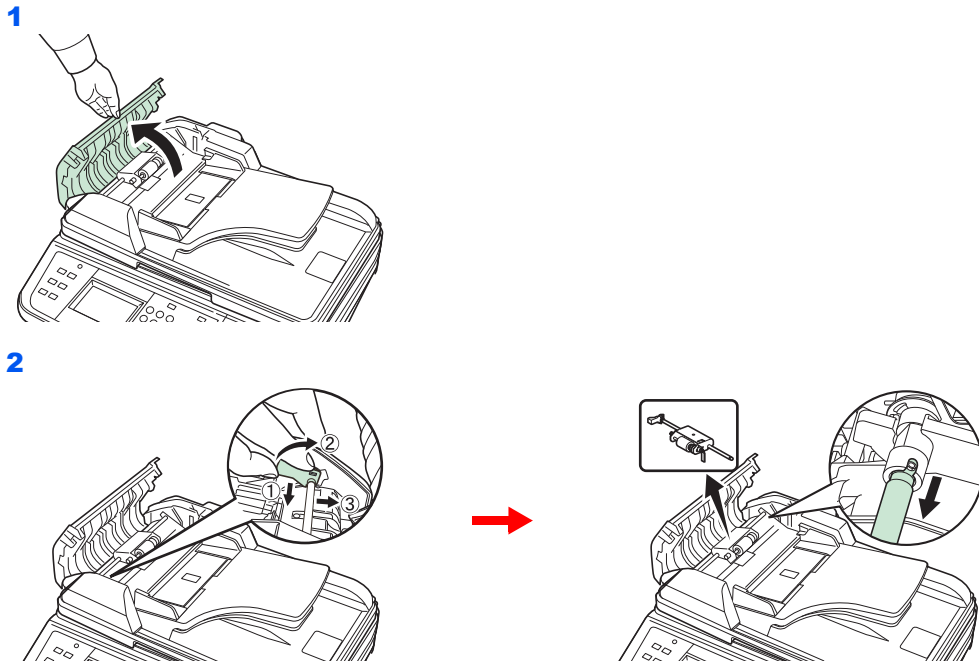


## 2 Remove the separation pad.

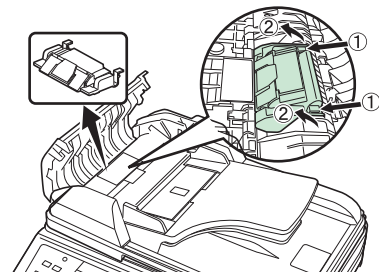

While pressing down on the hooks (x2) shown in the diagram, lift up and remove the separation pad.

## 3 Install a new paper feed roller and separation pad.

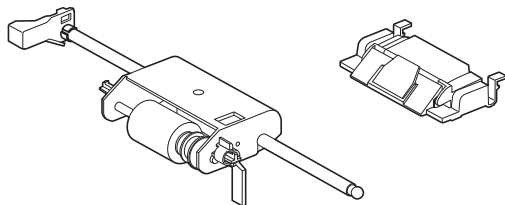

Remove the new separation pad and paper feed roller from the maintenance kit and follow the removal procedures in reverse to install.

# Cleaning


Clean the machine regularly to ensure optimum output quality.

## CAUTION

For safety, always unplug the power cord before cleaning the machine.

## Glass Platen

Wipe the inside of the document processor and the glass platen with a soft cloth dampened with alcohol or mild detergent.

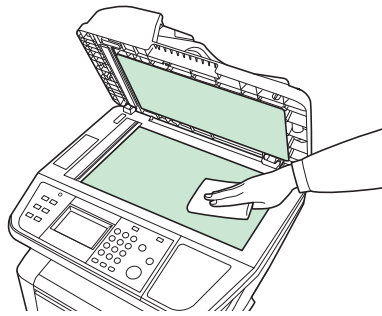

### NOTE

Do not use organic solvents or other strong chemicals.

## Document Processor


If black streaks or dirt appears in copies when using the document processor, clean the slit glass with the supplied cleaning cloth.




### NOTE

Wipe the slit glasses with the dry accessory cloth. Do not use water, soap or solvents for cleaning.

### 1 Wipe the slit glass.

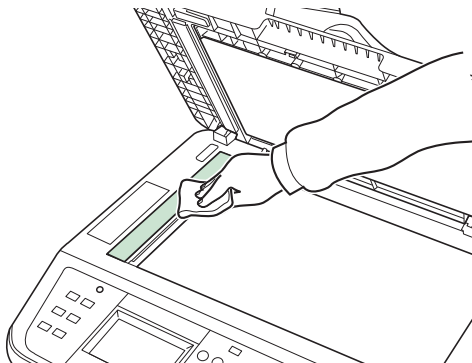


## 2 Wipe the white guide.

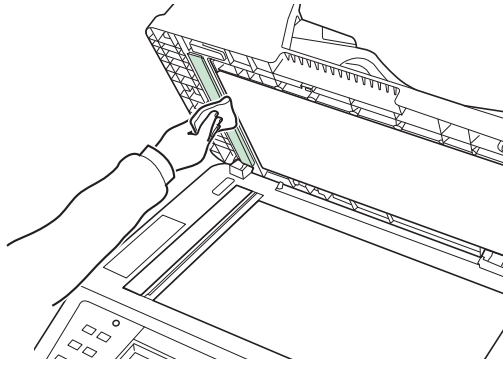


## Machine

To avoid print quality problems, the interior of the machine must be cleaned with every toner container and waste toner box replacement.

## 1 Wipe the registration roller.

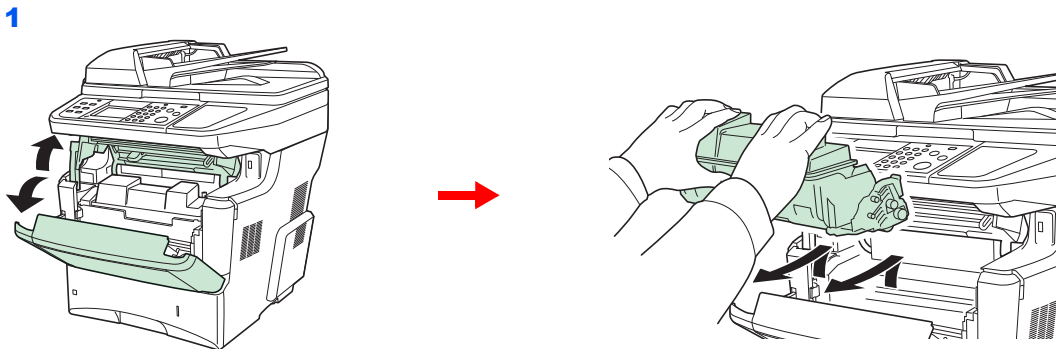


Lift the developer unit together with the toner container out of the machine.

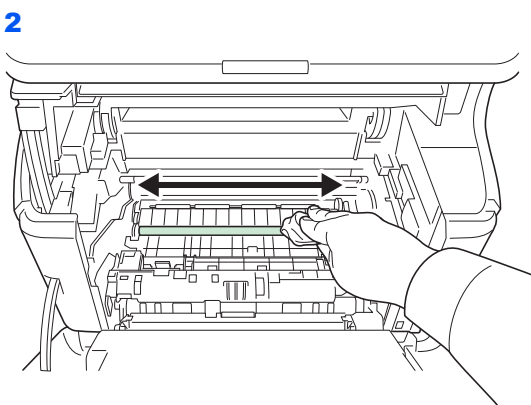


Use a lint free cloth to clean dust and dirt away from the registration roller (metal).

**3**

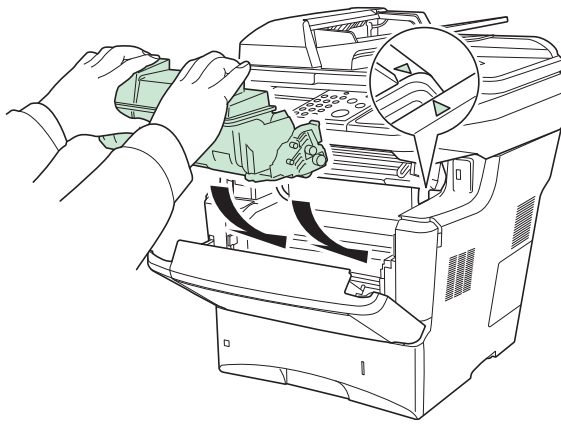


**2 Wipe the vents.**

**1**

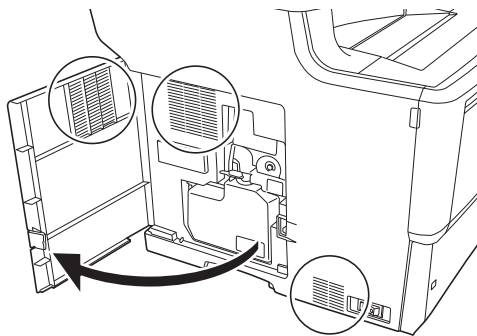

Use a lint free cloth to clean dust and dirt away from the vents.

**2**

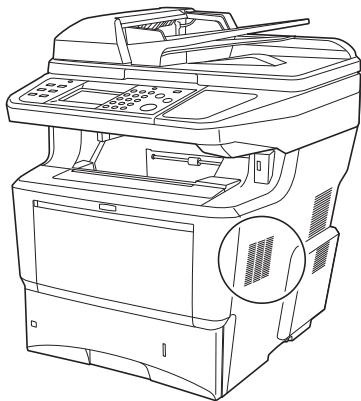






Use a lint free cloth to clean dust and dirt away from the vent on the right side of the machine.


# Solving Malfunctions

The table below provides general guidelines for problem solving.

If a problem occurs with your machine, look into the checkpoints and perform procedures indicated on the following pages. If the problem persists, contact your Service Representative.

Symptom	Checkpoints	Corrective Actions	Reference Page
An application does not start.	Is the Auto Panel Reset time short?	Set the Auto Panel Reset time to 30 seconds or more.	9-22
The touch panel does not respond when the main power switch is turned on.	Is the machine plugged in?	Plug the power cord into an AC outlet.	2-10
Pressing the <b>Start</b> key does not produce copies.	Is there a message on the touch panel?	Determine the appropriate response to the message and respond accordingly.	10-13
	Is the machine in Sleep mode?	Press the Power key to recover the machine from Sleep mode. The machine will be ready to copy within 15 seconds.	2-19
Cannot print.	Is the machine plugged in?	Plug the power cord into an AC outlet.	2-10
	Is the machine powered on?	Turn on the main power switch.	2-11
	Are the printer cable and network cable connected?	Connect the correct printer cable and network cable securely.	2-9
	Was the machine powered on before the printer cable was connected?	Power on the machine after connecting the printer cable.	2-9
	Is the print job paused?	Resume printing.	8-3
Blank sheets are ejected. 	Are the originals loaded correctly?	When placing originals on the platen, place them face-down and align them with the original size indicator plates.	3-12
		When placing originals in the document processor, place them face-up.	3-14
	—	Check that the application software is correctly operated.	—
Paper often jams.	Is the paper loaded correctly?	Load the paper correctly.	3-2
	Is the paper of the supported type? Is it in good condition?	Remove the paper, turn it over, and reload it.	3-2
	Is the paper curled, folded or wrinkled?	Replace the paper with new paper.	3-2
	Are there any loose scraps or jammed paper in the machine?	Remove any jammed paper.	10-22
Printouts are wrinkled or curled.	Is the paper damp?	Replace the paper with new paper.	3-2
Documents are printed improperly.	Are the application software settings at the PC set properly?	Check that the printer driver and application software settings are set properly.	—
Cannot print with USB memory. USB memory not recognized.	Is the USB host blocked?	Select [Unblock] in the USB host settings.	9-21
	—	Check that the USB memory is securely plugged into the machine.	—

Symptom	Checkpoints	Corrective Actions	Reference Page
Printouts are too light. 	Is the paper damp?	Replace the paper with new paper.	3-2
	Have you changed the density?	Select appropriate density level.	3-45, 9-23
	Is the toner distributed evenly within the toner container?	Shake the toner container from side to side about several times.	10-2
	Is there a message indicating the addition of toner?	Replace the toner container.	10-2
	Is EcoPrint mode enabled?	Disable EcoPrint mode.	4-13
	—	Run [Drum Refresh].	9-24
	—	Make sure the media type setting is correct the paper being used.	9-7
Printouts are too dark.	Have you adjusted the density?	Select appropriate density level.	3-45, 9-23
		Run [Drum Refresh].	9-24
The background density is obtrusive.	—	Carry out [Background Density Adjustment].	3-49
Dirt on the print side of the paper.	Is the platen or the document processor dirty?	Clean the platen or the document processor.	10-7
Dirt on the top edge or back of the paper. 	Is the interior of the machine dirty?	Clean the interior of the machine.	10-8
Printouts are fuzzy. 	Is the machine being used in very humid conditions?	Use in an environment that has suitable humidity.	1-3
	—	Run [Drum Refresh].	9-24
Part of the image is periodically faint or shows white lines. 	Have the developer unit been loaded properly?	Load the developer unit properly.	—
	—	Open and then close the rear cover.	—
	—	Run [Drum Refresh].	9-24
Copies have a moire pattern (dots grouped together in patterns and not aligned uniformly).	Is the original a printed photograph?	Set the image quality to [Photo].	3-47
Printouts are not clear.	Did you choose appropriate image quality for the original?	Select appropriate image quality.	3-47

Symptom	Checkpoints	Corrective Actions	Reference Page
Printouts have black lines. 	Is the slit glass dirty?	Clean the slit glass.	10-7
Images are skewed.	Are the originals placed correctly?	When placing originals on the platen, align them with the original size indicator plates.  When placing originals in the document processor, align the original width guides securely before placing the originals.	3-12  3-13
	Is the paper loaded correctly?	Check the position of the paper width guides.	3-2
	When displaying an image sent from the machine on the PC, an image size is shrunk vertically or horizontally.	Have you selected 200 x 100dpi Normal or 200 x 400dpi Super for the scan resolution?	Select a scan resolution other than 200 x 100dpi Normal or 200 x 400dpi Super when sending an image.
Cannot send via SMB.	Is the network cable connected?	Connect the correct network cable securely.	2-9
	Have the network settings for the equipment been configured properly?	Configure the TCP/IP settings properly.	9-17
	Have the folder sharing settings been configured properly?	Check sharing settings and access privileges under the folder properties.	6-7
	Has the SMB protocol been set to [On]?	Set the SMB protocol setting to [On].	2-21
	Has the [Host Name] been entered properly?*	Check the name of the computer to which data is being sent.	6-5
	Has the [Path] been entered properly?	Check the share name for the shared folder.	6-10
	Has the [Login User Name] been entered properly?*, **	Check the domain name and login user name.	6-19
	Has the same domain name been used for the [Host Name] and [Login User Name]?	Delete the domain name and backslash ("\") from the [Login User Name].	6-19
	Has the [Login Password] been entered properly?	Check the login password.	6-19
	Have exceptions for Windows Firewall been configured properly?	Configure exceptions for Windows Firewall properly.	6-11, 6-14
	Do the time settings for the equipment, domain server, and data destination computer differ?	Set the equipment, domain server, and data destination computer to the same time.	—
Is the touch panel displaying <i>Send error.</i> ?	Refer to <i>Responding to Send Error.</i>	10-19	

\* You can also enter a full computer name as the host name (for example, pc001.abcdnet.com).

\*\* You can also enter login user names in the following formats:  
 Domain\_name/user\_name (for example, abcdnet/james.smith)  
 User\_name@domain\_name (for example, james.smith@abcdnet)



# Responding to Error Messages

If the touch panel displays any of these messages, follow the corresponding procedure.

## A

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Activation error.</i>	—	Failed to activate the application. Contact administrator.	—
	—	Expansion Authentication is disabled. Turn the main power switch off and on. If the error exists, contact administrator.	—
<i>Add the following paper in cassette #.</i>	Does the selected paper size matches the paper size loaded in the specified paper source?	Press [Continue] to continue printing. Press [Cancel] to cancel the job.	—
	Is the indicated cassette out of paper?	Load paper. Press [Paper Selection] to select the other paper source. Press [Continue] to print on the paper in the currently selected paper source.	3-3
<i>Add the following paper in multi purpose tray.</i>	Does the selected paper size matches the paper size loaded in the specified paper source?	Press [Continue] to continue printing. Press [Cancel] to cancel the job.	—
	Is the paper of the selected size loaded in the multi purpose tray?	Load paper. Press [Paper Selection] to select the other paper source. Press [Continue] to print on the paper in the currently selected paper source.	3-7

## B

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Box limit exceeded.*</i>	—	Document box is full, and no further storage is available; Job is canceled. Press [End]. Try to perform the job again after printing or deleting data from the Document box.	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

## C

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Cannot connect to Authentication Server.*</i>	—	Set machine time to match the server's time.	9-22
	—	Check the domain name.	9-25
	—	Check the host name.	9-25
	—	Check the connection status with the server.	—

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Cannot duplex print on the following paper.*</i>	Did you select a paper size/type that cannot be duplex printed?	Press [Paper Selection] to select the available paper. Press [Continue] to print without using Duplex function.	4-7
<i>Cannot print the specified number of copies.*</i>	—	Only one copy is available due to processing too many jobs in parallel. Press [Continue] to continue printing. Press [Cancel] to cancel the job.	—
<i>Cannot process this job.*</i>	—	This job is canceled because it is restricted by User Authorization or Job Accounting. Press [End].	—
<i>Cassette is not installed.</i>	—	Cannot feed paper. Set the cassette indicated on the touch panel.	—
<i>Check the envelope switch.</i>	Does the position of the left envelope switch match the right envelope switch?	Match the position of the left and right envelope switches.	3-9
	Does the envelope switch setting match the paper type?	Match the paper type and the envelope switch position.	3-9
<i>Check waste toner box.</i>	Is the waste toner box full?	Replace the waste toner box.	10-4
	—	The waste toner box is not installed correctly. Set it correctly.	10-4

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**E**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Error occurred at cassette #.</i>	—	Remove the indicated cassette. Press [Next >] to follow the instructions.	—

**F**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Failed to specify Job Accounting.*</i>	—	Failed to specify Job Accounting when processing the job externally. The job is canceled. Press [End].	—
<i>Failed to store job retention data.</i>	—	The job is canceled. Press [End].	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**I**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Incorrect account ID.*</i>	—	The account ID was incorrect when processing the job externally. The job is canceled. Press [End].	—
<i>Incorrect Login User Name or Password.*</i>	—	The login user name or password was incorrect when processing the job externally. The job is canceled. Press [End].	—
<i>Inner tray is full of paper.</i>	—	Remove paper from the inner tray and press [Continue].	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**J**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Job Accounting restriction exceeded.*</i>	Is the acceptable printing count restricted by Job Accounting exceeded?	The printing count exceeded the acceptable count restricted by Job Accounting. Cannot print any more. This job is canceled. Press [End].	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**K**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>KPDL error.*</i>	—	PostScript error has occurred. The job is canceled. Press [End].	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**L**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Left cover is open.</i>	Is the left cover open?	Close the left cover.	—

**M**


Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Machine failure.</i>	—	Internal error has occurred. Make a note of the error code displayed on the touch panel, and contact your Service Representative.	—
<i>Maximum number of scanned pages.</i>	Is the acceptable scanning count exceeded?	Only one copy of the scanned pages is available. Press [Continue] to print, send or store the scanned pages. Press [Cancel] to cancel printing, sending or storing.	—
<i>Memory is full.*</i>	—	Unable to continue the job as the memory is used up. Press [Continue] to print the scanned pages. The print job cannot be processed completely. Press [Cancel] to cancel the job.	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**P**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Paper jam.</i>	—	If a paper jam occurs, the machine will stop and the location of the jam will be indicated on the touch panel. Leave the machine on and follow the instruction to remove the jammed paper.	10-22
<i>Print overrun.</i>	—	Warning. Low printer memory. The job was paused. Re-starting the job. Press [Continue].	—

R

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>RAM disk error.*</i>	—	<p>An error has occurred on the RAM disk. Job is canceled. Press [End].</p> <p>The possible error codes and their descriptions are as follows.</p> <p>01: The amount of data that can be saved at once has been exceeded. Restart the system or turn the power OFF/ON. If the error still occurs, divide the file into smaller files.</p> <p>04: Insufficient space on the RAM disk. Increase the RAM disk size by changing [RAM Disk Setting] in the system menu.</p> <p> <b>NOTE:</b> The range of RAM disk size can be increased by selecting [Printer Priority] in Optional Memory.</p>	9-22
<i>Removable memory error.*</i>	Is writing to a removable memory prohibited?	<p>An error occurred in the removable memory. The job stopped. Press [End].</p> <p>Possible error codes are as follows:</p> <p>01: Connect a removable memory that can be written to.</p>	7-2
	—	<p>An error occurred in the removable memory. The job stopped. Press [End].</p> <p>Possible error codes are as follows:</p> <p>01: The amount of data that can be saved at once has been exceeded. Restart the system or turn the power OFF/ON. If the error still occurs, the removable memory is not compatible with the machine. Use the removable memory formatted by this machine. If the removable memory cannot be formatted, it is damaged. Connect a compatible removable memory.</p>	7-2
<i>Removable Memory is full.*</i>	—	<p>Job is canceled. Press [End].</p> <p>Insufficient free space in the removable memory. Delete unneeded files.</p>	—
<i>Remove originals in the document processor.</i>	Are there any originals left in the document processor?	Remove originals from the document processor.	—
<i>Replace all originals and press [Continue].</i>	—	<p>Remove originals from the document processor, put them back in their original order, and place them again. Press [Continue] to resume printing.</p> <p>Press [Cancel] to cancel the job.</p>	—
<i>Replace MK.</i>	—	<p>Replacement of the parts in the maintenance kit is necessary at every 300,000 pages of printing and requires professional servicing. Contact your Service Representative.</p>	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**S**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Scanner memory is full.*</i>	—	Scanning cannot be performed due to insufficient memory of scanner. Only one copy of the scanned pages is available. Press [Continue] to print, send or store the scanned pages. Press [Cancel] to cancel the printing job.	—
<i>Send error.*</i>	—	An error has occurred during transmission. Refer to <i>Responding to Send Error</i> for the error code and corrective actions.	10-19
<i>System error.</i>	—	System error has occurred. Follow the instructions on the touch panel.	—

\* When Auto Error Clear is set to [On], processing resumes automatically after a set amount of time elapses.

**T**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>The cover is open.</i>	Is there any cover which is open?	Close the cover indicated on the touch panel.	—
<i>The phone receiver is off the hook.</i>	—	Put down the receiver.	—
<i>This memory is not formatted.</i>	Is the removable memory formatted by this machine?	Perform [Format] on this machine.	—
<i>Toner is empty.</i>	—	Replace the toner container.	10-2
<i>Toner is running out.</i>	—	It is almost time to replace the toner container. Obtain a new toner container.	—





**U**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Unknown Toner Installed.</i>	Is the installed toner container our own brand?	We will not be liable for any damage caused by the use of third party supplies in this machine.	—
<i>Unknown Toner Installed. PC</i>	Does the installed toner container's regional specification match the machine's?	Install the specified container.	—

**W**

Error Message	Checkpoints	Corrective Actions	Reference Page
<i>Warning low memory.</i>	—	Job cannot be started. Try again later.	—

## Responding to Send Error

Code	Error	Corrective Actions	Reference Page
1101	<i>Failed to send the e-mail.</i>	Check the host name of the SMTP server on the COMMAND CENTER.	2-22
	<i>Failed to send via FTP.</i>	Check the host name of FTP.	6-20
	<i>Failed to send via SMB.</i>	Check the host name of SMB.	6-19
1102	<i>Failed to send via SMB.</i>	Check the SMB settings. <ul style="list-style-type: none"> <li>• Login user name and login password</li> </ul>  <b>NOTE:</b> If the sender is a domain user, specify the domain name. <ul style="list-style-type: none"> <li>• Host name</li> <li>• Path</li> </ul>	6-20
	<i>Failed to send the e-mail.</i>	Check the followings on the COMMAND CENTER. <ul style="list-style-type: none"> <li>• SMTP login user name and login password</li> <li>• POP3 login user name and login password</li> </ul>	2-22
	<i>Failed to send via FTP.</i>	Check the FTP settings. <ul style="list-style-type: none"> <li>• Login user name and login password</li> </ul>  <b>NOTE:</b> If the sender is a domain user, specify the domain name. <ul style="list-style-type: none"> <li>• Path</li> <li>• Folder share permissions of the recipient</li> </ul>	6-20
1103	<i>Failed to send via SMB.</i>	Check the SMB settings. <ul style="list-style-type: none"> <li>• Login user name and login password</li> </ul>  <b>NOTE:</b> If the sender is a domain user, specify the domain name. <ul style="list-style-type: none"> <li>• Path</li> <li>• Folder share permissions of the recipient</li> </ul>	6-20
	<i>Failed to send via FTP.</i>	Check the FTP settings. <ul style="list-style-type: none"> <li>• Path</li> <li>• Folder share permissions of the recipient</li> </ul>	6-20
1104	<i>Failed to send the e-mail.</i>	Check the e-mail address.  <b>NOTE:</b> If the address is rejected by the domain, you cannot send the e-mail.	6-18
1105	<i>Failed to send via SMB.</i>	Select [On] of the SMB settings on the COMMAND CENTER.	2-22
	<i>Failed to send the e-mail.</i>	Select [On] of the SMTP settings on the COMMAND CENTER.	
	<i>Failed to send via FTP.</i>	Select [On] of the FTP settings on the COMMAND CENTER.	
1106	<i>Failed to send the e-mail.</i>	Check the sender address of SMTP on the COMMAND CENTER.	2-22
1131	<i>Failed to send via FTP.</i>	Select [On] of the secure protocol settings on the COMMAND CENTER.	2-22
1132	<i>Failed to send via FTP.</i>	Check the followings of the FTP server. <ul style="list-style-type: none"> <li>• Is FTPS available?</li> <li>• Is the encryption available?</li> </ul>	2-22

Code	Error	Corrective Actions	Reference Page
2101	<i>Failed to send via SMB. Failed to send via FTP.</i>	Check the network and SMB settings. Check the network and FTP settings. <ul style="list-style-type: none"> <li>• The network cable is connected.</li> <li>• The hub is not operating properly.</li> <li>• The server is not operating properly.</li> <li>• Host name and IP address</li> <li>• Port number</li> </ul>	2-22
	<i>Failed to send the e-mail.</i>	Check the network and COMMAND CENTER. <ul style="list-style-type: none"> <li>• The network cable is connected.</li> <li>• The hub is not operating properly.</li> <li>• POP3 server name of the POP3 user</li> <li>• SMTP server name</li> </ul>	
2102 2103	<i>Failed to send via FTP.</i>	Check the followings of the FTP server. <ul style="list-style-type: none"> <li>• Is FTP available?</li> <li>• The server is not operating properly.</li> </ul>	—
	<i>Failed to send the e-mail.</i>	Check the network. <ul style="list-style-type: none"> <li>• The network cable is connected.</li> <li>• The hub is not operating properly.</li> <li>• The server is not operating properly.</li> </ul>	
2201	<i>Failed to send the e-mail. Failed to send via FTP. Failed to send via SMB.</i>	Check the network. <ul style="list-style-type: none"> <li>• The network cable is connected.</li> <li>• The hub is not operating properly.</li> <li>• The server is not operating properly.</li> </ul>	—
2202	<i>Failed to send the e-mail. Failed to send via FTP.</i>		
2203	<i>Failed to send via FTP. Failed to send via SMB.</i>		
2204	<i>Failed to send the e-mail.</i>	Check the e-mail size limit of the SMTP settings on the COMMAND CENTER.	2-22
2231	<i>Failed to send via FTP.</i>	Check the network. <ul style="list-style-type: none"> <li>• The network cable is connected.</li> <li>• The hub is not operating properly.</li> <li>• The server is not operating properly.</li> </ul>	—
3101	<i>Failed to send the e-mail.</i>	Check the authentication methods of both the sender and the recipient.	—
	<i>Failed to send via FTP.</i>	Check the network. <ul style="list-style-type: none"> <li>• The network cable is connected.</li> <li>• The hub is not operating properly.</li> <li>• The server is not operating properly.</li> </ul>	
3201	<i>Failed to send the e-mail.</i>	Check the SMTP user authentication method of the recipient.	—




Code	Error	Corrective Actions	Reference Page
0007 4201 4701 5101 5102 5103 5104 7101 7102 7103 720f	—	Turn the main power switch off and back on. If this error occurs several times, make a note of the displayed error code and contact your service representative.	2-11

# Clearing Paper Jams

If a paper jam occurs, the touch panel will display *Paper jam.* and the machine will stop. Refer to these procedures to remove the jammed paper.


## How to read the screen

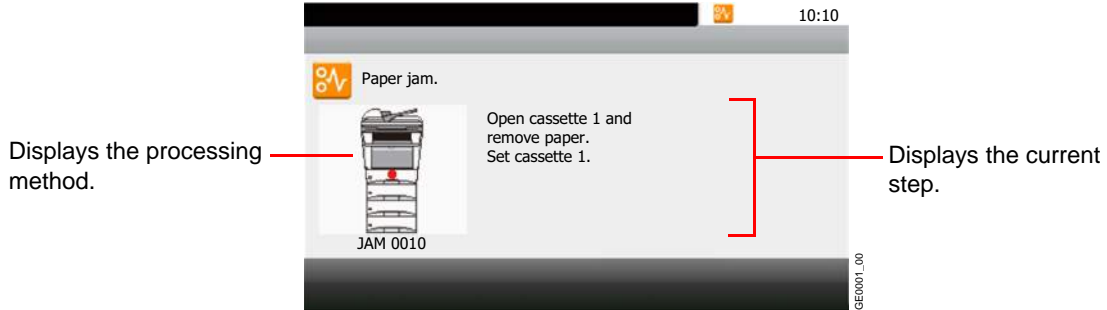

[< Back]	Returns to the previous step.
[Next >]	Advances to the next step.
[Hold]	Puts the current step on hold, and switches to the Status screen. The status of jobs can be checked. (Refer to <i>Checking Job Status on page 8-2.</i> )

## Paper Jam Location

Detailed paper jam positions are as follows. Refer to the indicated page number to remove the paper jam.

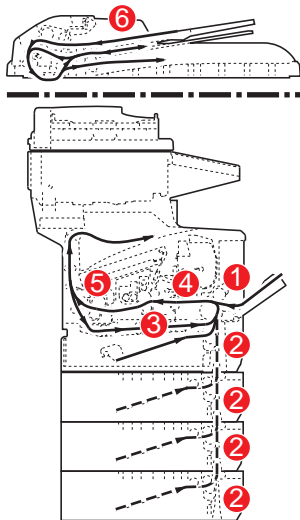

Paper Jam Location	Description	Reference Page
1	Clear the paper jammed in the multi purpose tray.	10-23
2	Clear the paper jammed in cassette.	10-23
3	Clear the paper jammed in duplexer.	10-24
4	Clear the paper jammed inside the machine.	10-25
5	Clear the paper jammed in the rear unit.	10-26
6	Clear the paper jammed in the document processor.	10-26

## Precautions with Paper Jams


- Do not reuse jammed papers.
- If the paper tears during removal, be sure to remove any loose scraps of paper from inside the machine.
- Scraps of paper left in the machine could cause subsequent jamming.

### CAUTION

The fixing unit is extremely hot. Take sufficient care when working in this area, as there is a danger of getting burned.

## Multi Purpose Tray

Follow the steps below to clear paper jams in the multi purpose tray.

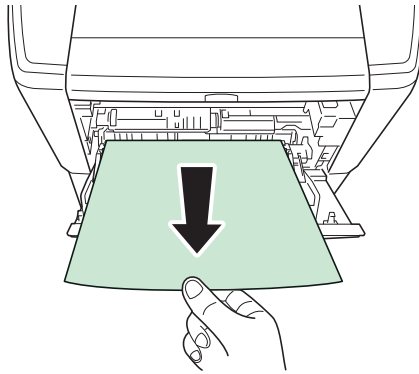

Open and close the top cover and front cover to clear the error.





### NOTE

If the paper cannot be removed, do not try to forcefully remove it. Go to paper jam inside the machine on page 10-25.

## Cassette

Follow the steps below to clear paper jams in cassette.

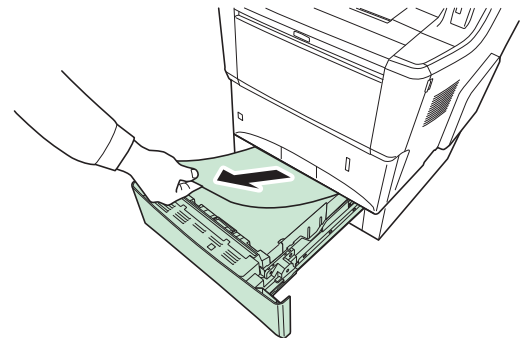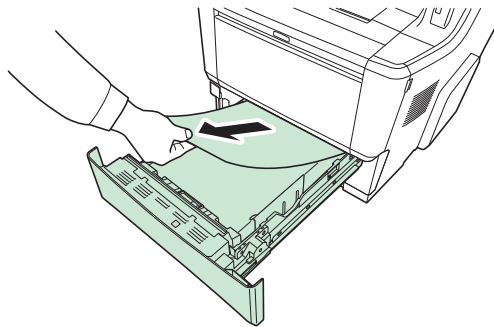

Check to see if paper is loaded correctly. If not, reload the paper.




### NOTE

If the paper cannot be removed, do not try to forcefully remove it. Go to paper jam inside the machine on page 10-25.

## Duplexer


Follow the steps below to clear paper jams in the duplexer.

1

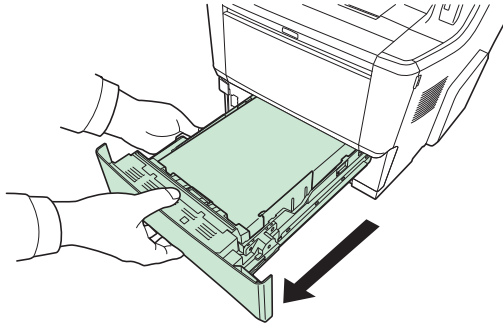


### CAUTION

Do not touch parts in this area, because it may result in burn injury.

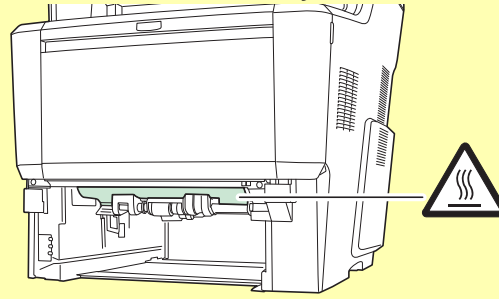


2

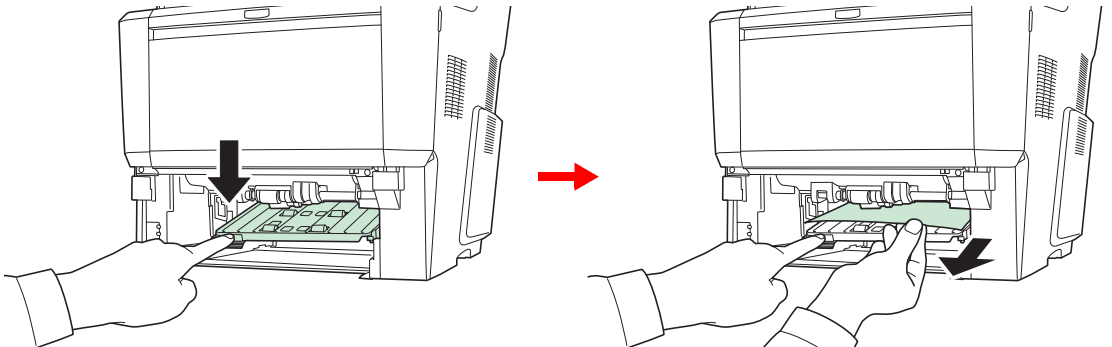

## Inside the Machine


Follow the steps below to clear paper jams inside the machine.

1

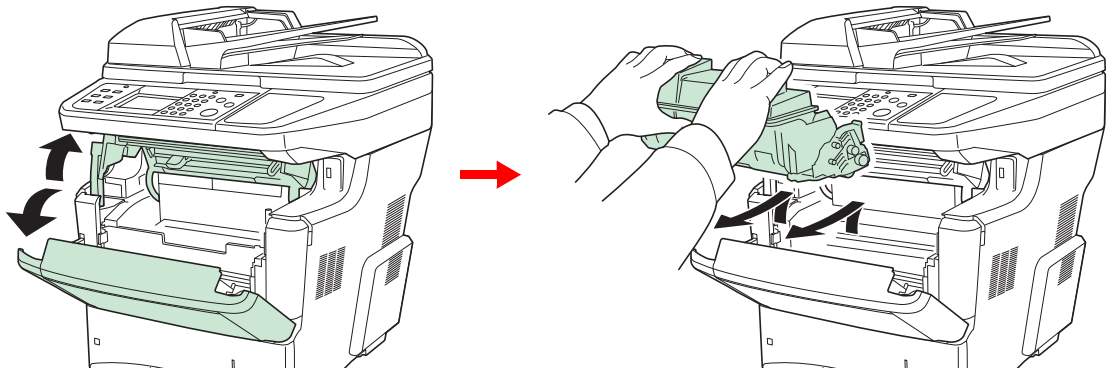

Open the top cover and front cover, and lift the developer unit together with the toner container out of the machine.

2

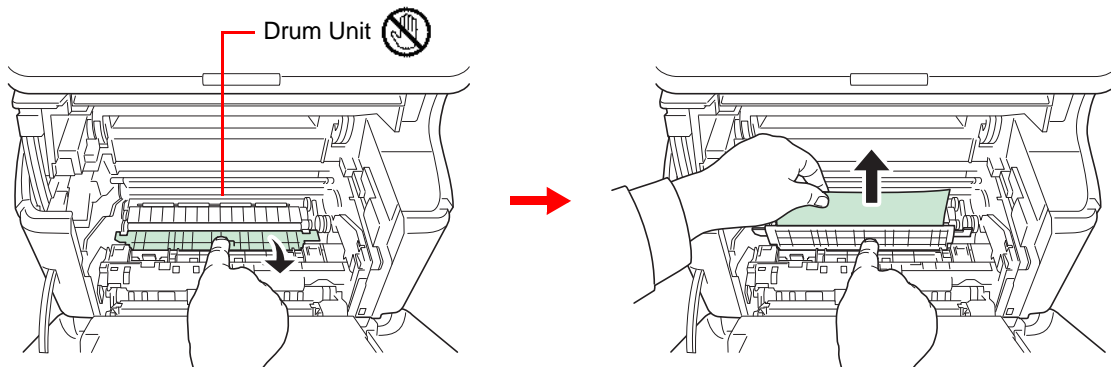

✔ **IMPORTANT**


Be careful not to touch the drum as this may adversely affect print quality. If you cannot find a paper jam, try checking inside the rear of the machine.



**NOTE**


If the jammed paper appears to be pinched by rollers, pull it along the normal running direction of the paper.

3

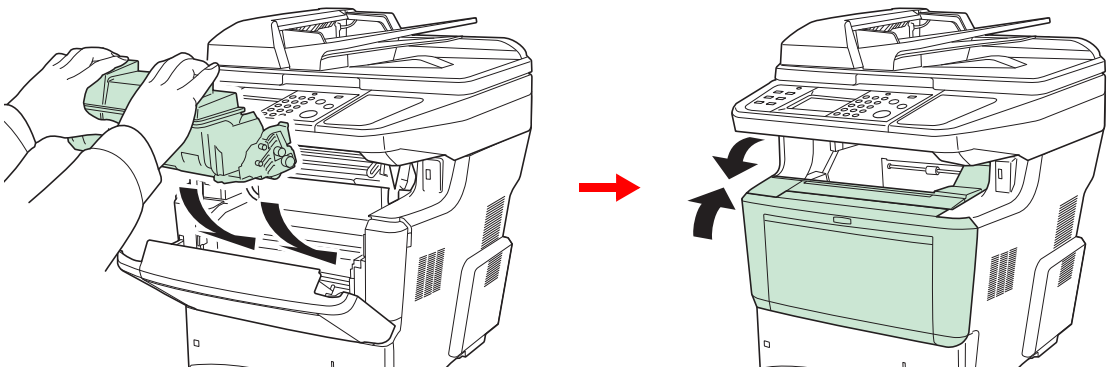

## Rear Unit

Follow the steps below to clear paper jams in the rear unit.

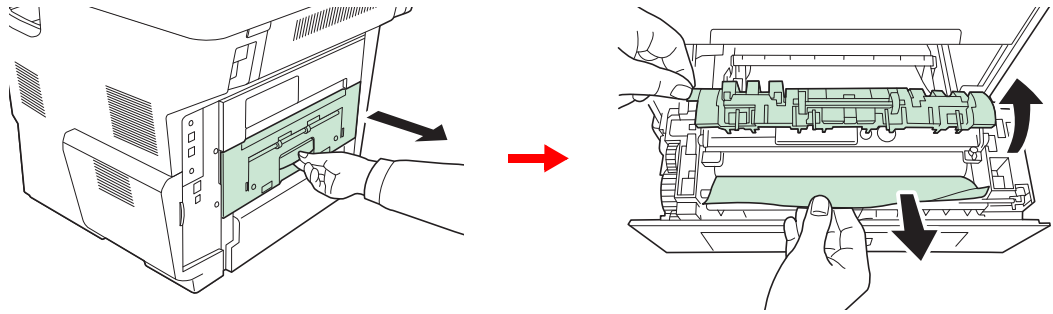


### CAUTION

The fuser unit inside the machine is hot. Do not touch it with your hands as it may result in burn injury. Remove jammed paper carefully.


## Document Processor

Follow the steps below to clear paper jams in the document processor.

1

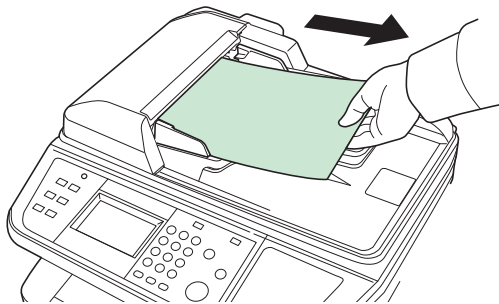


2

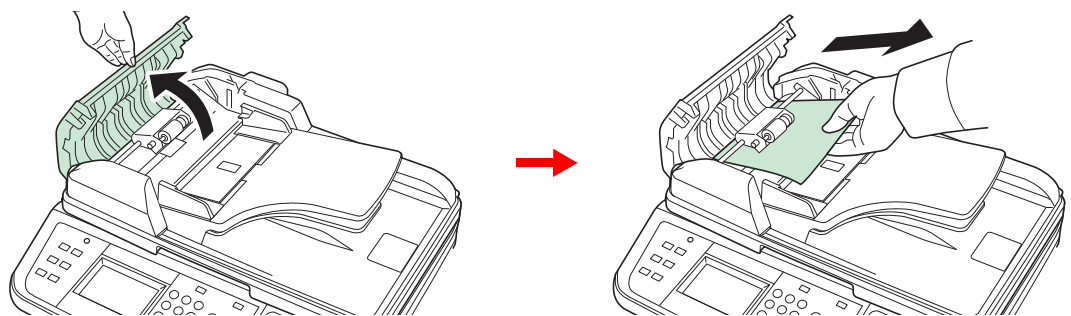

If the original is caught in the rollers or difficult to remove, proceed to the next step.

**3**

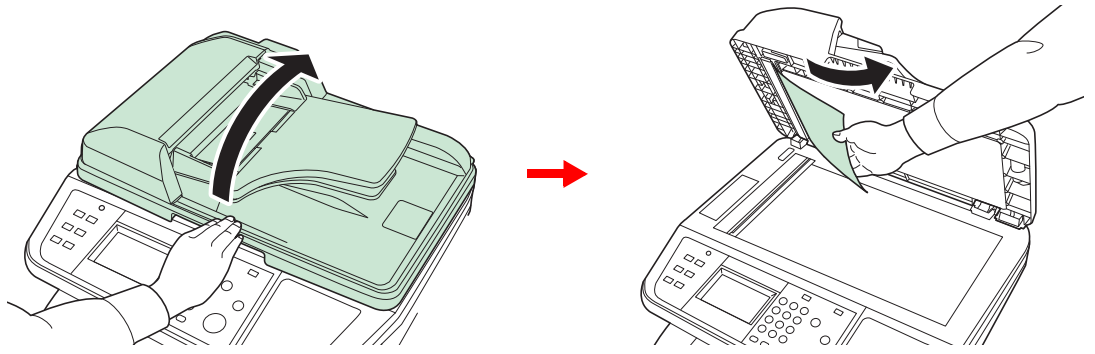





# 11 Appendix


This chapter explains the following topics:

Optional Equipment .....	11-2
Overview of Optional Equipment .....	11-2
Paper Feeder .....	11-2
Expansion Memory .....	11-3
Card Authentication Kit .....	11-4
USB Keyboard .....	11-4
Optional Function .....	11-5
Character Entry Method .....	11-7
Paper .....	11-10
Basic Paper Specifications .....	11-11
Choosing the Appropriate Paper .....	11-11
Special Paper .....	11-14
Specifications .....	11-18
Machine .....	11-18
Printer .....	11-20
Scanner .....	11-20
Document Processor .....	11-21
Environmental Specifications .....	11-21
Glossary .....	11-22

# Optional Equipment

## Overview of Optional Equipment

The following optional equipment is available for the machine.

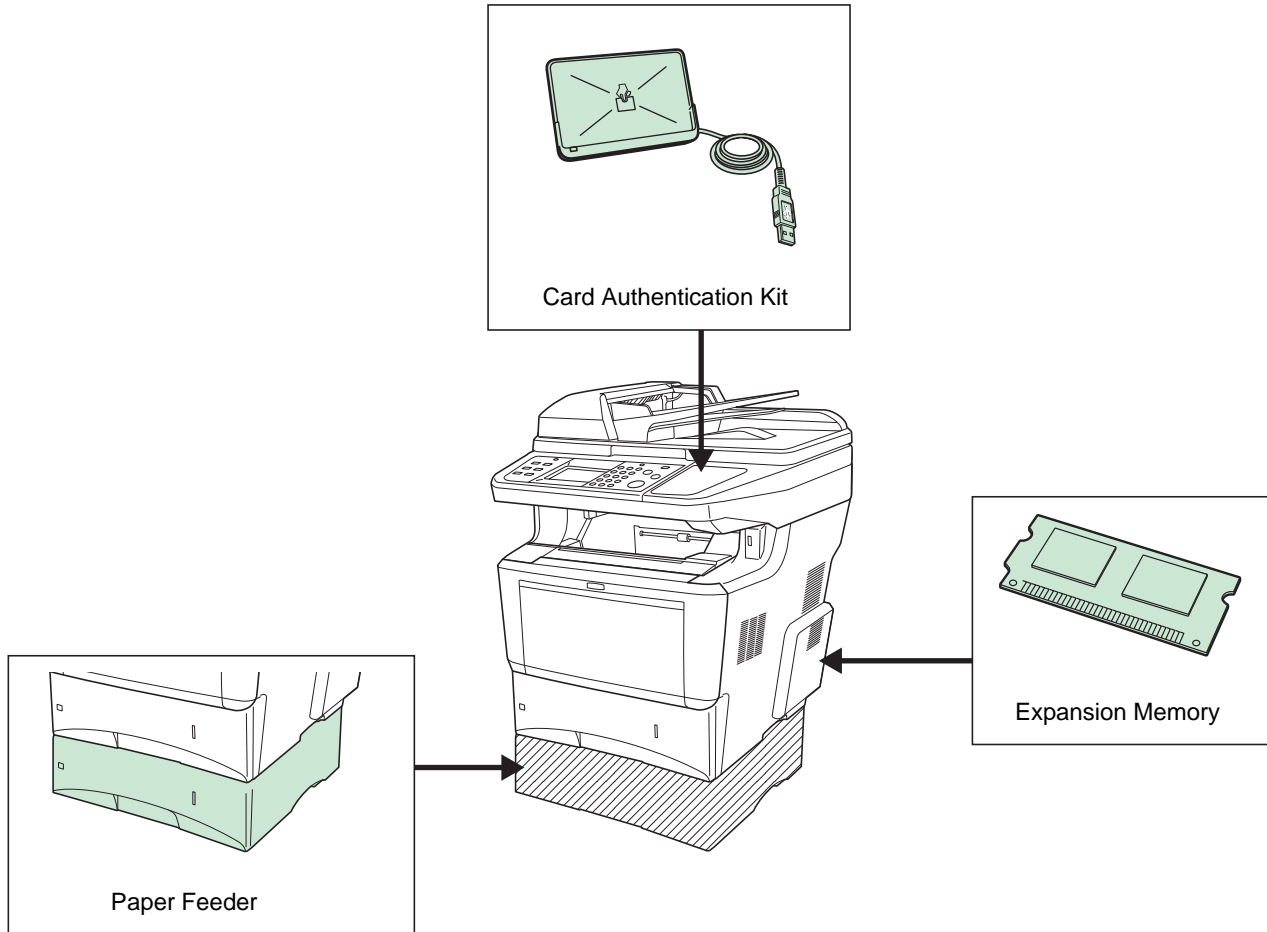


## Paper Feeder

Three additional cassettes identical to the machine's cassettes can be installed in the machine. Paper capacity and loading method are the same as Cassettes 1.

## Expansion Memory

To expand the printer memory for more complex print jobs and faster print speed, you can plug in optional memory module (dual in line memory module) in the memory slot provided on the main controller board. You can select additional memory module from 256, 512 or 1024 MB. The maximum memory size is 2048 MB.

### Precautions for Handling the Memory Module

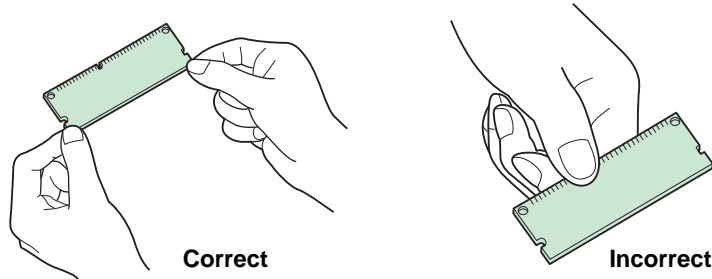


To protect electronic parts, discharge static electricity from your body by touching a water pipe (faucet) or other large metal object before handling the memory module. Or, wear an antistatic wrist strap, if possible, when you install the memory module.

### Installing the Memory Module

#### 1 Power off.

Turn off the machine and disconnect the power cord and interface cable.


#### 2 Remove the covers.

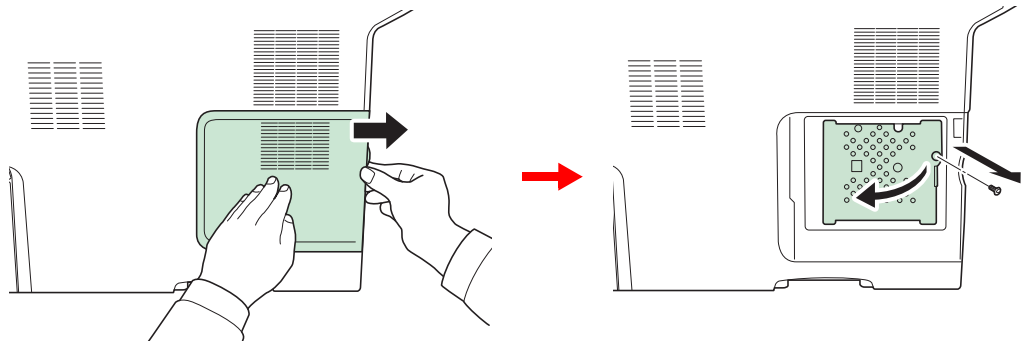

#### 3 Install the memory module.

- 1 Remove the memory module from its package.

- 2 With the memory connection terminal pointing toward the socket, align the cut-out part with the socket terminal and insert directly in at an angle.

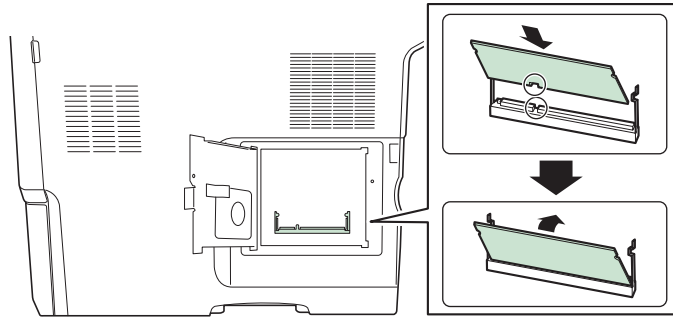

**✓ IMPORTANT**

**Before inserting a memory module in the machine, make sure that the machine is switched off.**

- 3 Carefully press the inserted memory down and into the machine.
- 4 Reinstall the covers.

## Removing the Memory Module

To remove a memory module, remove the right cover and the memory slot cover from the machine. Then, carefully push out the two socket clamps. Ease the memory module out of the socket to remove.

## Verifying the Expanded Memory

To verify that the memory module is working properly, test it by printing a status page.



Refer to *Report on page 9-5*.

## Card Authentication Kit

User login administration can be performed using IC cards. To do so, it is necessary to register IC card information on the previously registered local user list. For more information about how to register this information, refer to the *IC Card Authentication Kit Operation Guide*.

## USB Keyboard

A USB keyboard can be used to enter information into the text fields on the operation panel. Please contact your dealer or service representative for information on keyboards that are compatible with your MFP before you purchase one.

## Optional Function

You can use the optional applications installed on this machine.

### Overview of the Applications

The applications listed below are installed on this machine. You can use these applications for a limited period on a trial basis.

#### UG-33 (ThinPrint) (This application can only be activated in Europe.)

This application allows print data to be printed directly without a print driver.

**NOTE**  
Restrictions such as the number of times the application can be used during the trial period differ depending on the application.

### Starting Application Use

Use the procedure below to start using an application.


**NOTE**  
If user login administration is disabled, the user authentication screen appears. Enter your login user name and password and then press [Login]. For this, you need to login with administrator privileges. Refer to *Adding a User on page 9-29* for the default login user name and password.

#### 1 Display the screen.

◆ System Menu / Counter



1

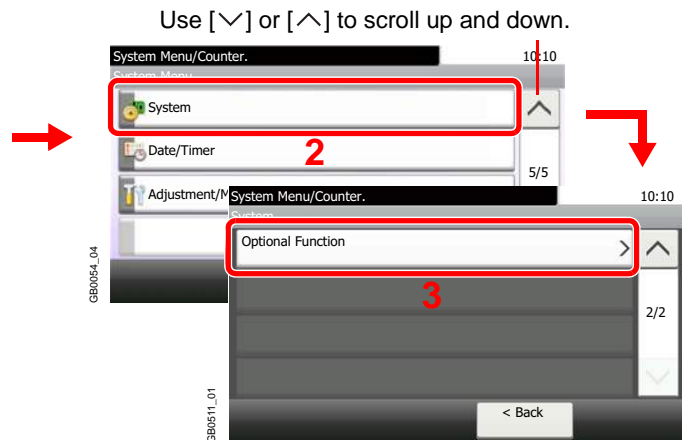


#### 2 Start using an application.

1 Select the desired application and press [Activate].



Displays details for individual applications.

**2** Select [Official] and enter the license key using the numeric keys.

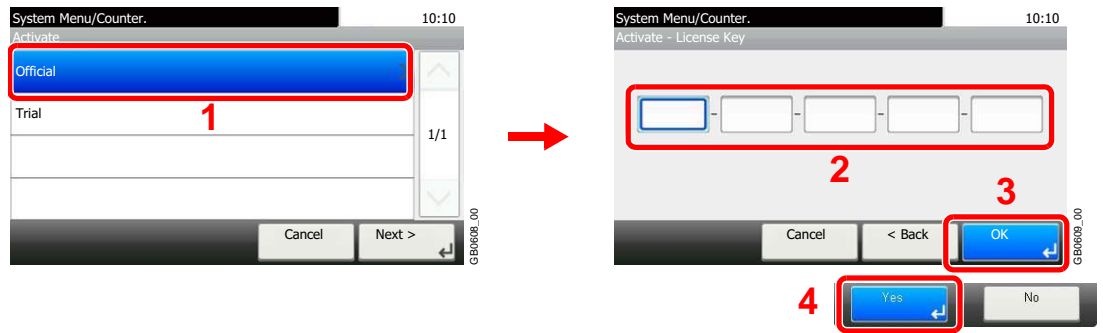

Some applications do not require you to enter a license key.

To use the application as a trial, select [Trial].



**IMPORTANT**

**If you change the date/time while using an application, you will no longer be able to use the application**

# Character Entry Method


To enter characters for a name, use the on-display keyboard in the touch panel following the steps as explained below.

## NOTE

QWERTY, QWERTZ and AZERTY are available as keyboard layouts the same as a PC keyboard. Press the **System Menu/Counter** key, [Common Settings] and then [Keyboard Layout] to choose desired layout. QWERTY layout is used here as an example. You may use another layout following the same steps.


## Entry Screens

### Lower-case Letter Entry Screen

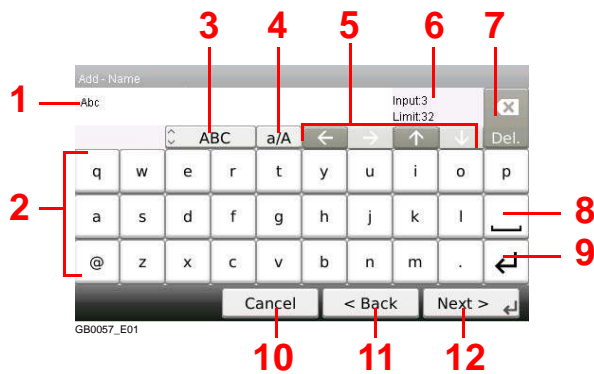


No.	Display/Key	Description
1	Display	Displays entered characters.
2	Keyboard	Press the character to enter.
3	[ABC] / [Symbol]	Select the characters that are entered. To enter symbols or numbers, select [Symbol].
4	[A/a] / [a/A]	Press to switch between upper case and lower case.
5	Cursor Key	Press to move the cursor on the display.
6	[Input] / [Limit] Display	Displays maximum number of characters and the number of characters entered.
7	Delete Key	Press to delete a character to the left of the cursor.
8	Space Key	Press to insert a space.
9	Enter Key	Press to enter a line break.
10	[Cancel]	Press to cancel entered characters and return to the screen before the entry was made.
11	[< Back]	Press to return to the previous screen.
12	[OK] / [Next >]	Press to save the entered characters and move to the next screen.

## Upper-case Letter Entry Screen

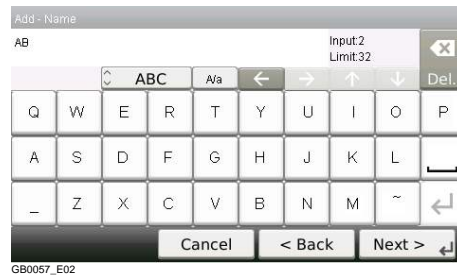

## Number/Symbol Entry Screen

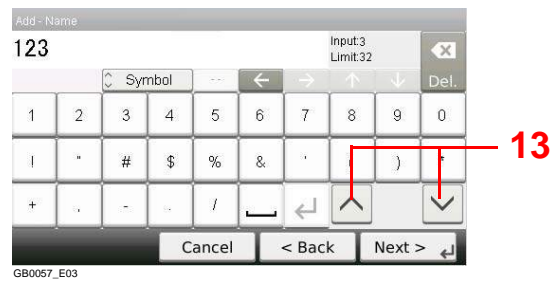


No.	Display/Key	Description
13	[▲]/[▼]	To enter a number or symbol not shown in the keyboard, press the cursor key and scroll the screen to view other numbers or symbols to enter.



## Entering Characters


Follow the steps below to enter 'List A-1' for an example.

### 1 Enter 'List', (space).

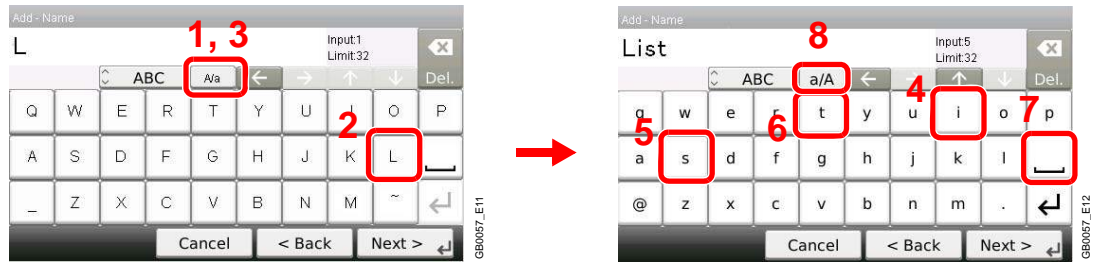


To shift from lower case to upper case letters, press [a/A]. To shift from upper case to lower case letters, press [A/a].

### 2 Enter 'A-1'.

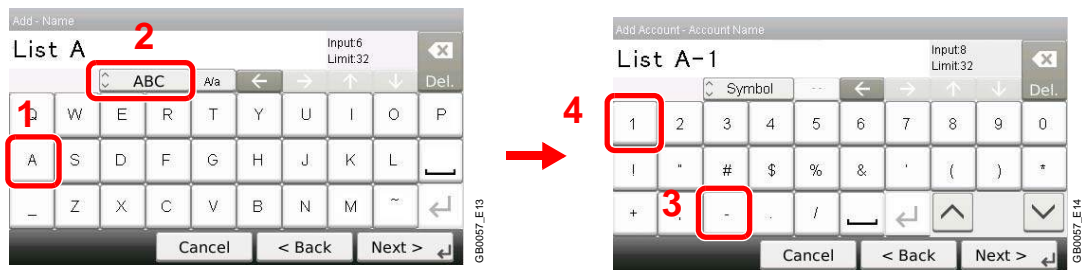

To enter numbers or symbols, press [ABC] to display [Symbol].

### 3 Register the characters you entered.

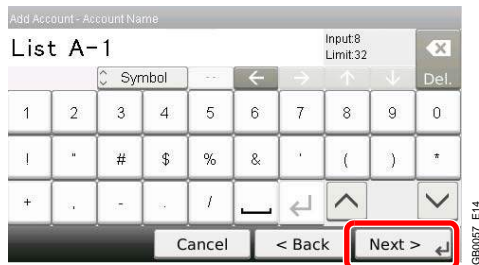

Press [Next>]. The entered characters are registered.

# Paper

This section explains the paper sizes and types that can be used in the paper source.

## Cassettes

Supported types	Supported paper sizes	No. of sheets
Plain paper (60 to 120 g/m <sup>2</sup> ) Recycled paper (60 to 120 g/m <sup>2</sup> )	Letter, Legal, Statement, Oficio II, A4, A5, A6, B5, Folio, 16K, ISO B5, Envelope C5 Other sizes: Portrait - 4.13 to 8.50" or 105 to 216 mm Landscape - 5.83 to 14.02" or 148 to 356 mm	500 (80 g/m <sup>2</sup> )

## Optional paper feeder

Supported types	Supported paper sizes	No. of sheets
Plain paper (60 to 120 g/m <sup>2</sup> ) Recycled paper (60 to 120 g/m <sup>2</sup> )	Letter, Legal, Statement, Executive, Oficio II, A4, A5, B5, Folio, 16K, ISO B5, Envelope C5 Other sizes: Portrait - 5.83 to 8.50" or 148 to 216 mm Landscape - 8.27 to 14.02" or 210 to 356 mm	500 (80 g/m <sup>2</sup> )

## Multi Purpose tray

Supported types	Supported paper sizes	No. of sheets
Plain paper (60 to 220 g/m <sup>2</sup> ) Recycled paper (60 to 220 g/m <sup>2</sup> ) Colored paper (60 to 220 g/m <sup>2</sup> )	Letter, Statement, Executive, A4, A5, A6, B5, B6, Folio, 16K Other sizes: Portrait - 2.76 to 8.50" or 70 to 216 mm Landscape - 5.83 to 14.02" or 148 to 356 mm	100 (80 g/m <sup>2</sup> )
Plain paper (60 to 220 g/m <sup>2</sup> ) Recycled paper (60 to 220 g/m <sup>2</sup> ) Colored paper (60 to 220 g/m <sup>2</sup> )	Legal	50 (80 g/m <sup>2</sup> )
Postcards	Postcards (100 × 148 mm)	1
Oufukuhagaki (return postcard)	Return postcard (148 × 200 mm)	1
Envelopes	Envelope DL, Envelope C5, Envelope #10 (Commercial #10), Envelope #9 (Commercial #9), Envelope #6 (Commercial #6 3/4), Monarch, ISO B5, Youkei 2, Youkei 4	5

## Basic Paper Specifications

This machine is designed to print on standard copy paper as used in regular ('dry') copiers and page printers such as laser printers. It also supports a variety of other types of paper that conform to the specifications given in this appendix.

Be careful when choosing paper. Paper unsuitable for the machine may cause jams or may be wrinkled.


### Supported Paper

Use standard copy paper for regular copiers or laser printers. The printing quality will be affected by the quality of paper. Poor quality paper may result in unsatisfactory output.

### Basic Paper Specifications

The following table lists the specifications of paper that is supported with this machine. Refer to the subsequent sections for further details.

Criteria	Specifications
Weight	Cassettes: 60 to 120 g/m <sup>2</sup>
	Multi purpose tray: 60 to 220 g/m <sup>2</sup>
Thickness	0.086 to 0.230 mm
Dimensional accuracy	±0.7 mm
Squareness of corners	90°±0.2°
Moisture content	4 to 6%
Grain direction	Long grain (paper supply direction)
Pulp content	80% or more

 **NOTE**  
Some recycled paper does not meet requirements for use with this machine as listed in the Basic Paper Specifications shown below, such as moisture or pulp content. For this reason, we recommend purchasing a small amount of recycled paper as a sample for testing prior to use. Choose recycled paper that gives the best printing results and contains low levels of paper dust.

We are not responsible for the problems occurred from the use of paper that does not conform to our specifications.

## Choosing the Appropriate Paper

This section describes guidelines for choosing paper.

### Condition

Avoid using paper with bent corners or that is curled, dirty, or torn. Do not use paper that has a rough surface or paper fiber lint, or that is especially delicate. Use of paper in any of these conditions will not only deliver poor copies but may also cause jams and shorten the useful life of the machine. Choose paper with a smooth and even surface; however, avoid coated paper or paper with a treated surface as it may damage the drum or fusing unit.

### Ingredient

Do not use paper such as paper that has been coated or surface-treated or paper that contains plastic or carbon. These paper may produce harmful fumes from the heat of printing and may damage the drum.

Be sure to use the standard paper that contains at least 80% pulp, i.e., not more than 20% of the total paper content consists of cotton or other fibers.

## Supported Paper Sizes

Paper of the following sizes is supported by the machine.

Measurements in the table take into account a  $\pm 0.7$  mm dimensional accuracy for length and width. Corner angles must be  $90^{\circ} \pm 0.2^{\circ}$ .

Multi Purpose Tray	Cassette or Multi Purpose Tray
B6 (186 × 128 mm)	A4 (297 × 210 mm)
Envelope #10 (Commercial #10) (4-1/8 × 9-1/2")	A5 (210 × 148 mm)
Envelope #9 (Commercial #9) (3-7/8 × 8-7/8")	A6 (148 × 105 mm)*
Envelope #6 (Commercial #6 3/4) (3-5/8 × 6-1/2")	B5 (257 × 182 mm)
Envelope Monarch (3-7/8 × 7-1/2")	Folio (210 × 330 mm)
Envelope DL (110 × 220 mm)	Letter
Hagaki (100 × 148mm)	Legal
Oufukuhagaki (148 × 200 mm)	Statement
Youkei 4 (105 × 235 mm)	Executive (7-1/4 × 10-1/2")
Youkei 2 (114 × 162 mm)	Oficio II
	16K (273 × 197 mm)
	ISO B5 (176 × 250 mm)
	Envelope C5 (162 × 229mm)
	Size Entry (70 × 148 to 216 × 352 mm)

\* Except for the optional paper feeder.

## Smoothness

The paper surface should be smooth, but it must be uncoated. With paper that is too smooth and slippery, several sheets may accidentally be supplied at once, causing jams.

## Basis Weight

In countries that use the metric system, basis weight is the weight in grams of one sheet of paper one square meter in area. In the United States, basis weight is the weight in pounds of one ream (500 sheets) of paper cut to the standard size (or trade size) for a specific grade of paper. Paper that is too heavy or too light may be supplied incorrectly or cause paper jams, which may cause excessive wear of the machine. Mixed paper weight (i.e., thickness) may cause several sheets to be supplied at once accidentally and may also cause blurring or other printing problems if the toner fails to adhere correctly.

## Thickness

Avoid using paper that is too thick or thin. Signs that paper may be thin include frequent problems with paper jams or with several sheets being supplied at once. Paper jams may also indicate that the paper is too thick. The proper thickness is between 0.086 and 0.110 mm.

## Moisture Content

Paper moisture content is the ratio of moisture to dryness expressed as a percentage. Moisture affects how the paper is supplied, the electrostatic changeability of the paper, and how the toner adheres.

Paper moisture content varies depending on the relative humidity in the room. High relative humidity causes paper to become damp, making the edges expand so it appears wavy. Low relative humidity causes paper to lose moisture, making the edges tighten and weakening print contrast.

Wavy or tight edges may cause the paper to slip when it is supplied. Try to keep the moisture content between 4 to 6%.

To maintain the right level of moisture content, bear in mind the following considerations.

- Store paper in a cool, well-ventilated place.
- Store paper flat and unopened in the package. Once the package is opened, reseal it if the paper is not to be used for a while.
- Store paper sealed in the original package and box. Put a pallet under the carton to keep it raised above the floor. Especially during rainy seasons keep the paper a sufficient distance away from wooden or concrete floors.
- Before using paper that has been stored, keep it at the proper moisture level for at least 48 hours.
- Do not store paper where it is exposed to heat, sunlight, or dampness.

## Other Paper Specifications

**Porosity:** The density of the paper fibers

**Stiffness:** Paper must be stiff enough or it may buckle in the machine, causing jams.

**Curl:** Most paper naturally tends to curl after the package is opened. When paper passes through the fixing unit, it curls upward slightly. To deliver flat printouts, load the paper so that the curl faces towards the bottom of the paper tray.

**Static electricity:** During printing, paper is electrostatically charged so that the toner adheres. Choose paper that can be discharged quickly so that copies do not cling together.

**Whiteness:** Paper whiteness affects print contrast. Use whiter paper for sharper, brighter copies.

**Quality:** Machine problems may occur if sheet sizes are not uniform or if corners are not square, edges are rough, sheets are uncut, or edges or corners are crushed. In order to prevent these problems, be especially careful when you cut the paper yourself.

**Packaging:** Choose paper that is properly packaged and stacked in boxes. Ideally, the packaging itself should have been treated with a coating to inhibit moisture.

**Specially treated paper:** We do not recommend printing onto the following types of paper, even if it conforms to the basic specifications. When you use these kinds of paper, purchase a small amount first as a sample to test.

- Glossy paper
- Watermarked paper
- Paper with an uneven surface
- Perforated paper

## Special Paper

This section describes printing onto special paper and print media.

The following paper and media can be used.

- Transparencies
- Preprinted paper
- Bond paper
- Recycled paper
- Thin paper (from 60 g/m<sup>2</sup> to 64 g/m<sup>2</sup> or less)
- Letterhead
- Colored paper
- Prepunched paper
- Envelopes
- Cardstocks (Hagaki)
- Thick paper (from 106 g/m<sup>2</sup> to 220 g/m<sup>2</sup> or less)
- Labels
- High-quality paper

When using these paper and media, choose that are designed specifically for copiers or page printers (such as laser printers). Use the multi purpose tray for transparencies, thick paper, envelopes, cardstocks, and labels.

### Choosing Special Paper

Although special paper that meets the following requirements can be used with the machine, print quality will vary considerably due to differences in the construction and quality of special paper. Thus, special paper is more likely than regular paper to cause printing problems. Before purchasing special paper in volume, try testing a sample to ensure the print quality is satisfactory. General precautions when printing onto special paper are given below. Note that we are not responsible for any harm to the user or damage to the machine caused by moisture or specifications of special paper.

Select a cassette or multi purpose tray for special paper.

### Transparencies

Transparencies must be able to withstand the heat of printing. Transparencies must meet the following conditions.

Heat resistance	Must withstand at least 190°C
Thickness	0.100 to 0.110 mm
Material	Polyester
Dimensional accuracy	±0.7 mm
Squareness of corners	90° ±0.2°

To avoid problems, use the multi purpose tray for transparencies and load transparencies with the long side facing the machine.


If transparencies jam frequently at output, try pulling the leading edge of sheets gently as they are ejected.

## Label

Be sure to feed labels from the multi purpose tray.

For selecting labels, use extreme care so that the adhesive may not come in direct contact with any part of the machine and that the labels are not easily peeled from the carrier sheet. Adhesives that stick to the drum or rollers and peeled labels remaining in the machine may cause a failure.


When printing onto labels, you must be liable for the print quality and possible trouble.

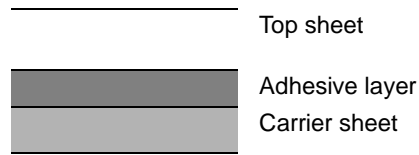

Labels consist of three layers as shown in the illustration. The adhesive layer contains materials that are easily affected by the force applied in the machine. The carrier sheet bears the top sheet until the label is used. This composition of labels may cause more problems.

The label surface must be covered completely with the top sheet. Gaps between labels may cause peeling of labels, resulting in a serious failure.


Some label paper has large margins on the top sheet. When using such paper, do not peel these margins from the carrier sheet before completing output.

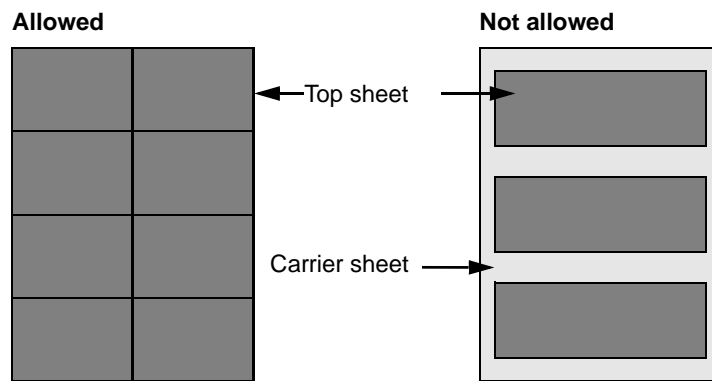

Use label paper that conforms to the following specifications.

Top sheet weight	44 to 74 g/m <sup>2</sup>
Basis weight (overall paper weight)	104 to 151 g/m <sup>2</sup>
Top sheet thickness	0.086 to 0.107 mm
Overall paper thickness	0.115 to 0.160 mm
Moisture content	4 to 6 % (composite)

## Hagaki

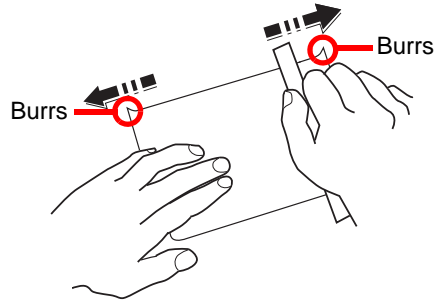

Before loading Hagaki into the multi purpose tray, fan them and align the edges. If the Hagaki paper is curled, straighten it before loading. Printing onto curled Hagaki may cause jams.

Use unfolded Oufukuhagaki (available at post offices). Some Hagaki may still have rough edges developed by a paper cutter on the back side. Remove any such rough edges by placing the Hagaki on a flat surface and rubbing the edges gently a few times with a ruler.

## Envelopes

Use the multi purpose tray for envelopes.

Due to the structure of envelopes, printing evenly over the entire surface may not be possible in some cases. Thin envelopes in particular may be wrinkled by the machine in some cases as they pass through. Before purchasing envelopes in volume, try testing a sample to ensure the print quality.

Storing envelopes for a long period may cause them to become wrinkled. Thus, keep the package sealed until you are ready to use them.

Keep the following points in mind.

- Do not use envelopes with exposed adhesive. In addition, do not use the type of envelope in which the adhesive is exposed after the top layer is peeled off. Serious damage may be caused if the paper covering the adhesive comes off in the machine.
- Do not use envelopes with certain special features. For example, do not use envelopes with a grommet for winding a string to close the flap or envelopes with an open or film-covered window.
- If paper jams occur, load fewer envelopes at once.

## Thick Paper

Before loading thick paper in the multi purpose tray, fan it and align the edges. Some thick paper may still have rough edges developed by a paper cutter on the back side. Remove any such rough edges just as with Hagaki by placing the paper on a flat surface and rubbing the edges gently a few times with a ruler. Printing onto paper with rough edges may cause jams



### NOTE

If the paper is not supplied correctly even after it is smoothed, load the paper in the multi purpose tray with the leading edge raised a few millimeters.

## Colored Paper

Colored paper must conform to the specifications listed on the page 11-11. In addition, the pigments in the paper must be able to withstand the heat of printing (up to 200°C or 392°F).

## Preprinted Paper

Preprinted paper must conform to the specifications listed on the page 11-11. The colored ink must be able to withstand the heat of printing. It must be resistant to silicone oil as well. Do not use paper with a treated surface such as glossy paper used for calendars.



## Recycled Paper

Recycled paper must conform to the specifications listed on the page *11-11*; however, its whiteness may be considered separately.



### **NOTE**

Before purchasing recycled paper in volume, try testing a sample to ensure that the print quality.

# Specifications



## IMPORTANT

Specifications are subject to change without notice.

## Machine

Item		Description
Type		Desktop
Printing Method		Electrophotography by semiconductor laser, single drum system
Supported Original Types		Sheet, Book, 3-dimensional objects (maximum original size: Folio/Legal)
Original Feed System		Fixed
Paper Weight	Cassette	60 to 120 g/m <sup>2</sup> (Duplex: 60 to 120 g/m <sup>2</sup> )
	Multi Purpose Tray	60 to 220 g/m <sup>2</sup>
Media Type	Cassette	Plain, Rough, Recycled, Preprinted, Bond, Color, Prepunched, Letterhead, High Quality, Custom 1 to 8 (Duplex: Same as Simplex)
	Multi Purpose Tray	Plain, Transparency (OHP film), Rough, Vellum, Labels, Recycled, Preprinted, Bond, Cardstock, Color, Prepunched, Letterhead, Envelope, Thick, High Quality, Custom 1 to 8
Paper Size	Cassette	Maximum: 8-1/2 × 14"/A4 (Duplex: 8-1/2 × 14"/A4) Minimum: 5-1/2 × 8 1/2"/A6 (Duplex: 7-1/4 × 10-1/2"/A5)
	Multi Purpose Tray	Maximum: 8-1/2 × 14"/A4 Minimum: 3-5/8 × 6-1/2"/A6
Zoom Level		Manual mode: 25 to 400%, 1% increments Fixed magnifications: 400%, 200%, 141%, 129%, 115%, 90%, 86%, 78%, 70%, 64%, 50%, 25%
Printing Speed		A4/Letter: 40/42 sheets/min B5: 33 sheets/min Legal: 33 sheets/min A5/A6: 22 sheets/min
First Print Time (A4, feed from Cassette)		7 seconds
Warm-up Time (22°C/71.6°F, 60%)	Power on	22 seconds or less
	Sleep	15 seconds or less
Paper Capacity	Cassette	500 sheets (80 g/m <sup>2</sup> )
	Multi Purpose Tray	100 sheets (80 g/m <sup>2</sup> , Letter/A4 or less), 50 sheets (80 g/m <sup>2</sup> , more than Letter/A4)
Output Tray Capacity		500 sheets (80 g/m <sup>2</sup> )
Continuous Copying		1 to 999 sheets (can be set in one sheet increments)
Image Write System		Semiconductor laser (1 beam)
Main Memory	Standard	1024 MB
	Maximum	2048 MB
Interface		USB Interface Connector: 1 (USB Hi-Speed) USB Host: 1 Network interface: 1 (10 BASE-T/100 BASE-TX/1000 BASE-T)

Item		Description
Resolution		600 × 600 dpi
Operating Environment	Temperature	10 to 32.5°C/50 to 90.5°F
	Humidity	15 to 80 %
	Altitude	2,500 m/8,202 ft maximum
	Brightness	1,500 lux maximum
Dimension (W × D × H)		11-1/2 × 19-9/16 × 22-5/16" 494 × 497.1 × 566.5 mm
Weight (with toner container)	FS-3540MFP	58.036 lb/26.38 kg
	FS-3640MFP	58.696 lb/26.68 kg
Space Required (W × D)		11-1/2 × 25-7/8" 494 × 656.1 mm (when using MP tray)
Power Requirement		120 V Specification Model: 120 V (60 Hz, more than 9.5 A) 230 V Specification Model: 220 to 240V (50/60 Hz, more than 5.1 A)
Power Consumption (Maximum)		Standard: 1032 W (U.S.A./Canada), 1046 W (European countries) With options: 1037 W (U.S.A./Canada), 1063 W (European countries)
Power Consumption (During printing)	FS-3540MFP	Standard: 679.9 W (U.S.A./Canada), 676.6 W (European countries) With options: 713.3 W (U.S.A./Canada), 688.2 W (European countries)
	FS-3640MFP	Standard: 680.9 W (U.S.A./Canada), 677.4 W (European countries) With options: 719.0 W (U.S.A./Canada), 703.5 W (European countries)
Power Consumption (During printing)	FS-3540MFP	Standard: 679.9 W (U.S.A./Canada), 676.6 W (European countries) With options: 713.3 W (U.S.A./Canada), 688.2 W (European countries)
	FS-3640MFP	Standard: 680.9 W (U.S.A./Canada), 677.4 W (European countries) With options: 719.0 W (U.S.A./Canada), 703.5 W (European countries)
Power Consumption (During standby)	FS-3540MFP	Standard: 94.5 W(U.S.A./Canada), 95.8 W (European countries) With options: 101.6 W(U.S.A./Canada), 103.7 W (European countries)
	FS-3640MFP	Standard: 104.6 W(U.S.A./Canada), 97.9 W (European countries) With options: 113.0 W(U.S.A./Canada), 102.1 W (European countries)
Power Consumption (Sleep mode)	FS-3540MFP	Standard: 6.8 W (U.S.A./Canada), 6.9 W (European countries) With options: 8.8 W (U.S.A./Canada), 9.1 W (European countries)
	FS-3640MFP	Standard: 10.4 W (U.S.A./Canada), 10.6 W (European countries) With options: 12.5 W (U.S.A./Canada), 12.6 W (European countries)
Power Consumption (Power off)		0.1 W
Options		Paper feeder (up to 3 units), Expansion memory, Card Authentication Kit

## Printer

Item	Description
Printing Speed	Same as Copying Speed.
First Print Time (A4, feed from Cassette)	11.5 seconds or less
Resolution	Fast 1200, 600 dpi
Operating System	Windows XP, Windows Server 2003, Windows Vista, Windows 7, Windows Server 2008, Apple Macintosh OS X
Interface	USB Interface Connector: 1 (USB Hi-Speed) Network interface: 1 (10 BASE-T/100 BASE-TX/1000 BASE-T)
Page Description Language	PRESCRIBE

## Scanner

Item	Description
System requirements	CPU: 600 Mhz or higher RAM: 128 MB or more
Resolution	600 dpi, 400 dpi, 300 dpi, 200 dpi, 200 x 400 dpi, 200 x 100 dpi (Resolution in FAX mode included)
File Format	PDF (PDF1.4, PDF/A), TIFF (TIFF V6, TTN2), JPEG, XPS
Scanning Speed	1-sided: B/W 35 Images/min, Color 13 Images/min (A4 landscape, 600 dpi, Image quality: Text/Photo original)
Interface	Ethernet (10 BASE-T/100 BASE-TX/1000 BASE-T) USB2.0 (Hi-Speed USB)
Network Protocol	TCP/IP
Transmission System	PC transmission
	SMB: Scan to SMB
	FTP: Scan to FTP, FTP over SSL
	E-mail transmission
	SMTP: Scan to E-mail
	TWAIN scan*
	WIA scan**

\* Available Operating System: Windows XP, Windows Server 2003, Windows Vista, Windows 7, Windows Server 2008

\*\* Available Operating System: Windows Vista, Windows 7, Windows Server 2008

## Document Processor

Item	Description
Original Feed Method	Automatic feed
Supported Original Types	Sheet originals
Paper Size	Maximum: Legal/A4, Minimum: Statement/A5
Paper Weight	Simplex: 50 to 120 g/m <sup>2</sup> Duplex: 50 to 110 g/m <sup>2</sup>
Loading Capacity	50 sheets (50 to 80 g/m <sup>2</sup> ) maximum

## Environmental Specifications

Item	Description
Time to Sleep mode (default setting)	1 minute
Recovery time from Sleep mode	15 seconds or less
Duplexing	Standard
Paper supply capability	100% recycled paper may be used.



### NOTE

Consult your dealer or service representative for recommended paper types.

### EN ISO 7779

Der höchste Schalldruckpegel beträgt 70 dB (A) oder weniger gemäß EN ISO 7779.

### EK1-ITB 2000

Das Gerät ist nicht für die Benutzung im unmittelbaren Gesichtsfeld am Bildschirmarbeitsplatz vorgesehen. Um störende Reflexionen am Bildschirmarbeitsplatz zu vermeiden, darf dieses Produkt nicht im unmittelbaren Gesichtsfeld platziert werden.

# Glossary

## AppleTalk

AppleTalk, which comes with Apple Computer's Mac OS, is a network protocol. AppleTalk enables file/printer sharing and also enables you to utilize application software that is on another computer on the same AppleTalk network.

## Auto Form Feed Timeout

During data transmission, the machine may sometimes have to wait until receiving the next data. This is the auto form feed timeout. When the preset timeout passes, the machine automatically put paper out. However, no output is performed if the last page has no data to be printed.

## Auto-IP

Auto-IP is a module that enables dynamic IPv4 addresses to be assigned to a device on startup. However, DHCP requires a DHCP server. Auto-IP is a server-less method of choosing an IP address. IP addresses between 169.254.0.0 to 169.254.255.255 are reserved for Auto-IP and assigned automatically.

## Auto Paper Selection

A function to automatically select paper in the same size as original at printing

## Auto Sleep

A mode designed for electrical power saving, activated when the machine is left unused or data transfer for a specific period. In Sleep mode, power consumption is kept to a minimum.

## Bonjour

Bonjour, also known as zero-configuration networking, is a service that automatically detects computers, devices and services on an IP network. Bonjour, because an industry-standard IP protocol is used, allows devices to automatically recognize each other without an IP address being specified or DNS server being set. Bonjour also sends and receives network packets by UDP port 5353. If a firewall is enabled, the user must check that UDP port 5353 is left open so that Bonjour will run correctly. Some firewalls are set up so as to reject only certain Bonjour packets. If Bonjour does not run stably, check the firewall settings and ensure that Bonjour is registered on the exceptions list and that Bonjour packets are accepted. If you install Bonjour on Windows XP Service Pack 2 or later, the Windows firewall will be set up correctly for Bonjour.

## Default Gateway

This indicates the device, such as a computer or router, that serves as the entrance/exit (gateway) for accessing computers outside the network that you are on. When no specific gateway is designated for a destination IP address, data is sent to the host designated as the Default Gateway.

## DHCP (Dynamic Host Configuration Protocol)

Dynamic Host Configuration Protocol (DHCP) that automatically resolves IP addresses, subnet masks, and gateway addresses on a TCP/IP network. DHCP minimizes the load of network management employing a large number of client computers because it relieves individual clients including printers from the IP address being assigned.

## DHCP (IPv6)

DHCP (IPv6) is the next-generation of the Internet's Dynamic Host Configuration Protocol and supports IPv6. It extends the BOOTP startup protocol that defines the protocols used for transferring configuration information to hosts on the

network. DHCP (IPv6) permits the DHCP server to use its expanded functionality to send configuration parameters to an IPv6 node. Because the network addresses that can be used are allocated automatically, the IPv6 node management workload is reduced in systems where the administrator has to exercise close control over IP address allocation.

### **dpi (dots per inch)**

A unit for resolution, representing the number of dots printed per inch (25.4 mm).

### **EcoPrint Mode**

A printing mode that helps save toner. Copies made in this mode are thus lighter than normal.

### **Enhanced WSD**

Kyocera's proprietary web services.

### **Emulation**

The function to interpret and execute other printers' page description languages. The machine emulates operation of PCL6, KPD, and KPD (automatic).

### **FTP (File Transfer Protocol)**

A protocol to transfer files on the TCP/IP network, whether the Internet or an intranet. Along with HTTP and SMTP/POP, FTP is now frequently used on the Internet.

### **Grayscale**

A computer color expression. Displayed images of this sort are typically composed of shades of gray, varying from black at the weakest intensity to white at the strongest, without any other colors. Gray levels are displayed in numerical levels: that is, white and black only for 1 bit; 256 gray levels (including white and black) for 8 bits; and 65,536 gray levels for 16 bits.

### **Help**

A ? (Help) key is provided on this machine's operation panel. If you are unsure of how to operate the machine, would like more information on its functions or are having problems getting the machine to work properly, press the ? (Help) key to view a detailed explanation on the touch panel.

### **IP Address**

An Internet protocol address is a unique number that represents a specific computer or related device on the network. The format of an IP address is four sets of numbers separated by dots, e.g. 192.168.110.171. Each number should be between 0 and 255.

### **IPP**

IPP (Internet Printing Protocol) is a standard that uses TCP/IP networks such as the Internet to enable print jobs to be sent between remote computers and printers. IPP is an extension of the HTTP protocol used to view websites and enables printing to be carried out via routers on printers in remote locations. It also supports the HTTP authentication mechanisms along with SSL server and client authentication as well as encryption.

### **KPDL (Kyocera Page Description Language)**

Kyocera's PostScript page description language compatible with Adobe PostScript Level 3.

## **Multi Purpose (MP) Tray**

The paper supply tray on the right side of the machine. Use this tray instead of the cassettes when printing onto envelopes, Hagaki, transparencies, or labels.

## **NetBEUI (NetBIOS Extended User Interface)**

An interface, developed by IBM in 1985, as an update from NetBIOS. It enables more advanced functions on smaller networks than other protocols such as TCP/IP, etc. It is not suitable for larger networks due to lack of routing capabilities to choose the most appropriate routes. NetBEUI has been adopted by IBM for its OS/2 and Microsoft for its Windows as a standard protocol for file sharing and printing services.

## **NetWare**

Novell's network management software that is able to run on a variety of operating systems.

## **PDF/A**

This is "ISO 19005-1. Document management - Electronic document file format for long-term preservation - Part 1: Use of PDF (PDF/A)", and is a file format based on PDF 1.4. It has been standardized as ISO 19005-1, and is a specialization of PDF, which has been mainly used for printing, for long-term storage. A new part, ISO 19005-2 (PDF/A-2), is currently being prepared.

## **POP3 (Post Office Protocol 3)**

A standard protocol to receive E-mail from the server in which the mail is stored on the Internet or an intranet.

## **PostScript**

A page description language developed by Adobe Systems. It enables flexible font functions and highly-functional graphics, allowing higher quality printing. The first version called Level 1 was launched in 1985, followed by Level 2 that enabled color printing and two-byte languages (e.g. Japanese) in 1990. In 1996, Level 3 was released as an update for the Internet access and PDF format as well as gradual improvements in implementation technologies.

## **PPM (prints per minute)**

This indicates the number of A4 size printouts made in one minute.

## **Printer Driver**

The software to enable you to print data created on any application software. The printer driver for the machine is contained in the DVD enclosed in the package. Install the printer driver on the computer connected to the machine.

## **RA (Stateless)**

The IPv6 router communicates (transmits) information such as the global address prefix using ICMPv6. This information is the Router Advertisement (RA). ICMPv6 stands for Internet Control Message Protocol, and is a IPv6 standard defined in the RFC 2463 "Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification".

## **Send as E-mail**

A function to send the image data stored in the machine as an E-mail attachment. E-mail addresses can be selected from the list or entered at each time.



## **SMTP (Simple Mail Transfer Protocol)**

A protocol for E-mail transmission over the Internet or an intranet. It is used for transferring mail between mail servers as well as for sending mail from clients to their servers.

## **Status Page**

The page lists machine conditions, such as the memory capacity, total number of prints and scans, and paper source settings.

## **Subnet Mask**

The subnet mask is a way of augmenting the network address section of an IP address. A subnet mask represents all network address sections as 1 and all host address sections as 0. The number of bits in the prefix indicates the length of the network address. The term "prefix" refers to something added to the beginning and, in this context, indicates the first section of the IP address. When an IP address is written, the length of the network address is indicated by the prefix length after a forward slash (/). For example, "24" in the address "133.210.2.0/24". In this way, "133.210.2.0/24" denotes the IP address "133.210.2.0" with a 24-bit prefix (network section). This new network address section (originally part of the host address) made possible by the subnet mask is referred to as the subnet address. When you enter the subnet mask, be sure to set the *DHCP* setting to *Off*.

## **TCP/IP (Transmission Control Protocol/Internet Protocol)**

TCP/IP is a suite of protocols designed to define the way computers and other devices communicate with each other over a network.

## **TCP/IP (IPv6)**

TCP/IP (IPv6) is based on the current Internet protocol, TCP/IP (IPv4). IPv6 is the next-generation Internet protocol and expands the available address space, which resolves the problem of the lack of addresses under IPv4, while also introducing other improvements such as additional security functionality and the capacity to prioritize data transmission.

## **TWAIN (Technology Without Any Interested Name)**

A technical specification for connecting scanners, digital cameras, and other image equipment to the computers. The TWAIN compatible devices enable you to process image data on any relevant application software. TWAIN is adopted on a large amount of graphic software (e.g. Adobe Photoshop) and OCR software.

## **USB (Universal Serial Bus)2.0**

A USB interface standard for Hi-Speed USB 2.0. The maximum transfer rate is 480 Mbps. This machine is equipped with USB 2.0 for high-speed data transfer.

## **WIA (Windows Imaging Acquisition)**

A function to import images supported after Windows Me/XP from digital cameras and other peripheral devices. This function replaces what TWAIN used to do; the feature is provided as a part of Windows functions and improves ease of operation, so that you import images directly to My Computer without using any application.



# Index

## A

- Address Book
  - Adding a Contact 6-24
  - Adding a Group 6-28
  - Editing and Deleting 6-31
- Adjustment/Maintenance
  - Auto Color Correction 9-23
  - Auto Drum Refresh 9-24
  - Background Density Adj. 9-23
  - Correcting Black Line 9-23
  - Density Adjustment 9-23
  - Display Brightness 9-23
  - Drum Refresh 9-24
  - Print Density 9-23
  - Toner Save Level (EcoPrint) 9-23
- AppleTalk 11-22
  - Setup 9-20
- Application 9-15
- Auto Form Feed Timeout 11-22
- Auto-IP 11-22
  - Setup 9-17
- Automatic 2-Sided Copy Function 1-12
- Auto Paper Selection 11-22
- Auto Sleep 2-19, 11-22

## B

- Background Density Adjust 3-49
- Bonjour 11-22
  - Setup 9-17

## C

- Card Authentication Kit 11-4
- Cassette
  - Loading Paper 3-3
  - Paper Size and Media Type 3-31, 9-7, 9-8
- Cassette 1 2-3
- Character Entry Method 11-7
- Checking the Counter 3-16
- Cleaning
  - Document Processor 10-7
  - Glass Platen 10-7
  - Machine 10-8
- Collate 3-44
- Colored Paper 11-16
- Color Selection 3-53
- Combine 4-10
  - 2 in 1 4-10
  - 4 in 1 4-10
  - Border Line 4-10
- COMMAND CENTER 2-21
- Connecting
  - LAN Cable 2-9
  - Power Cable 2-10
  - USB Cable 2-10
- Connection Method 2-7
- Continuous Scan 3-41

- Conventions in This Guide 1-13
- Copying 4-1
- Copying Settings
  - Auto % Priority 9-13
  - Auto Paper Selection 9-13

## D

- Date/Timer 2-20, 9-22
  - Auto Error Clear 9-22
  - Auto Panel Reset 9-22
  - Date/Time 9-22
  - Date Format 9-22
  - Error Clear Timer 9-22
  - Panel Reset Timer 9-22
  - Sleep Timer 9-22
  - Time Zone 9-22
- Default
  - Background Density Adj. 9-11
  - Collate 9-11
  - Color Selection 9-11
  - Continuous Scan 9-12
  - EcoPrint 9-11
  - E-mail Subject/Body 9-12
  - File Format 9-11
  - File Name Entry 9-12
  - File Separation 9-11
  - FTP Encrypted TX 9-12
  - Image Quality 9-12
  - JPEG/TIFF Print 9-12
  - Original Image 9-11
  - Original Orientation 9-11
  - PDF/A Setting 9-12
  - Scan Resolution 9-11
  - XPS Fit to Page 9-12
  - Zoom 9-11
- Default Gateway 11-22
  - Setup 9-17
- Default Screen 9-9
- Density 3-45
- Destination 6-15
  - Checking and Editing 6-22
  - Choosing by One Touch Key 6-17
  - Choosing from the Address Book 6-15
  - Dest. Check before Send 9-14
  - Entering a New E-mail Address 6-18
  - Entry Check for New Dest. 9-14
  - Multi Sending 6-23
  - Specifying a New PC Folder 6-19
- Developer Unit 2-2
- Device Status 8-12
  - FAX 8-13
  - Printer 8-13
  - Removable Memory 8-13
  - Scanner 8-12
- DHCP 11-22
  - Setup 9-17
- DHCP (IPv6) 11-22
  - Setup 9-18
- Document Processor 2-3
- Document Processor Cover 2-4

Document Processor Open/Close Handle 2-4  
dpi 11-23  
Duplex 3-39, 4-7  
Duplex Front Cover 2-2

## E

EcoPrint 11-23  
    Copy 4-13  
    Printer 9-16  
E-mail Subject/Body 6-40  
Emulation 11-23  
    Selection 9-16  
Encrypted PDF Password 7-11  
Energy Saving Control Function 1-12  
Energy Star Program 1-12  
Enhanced WSD 9-20, 11-23  
Envelopes 11-16  
Envelope Switch 2-3, 3-10  
Environment 1-3  
Error Handling 9-13  
Error Messages 10-13  
Expansion Memory 11-3

## F

Favorites 3-19  
    Editing and Deleting 3-23  
    Registering 3-19  
    Using 3-25  
Favorites/Application  
    Application 9-15  
    Default Screen 9-15  
File Format 3-51  
File Name Entry 3-56  
File Separation 6-39  
First Print Time 11-18, 11-20  
Front Cover 2-2  
FTP 11-23  
FTP Client (Transmission)  
    Protocol Detail 9-19  
FTP Encrypted TX 6-41  
FTP Server (Reception)  
    Protocol Detail 9-19  
Fuser Cover 2-3

## G

Glossary 11-22  
GPL/LGPL 1-9  
Grayscale 3-53, 11-23

## H

Hagaki 11-16  
Handholds 2-3, 2-4  
Help 11-23  
Help Screen 3-33  
Host Name 9-17  
HTTP  
    Protocol Detail 9-19  
HTTPS  
    Protocol Detail 9-19

HTTP Security 9-21

## I

Inner Tray 2-3  
Interface Block 9-21  
Internet  
    Proxy 9-15  
IP Address 11-23  
    Setup 9-17  
IPP  
    Protocol Detail 9-19  
IPP over SSL  
    Protocol Detail 9-19  
IPP Security 9-21  
IPSec  
    Setup 9-21

## J

Job  
    Canceling 3-34  
    Checking History 8-7  
    Checking Status 8-2  
    Details of the Status Screens 8-3  
    Pause and Resumption 8-3  
    Sending the Log History 8-8  
Job Accounting 9-50  
    Adding an Account 9-55  
    Counting the Number of Pages Printed 9-61  
    Default Setting 9-64  
    Editing and Deleting 9-57  
    Enabling/Disabling 9-53  
    Login 9-54  
    Logout 9-54  
    Printing an Accounting Report 9-63  
    Restricting the Use of the Machine 9-59  
Job Box 5-5  
    Automatic Delete Setting for Temporary Documents  
        5-10  
    Private Print 5-5  
    Proof and Hold 5-7  
Job Finish Notice 3-54  
JPEG/TIFF Print 7-12

## K

Keyboard Layout 9-13  
KPD L 11-23

## L

Label 11-15  
Language 9-5  
LAN Interface 9-21  
LDAP  
    Protocol Detail 9-19  
LDAP Security 9-21  
Left Cover 2-4  
Legal Information 1-9  
Legal Restriction on Copying 1-8  
Legal Restriction on Scanning 1-8  
LINE Connector 2-4

Login [3-17](#), [9-54](#)  
Logout [3-18](#), [9-54](#)  
LPD  
    Protocol Detail [9-19](#)

## M

Machine Setup Wizard [2-20](#)  
Main Power Switch [2-4](#)  
Manual Setting (IPv6) [9-18](#)  
Measurement [9-13](#)  
Monotype Imaging License Agreement [1-11](#)  
Multi Purpose Tray [2-3](#), [11-24](#)  
    Loading Paper [3-7](#)  
    Paper Size and Media Type [3-31](#), [9-8](#)  
Multi Sending [6-23](#)

## N

NetBEUI [11-24](#)  
    Protocol Detail [9-19](#)  
NetWare [11-24](#)  
    Setup [9-20](#)  
Network  
    Preparing [2-7](#)  
    Setup [2-20](#), [9-17](#)  
Network Cable  
    Connecting [2-9](#)  
Network Interface [2-8](#)  
Network Interface Connector [2-4](#)  
Network Interface Indicators [2-4](#)

## O

One Touch Key [6-33](#)  
    Adding a Destination [6-33](#)  
    Editing and Deleting [6-35](#)  
Open SSL License [1-9](#)  
Operation Panel [2-2](#), [2-5](#)  
Option  
    Card Authentication Kit [11-4](#)  
    Expansion Memory [11-3](#)  
    Overview [11-2](#)  
    Paper Feeder [11-2](#)  
Optional Function [11-5](#)  
Optional Memory [9-22](#)  
Option Interface Slot [2-4](#)  
Original Eject Table [2-4](#)  
Original Image [3-47](#)  
Original Orientation [3-38](#)  
Originals  
    Custom Original Size [9-9](#)  
    Default Original Size [9-9](#)  
    Loading Originals [3-12](#)  
    Original Size [3-37](#)  
Original Size [3-37](#)  
Original SSLeay License [1-10](#)  
Original Stopper [2-4](#)  
Original Table [2-4](#)  
Original Width Guides [2-4](#)

## P

Paper [11-10](#)  
    Appropriate Paper [11-11](#)  
    Before Loading [3-2](#)  
    Cassette [9-7](#), [9-8](#)  
    Checking the Remaining Amount of Paper [8-14](#)  
    Custom Paper Size [9-10](#)  
    Default Paper Source [9-10](#)  
    Loading Envelopes [3-11](#)  
    Loading in the Cassettes [3-3](#)  
    Loading in the Multi Purpose Tray [3-7](#)  
    Media for Auto [9-10](#)  
    Media Type Setting [9-10](#)  
    Multi Purpose Tray [9-8](#)  
    Setup [9-10](#)  
    Size and Media [3-31](#), [9-7](#)  
    Special Paper [11-14](#)  
    Special Paper Action [9-10](#)  
    Specifications [11-11](#)  
Paper Feeder [11-2](#)  
Paper Feed Mode [9-16](#)  
Paper Gauge [2-2](#), [3-6](#)  
Paper Jam  
    Cassette [10-23](#)  
    Document Processor [10-26](#)  
    Duplexer [10-24](#)  
    Inside the Machine [10-25](#)  
    Multi Purpose Tray [10-23](#)  
    Paper Jam Location [10-22](#)  
    Rear Unit [10-26](#)  
Paper Length Guide [2-3](#)  
Paper Selection [3-43](#)  
Paper Size Dial [2-3](#), [3-4](#)  
Paper Width Adjusting Tab [2-3](#)  
Paper Width Guides [2-3](#)  
Part Names [2-2](#)  
PDF/A [11-24](#)  
Platen [2-2](#)  
POP3 [11-24](#)  
POP3 (E-mail RX)  
    Protocol Detail [9-19](#)  
PostScript [11-24](#)  
Power Cable  
    Connecting [2-10](#)  
Power Cord Connector [2-4](#)  
Power Off [2-11](#)  
Power On [2-11](#)  
PPM [11-24](#)  
Precautions for Use [1-3](#)  
Preparing Cables [2-8](#)  
Preprinted Paper [11-16](#)  
Preset Limit [9-12](#)  
Printer Driver [11-24](#)  
    Installing [2-13](#)

- Printer Settings
    - Copies [9-16](#)
    - CR Action [9-16](#)
    - Duplex [9-16](#)
    - EcoPrint [9-16](#)
    - Emulation [9-16](#)
    - Form Feed TimeOut [9-16](#)
    - KIR [9-17](#)
    - LF Action [9-16](#)
    - Orientation [9-16](#)
    - Override A4/Letter [9-16](#)
    - Paper Feed Mode [9-16](#)
    - Resolution [9-17](#)
    - Wide A4 [9-16](#)
  - Printing [5-1](#)
  - Printing Speed [11-18](#), [11-20](#)
  - Priority Override [3-57](#)
- Q**
- Quick Setup Wizard [3-31](#)
- R**
- RA (Stateless) [11-24](#)
    - Setup [9-18](#)
  - Raw Port
    - Protocol Detail [9-19](#)
  - Rear Cover [2-4](#)
  - Rear Unit [2-3](#)
  - Recycled Paper [1-12](#), [11-17](#)
  - Regarding Trade Names [1-9](#)
  - Replacing the Maintenance Kit [10-6](#)
  - Report Print [9-5](#)
    - Accounting Report [9-6](#)
    - Font List [9-5](#)
    - Network Status [9-5](#)
    - Service Status [9-6](#)
    - Status Page [9-5](#)
  - Resolution [9-17](#), [11-19](#), [11-20](#)
  - Restart [9-4](#)
  - Result Report Settings [9-6](#)
- S**
- Safety Conventions in This Guide [1-2](#)
  - Scan Resolution [3-46](#)
  - Secure Protocol [9-21](#)
  - Send as E-mail [6-2](#), [11-24](#)
    - E-mail Subject/Body [6-40](#)
  - Sending [6-1](#)
    - Preparation for Sending a Document to a PC [6-5](#)
    - Send as E-mail [6-2](#)
    - Send to Folder (SMB/FTP) [6-2](#)
  - Sending E-mail [2-22](#)
  - Sending Size [6-37](#)
  - Send Settings
    - Color TIFF Compression [9-14](#)
    - Default Screen [9-14](#)
    - Dest. Check before Send [9-14](#)
    - Entry Check for New Dest. [9-14](#)
    - Send and Forward [9-14](#)
  - Serial Number [3-15](#)
  - Sharpness [3-48](#)
  - Shortcuts
    - Editing and Deleting [3-29](#)
    - Registering [3-27](#)
    - Using [3-30](#)
  - Simple Login [3-18](#)
  - Sleep [2-19](#)
  - Slit Glass [2-2](#)
  - SMB Client (Transmission)
    - Protocol Detail [9-19](#)
  - SMTP [11-25](#)
  - SMTP (E-mail TX)
    - Protocol Detail [9-19](#)
  - SNMP
    - Protocol Detail [9-19](#)
  - SNMPv3
    - Protocol Detail [9-19](#)
  - Solving Malfunctions [10-10](#)
  - Sound [9-9](#)
  - Specifications
    - Document Processor [11-21](#)
    - Environmental Specifications [11-21](#)
    - Machine [11-18](#)
    - Printer [11-20](#)
    - Scanner [11-20](#)
  - Status/Job Cancel [8-1](#)
  - Status Page [11-25](#)
  - Storing Size [7-14](#)
  - Subnet Mask [11-25](#)
    - Setup [9-17](#)
  - Symbols [1-2](#)
  - System Menu [9-2](#)
- T**
- TCP/IP [11-25](#)
  - TCP/IP (IPv4)
    - Setup [9-17](#)
  - TCP/IP (IPv6) [11-25](#)
    - Setup [9-18](#)
  - TEL Connector [2-4](#)
  - Thick Paper [11-16](#)
  - ThinPrint
    - Protocol Detail [9-19](#)
  - ThinPrintOverSSL
    - Protocol Detail [9-19](#)
  - Toner Container [2-2](#)
    - Checking the Remaining Amount of Toner [8-14](#)
    - Replacement [10-2](#)
  - Toner Container Lock Lever [2-2](#)
  - Top Cover [2-2](#)
  - Touch Panel [2-6](#)
  - Transparencies [11-14](#)
  - TWAIN [11-25](#)
    - Setting TWAIN Driver [2-17](#)
- U**
- Unknown Login User Name Job [9-65](#)
  - USB [11-25](#)

---

USB Cable  
    Connecting [2-10](#)  
USB Interface [2-8](#)  
USB Interface Connector [2-4](#)  
USB Keyboard Type [9-13](#)  
USB Memory  
    Printing Documents [7-2](#)  
    Removing [7-8](#)  
    Saving Documents [7-5](#)  
USB Memory Slot [2-2](#)  
User Login Administration [9-25](#)  
    Adding a User [9-29](#)  
    Editing and Deleting [9-35](#)  
    Enabling/Disabling [9-27](#)  
    Group Authorization [9-44](#)  
    Local User Authorization [9-33](#)  
    My Panel [9-34](#)  
    Obtain Network User Property [9-48](#)  
    Simple Login [9-38](#)  
User Property [9-7](#)

## W

Waste Toner Box [2-4](#)  
    Replacement [10-4](#)  
WIA [11-25](#)  
    Setting WIA Driver [2-18](#)  
WSD Print  
    Setup [9-20](#)  
WSD Scan [6-42](#)  
    Setup [9-20](#)

## X

XPS Fit to Page [7-13](#)

## Z

Zoom  
    Copy [4-5](#)  
    Send/Store [3-50](#)





**QUALITY  
CERTIFICATE**

This machine has passed  
all quality controls and  
final inspection.

# PASSIONATE PEOPLE. FROM ALL OVER THE WORLD.



## KYOCERA MITA EUROPE B.V.



EUROPEAN HEADQUARTERS  
Bloemlaan 4  
2132 NP Hoofddorp  
The Netherlands  
Phone: +31 20 654 0000  
Fax: +31 20 653 1256  
[www.kyoceramita-europe.com](http://www.kyoceramita-europe.com)



KYOCERA MITA Europe B.V.,  
Amsterdam (NL)  
Zweigniederlassung Zürich  
Hohlstrasse 614  
CH-8048 Zürich  
Phone: +41 1 908 49 49  
Fax: +41 1 908 49 50  
[www.kyoceramita.ch](http://www.kyoceramita.ch)

## KYOCERA MITA SALES COMPANIES IN EMEA



KYOCERA MITA INTERNATIONAL SALES  
(Europe, Middle East & North Africa)  
Bloemlaan 4  
2132 NP Hoofddorp  
The Netherlands  
Phone: +31 20 654 0000  
Fax: +31 20 653 1256  
[www.kyoceramita-europe.com](http://www.kyoceramita-europe.com)



AUSTRIA  
KYOCERA MITA AUSTRIA GmbH  
Eduard Kittenberger Gasse 95  
A-1230 Wien  
Phone: +43 1 86 338 0  
Fax: +43 1 86 338 400  
[www.kyoceramita.at](http://www.kyoceramita.at)



BELGIUM  
S.A. KYOCERA MITA Belgium N.V.  
Sint-Martinusweg 199-201  
BE-1930 Zaventem  
Phone: +32 2 720 9270  
Fax: +32 2 720 8748  
[www.kyoceramita.be](http://www.kyoceramita.be)



DENMARK  
KYOCERA MITA Denmark A/S  
Ejby Industrivej 60  
DK-2600 Glostrup  
Phone: +45 70 22 3880  
Fax: +45 45 76 3850  
[www.kyoceramita.dk](http://www.kyoceramita.dk)



FINLAND  
KYOCERA MITA Finland OY  
Kirvesmiehenkatu 4  
FI-00880 Helsinki  
Phone: +358 9 4780 5200  
Fax: +358 9 4780 5390  
[www.kyoceramita.fi](http://www.kyoceramita.fi)



FRANCE  
KYOCERA MITA France S.A.  
Espace Technologique de St Aubin  
Route de l'Orme  
FR-91195 Gif-sur-Yvette CEDEX  
Phone: +33 1 6985 2600  
Fax: +33 1 6985 3409  
[www.kyoceramita.fr](http://www.kyoceramita.fr)



GERMANY  
KYOCERA MITA Deutschland GmbH  
Otto-Hahn-Str. 12  
D-40670 Meerbusch / Germany  
Phone: +49 2159 918 0  
Fax: +49 2159 918 100  
[www.kyoceramita.de](http://www.kyoceramita.de)



ITALY  
KYOCERA MITA Italia S.P.A.  
Via Verdi, 89/91  
I-20063 Cernusco sul Naviglio (MI)  
Phone: +39 02 921 791  
Fax: +39 02 921 796 00  
[www.kyoceramita.it](http://www.kyoceramita.it)



THE NETHERLANDS  
KYOCERA MITA Nederland B.V.  
Beechavenue 25  
1119 RA Schiphol-Rijk  
Phone: +31 20 587 7200  
Fax: +31 20 587 7260  
[www.kyoceramita.nl](http://www.kyoceramita.nl)



NORWAY  
KYOCERA MITA Norge  
Olaf Helsetsvai 6  
NO-0694 Oslo  
Phone: +47 22 627 300  
Fax: +47 22 627 200  
[www.kyoceramitanorge.no](http://www.kyoceramitanorge.no)



PORTUGAL  
KYOCERA MITA Portugal LDA.  
Rua do Centro Cultural 41  
PT-1700-106 Lisboa  
Phone: +351 21 843 6780  
Fax: +351 21 849 3312  
[www.kyoceramita.pt](http://www.kyoceramita.pt)



SOUTH AFRICA  
KYOCERA MITA South Africa (Pty) Ltd.  
527 Kyalami Boulevard, Kyalami  
Business Park · ZA-1685 Midrand  
Phone: +27 11 540 2600  
Fax: +27 11 466 3050  
[www.kyoceramita.co.za](http://www.kyoceramita.co.za)



SPAIN  
KYOCERA MITA España S.A.  
Avda. Manacor No. 2  
ES-28290 Las Matas (Madrid)  
Phone: +34 91 631 83 92  
Fax: +34 91 631 82 19  
[www.kyoceramita.es](http://www.kyoceramita.es)



SWEDEN  
KYOCERA MITA Svenska AB  
Esbogatan 16B  
SE-164 75 Kista  
Phone: +46 8 546 550 00  
Fax: +46 8 546 550 10  
[www.kyoceramita.se](http://www.kyoceramita.se)



UNITED KINGDOM  
KYOCERA MITA UK Ltd.  
8 Beacontree Plaza, Gillette Way,  
Reading, Berkshire RG2 OBS  
Phone: +44 1189 311 500  
Fax: +44 1189 311 108  
[www.kyoceramita.co.uk](http://www.kyoceramita.co.uk)

## KYOCERA MITA WORLDWIDE



JAPAN  
KYOCERA MITA Corporation  
(Head Office)  
2-28, 1-Chome, Tamatsukuri, Chuo-ku,  
Osaka 540-8585, Japan  
Phone: +81 6 6764 3555  
Fax: +81 6 6764 3980  
[www.kyoceramita.com](http://www.kyoceramita.com)



USA  
KYOCERA MITA America, INC.  
(Head office)  
225 Sand Road, P.O. Box 40008  
Fairfield, New Jersey 07004-0008, USA  
Phone: +1 973 808 8444  
Fax: +1 973 882 6000  
[www.kyoceramita.com/us](http://www.kyoceramita.com/us)

## KYOCERA CORPORATION



JAPAN  
KYOCERA CORPORATION  
(Corporate Headquarters)  
6 Takeda Tobadono-cho, Fushimi-ku  
Kyoto 612-8501, Japan  
Phone: +81 75 604 3500  
Fax: +81 75 604 3501  
[www.kyocera.co.jp](http://www.kyocera.co.jp)



