



COMMERCIAL AIR CONDITIONERS

2016

COMMERCIAL AIR CONDITIONERS 2016



LG Electronics

<http://www.lg.com>
<http://partner.lge.com>

Copyright © 2016 LG Electronics. All rights reserved.

Distributed by



**LG HVAC
SOLUTION**

WHY?

LG COMMERCIAL AIR CONDITIONERS

01 LG INVERTER TECHNOLOGY CUTS POWER CONSUMPTION

LG has taken the initiative to develop new, highly efficient, inverter technology. In addition to consuming less electricity, the company's advanced inverter systems have powerful performance and enhanced reliability. A clear illustration of how innovative technology can make a real difference, LG's Inverter compressor provides a welcome reduction in power usage (up to 40%) and operational costs. Designed for commercial spaces, such as offices and retail stores, the new model offers effective comfort, greater endurance and exceptional seasonal energy efficiency.



02 TEMPERATURE & PRESSURE CONTROL ENSURES FASTER, MORE ACCURATE AND STABLE OPERATION OF COMPRESSOR






LG's Single and Multi Split models, the only solutions in the same product category to feature innovative Temperature & Pressure Control Sensor equipped with pressure control technology. Generally single and multi split systems estimate pressure to operate compressor via a single sensor, which measures refrigerant, internal and external temperature. However, LG's latest Single and Multi Split series add the Temperature & Pressure Control Sensor, which directly analyzes and controls refrigerant pressure and temperature, boosting compressor performance in terms of accuracy and efficiency. Precisely, the Temperature & Pressure Control Sensor leads to quicker, more effective heating and cooling. It also helps to extend the compressor's operational lifespan and ensure stable performance in all kinds of weather conditions.




LG Electronics participates in the Eurovent Certification Programme
For Comfort Air conditioner ; the certified models are listed in the Eurovent Directory.
Check on-going validity of certificate : www.eurovent-certification.com

* UU09W ULD, UU12W ULD, MU2M15 UL3, MU2M17 UL3 have temperature sensor only.

EUROPE SALES INFRASTRUCTURE

-  Europe B2B Regional Head Office
-  National Sales Office
-  Air Conditioning Academy
-  European Distribution Center
-  Europe Energy Lab
-  Production Site

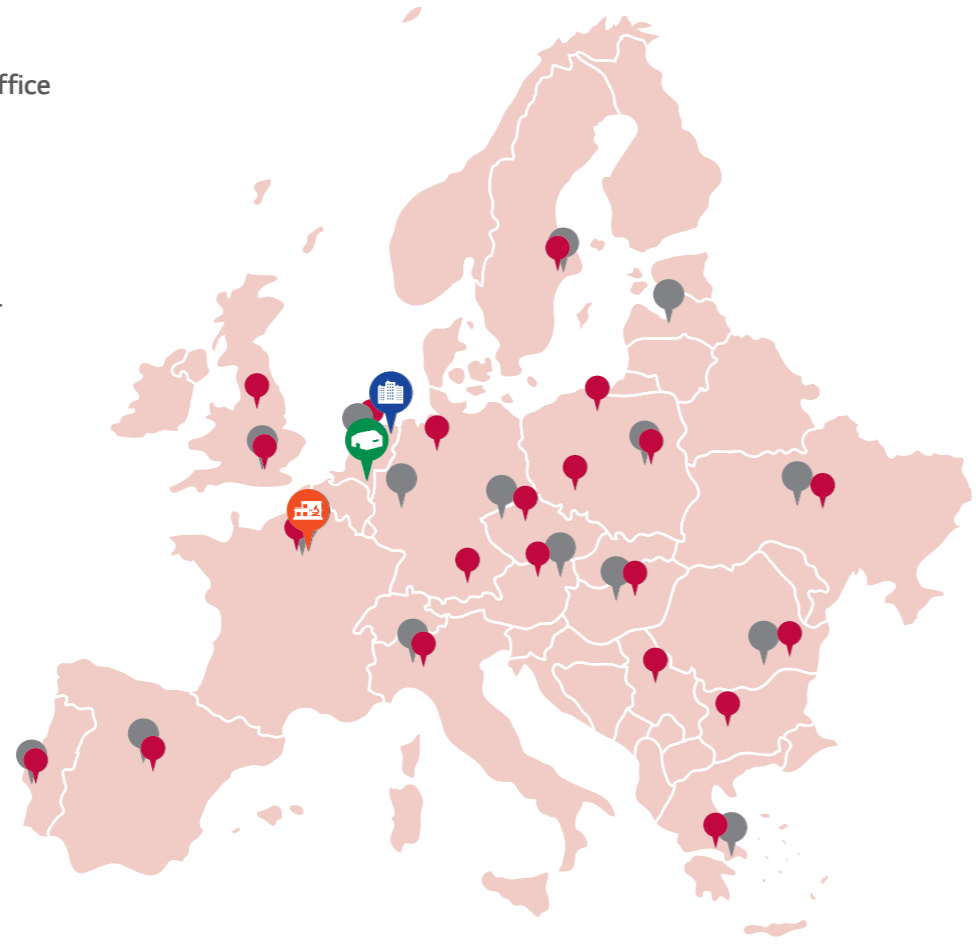

GLOBAL PRODUCTION SITE



LG Electronics products sold in Europe are 'Made in Korea' (Except for ceiling suspended unit).

TOTAL HVAC SOLUTION PROVIDER



LG Energy Labs in Europe

Committed to meet all requirements regarding energy efficiency and environmental demands, LG has been running Energy Lab. LG Energy Lab is an innovative site dedicated to commercial and residential products in heating, ventilation and the latest energy efficient air conditioning solutions. Also as a showcase, LG Energy Lab is equipped with complete monitoring and control systems. The performance of all products will be tracked and analyzed by a team of Research and Development engineers based in France, Finland and Korea, ensuring efficiency and reliability during the whole product lifecycle.



European Air Conditioning Distribution Center

LG's European Air Conditioning Distribution Center is located in Oosterhout, the Netherlands. Supplying and delivering products all over Europe, this distribution hub has contributed to smooth and rapid delivery, direct shipping for smaller orders and delivery tailored to air conditioners. The hub tries to manage inventory efficiency by taking advantage of LG EU's established inventory pool.

Ever since manufacturing Korea's first home grown air conditioner in 1968, LG has remained at the forefront of air conditioning innovation. LG has been the world's top selling manufacturer of residential air conditioning solutions. In 2008, LG achieved to sell the total of more than 100 million air conditioners. Building on its success and technological leadership in the residential air conditioning sector, LG has moved into system air conditioning as well.

The company's range of high performance system air conditioning products provides effective temperature control to large-scale buildings and facilities. Overtime, LG has evolved into the total HVAC and energy solution provider, investing in new technologies adding chillers, VRF systems and BMS (building management system) into its comprehensive product portfolio. Along with a wide range of innovative solutions, LG delivers unrivalled customer service.

The company produces top-notch air conditioning professionals at its academies, of which there are nearly 80 worldwide. These centers of excellence provide workshops and training programs that offer valuable hands-on experience. LG also provides useful tools for HVAC system engineers and installers, including its time saving LG Air Conditioner Technical Solution (LATS) software. Additionally, LG operates several state-of-the-art R&D facilities all across the planet.

One such facility is the Energy Lab, a purpose-built R&D and testing center in northern France. Helping to keep the company ahead of the competition, the scientists and engineers at the Energy Lab study the effects of different environmental conditions on LG's products. This in-depth research and analysis enables LG to tailor its solutions to the specific environmental demands of each individual market. Combining the best technologies with the best ideas, LG's high quality products are now enjoyed by customers in over 100 countries.

INDEX

SINGLE SPLIT

Ceiling Mounted Cassette	20	Floor Standing Unit	56
Ceiling Concealed Duct	30	Wall Mounted Unit	59
Ceiling & Floor Convertible Ceiling Suspended Unit	43	Synchro Operation	63
Console	52	AHU Solution	67
		Accessories	70

MULTI SPLIT

Outdoor Units	108
Indoor Units	116
Accessories	130
Combination Table	134

THERMA V

Monobloc Type	186
Split Type	188
High Temperature Type	190
Domestic Hot Water Tank	191





SINGLE SPLIT

- 20 Ceiling Mounted Cassette
- 30 Ceiling Concealed Duct
- 43 Ceiling & Floor Convertible
Ceiling Suspended Unit
- 52 Console
- 56 Floor Standing Unit
- 59 Wall Mounted Unit
- 63 Synchro Operation
- 67 AHU Solution
- 70 Accessories



SINGLE SPLIT LINE-UP

H-INVERTER							
kBTu	Type kW	Ceiling Mounted Cassette	Ceiling Concealed Duct	Ceiling Suspended Unit	Universal Outdoor Units		
					1 Phase	3 Phase	
36	10.0	 UT36H NM4	 UB36H NR3	 UV36H NL4	 UU36WH U34	 UU37WH U33	
42	12.5	 UT42H NM4	 UB42H NR3	 UV42H NL4	 UU42WH U34	 UU43WH U33	
48	14.0	 UT48H NM4	 UB48H NR3	 UV48H NL4	 UU48WH U34	 UU49WH U33	


COMPACT INVERTER							
kBTu	Type kW	Ceiling Mounted Cassette	Ceiling Concealed Duct	Ceiling Suspended Unit	Universal Outdoor Units		
					1 Phase	3 Phase	
18	5.0		 NEW UB18C NH0		 NEW UU18WC ULO		
24	7.1		 NEW UB24C NH0		 NEW UU24WC UE0		
30	8.0		 UM30 N14		 NEW UU30WC UE0		
36	10.0		 UM36 N24		 NEW UU36WC U40		

STANDARD INVERTER								
kBTu	Type kW	Ceiling Mounted Cassette	Ceiling Concealed Duct		Ceiling & Floor / Ceiling Suspended	Console / Wall Mounted / Floor Standing	Universal Outdoor Units	
			Mid / High Static	Low Static			1 Phase	3 Phase
9	2.5	 CT09 NR2		 CB09L N12	 CV09 NE2	 CQ09 NAO	 UU09W ULD	
12	3.5	 CT12 NR2		 CB12L N22	 CV12 NE2	 CQ12 NAO	 UU12W ULD	
18	5.0	 NEW CT18 NQ4	 CM18 N14	 CB18L N22	 CV18 NJ2	 CQ18 NAO	 NEW UU18W UE4	
24	7.1	 NEW CT24 NP4	 CM24 N14	 CB24L N32	 CV24NJ2		 NEW UU24W U44	
30	8.0	 NEW UT30 NP4	 UM30 N14		 UV30 NJ2	 UJ30 NV2	 NEW UU30W U44	
36	10.0	 UT36 NN2	 UM36 N24		 UV36 NK2	 UJ36 NV2	 UU36W U02	 UU37W U02
42	12.5	 UT42 NM2	 UM42 N24		 UV42 NL2		 UU42W U32	 UU43W U32
48	14.0	 UT48 NM2	 UM48 N34		 UV48 NL2	 UP48 NT2	 UU48W U32	 UU49W U32
60	15.0	 UT60 NM2	 UM60 N34		 UV60 NL2		 UU60W U32	 UU61W U32
70	20.0		 UB70 N94					 UU70W U34
85	25.0		 UB85 N94					 UU85W U74

ENERGY EFFICIENCY

BLDC (Brushless Direct Current Motor) Compressor


LG air conditioners are equipped with a BLDC compressor that uses a strong neodymium magnet. The compressor has improved efficiency compared to standard AC inverter products and it is optimised for seasonal efficiency.

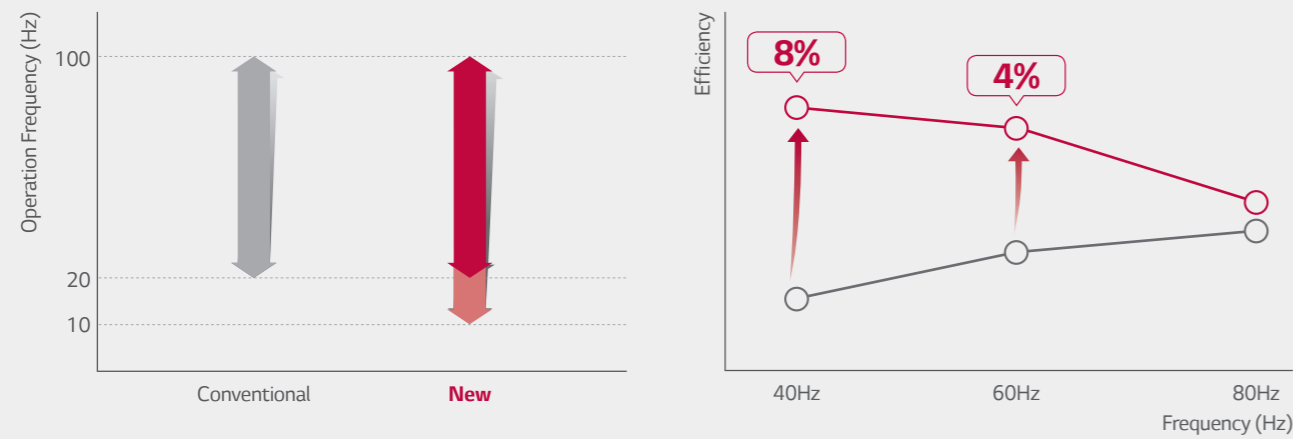

* Based on UU24W U44


BLDC Fan Motor

The BLDC Fan motor is more efficient than a conventional AC motor, offering an additional 40% energy savings at low speeds and 20% at high speeds.

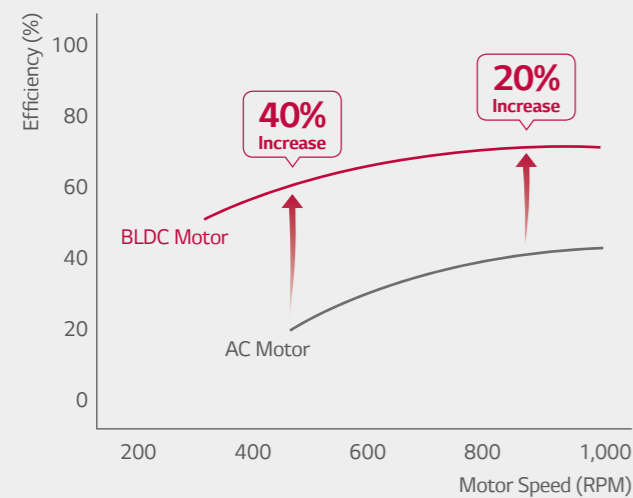


Variable Voltage Control

The compressor of new H-Inverter improved efficiency by adjusting compressor input voltage depends on the compressor input load.

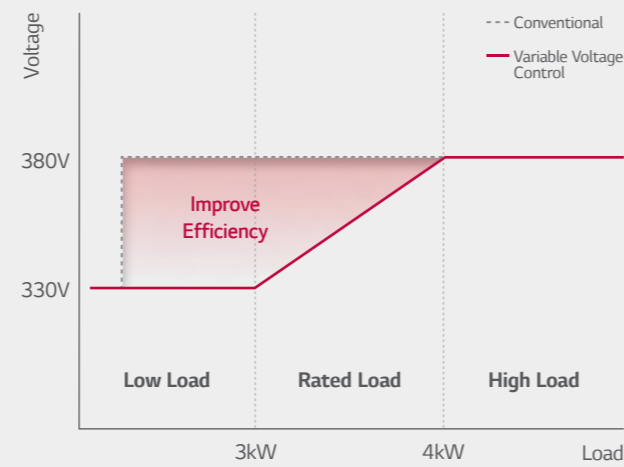

Wide Louver Plus Fin


Wide Louver Plus fin technology increases 11% of full load heating performance and 6% of COP compared to conventional fin. It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

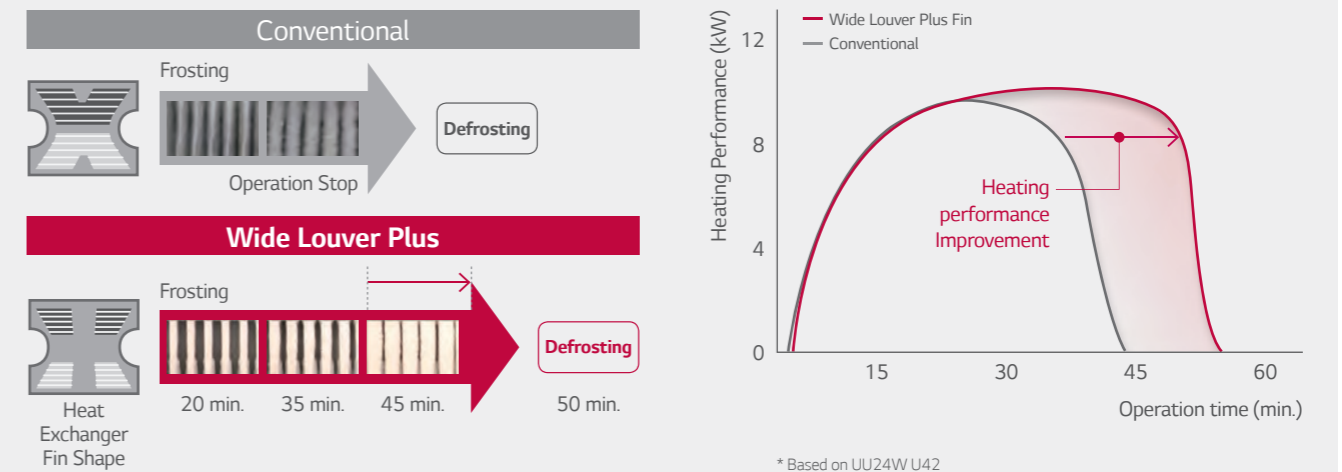

* Based on UU24W U42


Optimised Heat Exchanger Path

Optimised heat exchanger path improved cycle efficiency up to 5%.

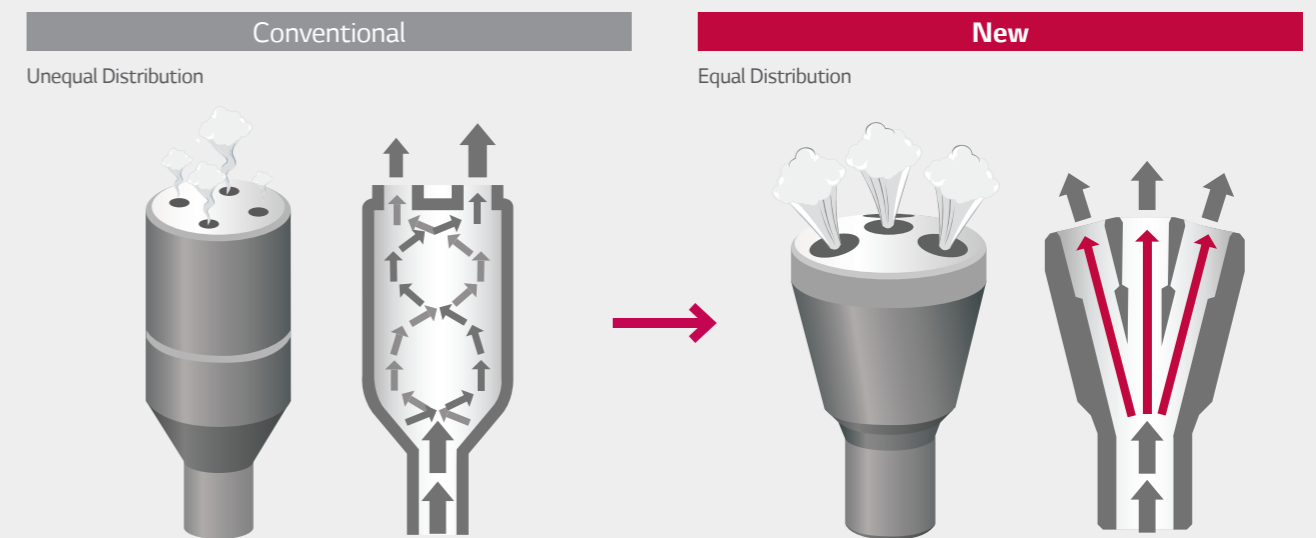

EFFICIENT OPERATION

Quick Operating Response



Conventional


Step 1

Sensing current temperature of refrigerant, indoor and outdoor temperature

Step 2

Estimating Pressure
Finding recorded target pressure to operate compressor, based on the corresponding temperature data

This algorithm is more likely to be impacted by temperature change and it takes more time to calculate proper operation range of compressor to target point.

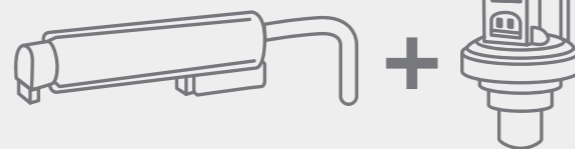

LG Inverter

Step 1


Sensing refrigerant pressure and temperature simultaneously to make sure compressor ready for target cooling operation

This ensures to reach target performance point without failing to keep a reliable operation.


Power Saving Start up

LG commercial air conditioners will automatically change discharge air temperature by controlling their refrigerant temperature based on the gap between the indoor temperature and the target indoor temperature. In cooling operation, evaporating temperature will increase if the gap becomes smaller. This can make more comfortable indoor air, and also reduce energy consumption.

Comfortable Indoor Air

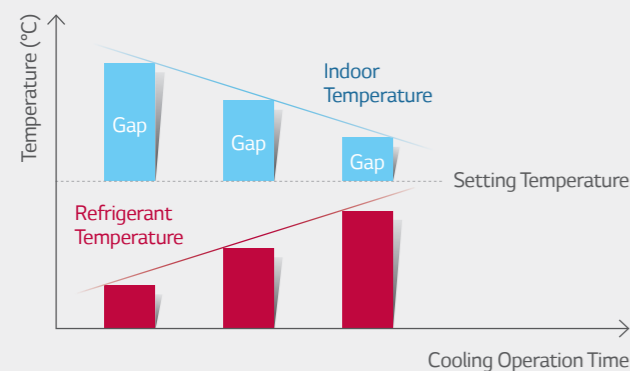


Energy Saving

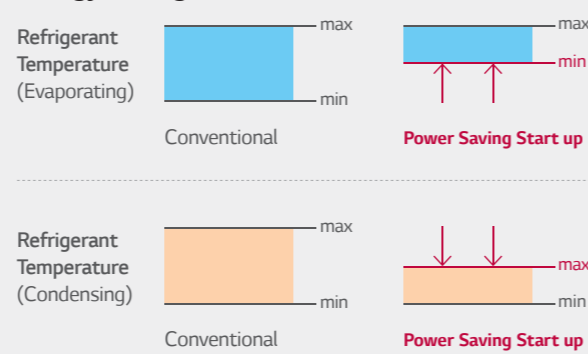


PERFORMANCE

Wide Operation Range

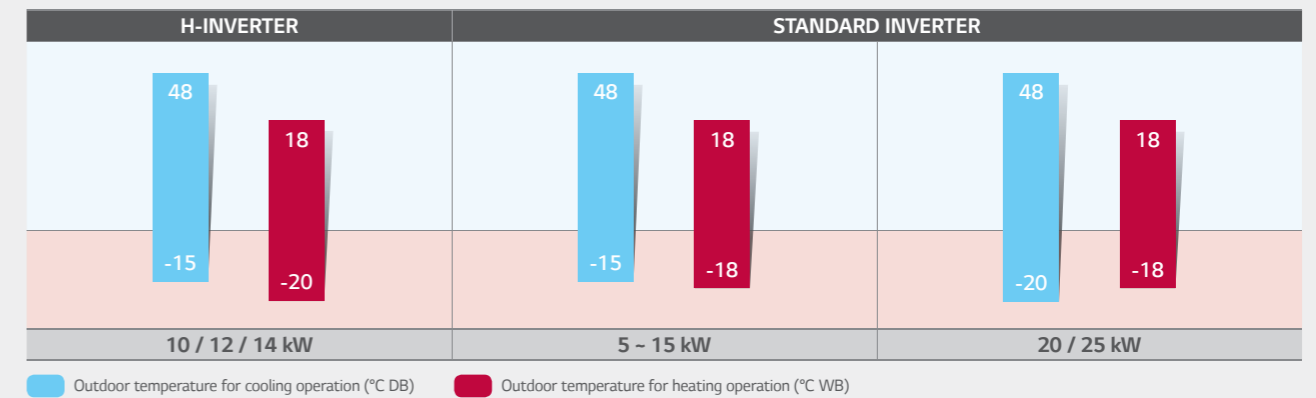


Stable Operation

High and stable cooling performance at low temperatures.

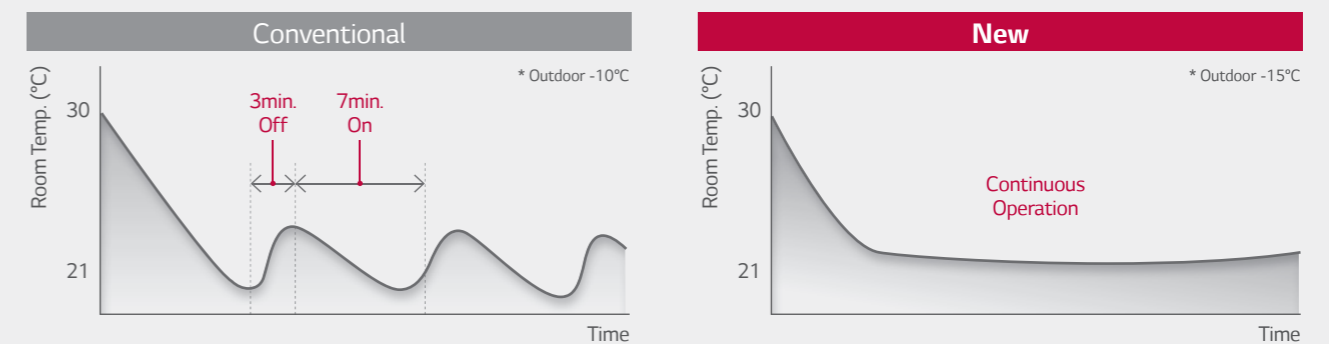

Heating Capacity in Low Temperature


High and stable performance at low temperatures.

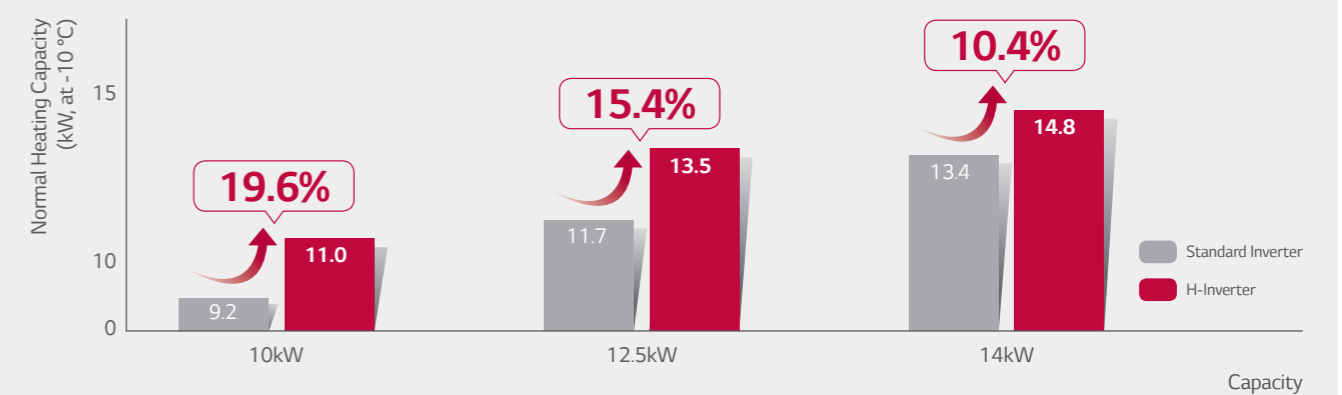

QUIET OPERATION

Improved Grille & Fan


The new grille shape design on the outdoor unit helps to disperse air more efficiently which improves heat exchange and reduces noise level. The new axial fan has a thick front edge and smooth rear edge, this provides a high efficiency, low noise, wide fan, as well as improving the air flow rate.

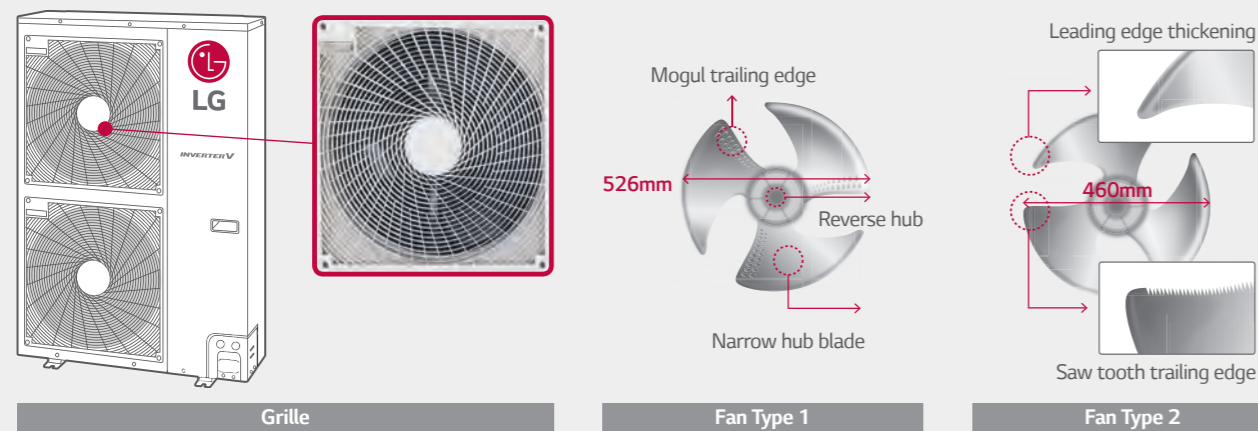

Night Silent Operation

Night silent operation can reduce noise levels at night time by simply setting the dip switch on the PCB of the outdoor unit.

Cooling Mode

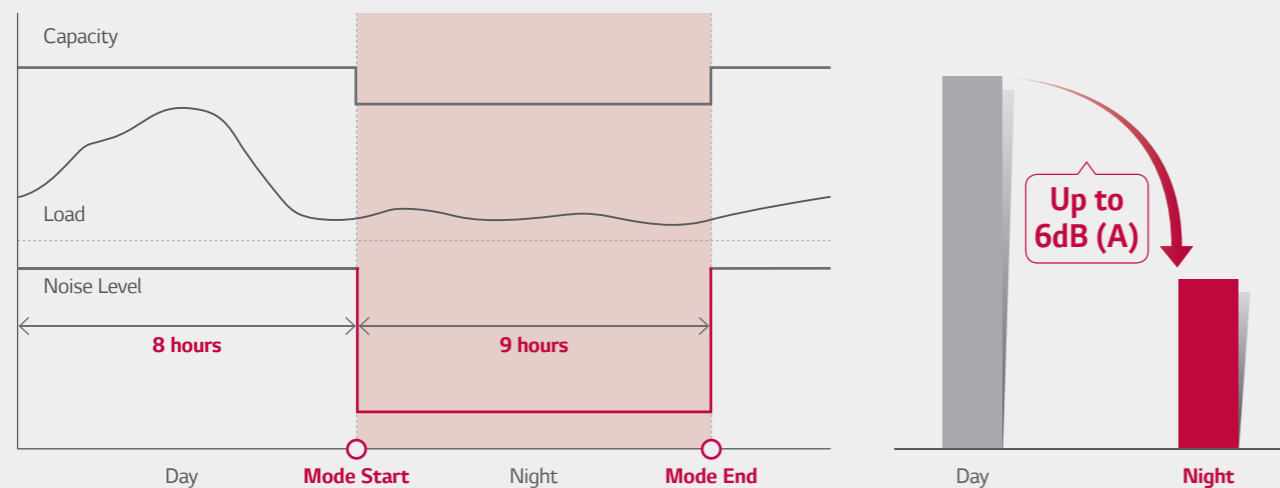


CONVENIENCE

SINGLE SPLIT


Forced Cooling Operation

The forced cooling operation allows refrigerant to be recharged or pumped down, regardless of the indoor temperature. More importantly this function can be used when indoor units are being moved or repaired.

Recharging

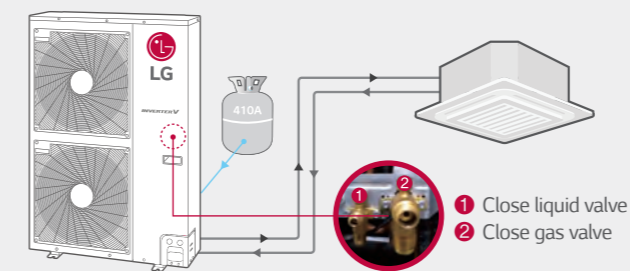


Pump Down

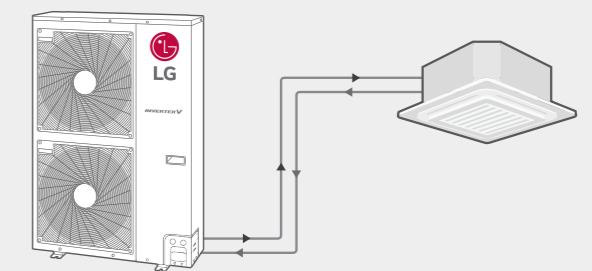


Outdoor Dry Contact

Air conditioners can be turned on / off at once with the on / off dry contact function that outdoor units have.

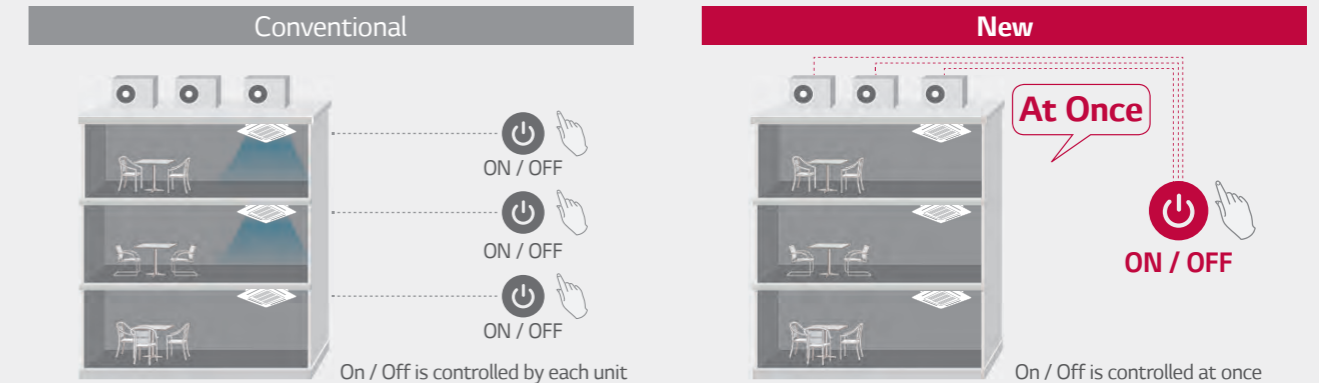

Weekly Program


You can set up 2 reservations for one day, and up to 14 reservations for a week.

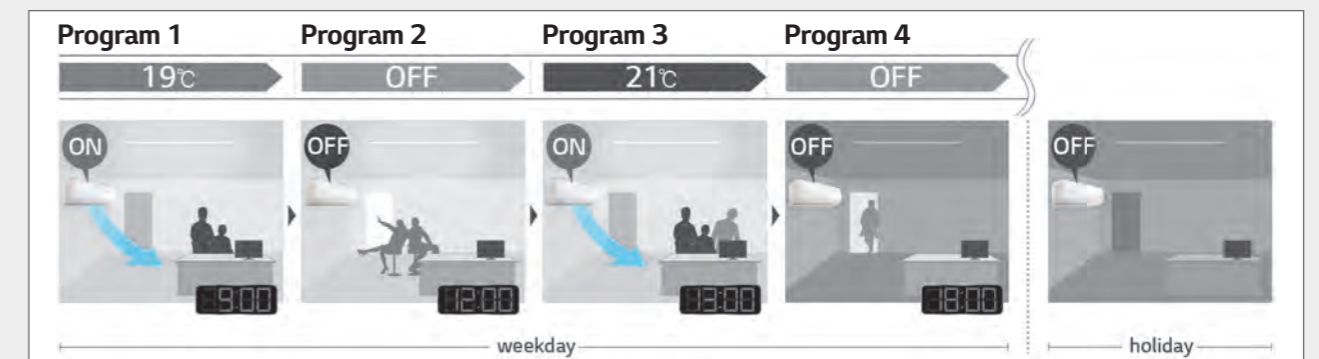

SAVING COST


Peak Current Control

The peak current control function keeps the air conditioner from running at the maximum level while maintaining current system setting, in order to reduce energy consumption. This function can help to cut energy costs during the peak periods of energy use when the energy fee is much higher.

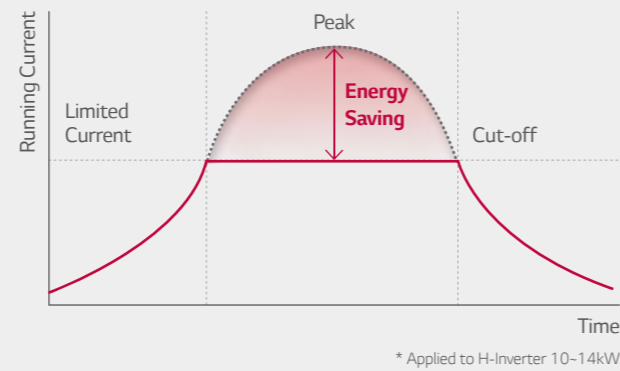

Mode Lock


Setting operation mode to either cooling-only or heating-only by adjusting dip switch, in order to prevent mixed use of cooling and heating.

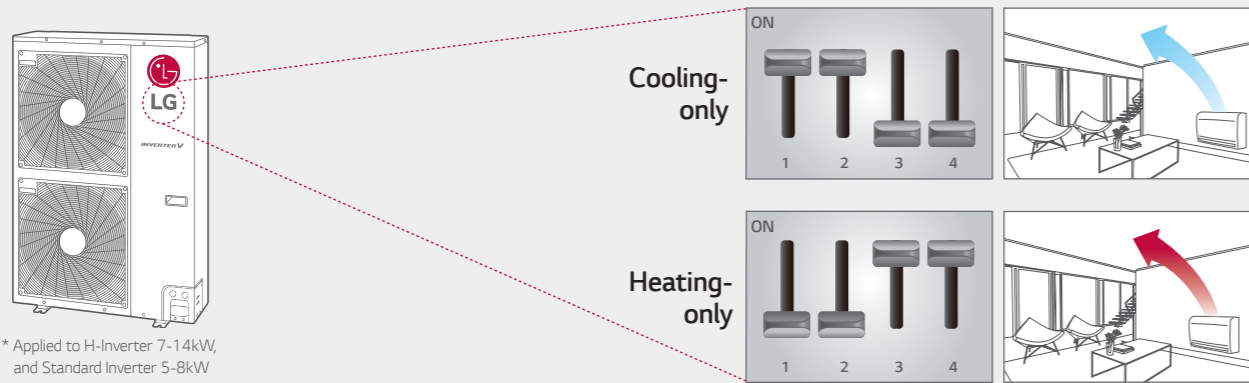

* Applied to H-Inverter 7-14kW, and Standard Inverter 5-8kW

Standby Mode

New H-Inverter can minimise power consumption by turning power off on the PCB except for the MICOM which receives signals.

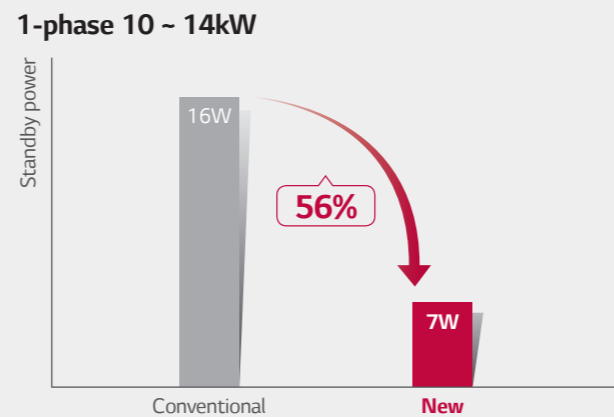


FEATURES OVERVIEW

		H-Inverter			Standard Inverter											Compact				
		kBTU	36	42	48	9	12	18	24	30	36	42	48	60	70	85	18	24	30	36
		kW	10.0	12.5	14.0	2.5	3.5	5.0	7.1	8.0	10.0	12.5	14.0	15.0	20.0	25.0	5.0	7.1	8.0	10.0
Energy Efficiency	BLDC Compressor	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•
	BLDC Fan Motor	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Variable Voltage Control	•	•	•			•	•	•	•	•	•	•	•	•					
	Wide Louver Plus Fin	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Optimised Heat Exchanger Path	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•
Efficient Operation	Power Saving Start up	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
	Quick Operation Response	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
Performance	Wide Operation Range	•	•	•			•	•	•	•	•	•	•	•	•					
	Stable Operation	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
Quiet Operation	Night Silent Operation	•	•	•			•	•	•	•	•	•	•	•	•					
Convenience	Forced Cooling Operation	•	•	•			•	•	•	•	•	•	•	•	•					
	Outdoor Dry Contact	•	•	•			•	•	•	•	•	•	•	•	•					
	Weekly Program*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•**	•**	•	•	
Saving Cost	Peak Current Control	•	•	•										•	•					
	Mode Lock	•	•	•			•	•	•	•**	•**	•**	•**	•	•					
	Standby Mode	•	•	•										•	•	•	•	•	•	
AHU Solution	Return Air Control	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	
	0-10V Supply Air Control						•	•	•				•	•						
Central Control	PI-485 Connection	•	•	•			•	•	•	•	•	•	•	•	•					

* Weekly program is available with wired remote controller
 ** With controller PREMTB001 / PREMTB01

SINGLE SPLIT

CEILING MOUNTED CASSETTE

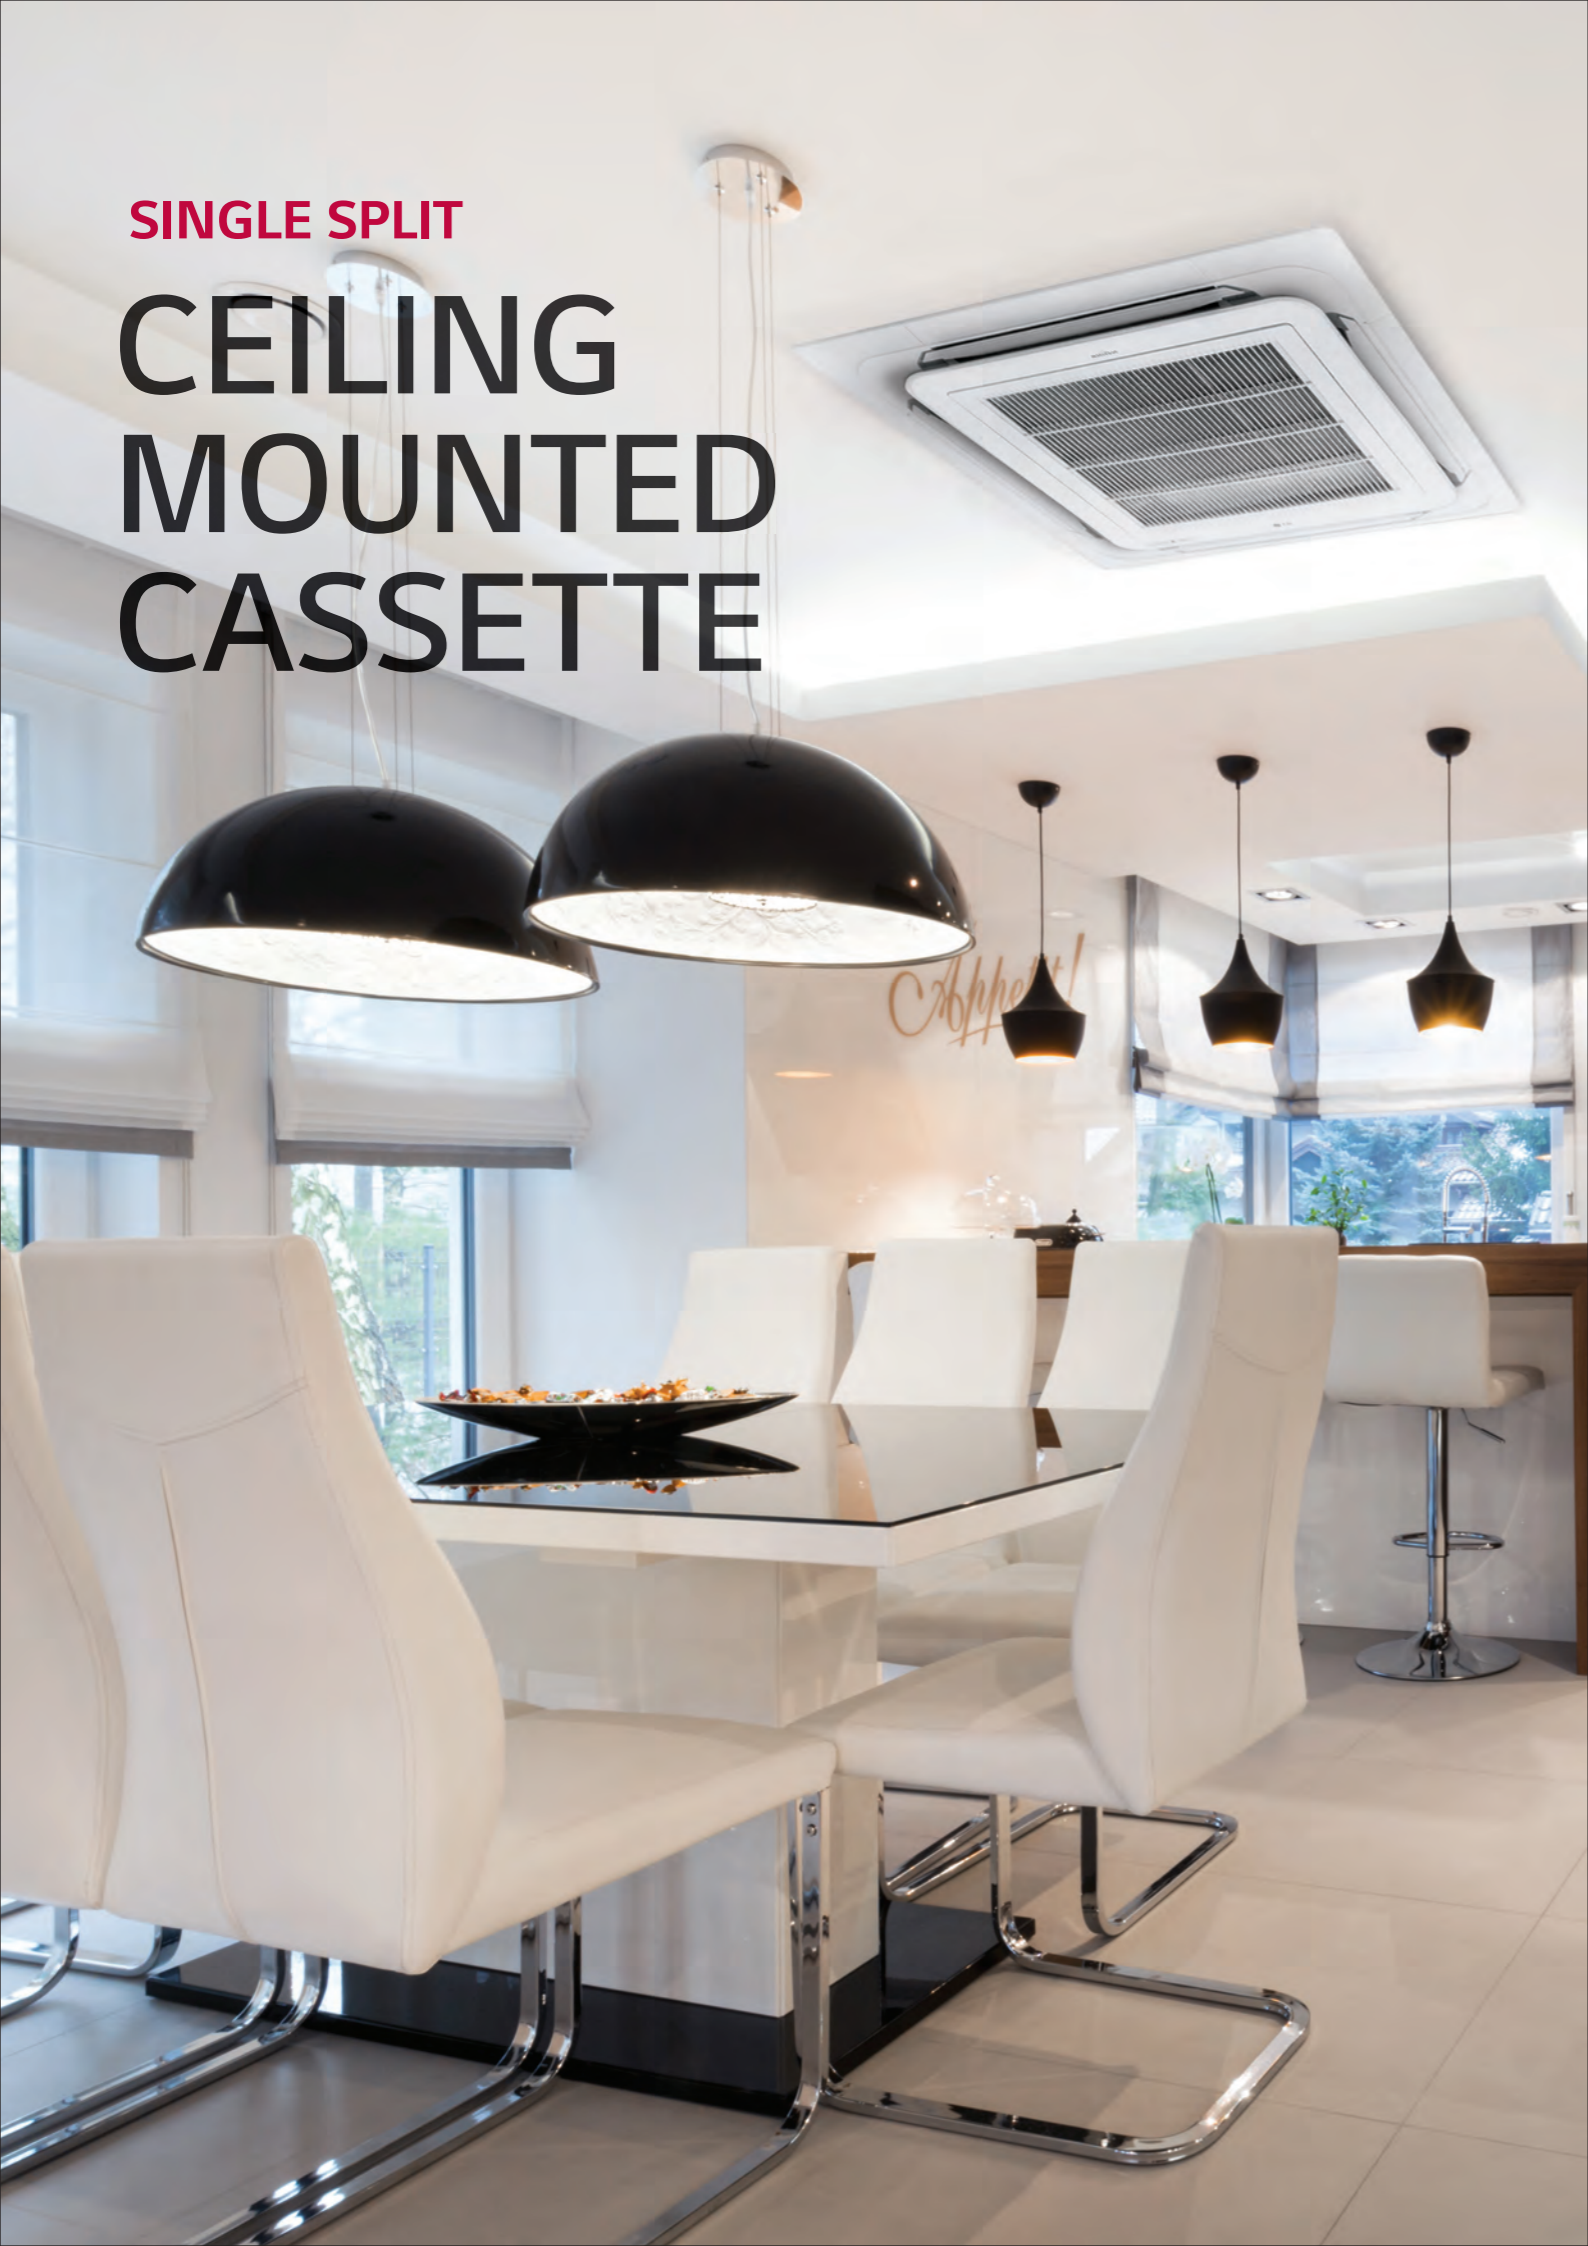


CEILING MOUNTED CASSETTE

SINGLE SPLIT

Ceiling Mounted Cassette

Compact Size

The indoor unit with slim and compact dimensions has reduced the restriction which enables successful installation in various spaces.

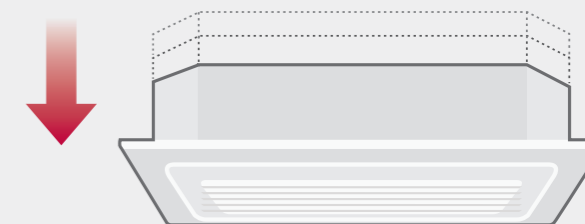


Length width : 840 x 840mm

Standard Inverter	Height
7.1-8.0 kW	204mm
10.0 kW	246mm
12.5-15 kW	288mm

High Ceiling Mode



High ceiling mode provides powerful cooling and heating up to 4.2m in height, from ceiling to floor.

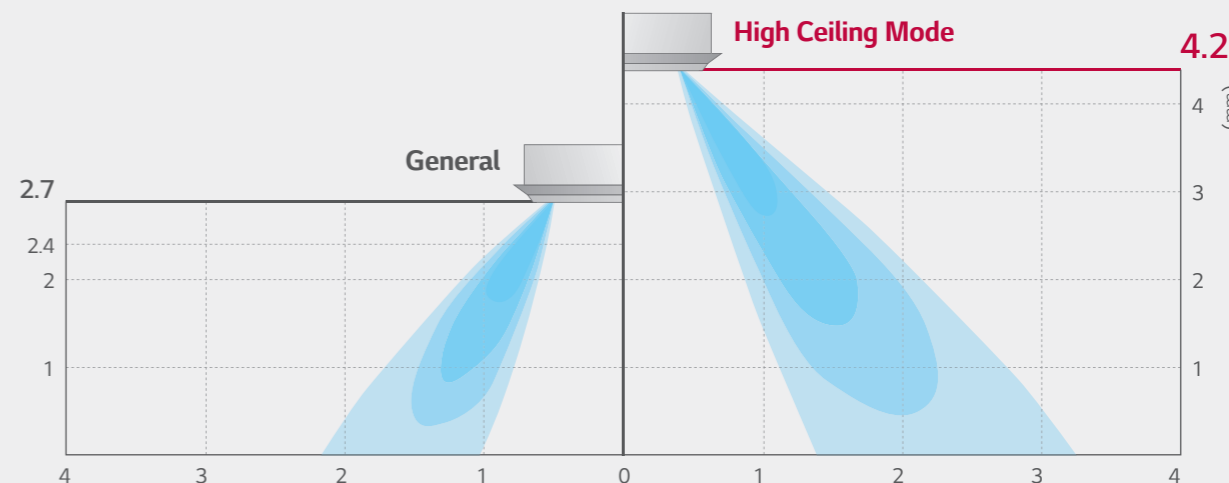

CEILING MOUNTED CASSETTE

Wide Jet Air Flow


Improved vanes reduce the curved area and provide even distribution.

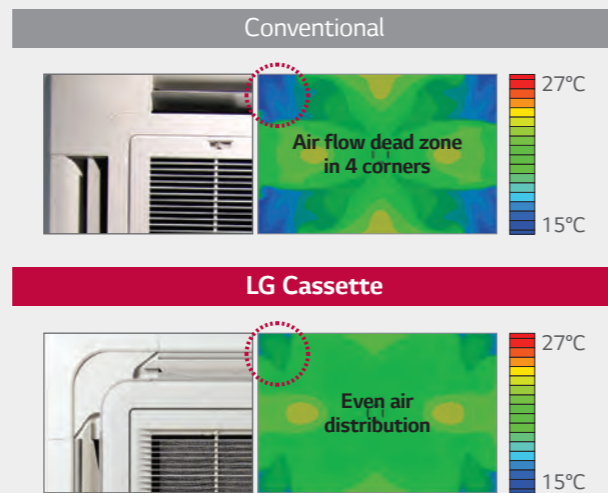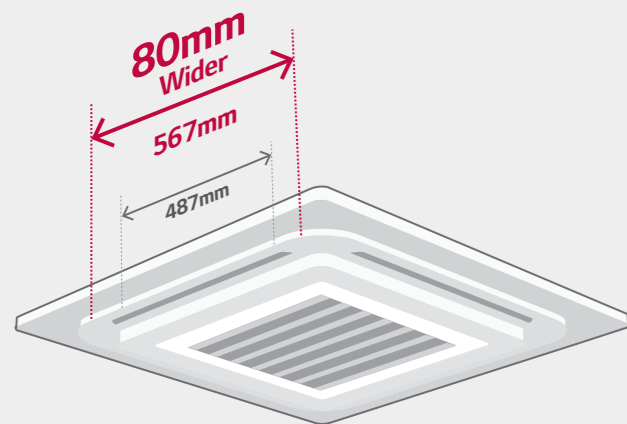

Independent Vane Operation

The independent vane operation feature uses separate motors, making it possible to control all four vanes independently.

All Vane Operation

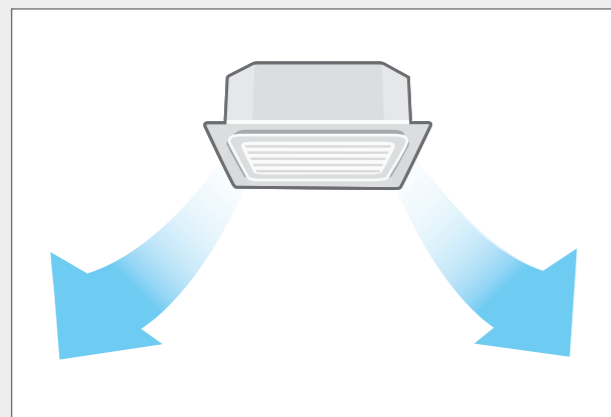

Independent Vane Control




* Wired remote controller PQRCVSLO (QW) applied


Convenient Panel Installation

The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain connection pipe.


Detachable Corner Design

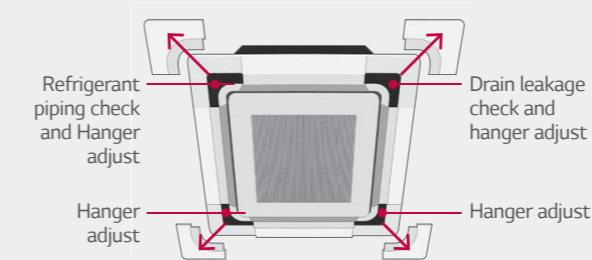


Drain Leakage Check



Hanger Adjust



It is easy to install the panel to the body, using the button type panel design.

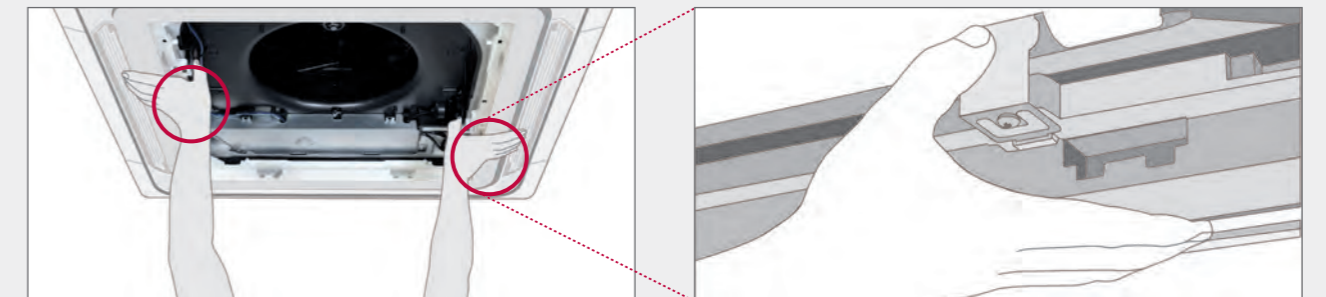


Auto Elevation Grille


Easy filter cleaning with elevation grill.




4-Point Support Structure




Auto Leveling



Memory for User's Level



Auto Stop Detection




* Operating with wired remote controller PQRCVSLO(QW) and wireless remote controller included in PTEGM0.
 * Except CT09 NR2 / CT12 NR2 / CT18 NQ2
 * Applied to cassette panel PT-UMC1

CEILING MOUNTED CASSETTE


Quiet Operation with 3D Fan

New technology of 3D fan is applied to H-Inverter cassettes 10 ~ 14kW. It increases air flow but reduces noise.

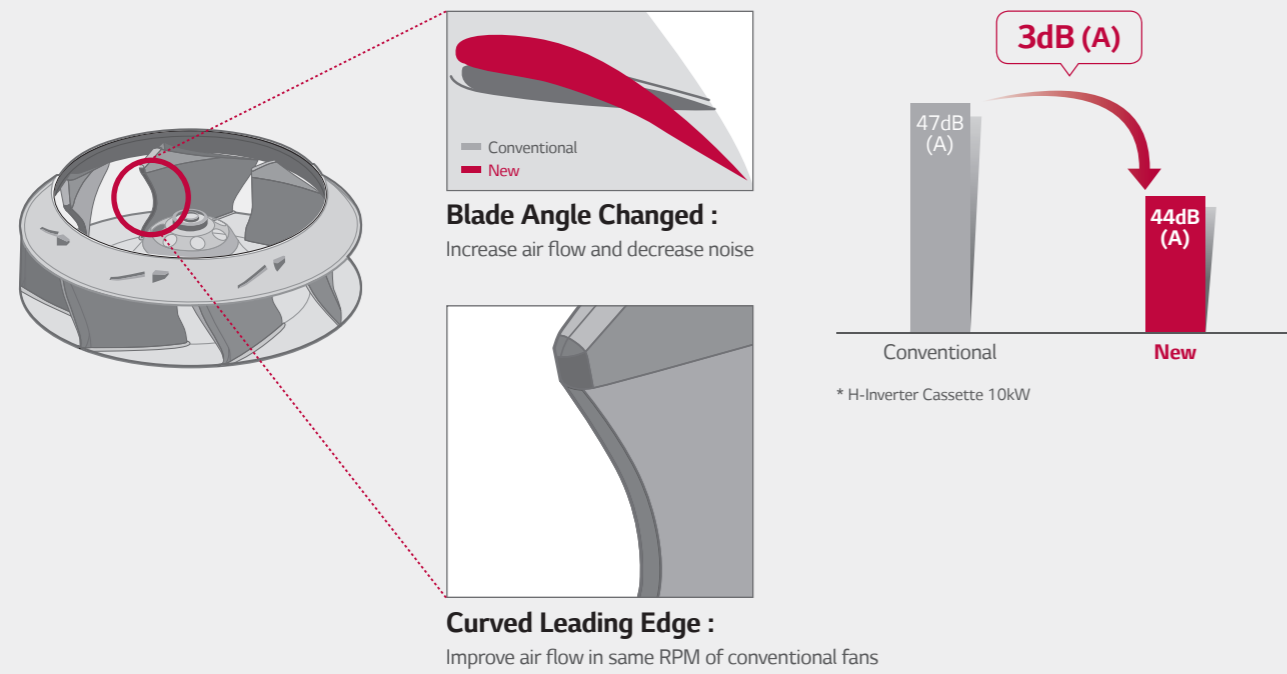

Prevent Ceiling Pollution

Coanda design of air outlet can prevent contamination of ceiling.

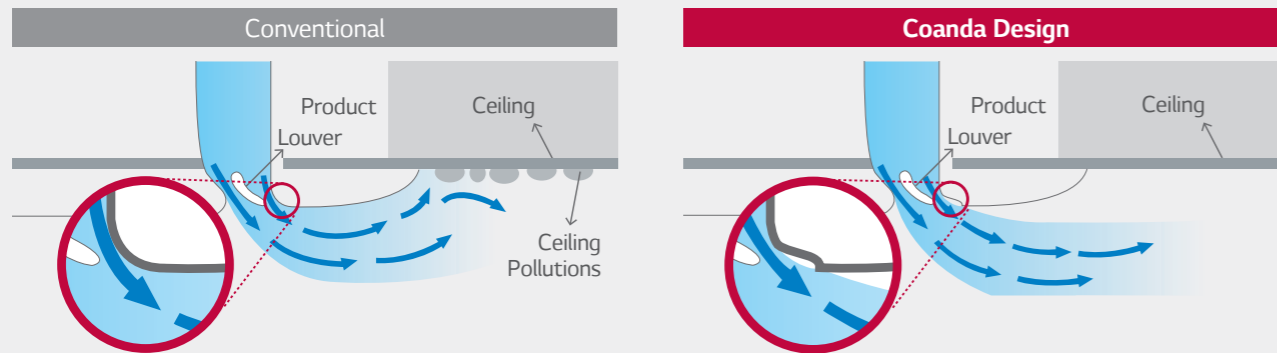

H-Inverter

CEILING MOUNTED CASSETTE

UT36H / UT42H / UT48H



UU36WH / UU42WH / UU48WH

INDOOR				UT36H NM4	UT42H NM4	UT48H NM4
Capacity	Cooling	Min / Nom / Max	kW	4.5 / 9.5 / 13.0	5.0 / 12.1 / 14.5	5.5 / 13.4 / 16.0
	Heating	Min / Nom / Max	kW	5.0 / 10.8 / 13.7	5.5 / 13.5 / 16.5	6.1 / 15.5 / 18.0
Low Temperature Capacity	Heating -7°C	Max	kW	11.5	13.9	15.3
	Cooling	Nom	kW	2.15	3.13	3.80
Power Input (Set)	Heating	Nom	kW	2.39	3.35	4.05
	Cooling	Nom	W	210	210	210
Running Current	Cooling / Heating	Nom	A	9.1 / 11.2	14.2 / 15.3	17.4 / 17.8
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				4.42	3.87	3.53
COP				4.53	4.03	3.83
SEER				7.31	-	-
SCOP				4.61	-	-
Pdesign (@ -10°C)			kW	10.0	-	-
Seasonal Energy Label	Cooling / Heating			A++ / A++	-	-
Annual Energy Consumption	Cooling / Heating		kWh	455 / 3,043	-	-
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain		mm	32 / 25	32 / 25	32 / 25
		O.D. / I.D.				
Air Flow Rate		High / Medium / Low	m³ / min	32.0 / 26.1 / 20.2	33.0 / 28.0 / 21.0	33.0 / 28.0 / 22.0
Sound Pressure	Cooling	High / Medium / Low	dBA	44 / 40 / 36	45 / 41 / 37	45 / 41 / 38
	Heating	Max	dBA	62	62	62
Sound Power	Cooling	Max	dBA	62	62	62
Dehumidification Rate			l / h	1.5	3.3	4.4
Dimensions	Body	W x H x D	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Net Weight		kg	28.0	28.0	28.0
Decoration Panel	Model			PT-UMC1	PT-UMC1	PT-UMC1
	Color			Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)
	Dimensions	W x H x D	mm	950 x 25 x 950	950 x 25 x 950	950 x 25 x 950
	Weight		kg	5.0	5.0	5.0

OUTDOOR				UU36WH U34	UU42WH U34	UU48WH U34
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m³ / min	110	110	110
	Sound Pressure	Cooling	Nom	dBA	51	52
Sound Power	Heating	Nom	dBA	53	54	54
	Cooling	Max	dBA	66	67	68
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	91.5	91.5	91.5
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	3,400	3,400	3,400
	Additional Charge (after 10m)		g / m	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-20 - 18	-20 - 18	-20 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 5.0	3C x 5.0	3C x 5.0
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	40	40	40
Piping Length Total		Min - Max	m	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.

2. Definition of Power Input Nominal conditions - Performance tested under EN14511

3. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB

4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition

5. This product contains fluorinated greenhouse gases (R410A)

H-Inverter

CEILING MOUNTED CASSETTE



UT36H / UT42H / UT48H



INDOOR				UT36H NM4	UT42H NM4	UT48H NM4	
Capacity	Cooling	Min / Nom / Max	kW	4.5 / 9.5 / 13.0	5.0 / 12.1 / 14.5	5.5 / 13.4 / 16.0	
	Heating	Min / Nom / Max	kW	5.0 / 10.8 / 13.7	5.5 / 13.5 / 16.5	6.1 / 15.5 / 18.0	
Low Temperature Capacity	Heating -7°C		Max	11.5	13.9	15.3	
	Cooling	Nom	kW	2.15	3.13	3.80	
Power Input (Set)	Cooling	Nom	kW	2.15	3.13	3.80	
	Heating	Nom	kW	2.39	3.35	4.05	
Power Input (Indoor)		Nom	W	210	210	210	
Running Current	Cooling / Heating	Nom	A	3.8 / 4.2	5.5 / 5.9	6.7 / 7.1	
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
EER				4.42	3.87	3.53	
COP				4.53	4.03	3.83	
SEER				6.81	-	-	
SCOP				4.61	-	-	
Pdesign (@ -10°C)			kW	10.0	-	-	
Seasonal Energy Label	Cooling / Heating			A++ / A++	-	-	
Annual Energy Consumption	Cooling / Heating		kWh	489 / 3,043	-	-	
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	
	Drain		mm	32 / 25	32 / 25	32 / 25	
	O.D. / I.D.						
Air Flow Rate		High / Medium / Low	m³ / min	32.0 / 26.1 / 20.2	33.0 / 28.0 / 21.0	33.0 / 28.0 / 22.0	
Sound Pressure	Cooling	High / Medium / Low	dBA	44 / 40 / 36	45 / 41 / 37	45 / 41 / 38	
Sound Power	Cooling	Max	dBA	62	62	62	
Dehumidification Rate			l / h	1.5	3.3	4.4	
Dimensions	Body	W x H x D	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	
Net Weight	Body		kg	28.0	28.0	28.0	
Decoration Panel	Model			PT-UMC1	PT-UMC1	PT-UMC1	
	Color			Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	
	Dimensions		W x H x D	mm	950 x 25 x 950	950 x 25 x 950	950 x 25 x 950
	Weight			kg	5.0	5.0	5.0

OUTDOOR				UU37WH U33	UU43WH U33	UU49WH U33
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom	m³ / min	110	110	110	
Sound Pressure	Cooling	Nom	dBA	51	52	52
	Heating	Nom	dBA	53	54	54
Sound Power	Cooling	Max	dBA	66	67	68
Dimensions	W x H x D	mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330	
Net Weight		kg	93.0	93.0	93.0	
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	3,400	3,400	3,400
	Additional Charge (after 10m)		g / m	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-20 - 18	-20 - 18	-20 - 18
Power Supply		Ø / V / Hz	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50	
Power Supply Cable		No. x mm²	5C x 2.5	5C x 2.5	5C x 2.5	
Transmission Cable		No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker		A	20	20	20	
Piping Length Total		Min - Max	m	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Standard Inverter

CEILING MOUNTED CASSETTE

CT09 / CT12 / **NEW** CT18 / **NEW** CT24 / **NEW** UT30



INDOOR				CT09 NR2	CT12 NR2	CT18 NQ4	CT24 NP4	UT30 NP4	
Capacity	Cooling	Min / Nom / Max	kW	1.0 / 2.5 / 2.8	1.4 / 3.4 / 3.7	2.0 / 5.0 / 5.5	2.8 / 6.8 / 7.8	3.2 / 8.0 / 8.8	
	Heating	Min / Nom / Max	kW	1.2 / 3.0 / 3.3	1.6 / 4.0 / 4.4	2.2 / 5.8 / 6.8	3.2 / 8.0 / 8.8	3.6 / 9.0 / 9.9	
Low Temperature Capacity	Heating -7°C		Max	2.7	3.6	4.9	7.2	8.1	
	Cooling	Nom	kW	0.75	1.06	1.56	2.00	2.49	
Power Input (Set)	Cooling	Nom	kW	0.81	1.10	1.66	2.22	2.72	
	Heating	Nom	kW	0.81	1.10	1.66	2.22	2.72	
Power Input (Indoor)		Nom	W	20	20	40	60	80	
Running Current	Cooling / Heating	Nom	A	3.3 / 3.5	4.6 / 4.78	7.1 / 7.5	8.9 / 9.7	10.8 / 11.8	
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
EER				3.33	3.21	3.22	3.70	3.21	
COP				3.70	3.64	3.62	3.62	3.31	
SEER				5.11	5.61	6.10	6.80	6.30	
SCOP				3.81	3.91	4.25	4.20	4.00	
Pdesign (@ -10°C)			kW	2.8	3.0	4.1	6.3	6.8	
Seasonal Energy Label	Cooling / Heating			A / A	A+ / A	A++ / A+	A++ / A+	A++ / A+	
Annual Energy Consumption	Cooling / Heating		kWh	172 / 1,032	213 / 1,077	287 / 1,351	350 / 2,110	444 / 2,380	
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	
Piping Connection	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	
	Drain		mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	
	O.D. / I.D.								
Air Flow Rate		High / Medium / Low	m³ / min	8.5 / 7.0 / 6.0	9.5 / 8.0 / 7.0	13.0 / 12.0 / 11.0	17.0 / 15.0 / 13.0	19.0 / 17.0 / 15.0	
Sound Pressure	Cooling	High / Medium / Low	dBA	36 / 33 / 30	38 / 35 / 32	41 / 39 / 36	38 / 36 / 34	40 / 37 / 35	
Sound Power	Cooling	Max	dBA	48	51	57	57	58	
Dehumidification Rate			l / h	1.4	1.7	2.1	2.4	2.5	
Dimensions	Body	W x H x D	mm	570 x 214 x 570	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840	840 x 204 x 840	
Net Weight	Body		kg	14.0	14.0	15.3	20.5	20.5	
Decoration Panel	Model			PT-UQC	PT-UQC	PT-UQC	PT-UMC1	PT-UMC1	
	Color			Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	
	Dimensions		W x H x D	mm	700 x 22 x 700	700 x 22 x 700	700 x 22 x 700	950 x 25 x 950	950 x 25 x 950
	Weight			kg	3.0	3.0	3.0	5.0	5.0

OUTDOOR				UU09W ULD	UU12W ULD	UU18W UE4	UU24W U44	UU30W U44
Compressor	Type			Rotary	Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom	m³ / min	32	32	50	58	58	
Sound Pressure	Cooling	Nom	dBA	47	47	47	48	48
	Heating	Nom	dBA	48	48	52	52	52
Sound Power	Cooling	Max	dBA	56	57	63	67	68
Dimensions	W x H x D	mm	770 x 540 x 245	770 x 540 x 245	870 x 655 x 320	950 x 834 x 330	950 x 834 x 330	
Net Weight		kg	32.0	32.0	44.6	56.1	58.0	
Refrigerant	Type			R410A	R410A	R410A	R410A	R410A
	Charge		g	1,000	1,000	1,300	2,000	2,000
	Additional Charge (after 7.5m)		g / m	20	20	20	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-10 - 43	-10 - 43	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18	-18 - 18	-18 - 18
Power Supply		Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Supply Cable		No. x mm²	3C x 2.5	3C x 2.5	3C x 2.5	3C x 2.5	3C x 2.5	
Transmission Cable		No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker		A	15	15	20	25	25	
Piping Length Total		Min - Max	m	5-15	5-15	5 - 30	5 - 50	5 - 50
Piping Elevation Difference	IDU - ODU	Max	m	10	10	30	30	30
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

SINGLE SPLIT
Ceiling Mounted Cassette

Standard Inverter

CEILING MOUNTED CASSETTE

UT36 / UT42 / UT48 / UT60



INDOOR				UT36 NN2	UT42 NM2	UT48 NM2	UT60 NM2
Capacity	Cooling	Min / Nom / Max	kW	4.0 / 10.0 / 11.0	5.0 / 12.5 / 13.8	5.5 / 13.9 / 15.7	5.9 / 14.6 / 16.3
	Heating	Min / Nom / Max	kW	4.4 / 11.0 / 12.1	5.0 / 14.0 / 15.4	6.4 / 15.4 / 17.6	6.8 / 16.9 / 18.7
Low Temperature Capacity	Heating -7°C		kW	9.8	12.5	14.3	15.2
	Cooling	Nom	kW	2.82	3.89	4.62	5.40
Power Input (Set)	Cooling	Nom	kW	3.09	3.88	4.51	5.50
	Heating	Nom	kW				
Power Input (Indoor)			W	140	210	210	210
	Cooling / Heating	Nom	A	12.3 / 13.4	16.9 / 16.9	20.1 / 19.6	23.5 / 23.9
Running Current			A				
	Cooling / Heating	Nom	A				
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
				3.55	3.21	3.01	2.70
EER				3.56	3.61	3.41	3.07
COP							
				5.41	-	-	-
SEER							
				3.81	-	-	-
SCOP							
			kW	7.6	-	-	-
Pdesign (@ -10°C)							
	Cooling / Heating		A / A				
Seasonal Energy Label							
	Cooling / Heating		kWh	648 / 2,800	-	-	-
Annual Energy Consumption							
	Cooling / Heating		kWh				
Piping Connection							
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Air Flow Rate							
	High / Medium / Low		m³ / min	24.0 / 22.0 / 19.0	30.0 / 28.0 / 26.0	34.0 / 32.0 / 30.0	34.0 / 32.0 / 30.0
	High / Medium / Low		dBA	43 / 40 / 37	46 / 44 / 43	49 / 47 / 45	49 / 47 / 45
Sound Pressure	Cooling		dBA				
	Max		dBA	66	65	66	66
Sound Power	Cooling		dBA				
	Max		dBA	66	65	66	66
Dehumidification Rate							
			l / h	2.7	3.6	4.4	5.5
Dimensions	Body	W x H x D	mm	840 x 246 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Body		kg	22.3	24.6	24.6	24.6
Net Weight							
				PT-UMC1	PT-UMC1	PT-UMC1	PT-UMC1
				Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)
	Dimensions	W x H x D	mm	950 x 25 x 950	950 x 25 x 950	950 x 25 x 950	950 x 25 x 950
	Weight		kg	5.0	5.0	5.0	5.0

OUTDOOR				UU36W U02	UU42W U32	UU48W U32	UU60W U32
Compressor			Type	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate							
	Nom		m³ / min	90	110	110	110
Sound Pressure	Cooling		dBA	53	52	52	52
	Nom		dBA	54	54	54	54
Sound Power	Cooling		dBA	66	67	68	71
	Max		dBA	66	67	68	71
Dimensions							
	W x H x D		mm	950 x 1,170 x 330	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight							
			kg	81.0	92.0	92.0	96.0
Refrigerant							
			Type	R410A	R410A	R410A	R410A
	Charge		g	2,800	3,400	3,400	3,400
Additional Charge (after 10m)							
			g / m	40	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18	-18 - 18
Power Supply							
			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable							
	No. x mm²			3C x 5.0	3C x 5.0	3C x 5.0	3C x 5.0
Transmission Cable							
	No. x mm²			4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker							
			A	40	40	40	40
Piping Length Total							
	Min - Max		m	5 - 50	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30	30
Piping Connection							
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
			mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note: 1. Due to our policy of innovation some specifications may be changed without notification.

2. Definition of Power Input Nominal conditions - Performance tested under EN14511

3. Capacities are based on the following conditions:

Cooling: - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating: - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB

4. Annual energy consumption: based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition

5. This product contains fluorinated greenhouse gases (R410A)



Standard Inverter

CEILING MOUNTED CASSETTE

UT36 / UT42 / UT48 / UT60



INDOOR				UT36 NN2	UT42 NM2	UT48 NM2	UT60 NM2
Capacity	Cooling	Min / Nom / Max	kW	4.0 / 10.0 / 11.0	5.0 / 12.5 / 13.8	5.5 / 13.9 / 15.7	5.9 / 14.6 / 16.3
	Heating	Min / Nom / Max	kW	4.4 / 11.0 / 12.1	5.0 / 14.0 / 15.4	6.4 / 15.3 / 17.6	6.8 / 16.9 / 18.7
Low Temperature Capacity	Heating -7°C		kW	9.8	12.5	14.3	15.2
	Cooling	Nom	kW	2.82	3.89	4.62	5.40
Power Input (Set)	Cooling	Nom	kW	3.09	3.88	4.49	5.50
	Heating	Nom	kW				
Power Input (Indoor)			W	140	210	210	210
	Cooling / Heating	Nom	A	4.1 / 4.5	5.6 / 5.6	6.7 / 6.5	7.8 / 8.0
Running Current			A				
	Cooling / Heating	Nom	A				
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
				3.55	3.21	3.01	2.70
EER				3.56	3.61	3.41	3.07
COP							
				5.41	-	-	-
SEER							
				3.81	-	-	-
SCOP							
			kW	7.6	-	-	-
Pdesign (@ -10°C)							
	Cooling / Heating		A / A				
Seasonal Energy Label							
	Cooling / Heating		kWh	648 / 2,800	-	-	-
Annual Energy Consumption							
	Cooling / Heating		kWh				
Piping Connection							
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Air Flow Rate							
	High / Medium / Low		m³ / min	24.0 / 22.0 / 19.0	30.0 / 28.0 / 26.0	34.0 / 32.0 / 30.0	34.0 / 32.0 / 30.0
	High / Medium / Low		dBA	43 / 40 / 37	46 / 44 / 43	49 / 47 / 45	49 / 47 / 45
Sound Pressure	Cooling		dBA				
	Max		dBA	62	65	66	66
Sound Power	Cooling		dBA				
	Max		dBA	62	65	66	66
Dehumidification Rate							
			l / h	2.7	3.6	4.4	5.5
Dimensions	Body	W x H x D	mm	840 x 246 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Body		kg	22.3	24.6	24.6	24.6
Net Weight							
				PT-UMC1	PT-UMC1	PT-UMC1	PT-UMC1
				Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)	Morning Fog (RAL 120-4)
	Dimensions	W x H x D	mm	950 x 25 x 950	950 x 25 x 950	950 x 25 x 950	950 x 25 x 950
	Weight		kg	5.0	5.0	5.0	5.0

OUTDOOR				UU37W U02	UU43W U32	UU49W U32	UU61W U32
Compressor			Type	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate							
	Nom		m³ / min	90	110	110	110
Sound Pressure	Cooling		dBA	53	52	52	52
	Nom		dBA	54	54	54	54
Sound Power	Cooling		dBA	66	67	68	71
	Max		dBA	66	67	68	71
Dimensions							
	W x H x D		mm	950 x 1,170 x 330	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight							
			kg	85.0	96.0	96.0	96.0
Refrigerant							
			Type	R410A	R410A	R410A	R410A
	Charge		g	2,800	3,400	3,400	3,400
Additional Charge (after 10m)							
			g / m	40	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18	-18 - 18
Power Supply							
			Ø / V / Hz	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50
Power Supply Cable							
	No. x mm²			5C x 2.5	5C x 2.5	5C x 2.5	5C x 2.5
Transmission Cable							
	No. x mm²			4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker							
			A	20	20	20	20
Piping Length Total							
	Min - Max		m	5 - 50	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30	30
Piping Connection							
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
			mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note: 1. Due to our policy of innovation some specifications may be changed without notification.

SINGLE SPLIT

CEILING CONCEALED DUCT




CEILING CONCEALED DUCT

SINGLE SPLIT

Ceiling Concealed Duct



E.S.P. (External Static Pressure) Control

E.S.P. control function can make air volume controlled easily with remote controller. The BLDC motor can control fan speed and air volume regardless of the external static pressure. No additional accessories are necessary to control air flow.

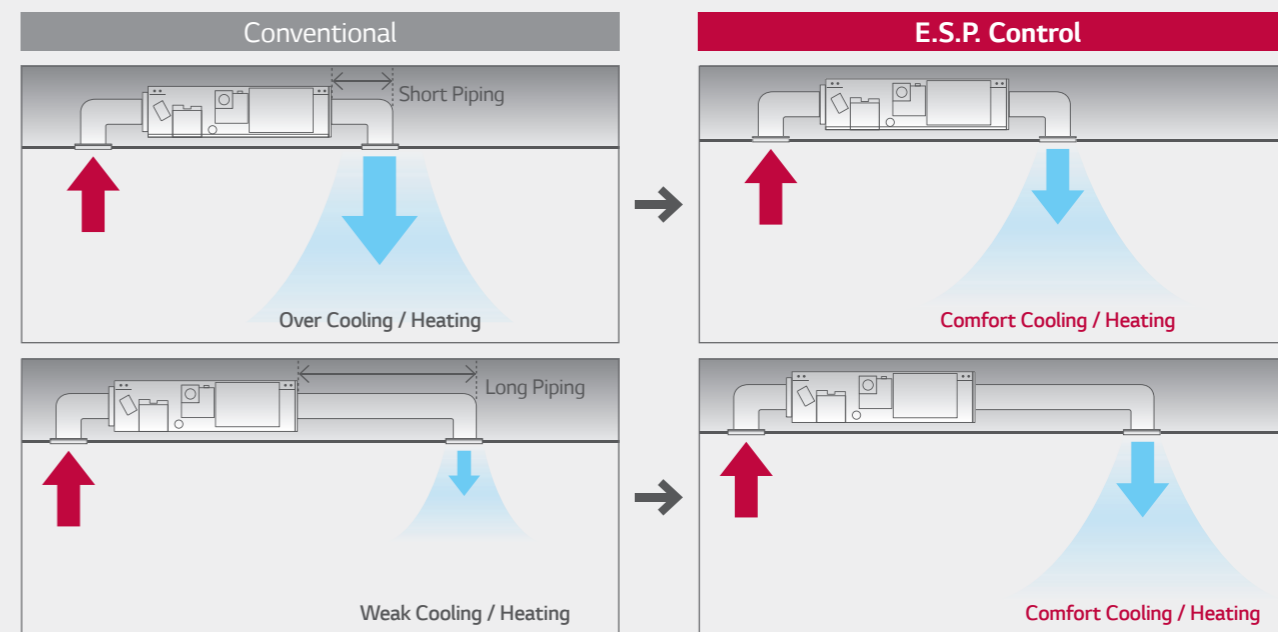

High Head Drain Pump

High head drain pump automatically drains water up to 200mm of drain-head height. It provides perfect solution for water drainage. (H-Inverter : Included / Standard Inverter : Accessory (ABDPG) / Low-static Duct : Included)

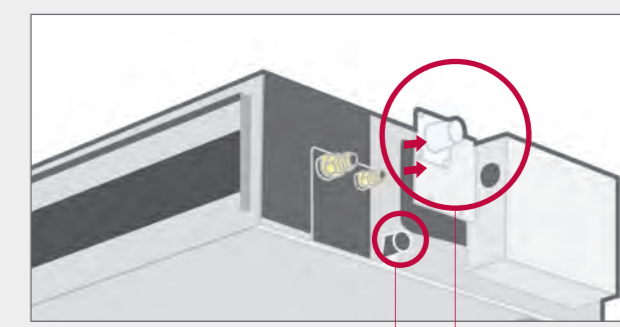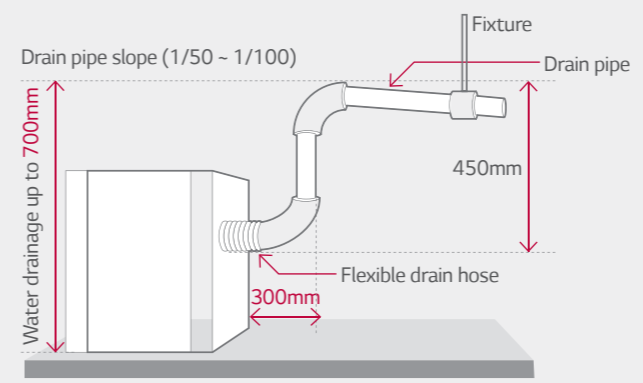


Available for Natural Drainage
Detachable Drain Pump

CEILING CONCEALED DUCT

Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.

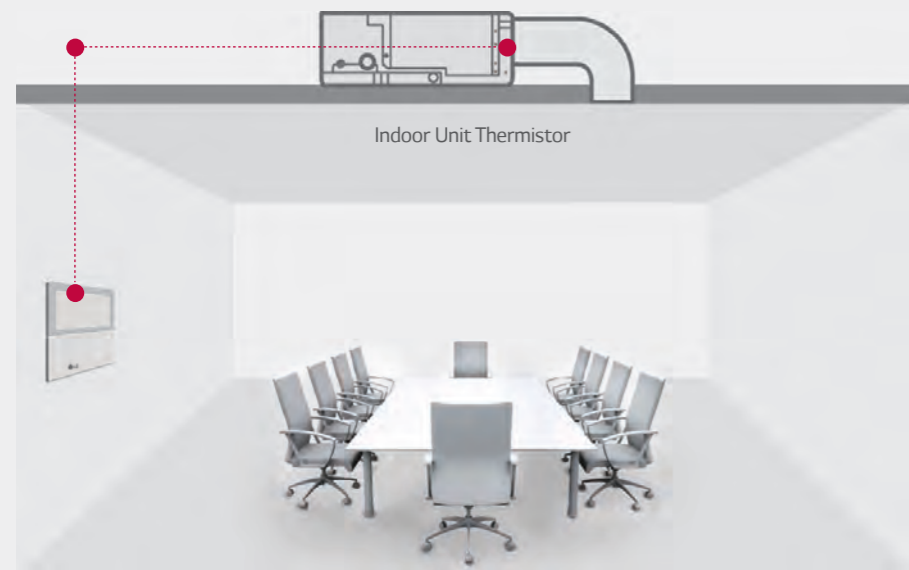


Compares temperatures sensed from different positions, and automatically selects the optimum temperature for users

Remote Controller Thermistor


Operation for Multiple Rooms

Using a spiral duct (embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously.

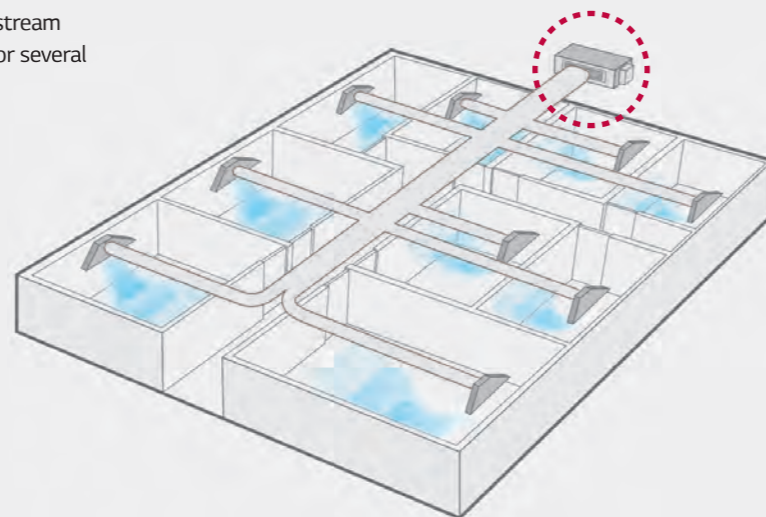


Minimized Height

New mid-static ducts provide ideal solution for installation in limited space.

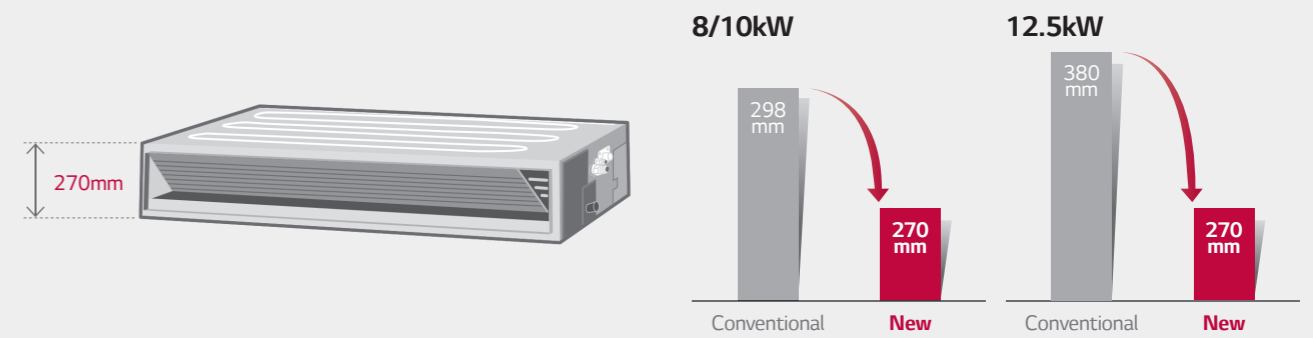


Wide Operation Range

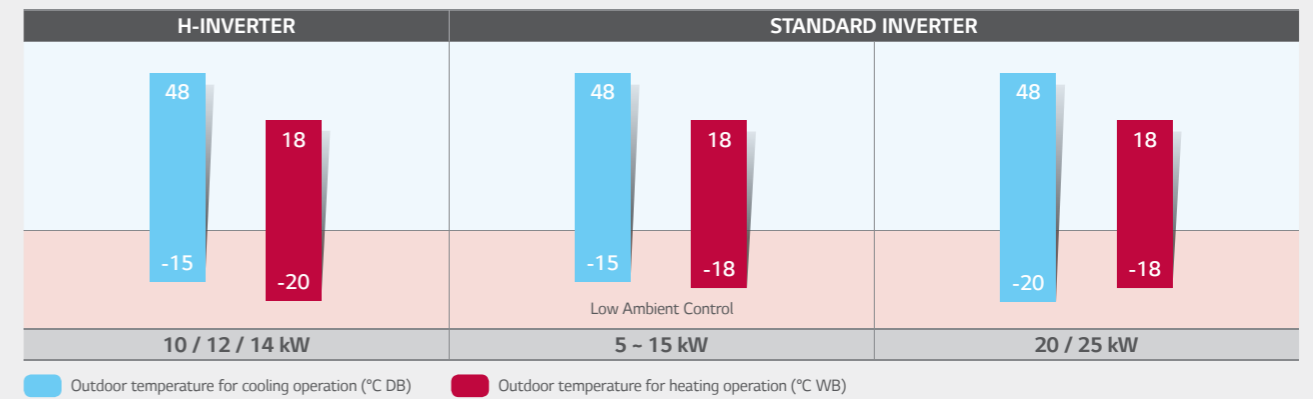

Easy Service & Maintenance

Users don't need to open whole panel for maintenance, since panel is divided into one for heat exchanger and one for fan/motor. Easily detach and attach the filter even in limited space.

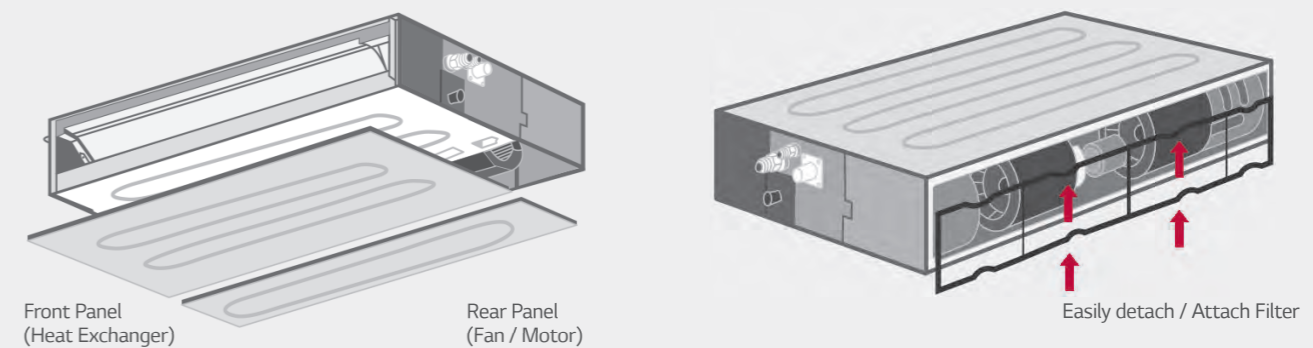


CEILING CONCEALED DUCT LOW STATIC PRESSURE

Quiet Operation


The noise level of low static ducts have been reduced, even though ESP has been increased.

Sound Pressure (High / Medium / Low)	dB (A)	CB09L N12	CB12L N22	CB18L N22	CB24L N32
		30 / 26 / 23	31 / 28 / 27	36 / 34 / 31	39 / 35 / 32

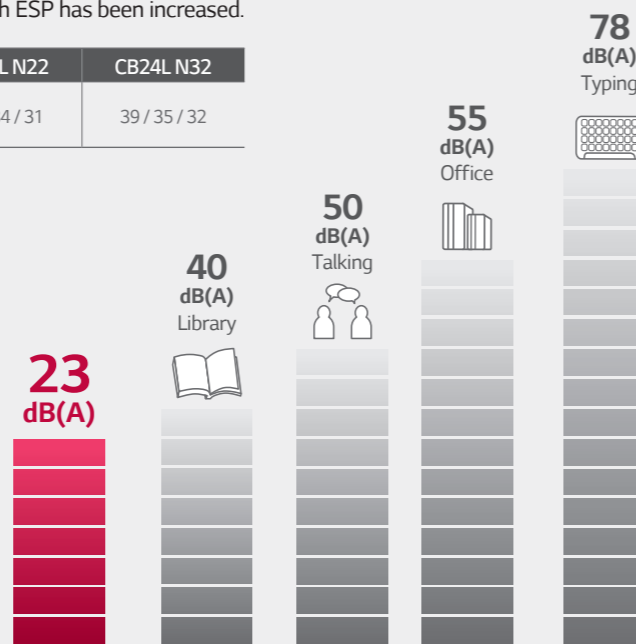

Flexible Installation

The new low static duct allows the air intake at the rear or bottom under installation condition.

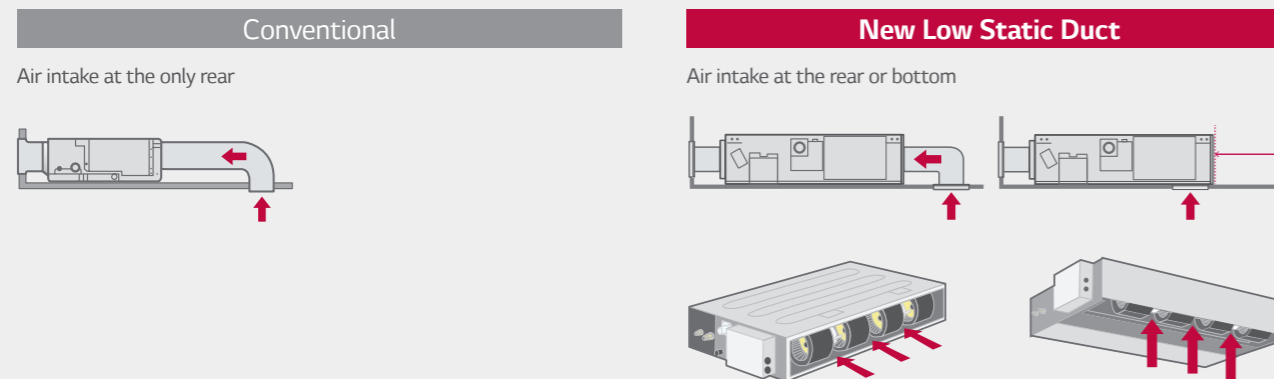

H-Inverter

CEILING CONCEALED DUCT

MID / HIGH STATIC PRESSURE -
UB36H / UB42H / UB48H



UU36WH / UU42WH / UU48WH

INDOOR				UB36H NR3	UB42H NR3	UB48H NR3
Capacity	Cooling	Min / Nom / Max	kW	4.8 / 9.5 / 13.0	5.1 / 12.1 / 14.5	5.5 / 13.4 / 16.0
	Heating	Min / Nom / Max	kW	5.3 / 10.8 / 13.7	5.6 / 13.5 / 16.5	6.1 / 15.5 / 18.0
Low Temperature Capacity	Heating -7°C		Max	11.2	14.0	15.5
	Cooling	Nom	kW	2.16	3.16	3.88
Power Input (Set)	Heating		Nom	2.57	3.50	4.18
	Min / Max (Nom ESP)		W	100 / 200	120 / 220	190 / 280
Running Current	Cooling / Heating		Nom	A	14.5 / 16.2	18.1 / 19.4
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				4.42	3.87	3.53
COP				4.53	4.03	3.83
SEER				6.54	-	-
SCOP				4.23	-	-
Pdesign (@ -10°C)			kW	11.0	-	-
Seasonal Energy Label	Cooling / Heating			A++ / A+	-	-
Annual Energy Consumption	Cooling / Heating		kWh	508 / 3,641	-	-
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25	32 / 25
Air Flow Rate	High / Medium / Low		m³ / min	34.0 / 28.0 / 21.0	37.0 / 31.0 / 24.0	40.0 / 34.0 / 28.0
Sound Pressure	Cooling	High / Medium / Low	dBA	39 / 37 / 35	40 / 38 / 36	41 / 39 / 37
	Cooling	Max	dBA	60	62	62
Dehumidification Rate			l / h	1.6	3.7	4.5
Dimensions	Body	W x H x D	mm	1,230 x 380 x 590	1,230 x 380 x 590	1,230 x 380 x 590
Net Weight	Body		kg	52.0	52.0	52.0
External Static Pressure	Min - Max		mmAq (Pa)	4-12 (39-118)	5-12 (49-118)	5-12 (49-118)

OUTDOOR				UU36WH U34	UU42WH U34	UU48WH U34
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	110	110	110
Sound Pressure	Cooling	Nom	dBA	51	52	52
	Heating	Nom	dBA	53	54	54
Sound Power	Cooling	Max	dBA	66	67	68
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	91.5	91.5	91.5
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	3,400	3,400	3,400
Operation Range (Outdoor)	Additional Charge (after 7.5m)		g / m	40	40	40
	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
Power Supply	Heating		°C WB	-20 - 18	-20 - 18	-20 - 18
	Ø / V / Hz			1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 5.0	3C x 5.0	3C x 5.0
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	40	40	40
Piping Length Total	Min - Max		m	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.

2. Definition of Power Input Nominal conditions - Performance tested under EN14511

3. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB

4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition

5. This product contains fluorinated greenhouse gases (R410A)

H-Inverter

CEILING CONCEALED DUCT



MID / HIGH STATIC PRESSURE -
UB36H / UB42H / UB48H



UU37WH / UU43WH / UU49WH

INDOOR				UB36H NR3	UB42H NR3	UB48H NR3
Capacity	Cooling	Min / Nom / Max	kW	4.8 / 9.5 / 13.0	5.1 / 12.1 / 14.5	5.5 / 13.4 / 16.0
	Heating	Min / Nom / Max	kW	5.3 / 10.8 / 13.7	5.6 / 13.5 / 16.5	6.1 / 15.5 / 18.0
Low Temperature Capacity	Heating -7°C		Max	11.2	14.0	15.5
	Cooling	Nom	kW	2.16	3.16	3.88
Power Input (Set)	Heating		Nom	2.57	3.50	4.18
	Min / Max (Nom ESP)		W	100 / 200	120 / 220	190 / 280
Running Current	Cooling / Heating	Nom	A	3.8 / 4.5	5.6 / 6.2	6.9 / 7.4
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				4.42	3.87	3.53
COP				4.53	4.03	3.83
SEER				6.54	-	-
SCOP				4.23	-	-
Pdesign (@ -10°C)			kW	11.0	-	-
Seasonal Energy Label	Cooling / Heating			A++ / A+	-	-
Annual Energy Consumption	Cooling / Heating		kWh	508 / 3,641	-	-
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain		mm	32 / 25	32 / 25	32 / 25
	O.D. / I.D.					
Air Flow Rate	High / Medium / Low		m³ / min	34.0 / 28.0 / 21.0	37.0 / 31.0 / 24.0	40.0 / 34.0 / 28.0
Sound Pressure	Cooling	High / Medium / Low	dB(A)	39 / 37 / 35	40 / 38 / 36	41 / 39 / 37
Sound Power	Cooling	Max	dB(A)	60	62	62
Dehumidification Rate			l / h	1.6	3.7	4.5
Dimensions	Body	W x H x D	mm	1,230 x 380 x 590	1,230 x 380 x 590	1,230 x 380 x 590
Net Weight	Body		kg	52.0	52.0	52.0
External Static Pressure	Min - Max		mmAq (Pa)	4-12 (39-118)	5-12 (49-118)	5-12 (49-118)

OUTDOOR				UU37WH U33	UU43WH U33	UU49WH U33
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	110	110	110
	Cooling	Nom	dB(A)	51	52	52
Sound Pressure	Heating		Nom	53	54	54
	Cooling	Max	dB(A)	66	67	68
Sound Power	Cooling	Max	dB(A)	66	67	68
Dimensions	W x H x D			mm	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight				kg	93.0	93.0
Refrigerant	Type			R410A	R410A	R410A
	Charge			g	3,400	3,400
	Additional Charge (after 7.5m)			g / m	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-20 - 18	-20 - 18	-20 - 18
Power Supply	Ø / V / Hz			3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50
Power Supply Cable	No. x mm²			5C x 2.5	5C x 2.5	5C x 2.5
Transmission Cable	No. x mm²			4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker	A			20	20	20
Piping Length Total	Min - Max			m	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Standard Inverter

CEILING CONCEALED DUCT

MID / HIGH STATIC PRESSURE -
CM18 / CM24 / UM30



NEW UU18W
NEW UU24W
NEW UU30W

INDOOR				CM18 N14	CM24 N14	UM30 N14
Capacity	Cooling	Min / Nom / Max	kW	1.8 / 5.0 / 6.0	2.8 / 6.8 / 7.5	3.2 / 7.8 / 8.8
	Heating	Min / Nom / Max	kW	2.2 / 6.0 / 7.2	3.2 / 7.5 / 8.3	3.6 / 9.0 / 9.9
Low Temperature Capacity	Heating -7°C		Max	5.4	7.2	8.1
	Cooling	Nom	kW	1.46	2.07	2.41
Power Input (Set)	Heating		Nom	1.66	2.34	2.62
	Min / Max (Nom ESP)		W	90 / 160	100 / 180	160 / 240
Running Current	Cooling / Heating	Nom	A	6.5 / 7.6	9.1 / 10.3	10.1 / 10.7
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				3.41	3.11	3.51
COP				3.61	3.21	3.70
SEER				6.10	6.10	6.10
SCOP				4.25	3.90	4.00
Pdesign (@ -10°C)			kW	4.1	6.0	6.5
Seasonal Energy Label	Cooling / Heating			A++ / A+	A++ / A	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	287 / 1,383	390 / 2,154	448 / 2,275
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain		mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	O.D. / I.D.					
Air Flow Rate	High / Medium / Low		m³ / min	16.5 / 14.5 / 13.0	18.0 / 16.5 / 14.5	22.0 / 20.0 / 18.0
Sound Pressure	Cooling	High / Medium / Low	dB(A)	34 / 32 / 30	35 / 34 / 32	37 / 35 / 34
Sound Power	Cooling	Max	dB(A)	59	60	62
Dehumidification Rate			l / h	2.0	2.5	2.8
Dimensions	Body	W x H x D	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700
Net Weight	Body		kg	23.8	24.2	25.3
External Static Pressure	Min - Max		mmAq (Pa)	2.5-15 (25-147)	2.5-15 (25-147)	2.5-15 (25-147)

OUTDOOR				UU18W UE4	UU24W U44	UU30W U44
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	50	58	58
	Cooling	Nom	dB(A)	47	48	48
Sound Pressure	Heating		Nom	52	52	52
	Cooling	Max	dB(A)	63	67	68
Sound Power	Cooling	Max	dB(A)	63	67	68
Dimensions	W x H x D			mm	870 x 655 x 320	950 x 834 x 330
Net Weight				kg	44.6	56.1
Refrigerant	Type			R410A	R410A	R410A
	Charge			g	1,300	2,000
	Additional Charge (after 7.5m)			g / m	20	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
Power Supply	Ø / V / Hz			1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	No. x mm²			3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable	No. x mm²			4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker	A			20	25	25
Piping Length Total	Min - Max			m	5 - 30	5 - 50
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

SINGLE SPLIT

Ceiling Concealed Duct

Standard Inverter

CEILING CONCEALED DUCT



HIGH STATIC PRESSURE -
UB70 / UB85



INDOOR				UB70 N94	UB85 N94
Capacity	Cooling	Min / Nom / Max	kW	7.6 / 19.0 / 20.9	9.2 / 23.0 / 25.3
	Heating	Min / Nom / Max	kW	9.0 / 22.4 / 24.6	10.8 / 27.0 / 29.7
Low Temperature Capacity	Heating -7°C	Max	kW	18.0	24.0
	Cooling	Nom	kW	6.69	8.19
Power Input (Set)	Heating	Nom	kW	6.4	8.31
	Cooling	Nom	kW	6.4	8.31
Power Input (Indoor)	Min / Max (Nom ESP)	W	550 / 760	610 / 920	
Running Current	Cooling / Heating	Nom	A	11.5 / 10.7	13.5 / 13.6
Power Supply	Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	
EER			2.84	2.81	
COP			3.50	3.25	
SEER			-	-	
SCOP			-	-	
Pdesign (@ -10°C)			kW	-	-
Seasonal Energy Label	Cooling / Heating			-	-
Annual Energy Consumption	Cooling / Heating		kWh	-	-
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Gas		mm (inch)	Ø25.4 (1/1)	Ø22.2 (7/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25
Air Flow Rate	High / Medium / Low		m³ / min	70.0 / 65.0 / 60.0	80.0 / 72.0 / 64.0
Sound Pressure	Cooling	High / Medium / Low	dBA	43 / 41 / 40	43 / 41 / 40
Sound Power	Cooling	Max	dBA	61	61
Dehumidification Rate			l / h	1.81 (4.2)	5.14 (11.9)
Dimensions	Body	W x H x D	mm	1,563 x 458 x 791	1,563 x 458 x 791
Net Weight	Body		kg	90.0	90.0
External Static Pressure	Min - Max		mmAq (Pa)	6 - 25 (60-250)	6 - 25 (60-250)

OUTDOOR				UU70W U34	UU85W U74
Compressor	Type			Hermetically Sealed Scroll	Hermetically Sealed Scroll
Airflow Rate	Nom		m³ / min	110	190
Sound Pressure	Cooling	Nom	dBA	55	59
	Heating	Nom	dBA	58	60
Sound Power	Cooling	Max	dBA	73	74
Dimensions	W x H x D		mm	950 x 1,380 x 330	1,090 x 1,625 x 380
Net Weight			kg	110	144.0
Refrigerant	Type			R410A	R410A
	Charge		g	5,200	5,500
	Additional Charge (after 7.5m)		g / m	70	70
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-20 - 48	-20 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18
Power Supply	Ø / V / Hz		3 / 380-415 / 50	3 / 380-415 / 50	
Power Supply Cable	No. x mm²		3C x 2.5	5C x 2.5	
Transmission Cable	No. x mm²		4C x 1.0	4C x 1.0	
Circuit Breaker	A		30	30	
Piping Length Total	Min - Max		m	75	75
Piping Elevation Difference	IDU - ODU	Max	m	30	30
Piping Connection	Liquid		mm (inch)	Ø9.53 (3/8)	Ø12.7 (1.2)
	Gas		mm (inch)	Ø25.4 (1/1)	Ø22.2 (7/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Standard Inverter

CEILING CONCEALED DUCT

LOW STATIC PRESSURE -
CB09L / CB12L / CB18L / CB24L



INDOOR				CB09L N12	CB12L N22	CB18L N22	CB24L N32
Capacity	Cooling	Min / Nom / Max	kW	1.1 / 2.5 / 3.2	1.4 / 3.4 / 3.7	2.0 / 5.0 / 6.0	4.0 / 7.1 / 7.7
	Heating	Min / Nom / Max	kW	1.2 / 3.2 / 3.6	1.6 / 4.0 / 4.5	2.2 / 6.0 / 7.2	2.0 / 7.5 / 8.3
Low Temperature Capacity	Heating -7°C	Max	kW	3.5	4.4	6.7	8.2
	Cooling	Nom	kW	0.72	1.00	1.55	2.36
Power Input (Set)	Heating	Nom	kW	0.91	1.05	1.50	2.05
	Cooling	Nom	kW	0.91	1.05	1.50	2.05
Power Input (Indoor)	Min / Max (Nom ESP)	W	40 / 60	80 / 100	100 / 140	110 / 160	
Running Current	Cooling / Heating	Nom	A	3.1 / 4.0	4.3 / 4.6	6.8 / 8.4	10.4 / 9.0
Power Supply	Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
EER			3.48	3.41	3.11	3.01	
COP			3.51	3.81	3.41	3.61	
SEER			5.11	5.61	6.10	5.60	
SCOP			3.81	3.81	3.95	3.90	
Pdesign (@ -10°C)			kW	2.8	3.0	4.0	5.8
Seasonal Energy Label	Cooling / Heating			A / A	A+ / A	A++ / A	A+ / A
Annual Energy Consumption	Cooling / Heating		kWh	172 / 1,032	213 / 1,105	287 / 1,418	444 / 2,082
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25	Ø32.0 / 25.0	Ø32.0 / 25.0
Air Flow Rate	High / Medium / Low		m³ / min	9.0 / 7.0 / 5.5	10.0 / 8.5 / 7.0	15.0 / 12.5 / 10.0	20.0 / 16.0 / 12.0
Sound Pressure	Cooling	High / Medium / Low	dBA	30 / 26 / 23	31 / 28 / 27	36 / 34 / 31	39 / 35 / 32
Sound Power	Cooling	Max	dBA	49	52	54	58
Dehumidification Rate			l / h	1.1	1.2	1.7	2.2
Dimensions	Body	W x H x D	mm	700 x 190 x 700	900 x 190 x 700	900 x 190 x 700	1,100 x 190 x 700
Net Weight	Body		kg	17.5	23.0	23.0	27.0
External Static Pressure	Min - Max		mmAq (Pa)	0-5 (0-49)	0-5 (0-49)	0-5 (0-49)	0-5 (0-49)

OUTDOOR				UU09W ULD	UU12W ULD	UU18W UE4	UU24W U44
Compressor	Type			Rotary	Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	32	32	50	58
Sound Pressure	Cooling	Nom	dBA	47	47	47	48
	Heating	Nom	dBA	48	48	52	52
Sound Power	Cooling	Max	dBA	56	57	63	67
Dimensions	W x H x D		mm	770 x 540 x 245	770 x 540 x 245	870 x 655 x 320	950 x 834 x 330
Net Weight			kg	32.0	32.0	44.8	56.1
Refrigerant	Type			R410A	R410A	R410A	R410A
	Charge		g	1,000	1,000	1,300	2,000
	Additional Charge (after 7.5m)		g / m	20	20	20	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-10 - 43	-10 - 43	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18	-18 - 18
Power Supply	Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Supply Cable	No. x mm²		3C x 2.5	3C x 2.5	3C x 2.5	3C x 2.5	
Transmission Cable	No. x mm²		4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker	A		15	15	20	25	
Piping Length Total	Min - Max		m	5-15	5-15	5 - 30	5 - 50
Piping Elevation Difference	IDU - ODU	Max	m	10	10	30	30
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Compact Inverter

CEILING CONCEALED DUCT

HIGH STATIC PRESSURE -

NEW UB18C / **NEW** UB24C / UM30 / UM36



INDOOR				UB18C NHO	UB24C NHO	UM30 N14	UM36 N24
Capacity	Cooling	Min / Nom / Max	kW	1.8 / 4.7 / 5.1	2.7 / 6.8 / 7.4	3.2 / 7.5 / 7.8	3.8 / 9.5 / 10.0
	Heating	Min / Nom / Max	kW	1.7 / 5.2 / 5.7	1.9 / 7.5 / 8.2	3.6 / 8.0 / 8.8	4.0 / 10.0 / 10.5
Low Temperature Capacity	Heating -7°C	Max	kW	3.9	5.7	7.0	8.7
	Cooling	Nom	kW	1.63	2.33	2.68	3.35
Power Input (Set)	Heating	Nom	kW	1.67	2.40	2.25	2.93
	Cooling	Nom	kW	1.67	2.40	2.25	2.93
Power Input (Indoor)		Min / Max (Nom ESP)	W	80 / 100	100 / 140	160 / 240	200 / 360
Running Current	Cooling / Heating	Nom	A	7.3 / 7.4	9.4 / 9.6	12.0 / 10.0	14.9 / 13.0
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				2.86	2.92	2.8	2.8
COP				3.11	3.13	3.6	3.4
SEER				5.11	5.38	5.6	5.6
SCOP				3.81	3.81	3.9	3.8
Pdesign (@ -10°C)			kW	3.2	5.2	5.8	6.5
Seasonal Energy Label	Cooling / Heating		A / A	A / A	A+ / A	A+ / A	A+ / A
Annual Energy Consumption	Cooling / Heating		kWh	322 / 1,176	442 / 1,911	469 / 2,082	594 / 2,388
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25	32 / 25	32 / 25
	Air Flow Rate	High / Medium / Low	m³ / min	13.5 / 12.0 / 10.5	18.0 / 16.5 / 14.5	22.0 / 20.0 / 18.0	32.0 / 28.0 / 24.0
Sound Pressure	Cooling	High / Medium / Low	dBA	36 / 34 / 32	38 / 36 / 34	37 / 35 / 34	36 / 34 / 33
	Heating	Max	dBA	59	63	62	60
Dehumidification Rate			l / h	1.1 (2.5)	2.12 (4.9)	2.8	3.2
Dimensions	Body	W x H x D	mm	882 x 260 x 450	882 x 260 x 450	900 x 270 x 700	1,250 x 270 x 700
Net Weight	Body		kg	25.3	26.1	25.3	36.0
External Static Pressure		Min - Max	mmAq (Pa)	2.5-8 (25-78)	2.5-8 (25-78)	2.5-15(25-147)	4-15(39-147)

OUTDOOR				UU18WC ULO	UU24WC UE0	UU30WC UE0	UU36WC U40
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	28	50	50	58
	Cooling	Nom	dBA	47	48	51	54
Sound Pressure	Heating	Nom	dBA	49	50	52	56
	Cooling	Max	dBA	65	68	70	70
Dimensions	W x H x D		mm	770 x 545 x 288	870 x 655 x 320	870 x 655 x 320	950 x 834 x 330
Net Weight			kg	37.5	44.5	45.4	58.2
Refrigerant	Type			R410A	R410A	R410A	R410A
	Charge		g	1,300	1,400	1,600	2,200
	Additional Charge (after 7.5m)		g / m	20	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-10 - 46	-10 - 46	-10 - 48	-10 - 48
	Heating	Min - Max	°C WB	-10 - 18	-15 - 18	-10 - 18	-10 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	0 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 2.5	3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	15	20	20	25
Piping Length Total		Min - Max	m	5-30	5-30	5-35	5-40
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30	30
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)



SINGLE SPLIT CEILING & FLOOR CONVERTIBLE CEILING SUSPENDED UNIT



CEILING & FLOOR CONVERTIBLE

Flexible Installation

The ceiling and floor models can be installed either on the ceiling or on the floor. This saves space when installed in the shops or offices.

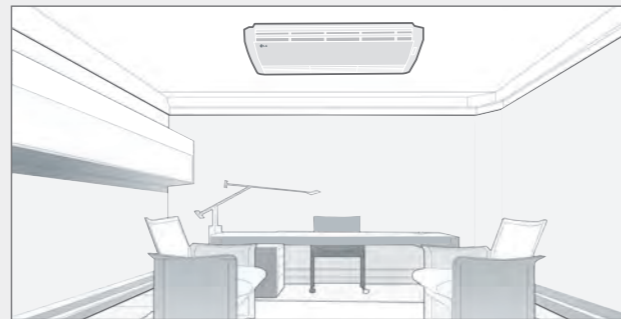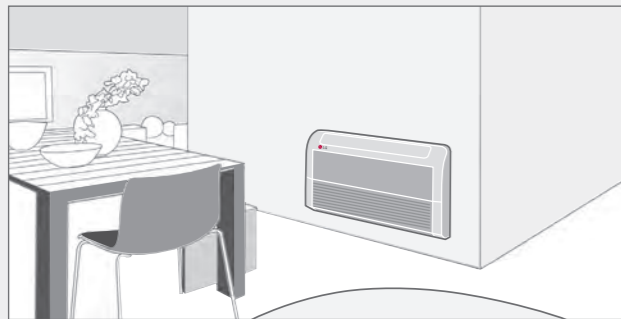


* Ceiling & Floor : CV09 NE2 / CV12 NE2


Airflow Direction Control

Vertical airflow direction can be adjusted using remote controller, and horizontal airflow direction can be adjusted manually.


Horizontal

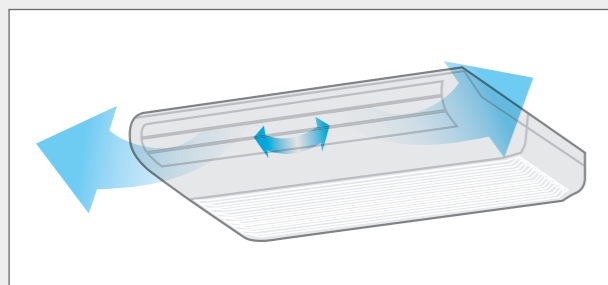


Vertical

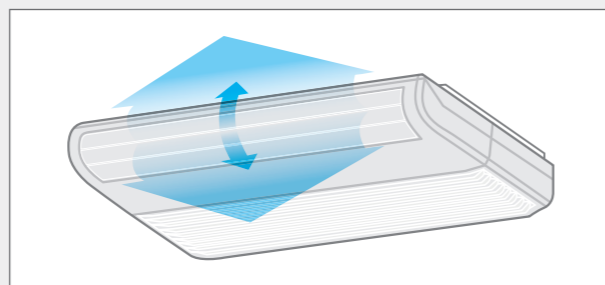

Cooling

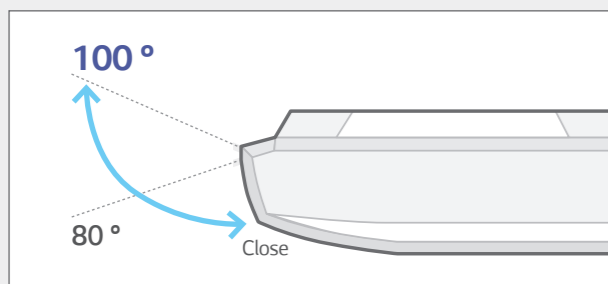

Heating

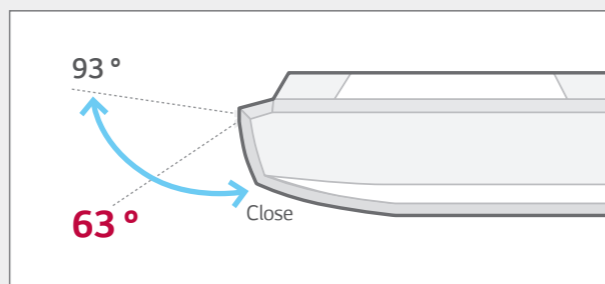


CEILING SUSPENDED UNIT

SINGLE SPLIT

Ceiling & Floor Convertible Ceiling Suspended Unit


Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Compares temperatures sensed from different positions, and automatically selects the optimum temperature for users. Two thermistors can optimise indoor air temperature for a more comfortable environment.

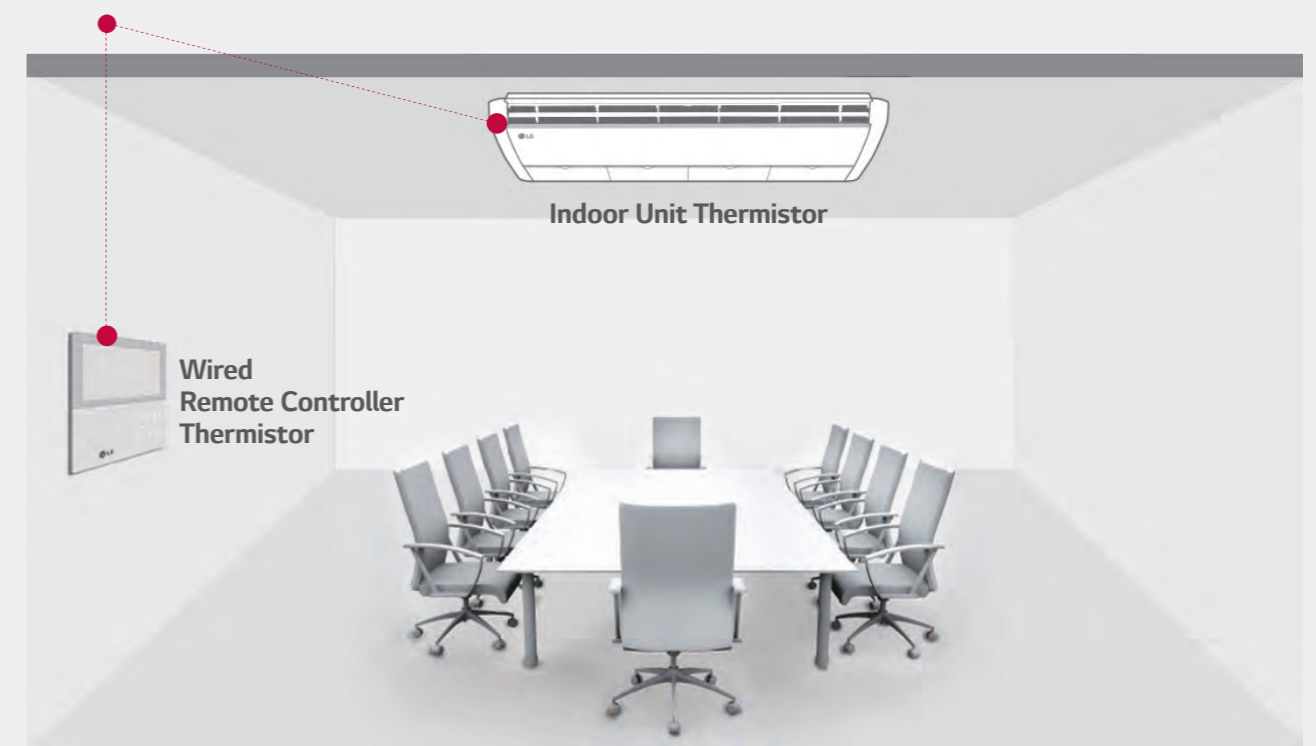

Filter Change Alarm

The filter change alarm informs you when the unit has been operating for 2,400 hours. It is very easy to clean or change the filter.

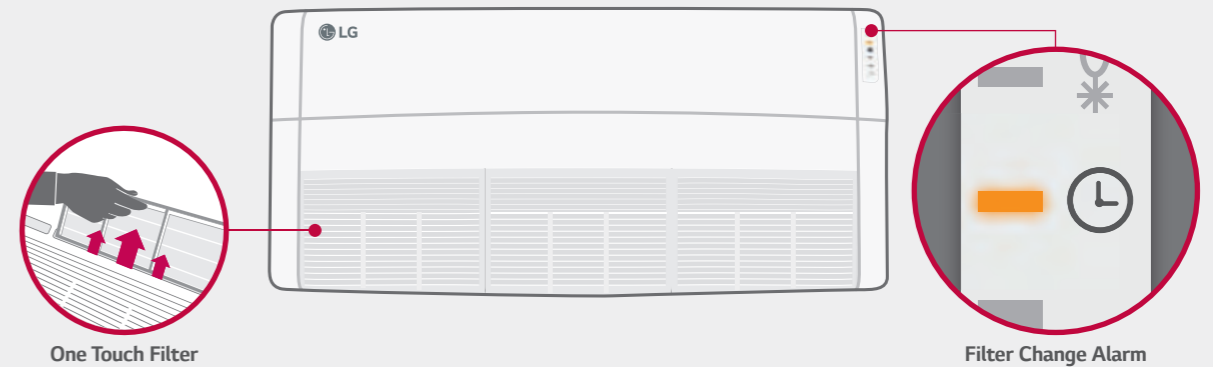

H-Inverter

CEILING SUSPENDED UNIT

UV36H / UV42H / UV48H



UU36WH / UU42WH / UU48WH

INDOOR				UV36H NL4	UV42H NL4	UV48H NL4
Capacity	Cooling	Min / Nom / Max	kW	4.5 / 9.5 / 13.0	5.0 / 12.1 / 14.5	5.5 / 13.4 / 16.0
	Heating	Min / Nom / Max	kW	5.0 / 10.8 / 13.7	5.5 / 13.5 / 16.5	6.1 / 15.5 / 18.0
Low Temperature Capacity	Heating -7°C		Max	11.1	13.9	15.2
	Cooling	Nom	kW	2.36	3.43	4.01
Power Input (Set)	Cooling	Nom	kW	2.36	3.43	4.01
	Heating	Nom	kW	2.57	3.64	4.59
Power Input (Indoor)		Nom	W	160	160	160
Running Current	Cooling / Heating	Nom	A	11.4 / 12.1	16.2 / 17.2	18.9 / 20.0
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				4.02	3.53	3.34
COP				4.21	3.71	3.38
SEER				6.43	-	-
SCOP				4.36	-	-
Pdesign (@ -10°C)			kW	11.0	-	-
Seasonal Energy Label	Cooling / Heating			A++ / A+	-	-
Annual Energy Consumption	Cooling / Heating		kWh	517 / 3,532	-	-
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	21.5 / 16.0	21.5 / 16.0	21.5 / 16.0
Air Flow Rate		High / Medium / Low	m³ / min	28.6 / 26.9 / 25.2	28.6 / 26.9 / 25.2	31.5 / 29.7 / 28.0
Sound Pressure	Cooling	High / Medium / Low	dBA	47 / 46 / 44	47 / 46 / 44	48 / 47 / 45
Sound Power	Cooling	Max	dBA	65	66	67
Dehumidification Rate			l / h	3.4	5	5.8
Dimensions	Body	W x H x D	mm	1,750 x 650 x 220	1,750 x 650 x 220	1,750 x 650 x 220
Net Weight	Body		kg	36.0	36.0	36.0

OUTDOOR				UU36WH U34	UU42WH U34	UU48WH U34
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m³ / min	110	110	110
Sound Pressure	Cooling	Nom	dBA	51	52	52
	Heating	Nom	dBA	53	54	54
Sound Power	Cooling	Max	dBA	66	67	68
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	91.5	91.5	91.5
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	3,400	3,400	3,400
	Additional Charge (after 7.5m)		g / m	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-20 - 18	-20 - 18	-20 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 5.0	3C x 5.0	3C x 5.0
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	40	40	40
Piping Length Total		Min - Max	m	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)



H-Inverter

CEILING SUSPENDED UNIT

UV36H / UV42H / UV48H



UU37WH / UU43WH / UU49WH

INDOOR				UV36H NL4	UV42H NL4	UV48H NL4
Capacity	Cooling	Min / Nom / Max	kW	4.5 / 9.5 / 13.0	5.0 / 12.1 / 14.5	5.5 / 13.4 / 16.0
	Heating	Min / Nom / Max	kW	5.0 / 10.8 / 13.7	5.5 / 13.5 / 16.5	6.1 / 15.5 / 18.0
Low Temperature Capacity	Heating -7°C		Max	11.1	13.9	15.2
	Cooling	Nom	kW	2.36	3.43	4.01
Power Input (Set)	Cooling	Nom	kW	2.36	3.43	4.01
	Heating	Nom	kW	2.57	3.64	4.59
Power Input (Indoor)		Nom	W	160	160	160
Running Current	Cooling / Heating	Nom	A	4.2 / 4.5	6.1 / 6.5	7.1 / 8.1
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				4.02	3.53	3.34
COP				4.21	3.71	3.38
SEER				6.43	-	-
SCOP				4.36	-	-
Pdesign (@ -10°C)			kW	11.0	-	-
Seasonal Energy Label	Cooling / Heating			A++ / A+	-	-
Annual Energy Consumption	Cooling / Heating		kWh	517 / 3,532	-	-
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	21.5 / 16.0	21.5 / 16.0	21.5 / 16.0
Air Flow Rate		High / Medium / Low	m³ / min	28.6 / 26.9 / 25.2	28.6 / 26.9 / 25.2	31.5 / 29.7 / 28.0
Sound Pressure	Cooling	High / Medium / Low	dBA	47 / 46 / 44	47 / 46 / 44	48 / 47 / 45
Sound Power	Cooling	Max	dBA	65	66	67
Dehumidification Rate			l / h	3.4	5	5.8
Dimensions	Body	W x H x D	mm	1,750 x 650 x 220	1,750 x 650 x 220	1,750 x 650 x 220
Net Weight	Body		kg	36.0	36.0	36.0

OUTDOOR				UU37WH U33	UU43WH U33	UU49WH U33
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m³ / min	110	110	110
Sound Pressure	Cooling	Nom	dBA	51	52	52
	Heating	Nom	dBA	53	54	54
Sound Power	Cooling	Max	dBA	66	67	68
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	93.0	93.0	93.0
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	3,400	3,400	3,400
	Additional Charge (after 7.5m)		g / m	40	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-20 - 18	-20 - 18	-20 - 18
Power Supply			Ø / V / Hz	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50
Power Supply Cable			No. x mm²	5C x 2.5	5C x 2.5	5C x 2.5
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	20	20	20
Piping Length Total		Min - Max	m	5 - 75	5 - 75	5 - 75
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Standard Inverter

CEILING & FLOOR CONVERTIBLE

CV09 / CV12



UU09W / UU12W

INDOOR				CV09 NE2	CV12 NE2
Capacity	Cooling	Min / Nom / Max	kW	1.0 / 2.5 / 2.8	1.3 / 3.3 / 3.6
	Heating	Min / Nom / Max	kW	1.2 / 3.0 / 3.3	1.5 / 3.8 / 4.2
Low Temperature Capacity	Heating -7°C		Max	3.1	3.4
	Cooling	Nom	kW	0.75	1.09
Power Input (Set)	Heating		Nom	0.83	1.18
	Heating		Nom	W	40
Power Input (Indoor)	Cooling / Heating		Nom	A	3.26 / 3.61
Running Current	Cooling / Heating		Nom	A	4.74 / 5.13
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
EER				3.33	3.03
COP				3.61	3.22
SEER				5.11	5.31
SCOP				3.81	3.81
Pdesign (@ -10°C)			kW	3.0	3.0
Seasonal Energy Label	Cooling / Heating			A / A	A / A
Annual Energy Consumption	Cooling / Heating		kWh	172 / 1,102	218 / 1,102
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
Piping Connection	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Drain		mm	21.5 / 16.0	21.5 / 16.0
	O.D. / I.D.		mm	21.5 / 16.0	21.5 / 16.0
Air Flow Rate	High / Medium / Low		m³ / min	7.6 / 6.9 / 6.2	9.2 / 7.6 / 6.6
Sound Pressure	Cooling	High / Medium / Low	dBA	38 / 35 / 32	40 / 36 / 31
Sound Power	Cooling	Max	dBA	52	56
Dehumidification Rate			l / h	1.2	1.2
Dimensions	Body	W x H x D	mm	900 x 490 x 200	900 x 490 x 200
Net Weight	Body		kg	13.7	13.7

OUTDOOR				UU09W ULD	UU12W ULD
Compressor	Type			Rotary	Rotary
Airflow Rate		Nom	m³ / min	32	32
Sound Pressure	Cooling	Nom	dBA	47	47
	Heating	Nom	dBA	48	48
Sound Power	Cooling	Max	dBA	56	57
Dimensions	W x H x D		mm	770 x 540 x 245	770 x 540 x 245
Net Weight			kg	32.0	32.0
Refrigerant	Type			R410A	R410A
	Charge			g	1,000
Additional Charge (after 7.5m)				g / m	20
	Cooling	Min - Max		°C DB	-10 - 43
Operation Range (Outdoor)	Heating		Min - Max	°C WB	-18 - 18
	Heating		Min - Max	°C WB	-18 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75
Circuit Breaker			A	15	15
Piping Length Total	Min - Max		m	5 - 15	5 - 15
Piping Elevation Difference	IDU - ODU	Max	m	10	10
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Standard Inverter

CEILING SUSPENDED UNIT

CV18 / CV24 / UV30



NEW UU18W NEW UU24W NEW UU30W

INDOOR				CV18 NJ2	CV24 NJ2	UV30 NJ2
Capacity	Cooling	Min / Nom / Max	kW	1.92 / 5.0 / 5.8	2.8 / 6.8 / 7.5	3.0 / 7.6 / 8.4
	Heating	Min / Nom / Max	kW	2.0 / 5.2 / 6.0	3.08 / 7.5 / 8.3	3.4 / 8.2 / 9.2
Low Temperature Capacity	Heating -7°C		Max	4.6	6.9	7.5
	Cooling	Nom	kW	1.46	2.25	2.52
Power Input (Set)	Heating		Nom	1.53	2.45	2.72
	Heating		Nom	W	60	60
Power Input (Indoor)	Cooling / Heating		Nom	A	6.7 / 6.9	9.9 / 10.8
Running Current	Cooling / Heating		Nom	A	10.0 / 10.7	10.0 / 10.7
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				3.40	3.21	3.02
COP				3.42	3.21	3.01
SEER				6.10	5.80	5.61
SCOP				4.15	3.90	3.90
Pdesign (@ -10°C)			kW	4.0	6.0	6.3
Seasonal Energy Label	Cooling / Heating			A++ / A+	A+ / A	A+ / A
Annual Energy Consumption	Cooling / Heating		kWh	287 / 1,349	410 / 2,154	474 / 2,262
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connection	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain		mm	Ø21.5 / 16.0	Ø21.5 / 16.0	Ø21.5 / 16.0
	O.D. / I.D.		mm	Ø21.5 / 16.0	Ø21.5 / 16.0	Ø21.5 / 16.0
Air Flow Rate	High / Medium / Low		m³ / min	12.4 / 11.4 / 10.4	13.9 / 12.9 / 11.9	13.9 / 12.9 / 11.9
Sound Pressure	Cooling	High / Medium / Low	dBA	42 / 40 / 39	44 / 43 / 41	44 / 43 / 41
Sound Power	Cooling	Max	dBA	57	61	62
Dehumidification Rate			l / h	2.4	3.2	3.5
Dimensions	Body	W x H x D	mm	950 x 220 x 650	950 x 650 x 220	950 x 650 x 220
Net Weight	Body		kg	22.0	23.0	23.0

OUTDOOR				UU18W UE4	UU24W U44	UU30W U44
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m³ / min	50	58	58
Sound Pressure	Cooling	Nom	dBA	47	48	48
	Heating	Nom	dBA	52	52	52
Sound Power	Cooling	Max	dBA	63	67	68
Dimensions	W x H x D		mm	870 x 655 x 320	950 x 834 x 330	950 x 834 x 330
Net Weight			kg	44.6	56.1	58.0
Refrigerant	Type			R410A	R410A	R410A
	Charge			g	1,300	2,000
Additional Charge (after 7.5m)				g / m	20	40
	Cooling	Min - Max		°C DB	-15 - 48	-15 - 48
Operation Range (Outdoor)	Heating		Min - Max	°C WB	-18 - 18	-18 - 18
	Heating		Min - Max	°C WB	-18 - 18	-18 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	20	25	25
Piping Length Total	Min - Max		m	5 - 30	5 - 30	5 - 30
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

Standard Inverter

CEILING SUSPENDED UNIT

UV36 / UV42 / UV48 / UV60



INDOOR				UV36 NK2	UV42 NL2	UV48 NL2	UV60 NL2	
Capacity	Cooling	Min / Nom / Max	kW	3.8 / 9.5 / 10.5	5.0 / 12.5 / 13.8	5.3 / 13.3 / 14.6	5.7 / 14.4 / 15.7	
	Heating	Min / Nom / Max	kW	4.2 / 10.5 / 11.6	5.6 / 13.6 / 15.4	6.4 / 15.3 / 17.6	6.8 / 16.8 / 18.7	
Low Temperature Capacity	Heating -7°C		Max	9.4	12.5	14.3	15.2	
	Power Input (Set)	Cooling	Nom	kW	2.78	3.89	4.28	5.24
Heating		Nom	kW	3.08	3.68	4.49	5.42	
Power Input (Indoor)			Nom	W	90	130	150	
Running Current	Cooling / Heating	Nom		A	12.1 / 13.4	16.9 / 16.0	18.6 / 19.5	22.8 / 23.6
Power Supply				Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER					3.42	3.21	3.11	2.75
COP					3.41	3.70	3.41	3.10
SEER					5.11	-	-	-
SCOP					3.81	-	-	-
Pdesign (@ -10°C)				kW	7.6	-	-	-
Seasonal Energy Label	Cooling / Heating			A / A				
Annual Energy Consumption	Cooling / Heating		kWh	652 / 2,800	-	-	-	
	Piping Connection	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)		
Air Flow Rate	High / Medium / Low	m ³ / min		21.4 / 19.8 / 18.2	28.6 / 26.9 / 25.2	30.0 / 28.3 / 26.6	31.5 / 29.7 / 28.0	
		Sound Pressure	Cooling	High / Medium / Low	dBa	45 / 44 / 41	46 / 44 / 43	47 / 46 / 44
Sound Power	Cooling		Max		dBa	63	63	63
		Dehumidification Rate	l / h		3.5	4.5	5.8	6.2
Dimensions	Body		W x H x D	mm	1,350 x 650 x 220	1,750 x 650 x 220	1,750 x 650 x 220	1,750 x 650 x 220
Net Weight	Body			kg	34.1	42.5	42.5	42.5

OUTDOOR				UU36W UO2	UU42W U32	UU48W U32	UU60W U32	
Compressor	Type			Twin Rotary				
Airflow Rate	Nom		m ³ / min	90	110	110	110	
Sound Pressure	Cooling	Nom		dBa	53	52	52	52
	Heating	Nom		dBa	54	54	54	54
Sound Power	Cooling	Max		dBa	66	67	68	71
Dimensions	W x H x D			mm	950 x 1,170 x 330	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight				kg	81.0	92.0	92.0	92.0
Refrigerant	Type			R410A	R410A	R410A	R410A	
	Charge		g	2,800	3,400	3,400	3,400	
Operation Range (Outdoor)	Cooling		Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48	-15 - 48
	Heating		Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18	-18 - 18
Power Supply	Ø / V / Hz			1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Supply Cable	No. x mm ²			3C x 2.5	3C x 5.0	3C x 5.0	3C x 5.0	
Transmission Cable	No. x mm ²			4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker	A			40	40	40	40	
Piping Length Total	Min - Max		m	5 - 50	5 - 75	5 - 75	5 - 75	
Piping Elevation Difference	IDU - ODU	Max		m	30	30	30	
Piping Connection	Liquid	mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
	Gas	mm (inch)		Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	

- Note : 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Definition of Power Input Nominal conditions – Performance tested under EN14511
- 3. Capacities are based on the following conditions:
Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
- 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
- 5. This product contains fluorinated greenhouse gases (R410A)



Standard Inverter

CEILING SUSPENDED UNIT

UV36 / UV42 / UV48 / UV60



INDOOR				UV36 NK2	UV42 NL2	UV48 NL2	UV60 NL2	
Capacity	Cooling	Min / Nom / Max	kW	3.8 / 9.5 / 10.5	5.0 / 12.5 / 13.8	5.3 / 13.3 / 14.6	5.7 / 14.4 / 15.7	
	Heating	Min / Nom / Max	kW	4.2 / 10.5 / 11.6	5.6 / 13.6 / 15.4	6.4 / 15.3 / 17.6	6.8 / 16.8 / 18.7	
Low Temperature Capacity	Heating -7°C		Max	9.4	12.5	14.3	15.2	
	Power Input (Set)	Cooling	Nom	kW	2.78	3.89	4.28	5.24
Heating		Nom	kW	3.08	3.68	4.49	5.42	
Power Input (Indoor)			Nom	W	90	130	150	
Running Current	Cooling / Heating	Nom		A	4.0 / 4.4	5.6 / 5.3	6.2 / 6.5	7.6 / 7.9
Power Supply				Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER					3.42	3.21	3.11	2.75
COP					3.41	3.70	3.41	3.10
SEER					5.11	-	-	-
SCOP					3.81	-	-	-
Pdesign (@ -10°C)				kW	7.6	-	-	-
Seasonal Energy Label	Cooling / Heating			A / A				
Annual Energy Consumption	Cooling / Heating		kWh	652 / 2,800	-	-	-	
	Piping Connection	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)		
Air Flow Rate	High / Medium / Low	m ³ / min		21.4 / 19.8 / 18.2	28.6 / 26.9 / 25.2	30.0 / 28.3 / 26.6	31.5 / 29.7 / 28.0	
		Sound Pressure	Cooling	High / Medium / Low	dBa	45 / 44 / 41	46 / 44 / 43	47 / 46 / 44
Sound Power	Cooling		Max		dBa	63	63	63
		Dehumidification Rate	l / h		3.5	4.5	5.8	6.2
Dimensions	Body		W x H x D	mm	1,350 x 650 x 220	1,750 x 650 x 220	1,750 x 650 x 220	1,750 x 650 x 220
Net Weight	Body			kg	34.1	42.5	42.5	42.5

OUTDOOR				UU37W UO2	UU43W U32	UU49W U32	UU61W U32	
Compressor	Type			Twin Rotary				
Airflow Rate	Nom		m ³ / min	90	110	110	110	
Sound Pressure	Cooling	Nom		dBa	53	52	52	52
	Heating	Nom		dBa	54	54	54	54
Sound Power	Cooling	Max		dBa	66	67	68	71
Dimensions	W x H x D			mm	950 x 1,170 x 330	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight				kg	85.0	96.0	96.0	96.0
Refrigerant	Type			R410A	R410A	R410A	R410A	
	Charge		g	2,800	3,400	3,400	3,400	
Operation Range (Outdoor)	Cooling		Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48	-15 - 48
	Heating		Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18	-18 - 18
Power Supply	Ø / V / Hz			3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50	
Power Supply Cable	No. x mm ²			5C x 2.5	5C x 2.5	5C x 2.5	5C x 2.5	
Transmission Cable	No. x mm ²			4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker	A			20	20	20	20	
Piping Length Total	Min - Max		m	5 - 50	5 - 75	5 - 75	5 - 75	
Piping Elevation Difference	IDU - ODU	Max		m	30	30	30	
Piping Connection	Liquid	mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
	Gas	mm (inch)		Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	

- Note : 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Definition of Power Input Nominal conditions – Performance tested under EN14511
- 3. Capacities are based on the following conditions:
Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
- 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
- 5. This product contains fluorinated greenhouse gases (R410A)

SINGLE SPLIT

Ceiling & Floor Convertible Ceiling Suspended Unit

SINGLE SPLIT CONSOLE



CONSOLE


SINGLE SPLIT

Console


Optimised Air Flow for Cooling & Heating

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature especially for floor.


Cooling

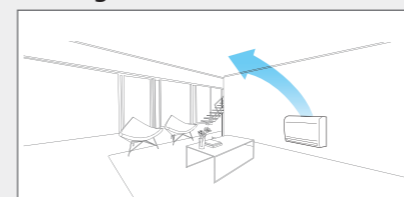

Heating (Normal)

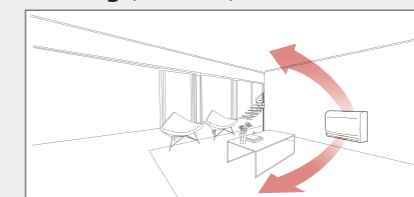

Heating (Floor Heating Mode)

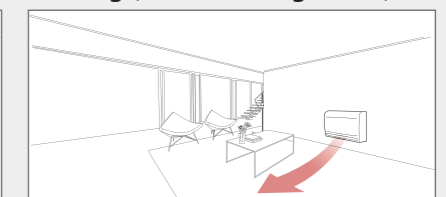

Quick Floor Heating


Console air conditioners offer a fast and powerful performance. Using the floor heating mode, console air conditioners provide faster floor heating and help to reach the desired temperature quickly.

	Company A	Electric Heater	LG	LG Floor Heating Mode
27°C				
Vertical				
15°C				
Horizontal				
Lead Time for Heating (13°C - 21°C)	12 minutes 30 seconds	50 minutes	9 minutes 30 seconds	8 minutes 40 seconds

(Test Condition :Target Temp 23°C, Indoor Room : 13°C-, Outdoor Room : 7°C)


5-Step Vane Control

There are 5 different stages to control air flow direction.

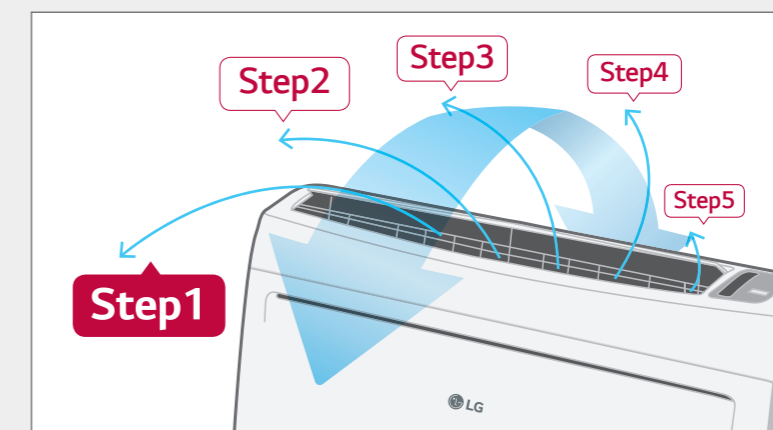

CONSOLE

Healthier Air (3 Stage Air Filter System)

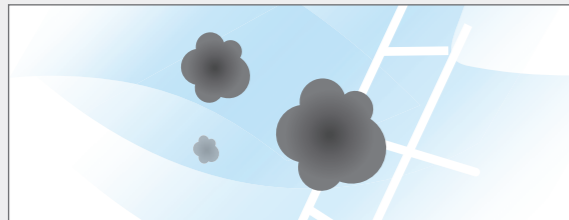

1st Advanced Pre Filter :

The antibacterial pre-filter primarily reduces large dust particles, mould and quilt dust.



2nd Allergy Filter :

Filter consists of enzyme that breaks down allergens, apatite and organic / inorganic binders. When the air passes through the filter, allergens cling to the filter, and the filter deactivates the allergens.




3rd Plasma Ion Generator :


The sterilised ion generator emits around 1.2 million ions, and traps some of the airborne hazardous substances.

Easy Installation and Service

6 Different Ways to Install Piping

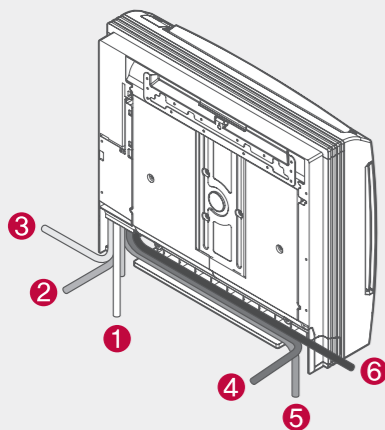

Easy Slide-type PCB

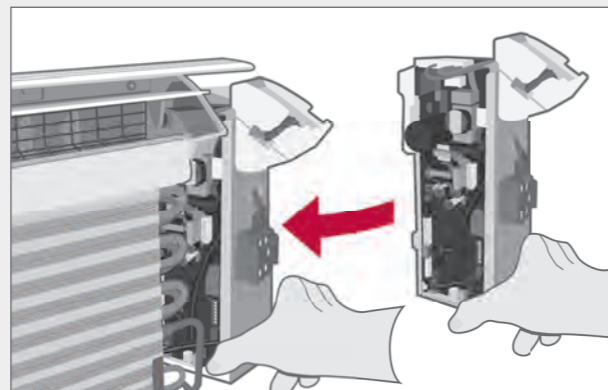

Standard Inverter

CONSOLE

CQ09 / CQ12 / CQ18



INDOOR				CQ09 NAO	CQ12 NAO	CQ18 NAO
Capacity	Cooling	Min / Nom / Max	kW	1.3 / 2.6 / 3.4	1.4 / 3.5 / 3.7	2.2 / 5.0 / 5.6
	Heating	Min / Nom / Max	kW	1.4 / 3.1 / 4.2	1.6 / 4.0 / 4.4	2.2 / 4.8 / 5.8
Low Temperature Capacity	Heating -7°C		Max	3.4	3.6	4.9
	Cooling	Nom	kW	0.64	1.06	1.55
Power Input (Set)	Heating		Nom	0.74	1.08	1.50
			W	20	30	40
Running Current	Cooling / Heating	Nom	A	3.42 / 3.87	5.02 / 5.03	7.0 / 6.9
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				3.98	3.30	3.23
COP				4.19	3.70	3.20
SEER				5.11	5.31	6.2
SCOP				3.81	3.81	3.81
Pdesign (@ -10°C)			kW	2.8	3.0	3.8
Seasonal Energy Label	Cooling / Heating			A / A	A / A	A++ / A
Annual Energy Consumption	Cooling / Heating		kWh	172 / 1,032	231 / 1,105	282 / 1,396
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
Piping Connection	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Drain	O.D. / I.D.	mm	21.5 / 16.0	21.5 / 16.0	21.5 / 16.0
	Air Flow Rate	High / Medium / Low	m³ / min	8.5 / 6.7 / 5.0	9.0 / 6.9 / 5.2	10.1 / 8.6 / 7.2
Sound Pressure	Cooling	High / Medium / Low	dBA	38 / 32 / 27	39 / 32 / 27	44 / 39 / 35
	Sound Power	Cooling	Max	53	56	60
Dehumidification Rate			l / h	1.2	1.4	2.3
Dimensions	Body	W x H x D	mm	700 x 600 x 210	700 x 600 x 210	700 x 600 x 210
Net Weight	Body		kg	14.0	14.0	14.0

OUTDOOR				UU09W ULD	UU12W ULD	UU18W UE4
Compressor	Type			Rotary	Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	32	32	50
	Cooling	Nom	dBA	47	47	47
Sound Pressure	Heating		Nom	48	48	52
	Cooling	Max	dBA	56	57	63
Dimensions	W x H x D		mm	770 x 540 x 245	770 x 540 x 245	870 x 655 x 320
Net Weight			kg	32.0	32.0	44.6
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	1,000	1,000	1,300
	Additional Charge (after 7.5m)		g / m	20	20	20
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-10 - 43	-10 - 43	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm²	3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	15	15	20
Piping Length Total	Min - Max		m	5 - 15	5 - 15	5 - 30
Piping Elevation Difference	IDU - ODU		m	10	10	30
	Max					
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.

2. Definition of Power Input Nominal conditions - Performance tested under EN14511

3. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB

4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition

5. This product contains fluorinated greenhouse gases (R410A)

SINGLE SPLIT

FLOOR STANDING UNIT



FLOOR STANDING UNIT

SINGLE SPLIT

Floor Standing Unit

Stylish Design

The new LG floor standing air conditioner which is Red Dot design award winner 2013, is ideal for modern interiors in your home or office.




reddot design award winner 2013


Quick Response

Offering powerful cooling, the commercial air conditioning system can reach a set temperature in a shorter period of time. Meanwhile, the Power Heating function provides the optimal airflow angle, guaranteeing a faster heating performance.

Cooling

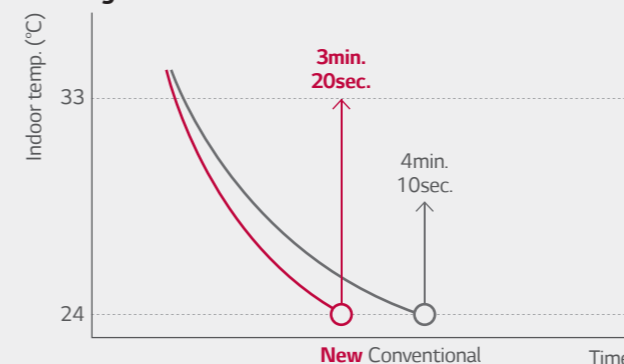


Heating

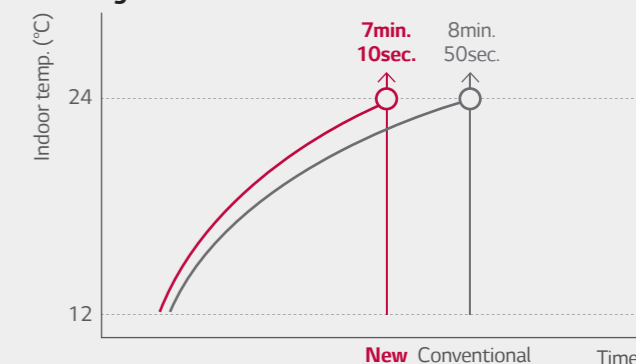

Powerful Air Flow

The new LG floor standing air conditioner is efficient for using in large areas due to its powerful cooling and heating operation. The powerful air speed and volume means the air flow can reach up to 20m away from the air conditioner.

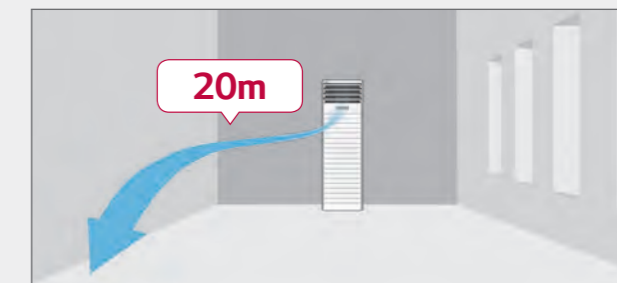

Standard Inverter

FLOOR STANDING UNIT



UP48



UU48W / UU49W

INDOOR				UP48 NT2	
Capacity	Cooling	Min / Nom / Max	kW	6.0 / 13.4 / 15.2	6.0 / 13.4 / 15.2
	Heating	Min / Nom / Max	kW	6.0 / 15.5 / 17.1	6.0 / 15.5 / 17.1
Low Temperature Capacity	Heating -7°C		Max	16.0	16.0
	Cooling	Nom	kW	4.2	4.2
Power Input (Set)	Heating		Nom	4.5	4.5
	Nom		W	200	200
Power Input (Indoor)	Cooling / Heating	Nom	A	18.1 / 19.5	5.76 / 6.20
Running Current			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply					
EER				3.21	3.21
COP				3.41	3.41
SEER				-	-
SCOP				-	-
Pdesign (@ -10°C)			kW	-	-
Seasonal Energy Label	Cooling / Heating			-	-
Annual Energy Consumption	Cooling / Heating		kWh	-	-
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25
Air Flow Rate	High / Medium / Low		m³ / min	31 / 27 / 23	31 / 27 / 23
Sound Pressure	Cooling	High / Medium / Low	dBA	52 / 49 / 45	52 / 49 / 45
	Heating	Max	dBA	59	59
Sound Power	Cooling			5.0	5.0
Dehumidification Rate			l / h	5.0	5.0
Dimensions	Body	W x H x D	mm	590 x 1,840 x 460	590 x 1,840 x 460
	Net Weight	Body	kg	50.0	50.0

OUTDOOR				UU48W U32	UU49W U32
Compressor	Type			Twin Rotary	Twin Rotary
Airflow Rate	Nom		m³ / min	110	110
Sound Pressure	Cooling	Nom	dBA	52	52
	Heating	Nom	dBA	54	54
Sound Power	Cooling	Max	dBA	68	68
	Heating				
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	92.0	96.0
Refrigerant	Type			R410A	R410A
	Charge		g	3,400	3,400
	Additional Charge (after 7.5m)		g / m	40	40
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	3 / 380-415 / 50
Power Supply Cable			No. x mm²	3C x 5.0	5C x 5.0
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75
Circuit Breaker			A	40	20
Piping Length Total	Min - Max		m	75	75
Piping Elevation Difference	IDU - ODU	Max	m	30	30
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)


SINGLE SPLIT WALL MOUNTED UNIT



WALL MOUNTED UNIT

Wide Operation Range


Ideal solution for server rooms, machine rooms and kitchens.

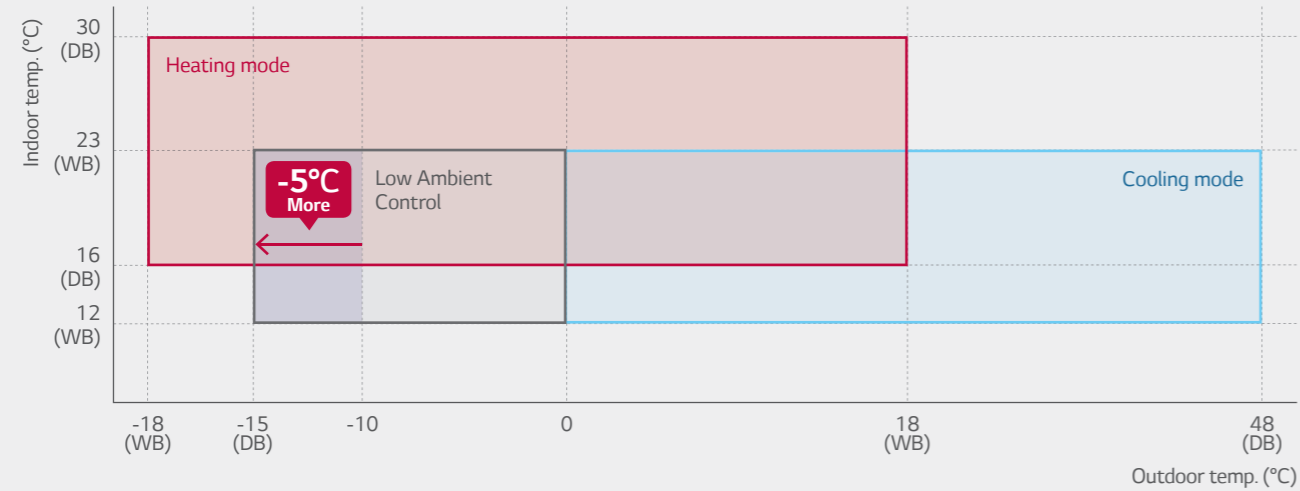

Easy Installation


Detachable Bottom Cover

The bottom cover is detachable when needed, making installation easier. Disassembly or additional support of the unit is unnecessary. Installation can be completed by one individual with LG's patented support tool.

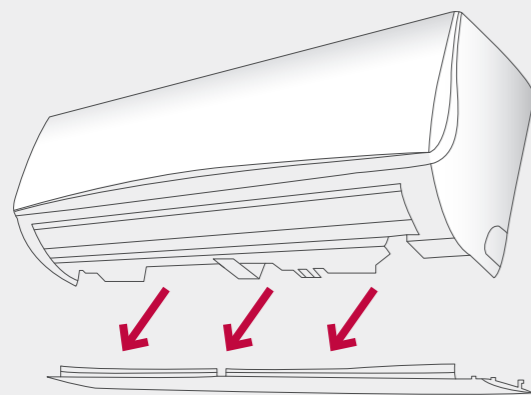

Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

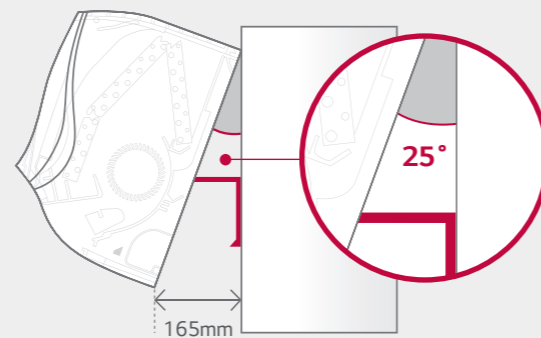


High Energy Efficiency

New wall mounted units provide good seasonal energy efficiency connected with Standard Inverter outdoor units.

	8.0kW	10kW
SEER	6.1 (A++)	5.4 (A)
SCOP	3.9 (A)	3.8 (A)


Powerful Cooling & Heating

20m Windblast

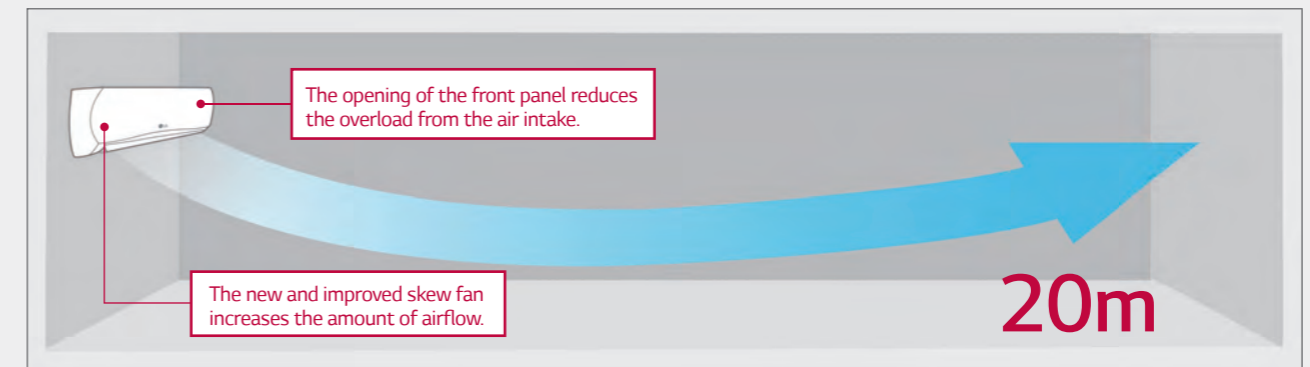

Optimised Airflow

Direction of horizontal vane can be adjusted from step 1 to step 6 with full auto swing. This function can cool and heat specific areas much faster.

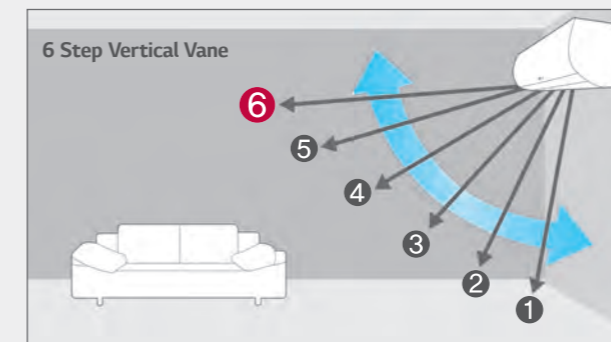

Quick Cooling & Heating

Jet cooling and heating disperses air evenly at high speed to secure an optimally cooled or heated room in just 3 minutes.



Standard Inverter

WALL MOUNTED UNIT

UJ30 / UJ36



INDOOR				UJ30 NV2	UJ36 NV2	UJ36 NV2
Capacity	Cooling	Min / Nom / Max	kW	3.5 / 7.8 / 8.5	4.0 / 9.5 / 10.5	4.0 / 9.5 / 10.5
	Heating	Min / Nom / Max	kW	4.0 / 8.4 / 9.2	4.4 / 10.5 / 11.5	4.4 / 10.5 / 11.5
Low Temperature Capacity	Heating -7°C	Max	kW	7.5	9.4	9.4
	Cooling	Nom	kW	2.29	2.79	2.79
Power Input (Set)	Heating	Nom	kW	2.46	3.08	3.08
	Power Input (Indoor)	Nom	W	140	160	160
Running Current	Cooling / Heating	Nom	A	10.0 / 10.7	12.1 / 13.4	4.0 / 4.4
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
EER				3.41	3.41	3.41
COP				3.41	3.41	3.41
SEER				6.11	5.41	5.41
SCOP				3.91	3.81	3.81
Pdesign (@ -10°C)			kW	6.3	7.6	7.6
Seasonal Energy Label	Cooling / Heating			A++ / A	A / A	A / A
Annual Energy Consumption	Cooling / Heating		kWh	448 / 2,262	615 / 2,793	615 / 2,793
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	21.5 / 16.0	21.5 / 16.0	21.5 / 16.0
Air Flow Rate		High / Medium / Low	m³ / min	22.0 / 19.0 / 16.0	27.0 / 24.0 / 20.0	27.0 / 24.0 / 20.0
Sound Pressure	Cooling	High / Medium / Low	dB(A)	45 / 42 / 40	48 / 45 / 41	48 / 45 / 41
	Sound Power	Max	dB(A)	61	63	63
Dehumidification Rate			l / h	3.0	3.4	3.4
Dimensions	Body	W x H x D	mm	1,190 x 346 x 265	1,190 x 346 x 265	1,190 x 346 x 265
Net Weight	Body		kg	18.5	18.5	18.5

OUTDOOR				UU30W U44	UU36W U02	UU37W U02
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m³ / min	58	90	90
Sound Pressure	Cooling	Nom	dB(A)	48	53	53
	Heating	Nom	dB(A)	52	54	54
Sound Power	Cooling	Max	dB(A)	68	66	66
Dimensions	W x H x D		mm	950 x 834 x 330	950 x 1,170 x 330	950 x 1,170 x 330
Net Weight			kg	58.0	81.0	85.0
Refrigerant	Type			R410A	R410A	R410A
	Charge		g	2,000	2,800	2,800
Operation Range (Outdoor)	Additional Charge (after 7.5m)		g / m	40	40	40
	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	3 / 380-415 / 50
Power Supply Cable			No. x mm²	3C x 2.5	3C x 5.0	5C x 2.5
Transmission Cable			No. x mm²	3C x 2.5	4C x 0.75	4C x 0.75
Circuit Breaker			A	4C x 0.75	40	20
Piping Length Total		Min - Max	m	25	5 - 50	5 - 50
Piping Elevation Difference	IDU - ODU	Max	m	30	30	30
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)




SINGLE SPLIT SYNCHRO OPERATION

SYNCHRO OPERATION

Simultaneous Operation

It is possible to connect 2, 3, or 4 indoor units to a single outdoor unit. All indoor units are operated together within the same mode from one remote controller. This allows equal air distribution in large commercial areas.

- High efficiency & low noise
- Various indoor unit types
- Only using simple branch piping
- Standard Inverter
- 12.5 / 14.0 / 15.0 / 20.0 / 25.0kW

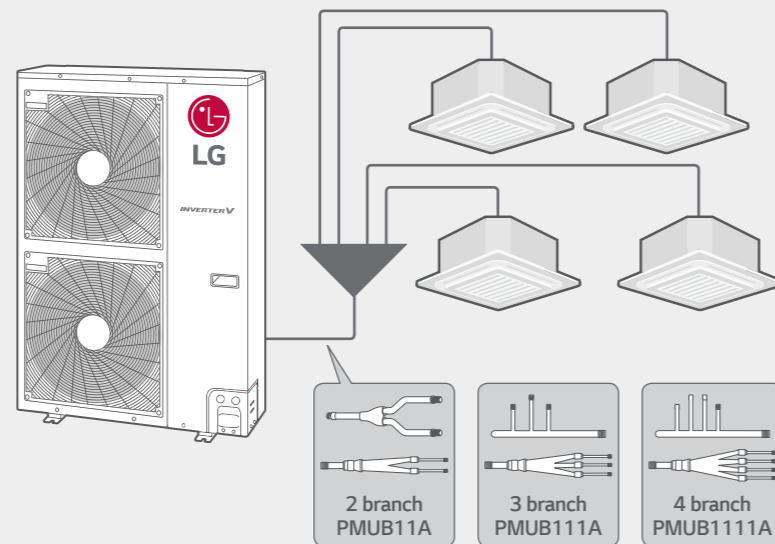

Combination Table

	Duo			Trio			Quartet					
	Capacity (kW)	Cooling	Heating	Cassette	Duct	Ceiling Suspended	Cassette	Duct	Ceiling Suspended	Cassette	Duct	Ceiling Suspended
UU42W U32 UU43W U32	12.5	14.0		CT24 NP4 x 2	CM24 N14 x 2 CB24L N32 x 2	CV24 NJ2 x 2	CT18 NQ4 x 3	CM18 N14 x 3 CB18L N22 x 3	CV18 NJ2 x 3	CT12 NR2 x 4	CB12L N22 x 4	-
UU48W U32 UU49W U32	14.0	16.0		CT24 NP4 x 2	CM24 N14 x 2 CB24L N32 x 2	CV24 NJ2 x 2	CT18 NQ4 x 3	CM18 N14 x 3 CB18L N22 x 3	CV18 NJ2 x 3	CT12 NR2 x 4	CB12L N22 x 4	-
UU60W U32 UU61W U32	15.0	17.0		UT30 NP4 x 2	UM30 N14 x 2	UV30 NJ2 x 2	CT18 NQ4 x 3	CM18 N14 x 3 CB18L N22 x 3	CV18 NJ2 x 3	CT12 NR2 x 4	CB12L N22 x 4	-
UU70W U34	19.0	22.4		UT36 NN2 x 2	UM36 N24 x 2	UV36 NK2 x 2	CT24 NP4 x 3	CM24 N14 x 3 CB24L N32 x 3	CV24 NJ2 x 3	CT18 NQ4 x 4	CM18 N14 x 4 CB18L N22 x 4	CV18 NJ2 x 4
UU85W U74	23.0	27.0		UT42 NM2 x 2	UM42 N24 x 2	UV42 NL2 x 2	CT24 NP4 x 3	CM24 N14 x 3 CB24L N32 x 3	CV24 NJ2 x 3	CT18 NQ4 x 4	CM18 N14 x 4 CB18L N22 x 4	CV18 NJ2 x 4
Remote Controller	Standard Wired Remote Controller : PREMTB001 (White) / PREMTB01 (Black)											
BD Unit				PMUB11A			PMUB111A			PMUB1111A		
AC EZ				PQCSZ250S0								

* For Ceiling suspended, the wired remote controller has to be purchased separately.

Standard Inverter

SYNCHRO OPERATION

UU42W / UU48W / UU60W



INDOOR				CT12 / CT18 / CT24 / UT30 NR2/N*4 CM18 / CM24 / UM30 N*4 CB12L / CB18L / CB24L N*2 CV18 / CV24 / UV30 N*2	
Capacity	Cooling	Min / Nom / Max	kW	* Please refer to the Combination Table	
	Heating	Min / Nom / Max	kW		
Power Input	Cooling	Nom	kW	* Please refer to the specification of each indoor unit. * Below functions are not available for Synchro operation. - Group Control - Zone Control - Dry Contact - Auto Changeover	
	Heating	Nom	kW		
Running Current	Cooling / Heating	Nom	A		
Power Supply			Ø / V / Hz		
Piping Connection	Liquid	mm (inch)			
	Gas	mm (inch)			
	Drain	O.D. / I.D.	mm		
Air Flow Rate			High / Medium / Low	m ³ / min	
Sound Pressure	Cooling	High / Medium / Low		dBA	
Sound Power	Cooling	Max		dBA	
Dehumidification Rate				l / h	
Dimensions	Body	W x H x D		mm	
Net Weight	Body			kg	

OUTDOOR				UU42W U32	UU48W U32	UU60W U32
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m ³ / min	110	110	110
Sound Pressure	Cooling	Nom		52	52	52
	Heating	Nom		54	54	54
Sound Power	Cooling	Max		67	68	71
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	92.0	92.0	92.0
Refrigerant	Type			R410A	R410A	R410A
	Charge	g		3,400	3,400	3,400
Operation Range (Outdoor)	Additional Charge (after 7.5m)		Please refer to the Product Data Book or Installation Manual			
	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
Power Supply	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm ²	3C x 5.0	3C x 5.0	3C x 5.0
Transmission Cable			No. x mm ²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	40	40	40
Piping Connection	Liquid	mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inch)		Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Max. Interunit Piping Length	Total Piping (Main + Total Branch)		m	80	80	80
	Main Piping		m	45	45	45
	Total Branch Piping		m	40	40	40
Max. Installation Height Difference	Each Branch Piping		m	15	15	15
	Indoor Unit - Outdoor Unit		m	30	30	30
		Indoor Unit - Indoor Unit		m	1	1

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input: Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)



Standard Inverter

SYNCHRO OPERATION

UU43W / UU49W / UU61W



INDOOR				CT12 / CT18 / CT24 / UT30 NR2/N*4 CM18 / CM24 / UM30 N*4 CB12L / CB18L / CB24L N*2 CV18 / CV24 / UV30 N*2			
--------	--	--	--	--	--	--	--

Capacity	Cooling	Min / Nom / Max	kW	* Please refer to the Combination Table
	Heating	Min / Nom / Max	kW	
Power Input	Cooling	Nom	kW	
	Heating	Nom	kW	
Running Current	Cooling / Heating	Nom	A	* Please refer to the specification of each indoor unit. * Below functions are not available for Synchro operation. - Group Control - Zone Control - Dry Contact - Auto Changeover
Power Supply			Ø / V / Hz	
Piping Connection	Liquid	mm (inch)		
	Gas	mm (inch)		
	Drain	O.D. / I.D.	mm	
Air Flow Rate	High / Medium / Low		m ³ / min	
Sound Pressure	Cooling	High / Medium / Low	dB(A)	
Sound Power	Cooling	Max	dB(A)	
Dehumidification Rate			l / h	
Dimensions	Body	W x H x D	mm	
Net Weight	Body		kg	

OUTDOOR				UU43W U32	UU49W U32	UU61W U32
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Airflow Rate		Nom	m ³ / min	110	110	110
Sound Pressure	Cooling	Nom	dB(A)	52	52	52
	Heating	Nom	dB(A)	54	54	54
Sound Power	Cooling	Max	dB(A)	67	68	71
Dimensions	W x H x D	mm		950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	96.0	96.0	96.0
Refrigerant	Type			R410A	R410A	R410A
	Charge	g		3,400	3,400	3,400
	Additional Charge (after 7.5m)	g / m		Please refer to the Product Data Book or Installation Manual		
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-15 - 48	-15 - 48	-15 - 48
	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
Power Supply			Ø / V / Hz	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50
Power Supply Cable			No. x mm ²	5C x 2.5	5C x 2.5	5C x 2.5
Transmission Cable			No. x mm ²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	20	20	20
Piping Connection	Liquid	mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inch)		Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Max. Interunit Piping Length	Total Piping (Main + Total Branch)	m		80	80	80
	Main Piping	m		45	45	45
	Total Branch Piping	m		40	40	40
	Each Branch Piping	m		15	15	15
Max. Installation Height Difference	Indoor Unit - Outdoor Unit	m		30	30	30
	Indoor Unit - Indoor Unit	m		1	1	1

Note : 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C DB / 19°C WB - Outdoor Temperature 35°C DB / 24°C WB Heating : - Indoor Temperature 20°C DB / 15°C WB - Outdoor Temperature 7°C DB / 6°C WB
 4. Annual energy consumption : based on average use of 350 running hours in cooling and 1,400 hours in heating per year at seasonal condition
 5. This product contains fluorinated greenhouse gases (R410A)

SINGLE SPLIT

AHU SOLUTION




AHU COMBINATION

Air Handling Applications

Economic solution for pair application with air handling units.

- Refrigerant Piping
 - Communication Wire
 - Sensor Signal
- * DDC : Digital Direct Controller

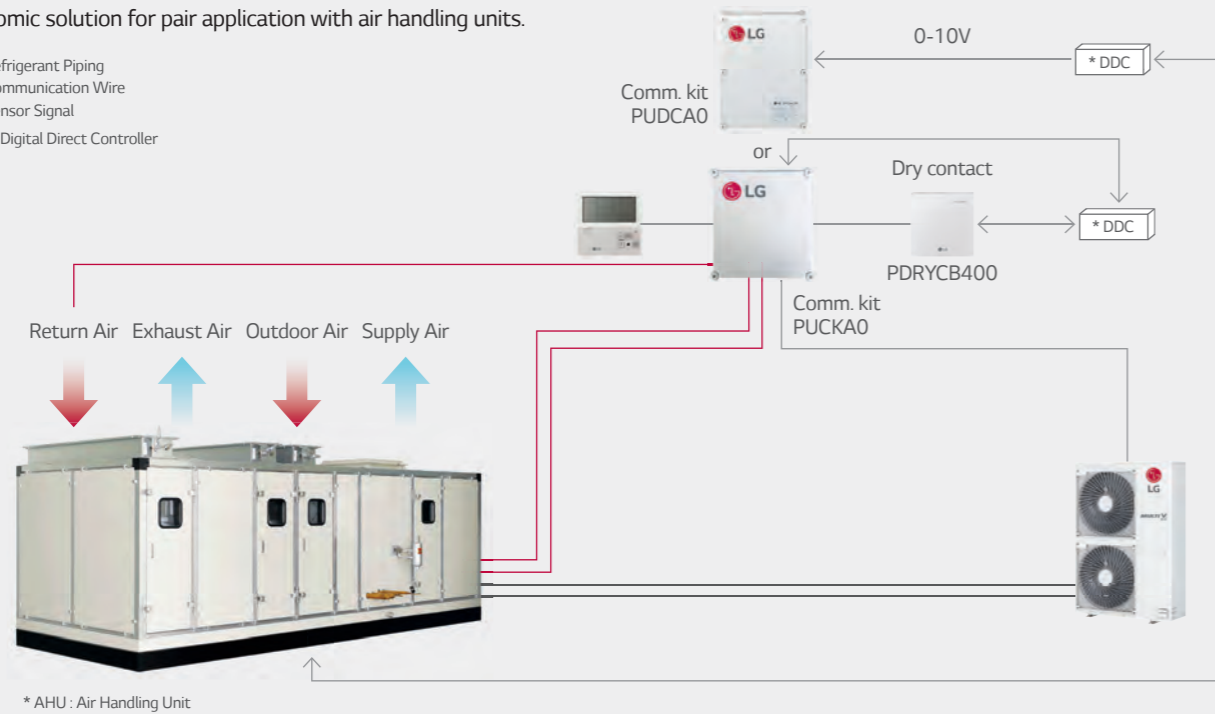

Combination Table

H-INVERTER

Capacity	Cooling kW	1-phase			3-phase		
		UU36WH U34	UU42WH U34	UU48WH U34	UU37WH U33	UU43WH U33	UU49WH U33
Heating kW	10.8	13.5	15.5	9.5	12.1	13.4	
AHU Kit	PUCKA0	•	•	•	•	•	


STANDARD INVERTER (1-phase)

Capacity	Cooling kW	UU18W UE4	UU24W U44	UU30W U44	UU36W U02	UU42W U32	UU48W U32	UU60W U32
		Heating kW	4.7	7.7	8.0	10.0	12.5	13.9
AHU Kit	PUCKA0	•	•	•	•	•	•	•
	PUDCA0	•	•	•	-	-	-	-

STANDARD INVERTER (3-phase)

Capacity	Cooling kW	UU37W U02	UU43W U32	UU49W U32	UU61W U32	UU70W U34	UU85W U74
		Heating kW	10.0	12.5	13.9	14.6	19.0
AHU Kit	PUCKA0	•	•	•	•	•	•
	PUDCA0	-	-	-	-	•	•

AHU COMMUNICATION KITS

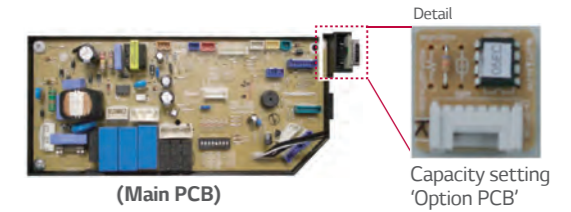

Specifications

INDOOR	Model Name	Combination				Central Controller	CB09L N12	Dimensions (mm)		
		Outdoor unit	EEV Kit	Expansion Kit	Return / Room air control by remote controller or dry contact			W	H	D
Communication Kit	PUCKA0	Single Split	-	-	•	Return / Room air control by remote controller or dry contact	280	135	280	
	PUDCA0	Single Split	-	-	-	Return / Room air or supply (capacity) control by DDC	330	180	430	

Function list for Communication kit

● : Available ▲ : Dry Contact is needed - : Not available

List	Description	PUCKA0		PUDCA0			
		Availability	Type	Availability	Type	Min	Max
Controlling	Outdoor Unit Operation	•	On / Off	•	Digital input** (Non voltage)	-	-
	Mode	•	Fan only / Heating / Cooling	•	Digital input (Non voltage)	-	-
	Fan Step	•	High / Mid / Low (3 steps)	•	Digital input (Non voltage)	-	-
	Room Temperature Control	•	Cooling 18 ~ 30°C, heating 16 ~ 30°C	•	Analog input	0 V	0 V
	Supply Air Temperature (by outdoor capacity control)	-	Compressor off, Compressor Off & Fan off, 40 ~ 100% capacity control	•	Analog input	0 V	0 V
Monitoring	Outdoor Unit Operation	-	On / Off	•	Digital output** (Non voltage)	Max : AC 250 V, DC 30 V, 1A	
	AHU Communication Kit Operation	-	On / Off	•	Digital output (Non voltage)	Max : AC 250 V, DC 30 V, 1A	
	Outdoor Mode	-	Fan / Defrost / Cooling / Heating	•	Digital output (Non voltage)	Max : AC 250 V, DC 30 V, 1A	
	Fan Mode	•	High / Mid / Low (3 steps)	•	Digital output (Non voltage)	Max : AC 250 V, DC 30 V, 1A	
	Error Status	▲***	No error / Error occurred	•	Digital output (Non voltage)	Max : AC 250 V, DC 30 V, 1A	

Note : PUCKA0 is controlled by remote controller (default) and Dry Contact, PUDCA0 is controlled by external input (default) and wired remote controller
 * Optional accessory, recommended model : PREMTB001, PREMTB01 ** Binary input and output (Open and short), DO is normal open *** Recommended model : PDRYCB000

Capacity selection

When selecting evaporator, change "Option PCB" in communication kit according to below table. (Basic "Option PCB" is for 24kBTU)

Option PCB	Outdoor unit capacity		Recommended heat exchanger volume (10 ⁻³ x m ³)	Maximum heat exchanger capacity (kW)	Air flow rate (CMM)	Applicable Outdoor Units		
	kBTU	kW				PUCKA0		PUDCA0
	H-Inverter	Standard Inverter				Standard Inverter		
EBR65102901	12	3.5	2.2	3.5	9 ~ 10	-	•	-
EBR65102902	18	5.0	2.4	5.0	13 ~ 16.5	-	•	•*
EBR65102903	24	7.1	2.6	7.1	14 ~ 18	•	•	•*
EBR65102904	30	8.0	2.9	8.0	20 ~ 26.5	•	•	•*
EBR65102905	36	10.0	3.1	10.0	26.5 ~ 32	•	•	-
EBR65102906	42	12.5	3.4	12.5	28 ~ 36	•	•	-
EBR65102907	48	14.0	4.0	14.0	30 ~ 40	•	•	-
EBR65102908	60	15.0	4.7	15.0	40 ~ 50	-	•	-
EBR77627409	70	19.0	5.2	20.0	60 ~ 70	-	•	•
EBR77627406	85	23.0	5.9	23.0	64 ~ 80	-	•	•

1) Evaporator Saturated Temperature = 6°C, Air Temperature = 27°C DBT / 19°C WBT 2) Combination allowed only for air-to-air system.
 * UU18WUE4 / UU24WU44 / UU30WU44 Available

SINGLE SPLIT ACCESSORIES

WI-FI CONTROLLER

Wi-Fi Controller¹⁾

LG-IR-WF-1



Models Applied

- Connectable with the indoor unit having IR receiver
- Control and monitor : On / Off Mode, Set Temp, Room Temp, Fan Speed
- Power supply includes EU-UK-US-AU heads
- Easy to install : Wall or desktop mounted
- Attractive design
- On/Off status and mode indicated by LED light
- Automatic firmware Updates *

* Internet access is necessary

Model Name	LG-IR-WF-1
Start / Stop Operation	•
Operation Mode	Cool / Heat / Auto / Fan / Dry
Set Point	•
Ambient Temperature	•
Fan Speed	•

Specifications

Model Name	LG-IR-WF-1
Enclosure	ABS (V-0, 5VB) 2,1 mm thickness PC (V-2) 1mm thickness
Dimensions (mm)	81 × 78 × 28
Weight (g)	76
Colour	White
Power Supply	5VDC 0,2 A NEC Class 2 or Limited Power Source (LPS) and SELV Rated Power supply
Mounting	Wall
LED Indicators	1 × Device status
Operating Temperature	From 0°C to 40°C
Operating Humidity	<93% HR, no Condensation
Stock Humidity	<93% HR, no Condensation
RoHS Conformity	Compliant with RoHS Directive (2002 / 95 / CE)
Certifications	Compliant with RoHS Directive (2002 / 95 / CE) CE Conformity to EMC Directive (2004 / 108 / EC) and Low-voltage Directive (2006 / 95 / EC) EN 60950-1 / EN 301489-1 v1.8.1 / EN 300328

Overview

Case 1) Connection with indoor units with IR receiver



Case 2) Connection with duct type indoor units



1) This product is provided by INTESIS. For more information, please contact INTESIS directly

SYNCHRO BRANCHES

- 2 Units
PMUB11A
- 3 Units
PMUB111A
- 4 Units
PMUB1111A




Features

- Various Y Branch pipes of different capacities make installation easier
- Y Branch and header branch for both gas and liquid are provided
- Insulation material is also provided for covering the branches

Models Applied


Standard inverter : 12.5 / 14.0 / 15.0 / 20.0 / 25.0kw

Application

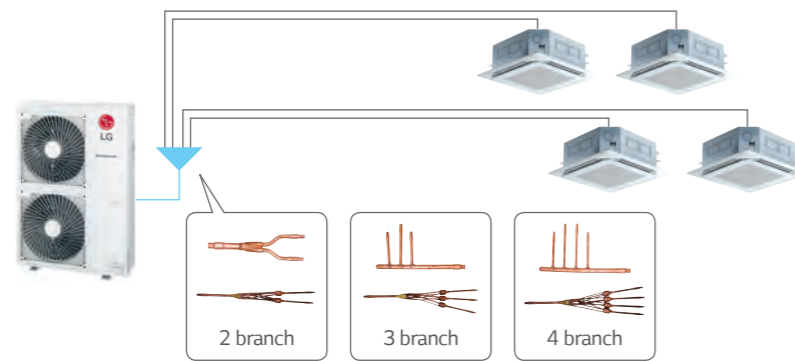

Branching kit

Indoor Classification	Model Name	Capacity Ratio(%)
2 Units	PMUB11A	50:50 (1:1)
3 Units	PMUB111A	33:33:33 (1:1:1)
4 Units	PMUB1111A	25:25:25:25 (1:1:1:1)

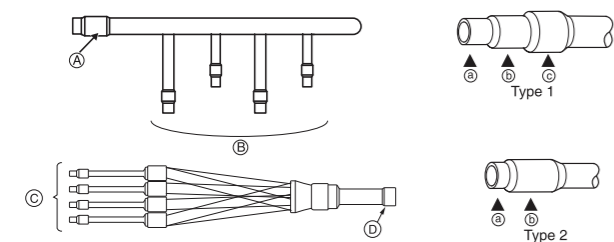

	a	b	c	Type
(A)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø25.4 (1)	1
(B)	Ø9.52 (3/8) Ø12.7 (1/2)	Ø12.7 (1/2) Ø15.88 (5/8)	-	2
(C)	Ø6.35 (1/4)	Ø9.52 (3/8)	-	2
(D)	Ø9.52 (3/8)	Ø12.7 (1/2)	-	2


CEILING CASSETTE

SINGLE SPLIT

CT09 NR2 / CT12 NR2

(Unit:mm)

Part Name	
1	Decoration panel (PT-UQC)
2	Air suction grille
3	Air discharge grille
4	Gas pipe connection
5	Liquid pipe connection
6	Drain pipe connection
7	Power supply connection
8	Fresh air connection (Ø70)

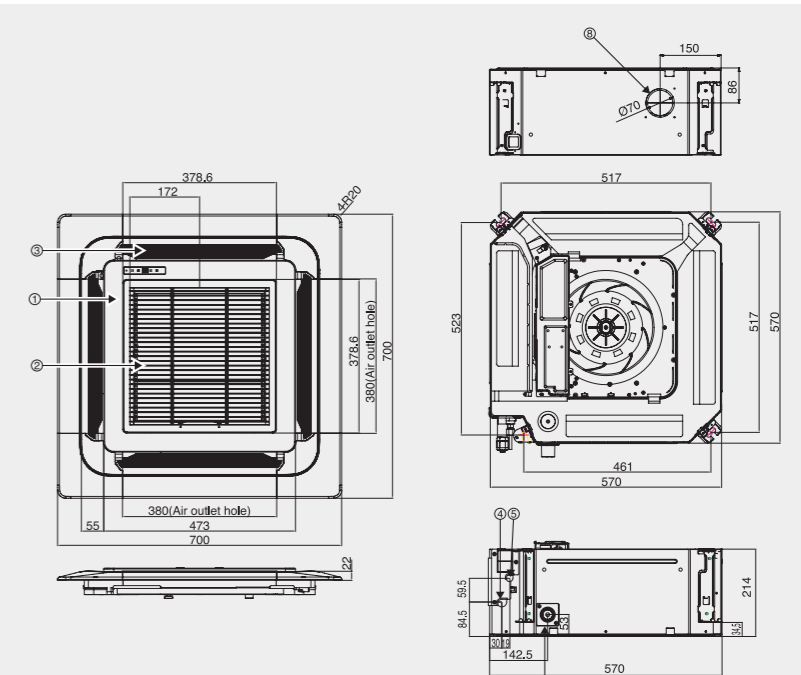


Dimensions

CT18 NQ4

(Unit:mm)

Part Name	
1	Decoration panel (PT-UQC)
2	Air suction grille
3	Air discharge grille
4	Gas pipe connection
5	Liquid pipe connection
6	Drain pipe connection
7	Power supply connection
8	Fresh air connection (Ø70)

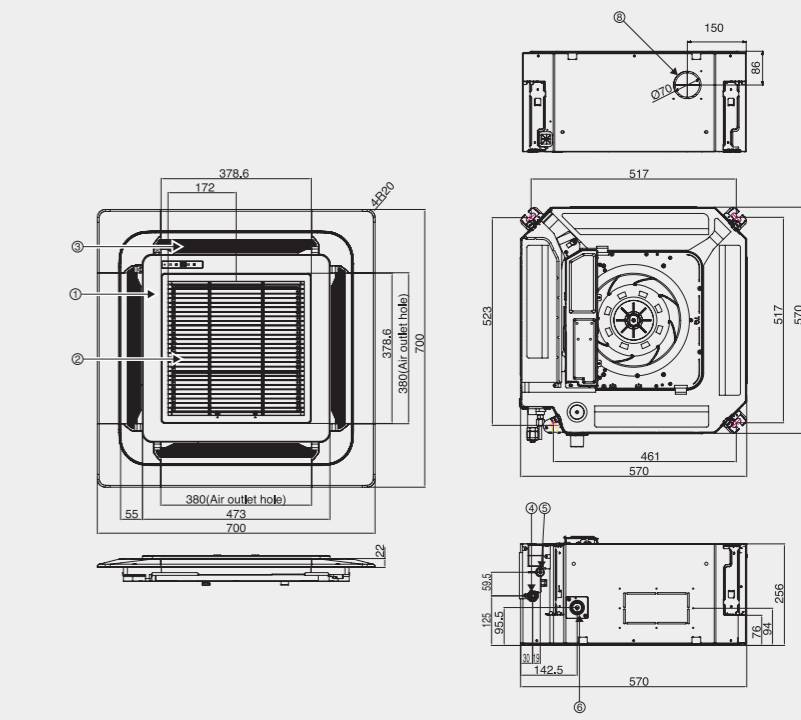


CEILING CASSETTE

CT24 NP4 / UT30 NP4

(Unit:mm)


Part Name	
1	Decoration panel (PT-UMC1)
2	Air suction grille
3	Air discharge grille
4	Gas pipe connection
5	Liquid pipe connection
6	Drain pipe connection
7	Power supply connection
8	Fresh air connection (Ø70)

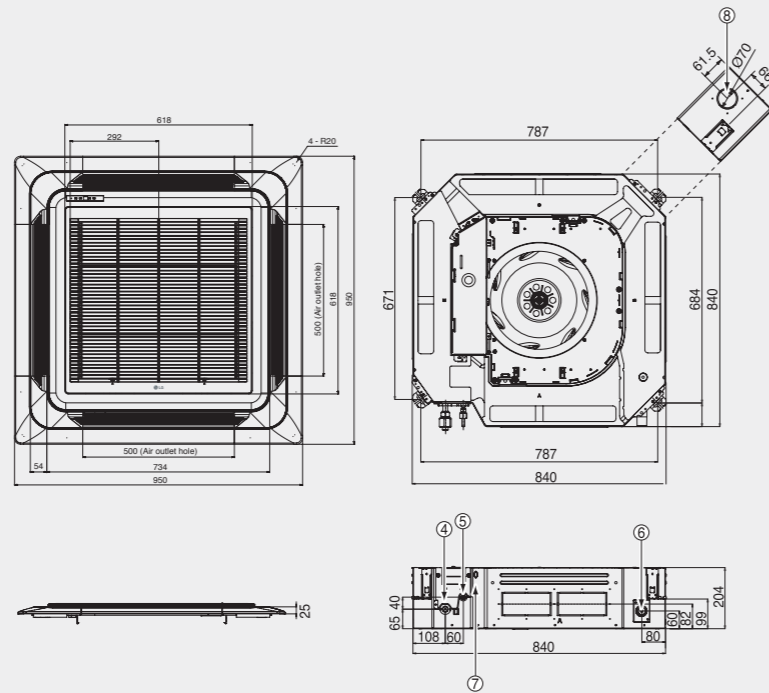

UT36 NN2

(Unit:mm)

Part Name	
1	Decoration panel (PT-UMC1)
2	Air suction grille
3	Air discharge grille
4	Gas pipe connection
5	Liquid pipe connection
6	Drain pipe connection
7	Power supply connection
8	Fresh air connection (Ø70)

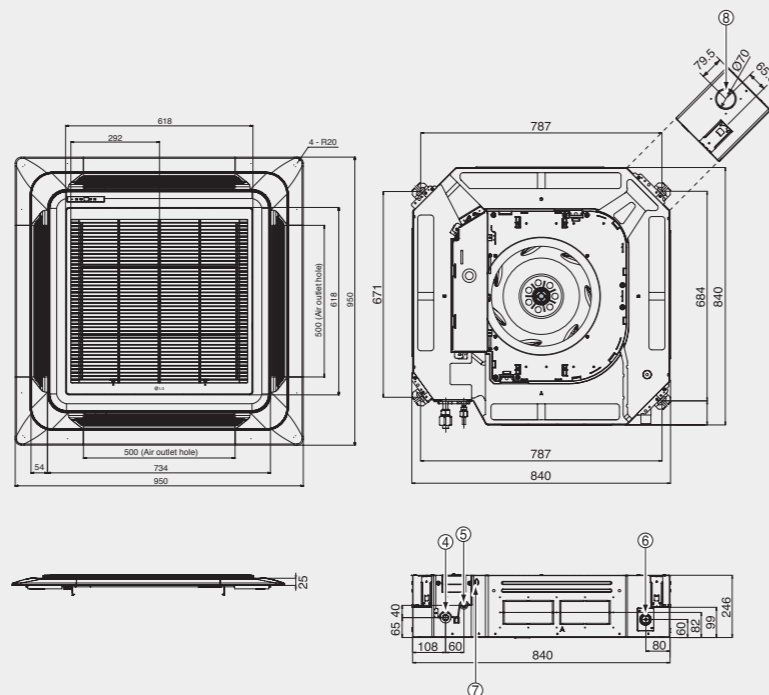


CEILING CASSETTE

UT42 NM2 / UT48 NM2 / UT60 NM2 / UT36H NM4 / UT42H NM4 / UT48H NM4

(Unit:mm)

Part Name	
1	Decoration panel (PT-UMC1)
2	Air suction grille
3	Air discharge grille
4	Gas pipe connection
5	Liquid pipe connection
6	Drain pipe connection
7	Power supply connection
8	Fresh air connection (Ø70)

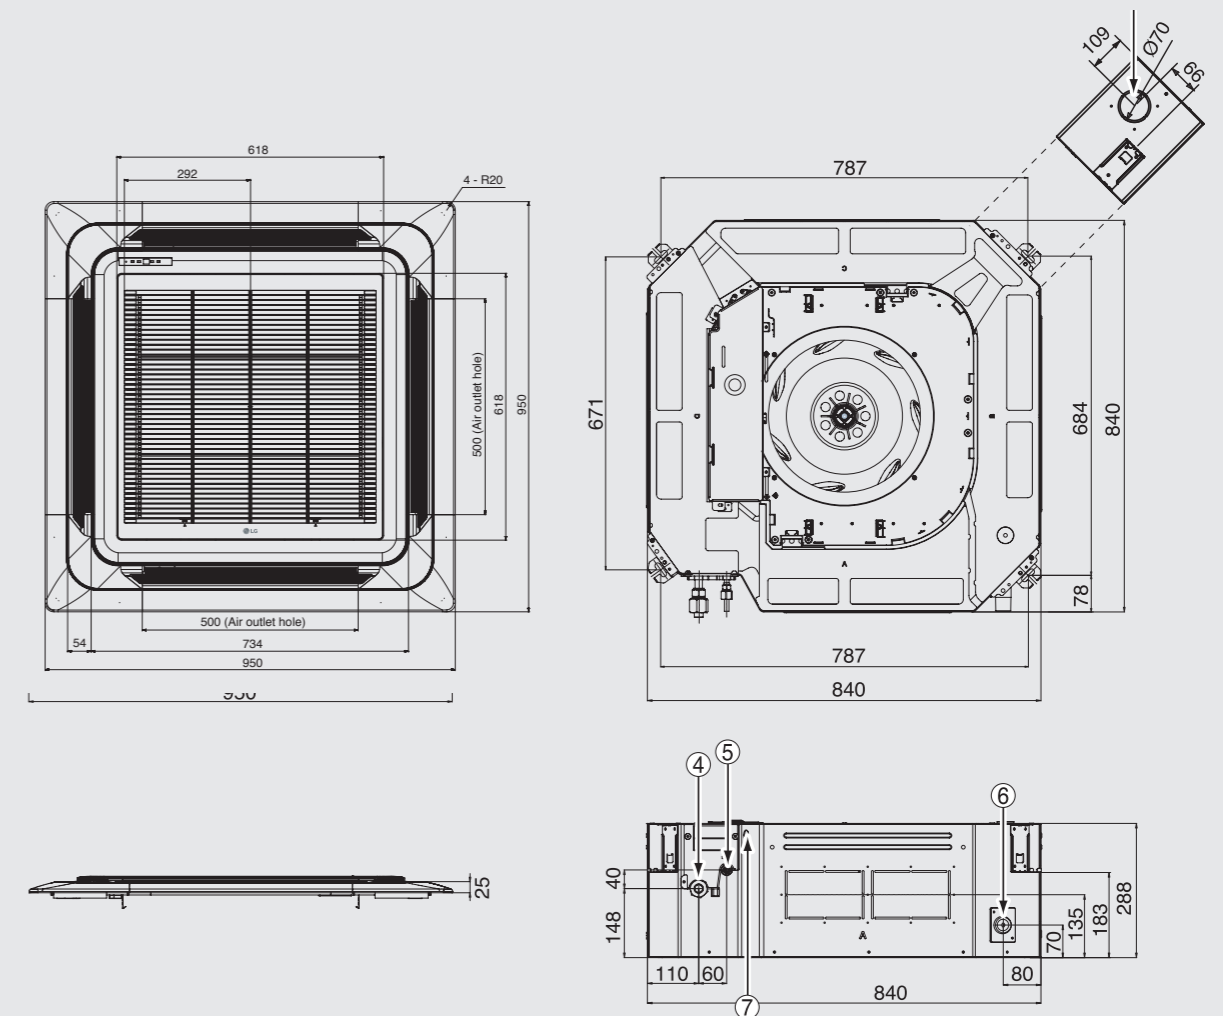


CEILING CONCEALED DUCT

UB36H NR3 / UB42H NR3 / UB48H NR3

(Unit:mm)


Part Name
1 Air suction flange
2 Air discharge flange
3 Control box
4 Gas pipe connection
5 Liquid pipe connection
6 Drain pipe connection

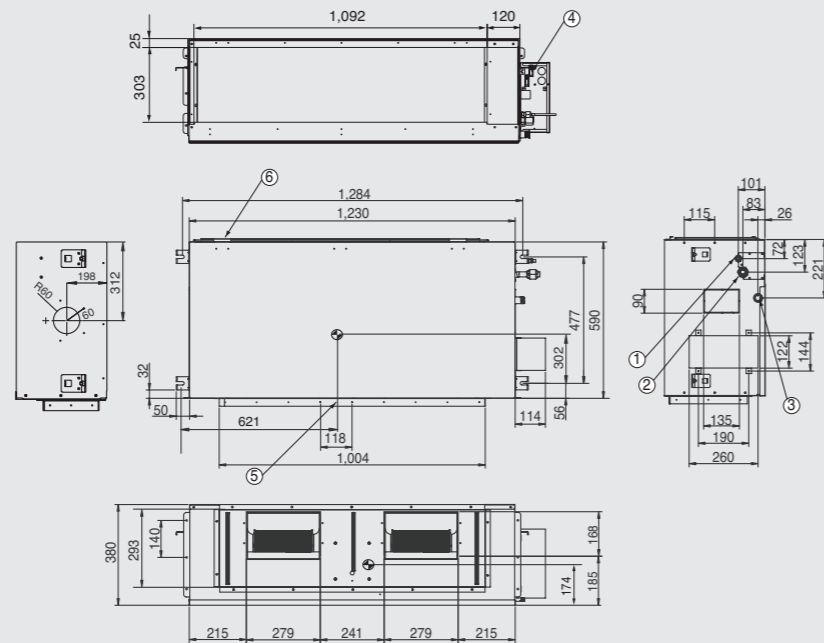

CB09L N12

(Unit:mm)

Part Name
1 Liquid pipe connection
2 Gas pipe connection
3 Drain pipe connection
4 Power supply connection
5 Air discharge
6 Air suction

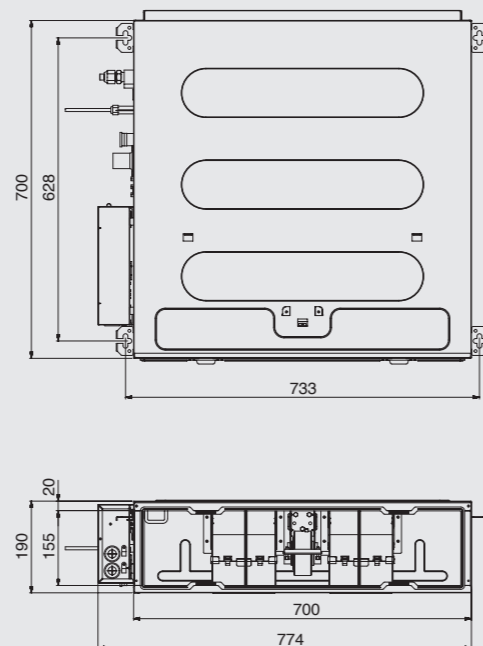


CEILING CONCEALED DUCT

CB12L N22 / CB18L N22

(Unit:mm)


Part Name
1 Liquid pipe connection
2 Gas pipe connection
3 Drain pipe connection
4 Power supply connection
5 Air discharge
6 Air suction

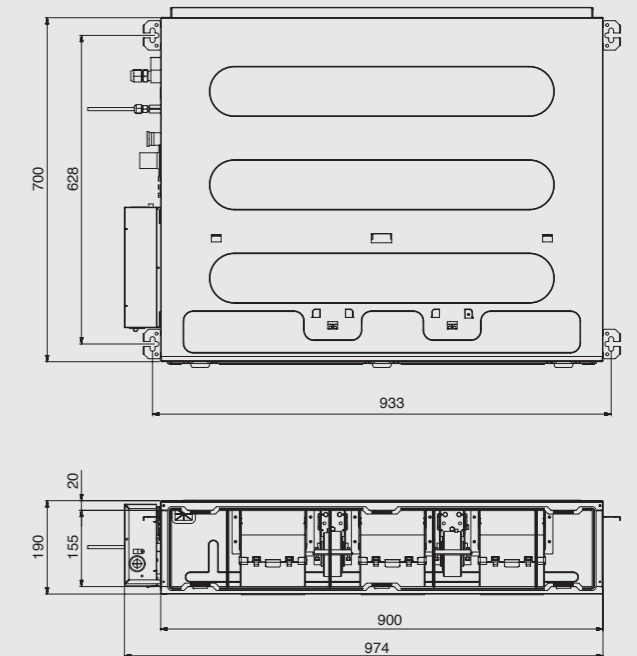

CB24L N32

(Unit:mm)

Part Name
1 Liquid pipe connection
2 Gas pipe connection
3 Drain pipe connection
4 Power supply connection
5 Air discharge
6 Air suction

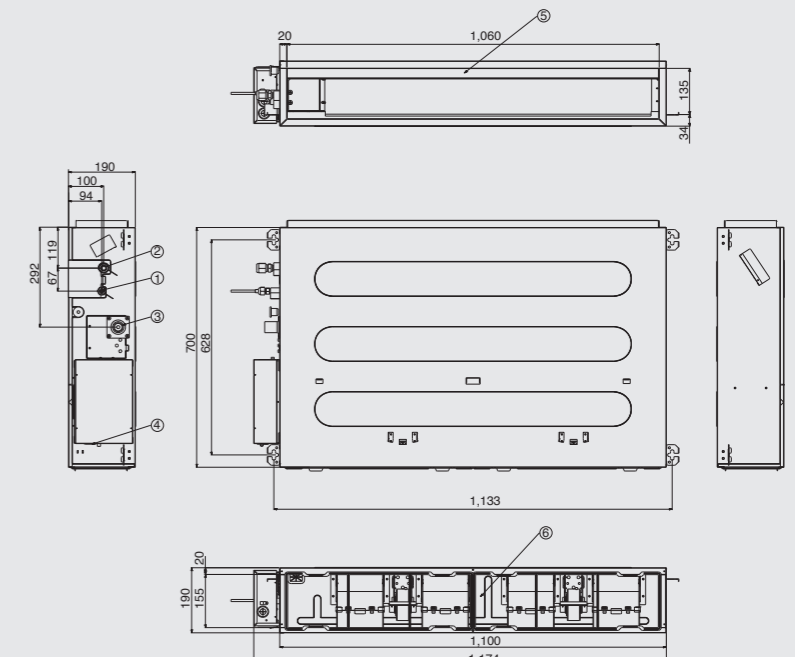


CEILING CONCEALED DUCT

CM18 N14 / CM24 N14 / UM30 N14

(Unit:mm)


Part Name	
1	Gas pipe connection
2	Liquid pipe connection
3	Drain pipe connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet Vent
7	Air Outlet Vent
8	Air Filter
9	Control Cover

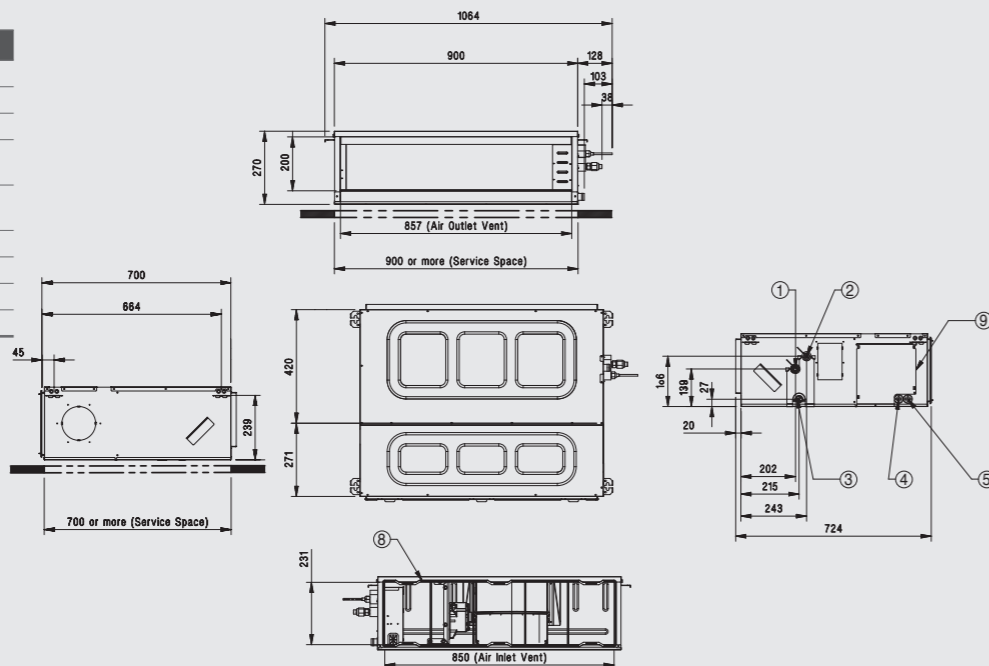

UM36 N24 / UM42 N24

(Unit:mm)

Part Name	
1	Gas pipe connection
2	Liquid pipe connection
3	Drain pipe connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

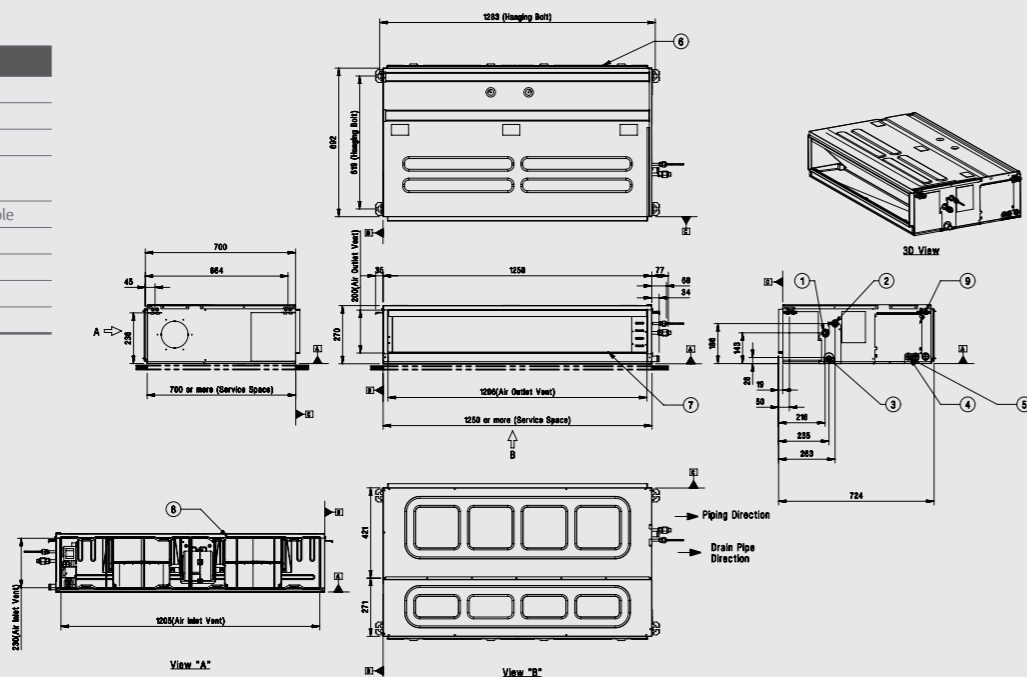


CEILING CONCEALED DUCT

UM48 N34 / UM60 N34

(Unit:mm)


Part Name	
1	Gas pipe connection
2	Liquid pipe connection
3	Drain pipe connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

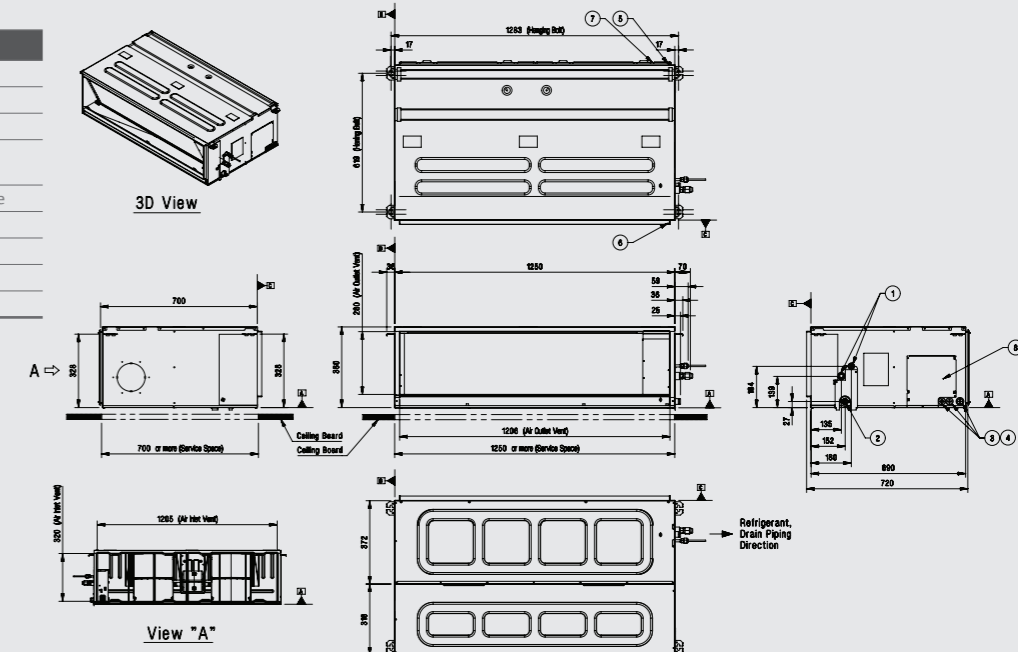

UB70 N94 / UB85 N94

(Unit:mm)

Part Name	
1	Air suction flange
2	Air discharge flange
3	Control Box
4	Gas piping connection
5	Liquid pipe connection
6	Drain pipe connection
7	Drain pump (Option)

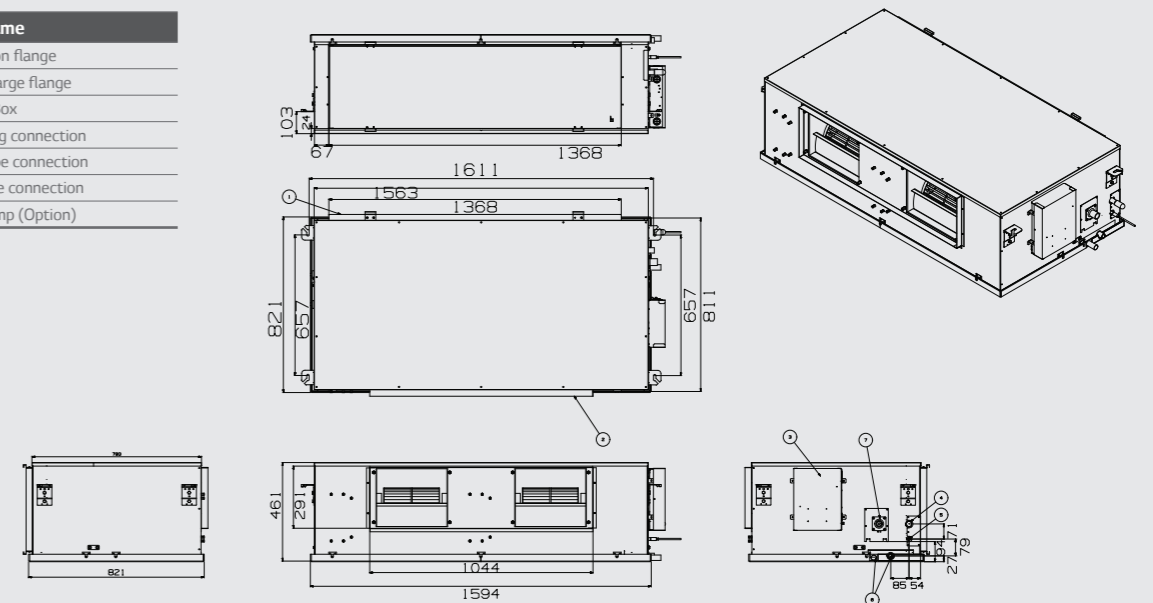


CEILING CONCEALED DUCT

UB18C NH0 / UB24C NH0

(Unit:mm)

Part Name	
1	Liquid pipe connection
2	Gas pipe connection
3	Drain pipe connection
4	Power supply connection
5	Air discharge
6	Air suction

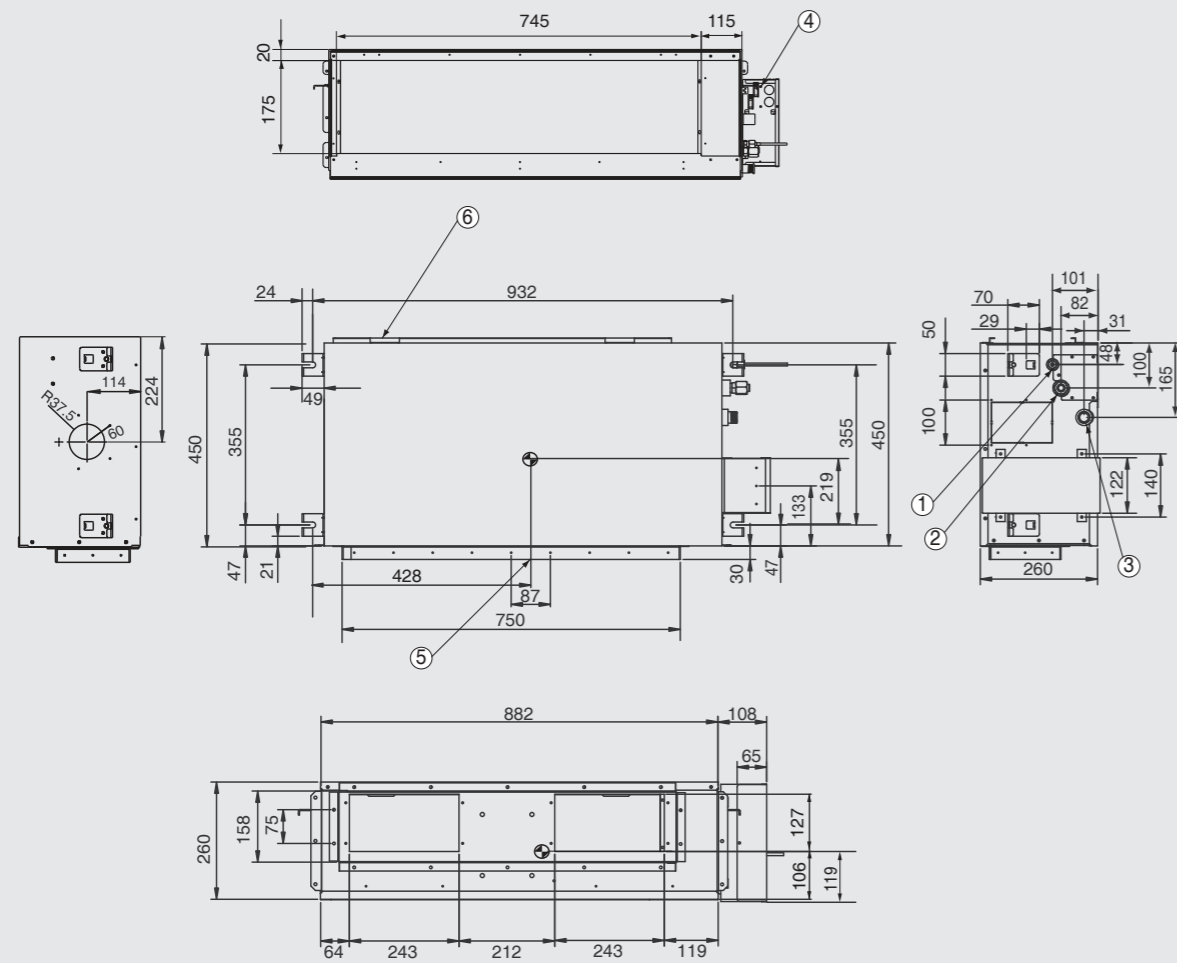


WALL MOUNTED

UJ30 NV2 / UJ36 NV2

(Unit:mm)

Part Name	
1	Front Panel
2	Display & Signal Receiver
3	Air Suction Grille
4	Installation Plate

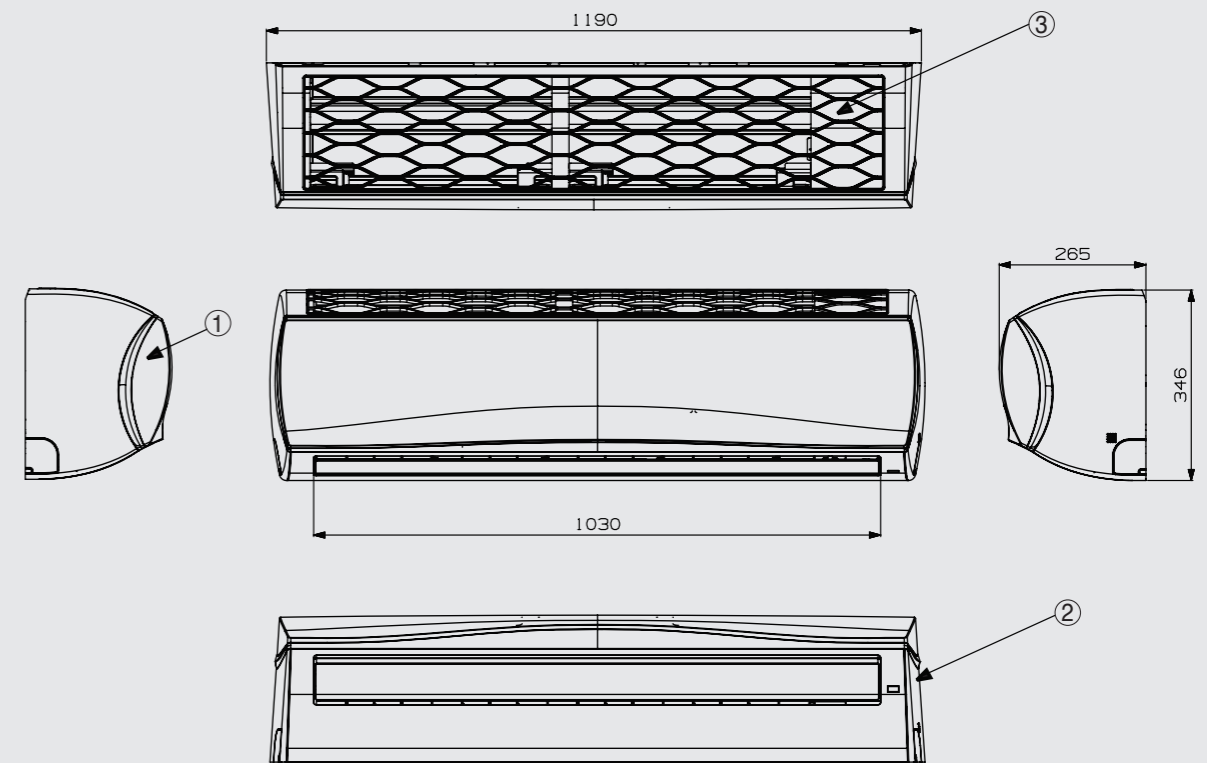


CEILING & FLOOR / CEILING SUSPENDED

CV09 NE2 / CV12 NE2

(Unit:mm)


Part Name
1 Front air discharge grille
2 Display & Single receiver
3 Air suction grille
4 Knockout hole
5 Installation plate

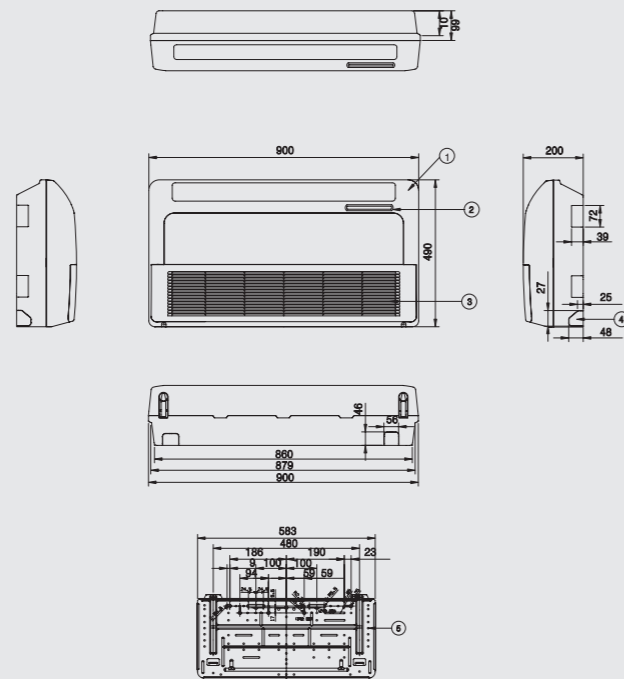

CV18 NJ2 / CV24 NJ2 / UV30 NJ2

(Unit:mm)

Part Name
1 liquid pipe
2 Gas pipe
3 Suction grille
4 Discharge grille
5 Suspension bracket
6 Right side drain hose hole
7 Left side drain hose hole
8 Wiring connection
9 Piping connection
10 Right side drain pipe connection
11 Left side drain pipe connection

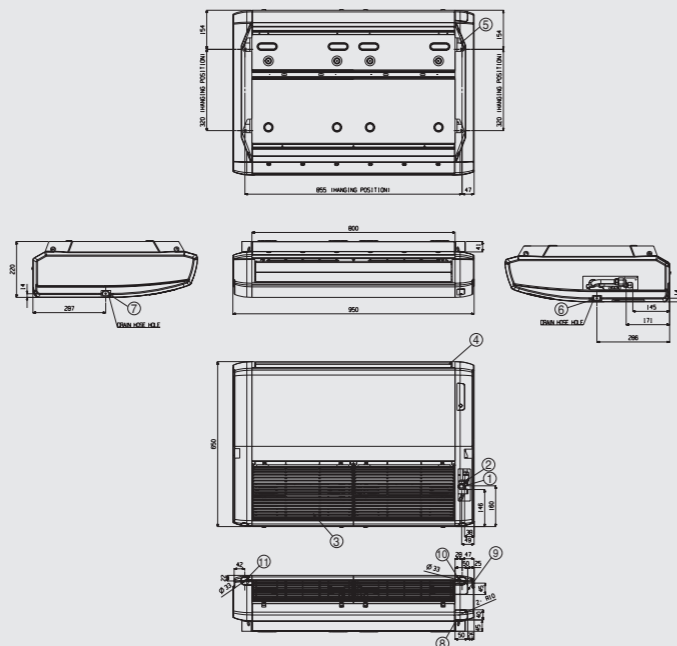


CEILING & FLOOR / CEILING SUSPENDED

UV36 NK2

(Unit:mm)


Part Name
1 Front air discharge grille
2 Display & Single receiver
3 Air suction grille

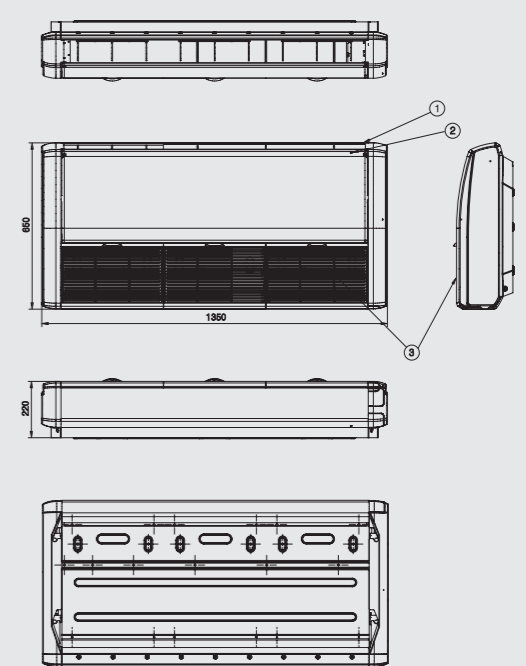

UV42 NL2 / UV48 NL2 / UV60 NL2 / UV36H NL4 / UV42H NL4 / UV48H NL4

(Unit:mm)

Part Name
1 Front air discharge grille
2 Display & Single receiver
3 Air suction grille

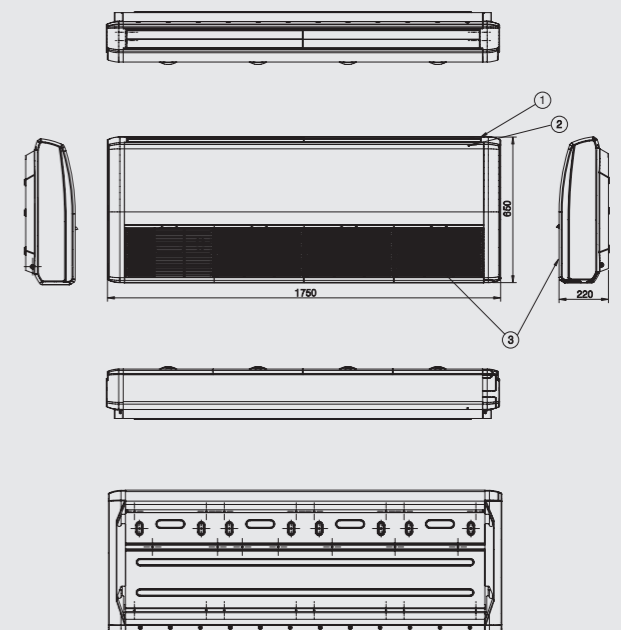


CONSOLE

CQ09 NA0 / CQ12 NA0 / CQ18 NA0

(Unit:mm)

Part Name	
1	Front air discharge grille
2	Display & Single receiver
3	Air suction grille

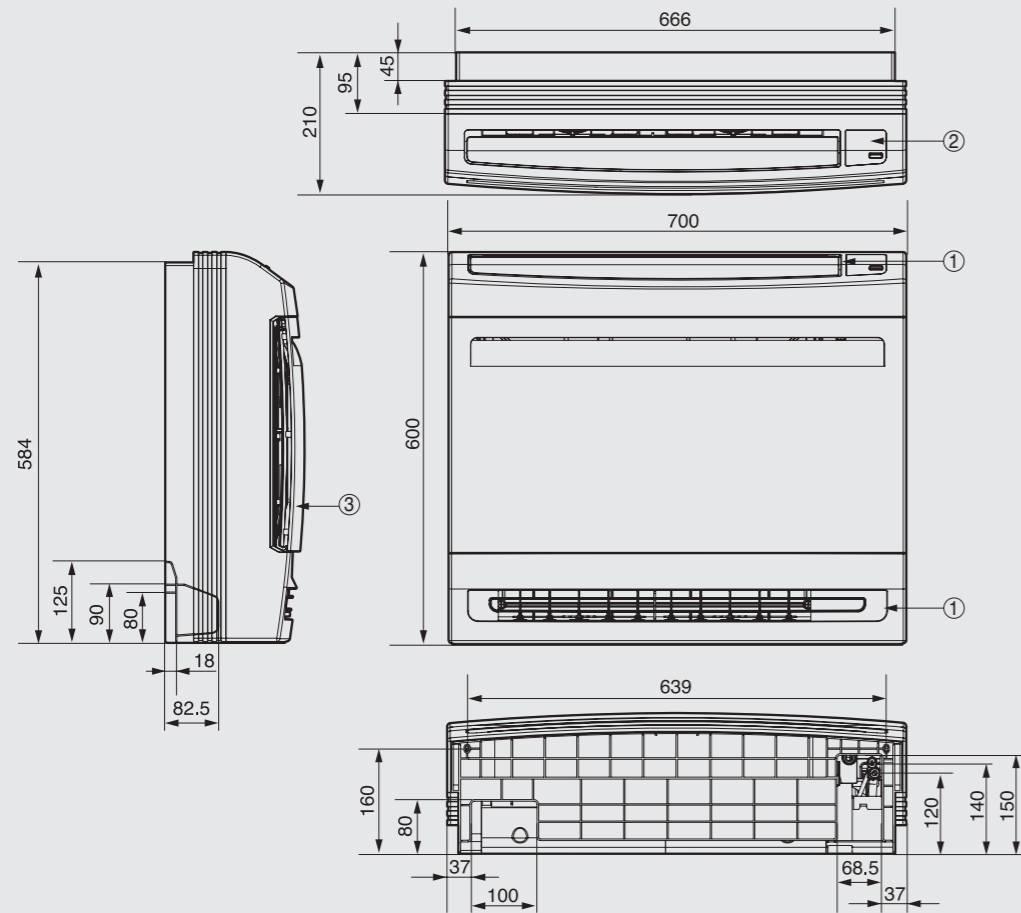


FLOOR STANDING

UP48 NT2

(Unit:mm)

Part Name	
1	Front air discharge grille
2	Display & Single receiver
3	Air suction grille

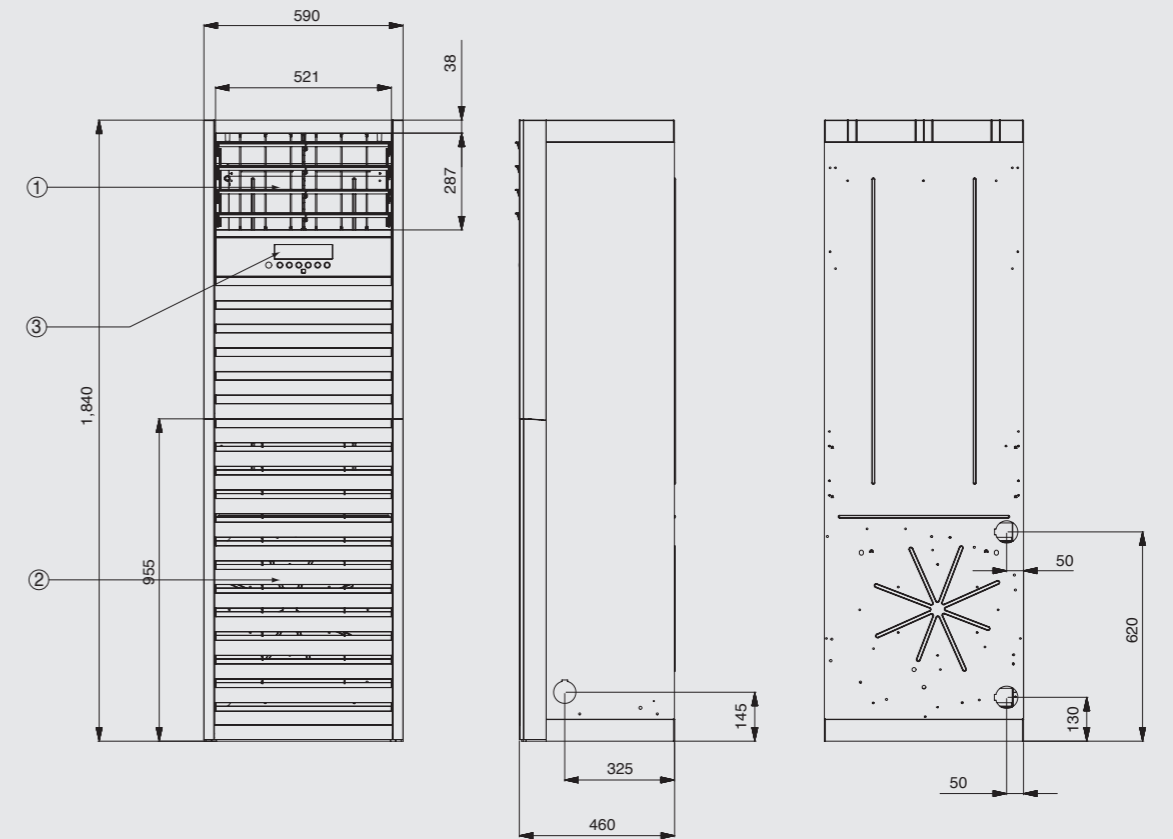


UNIVERSAL OUTDOOR

UU24W U44 / UU30W U44 / UU30WC U40

(Unit:mm)


Part Name	
1	Air discharge grille
2	Liquid pipe connection
3	Gas pipe connection
4	Power & Transmission connection
5	Earth screw

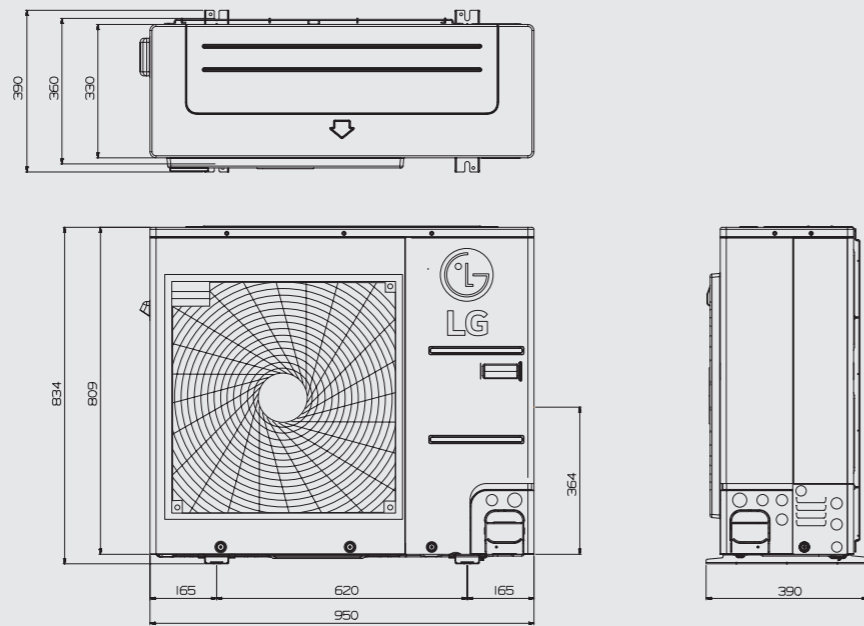

UU36WH U34 / UU42WH U34 / UU48WH U34 / UU37WH U33 / UU43WH U33 / UU49WH U33 / UU42W U32 / UU48W U32 / UU60W U32 / UU43W U32 / UU49W U32 / UU61W U32 / UU70W U34

(Unit:mm)

Part Name	
1	Air discharge grille
2	Gas pipe connection
3	Liquid pipe connection
4	Power & Transmission connection

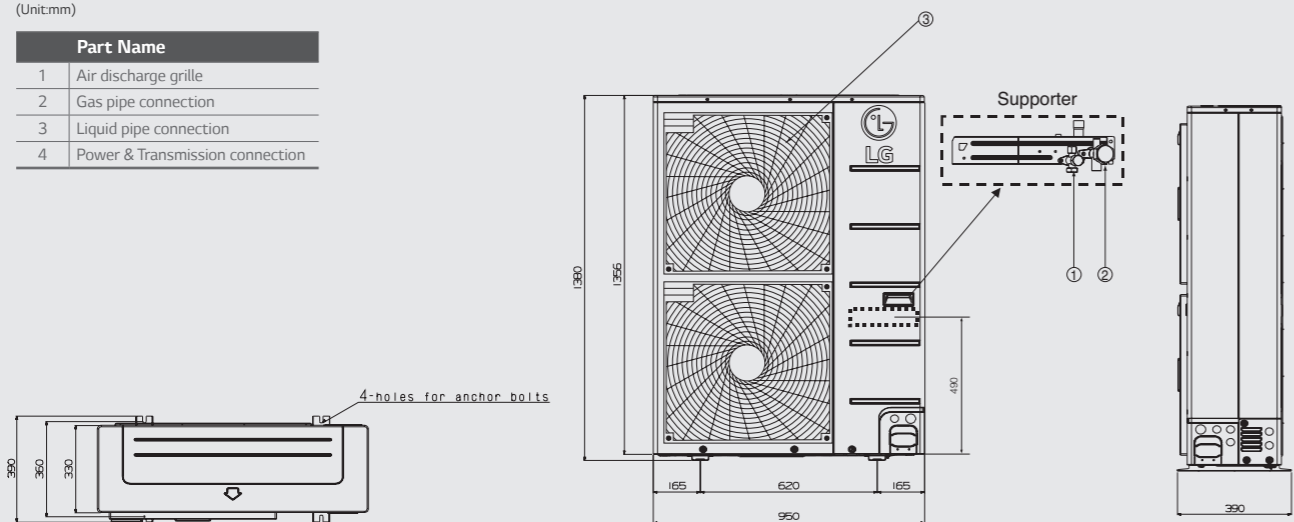


UNIVERSAL OUTDOOR

UU09W ULD / UU12W ULD

(Unit:mm)


Part Name	
1	Air discharge grille
2	Gas pipe connection
3	Liquid pipe connection
4	Power & Transmission connection
5	Earth screw
6	SVC valve cover

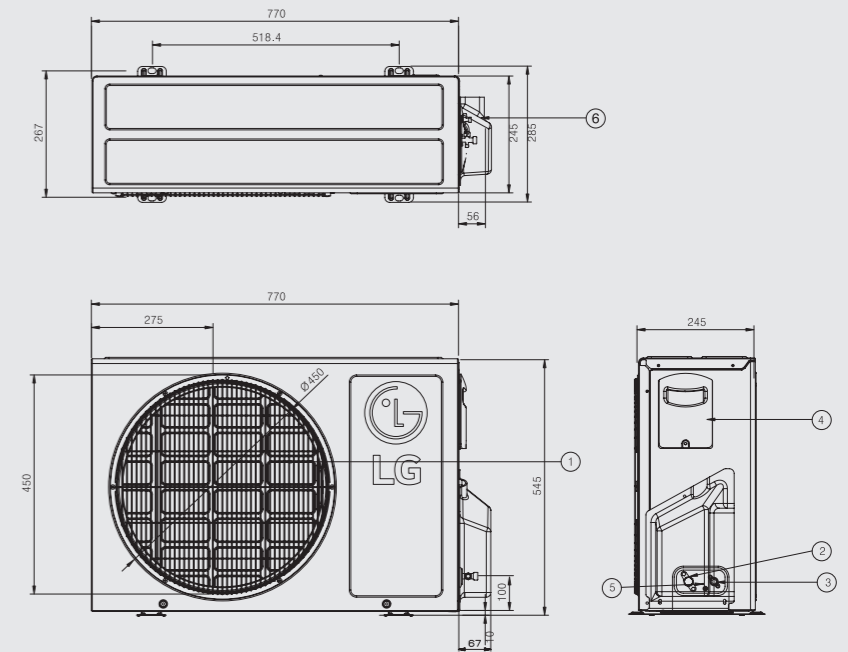

UU18W UE4

(Unit:mm)

Part Name	
1	Air discharge grille
2	Gas pipe connection
3	Liquid pipe connection
4	Power & Transmission connection
5	Earth screw
6	SVC valve cover

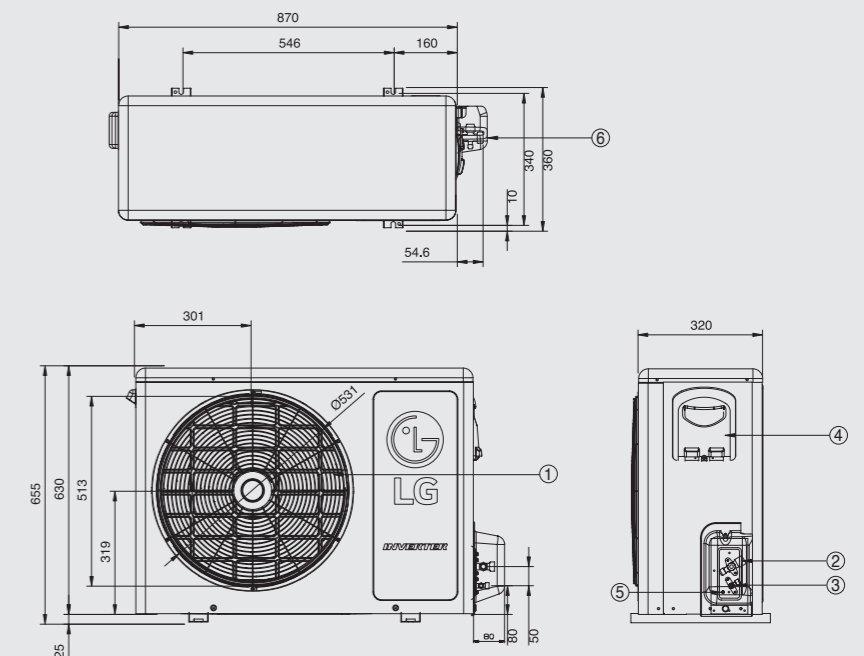

MULTI SPLIT









































- 108 Outdoor Units
- 116 Indoor Units
- 130 Accessories
- 134 Combination Table



MULTI SPLIT LINE-UP

OUTDOOR UNITS					
kBtu	Type kW	Multi Piping	Max. Indoor Units	Phase	Combination Sample
14	4.1	MU2M15 UL3 	2	1Ø	
16	4.7	MU2M17 UL3 	2	1Ø	
18	5.3	MU3M19 UE3 	3	1Ø	
21	6.2	MU3M21 UE3 	3	1Ø	
24	7.0	MU4M25 U43 	4	1Ø	
27	7.9	MU4M27 U43 	4	1Ø	
30	8.8	MU5M30 U43 	5	1Ø	
40	11.7	MU5M40 UO2 	5	1Ø	
kBtu	Type kW	DB Box Type	Max. Indoor Units	Phase	Combination Sample
40	11.7	FM40AH UO2 	7	1Ø	
46	13.5	FM41AH U32 	7	3Ø	
48	14.1	FM48AH U32 FM49AH U32 	8	1Ø / 3Ø	
57	16.7	FM56AH U32 FM57AH U32 	9	1Ø / 3Ø	

LG MULTI systems offer various indoor units and outdoor units up to 16.7kW. More than 2,000 combinations are possible with 14 types of outdoor unit and 40 types of indoor unit


INDOOR UNITS								
Type	kBtu kW	5	7	9	12	15	18	24
		1.5	2.1	2.6	3.5	4.2	5.3	7
Wall Mounted Unit	Standard	 MS05SQ NW0	 MS07SQ NW0	 MS09SQ NB0	 MS12SQ NB0	 MS15SQ NB0	 MS18SQ NC0	 MS24SQ NC0
	Deluxe		 MS07AQ NB0	 MS09AQ NB0	 MS12AQ NB0		 MS18AQ NC0	 MS24AQ NC0
	ART COOL Mirror		 MS07AW* NB0	 MS09AW* NB0	 MS12AW* NB0		 MS18AW* NC0	 MS24AW* NC0
	ART COOL Gallery			 MA09AH1 NF1	 MA12AH1 NF1			
Ceiling Mounted Cassette	1 Way Cassette			 MT09AH NU1	 MT11AH NU1			
	4 Way Cassette	 MT06AH NR0	 MT08AH NR0	 CT09 NR2	 CT12 NR2		 NEW CT18 NQ4	 NEW CT24 NP4
Ceiling Concealed Duct	Mid / High Static Pressure						 CM18 N14	 CM24 N14
	Low Static Pressure			 CB09L N12	 CB12L N22		 CB18L N22	 CB24L N32
Ceiling & Floor Convertible Unit / Ceiling Suspended Unit				 CV09 NE2	 CV12 NE2		 CV18 NJ2	 CV24 NJ2
Console				 CQ09 NA0	 CQ12 NA0		 CQ18 NA0	

ART COOL Mirror Note : * indicates panel color - Mirror (R), Silver (V), White (W)

ENERGY EFFICIENCY


BLDC (Brushless Direct Current Motor) Compressor

LG air conditioners are equipped with a BLDC compressor that uses a strong neodymium magnet. The compressor has improved efficiency compared to standard AC inverter products and it is optimised for seasonal efficiency.

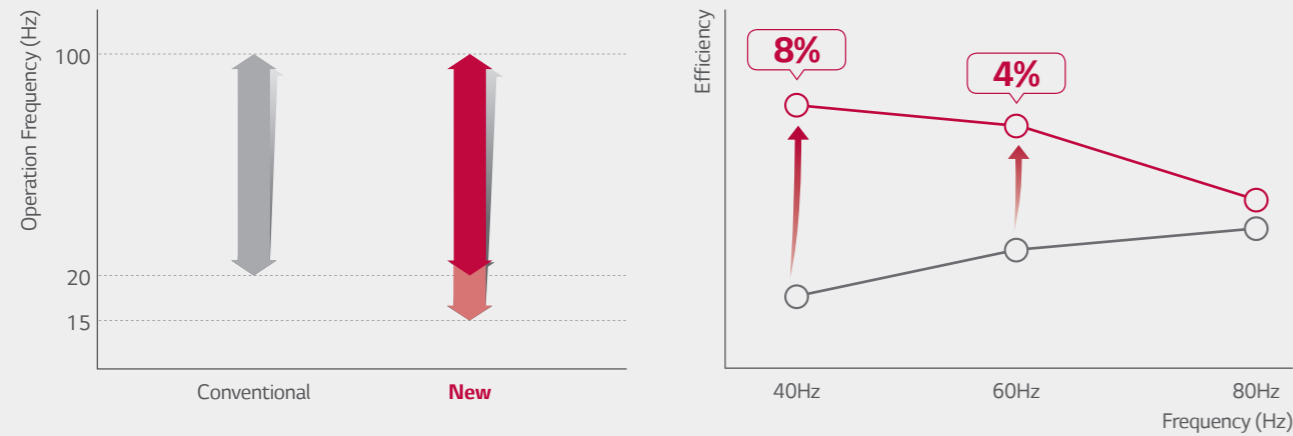


BLDC Fan Motor

The BLDC Fan motor is more efficient than a conventional AC motor, offering an additional 40% energy savings at low speeds and 20% at high speeds.

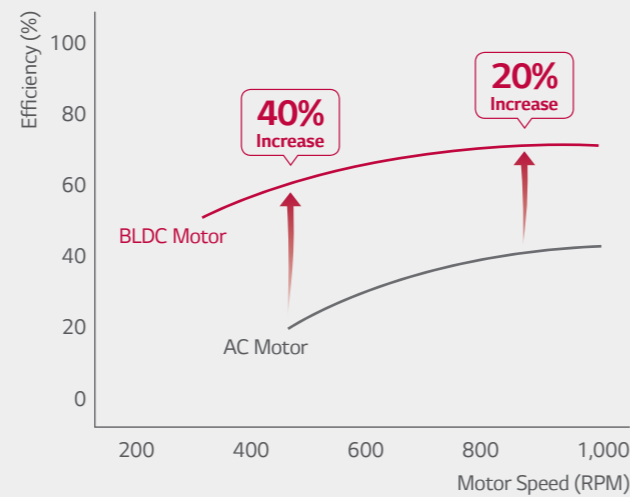


Wide Louver Plus Fin

Wide Louver Plus fin technology increases 11% of full load heating performance and 6% of COP compared to conventional fin. It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

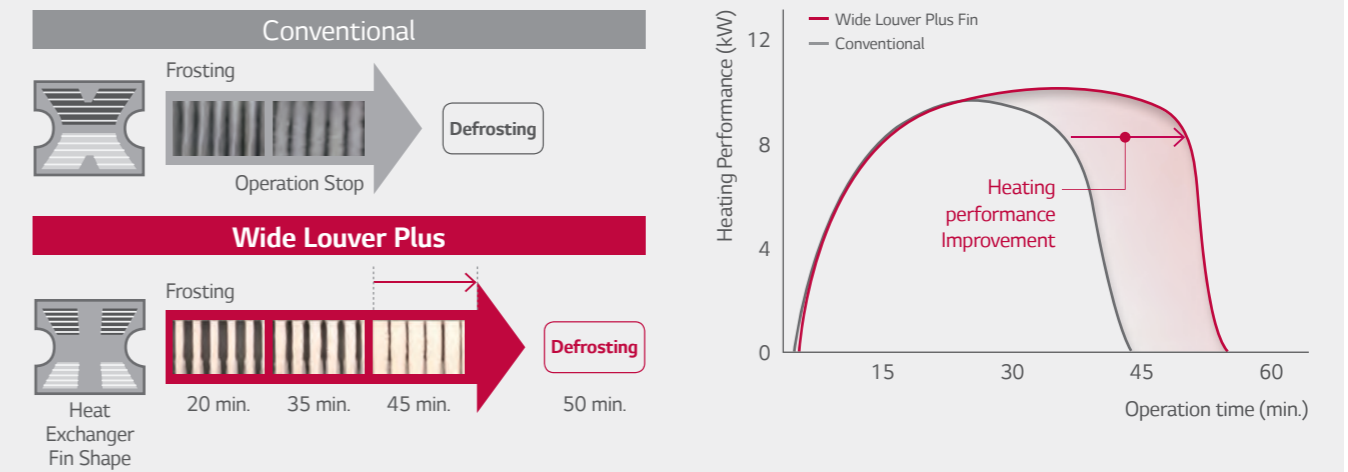

Optimised Heat Exchanger Path

Optimised heat exchanger path improved cycle efficiency up to 5%.

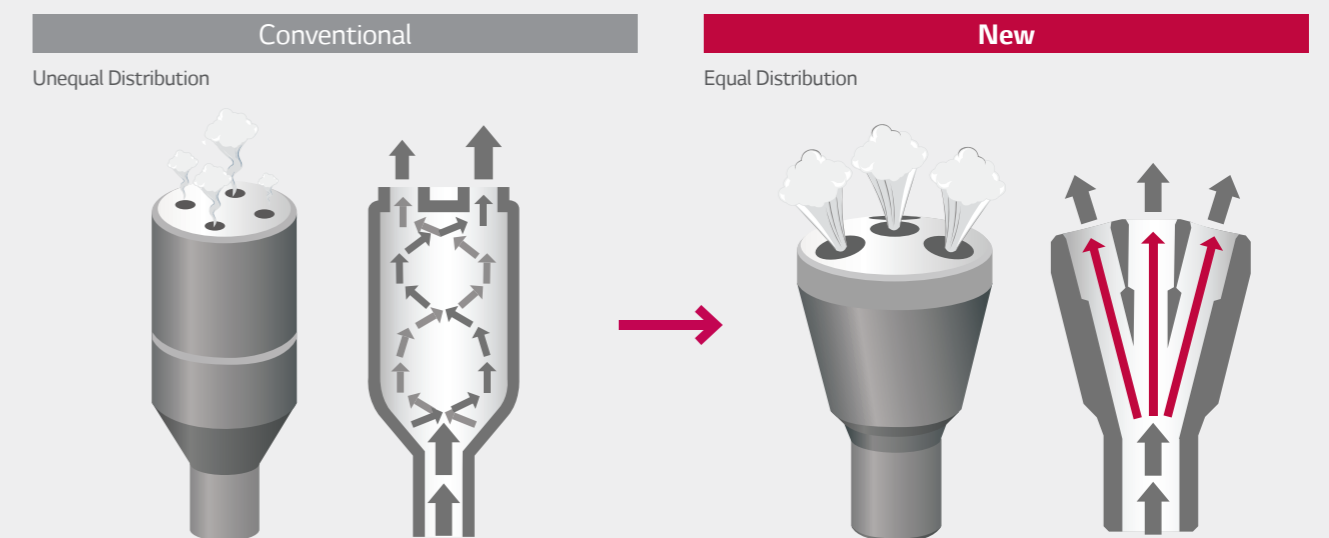

QUICK COOLING & HEATING

Quick Response



Conventional


Step 1

Sensing current temperature of refrigerant, indoor and outdoor temperature

Step 2

Estimating Pressure
Finding recorded target pressure to operate compressor, based on the corresponding temperature data

This algorithm is more likely to be impacted by temperature change and it takes more time to calculate proper operation range of compressor to target point.

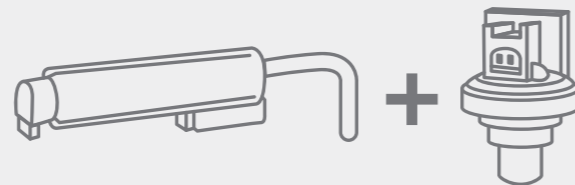


LG Inverter

Step 1

Sensing refrigerant pressure and temperature simultaneously to make sure compressor ready for target cooling operation

This ensures to reach target performance point without failing to keep a reliable operation.

Pressure control takes less time to reach the desired temperature up to 30% in cooling and 44% in heating with high level of accuracy and stability.

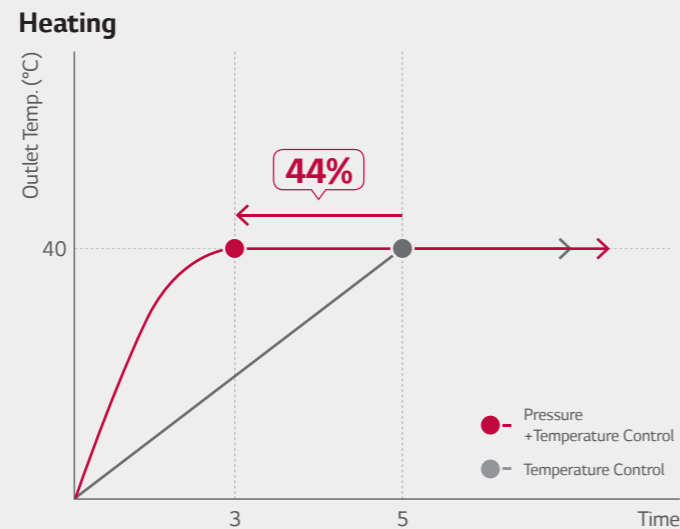


* Based on internal test data


OPERATION RANGE

Wide Operation Range

Multi split has wide operation range, it can be ideal solution for server rooms, machine rooms and kitchen.

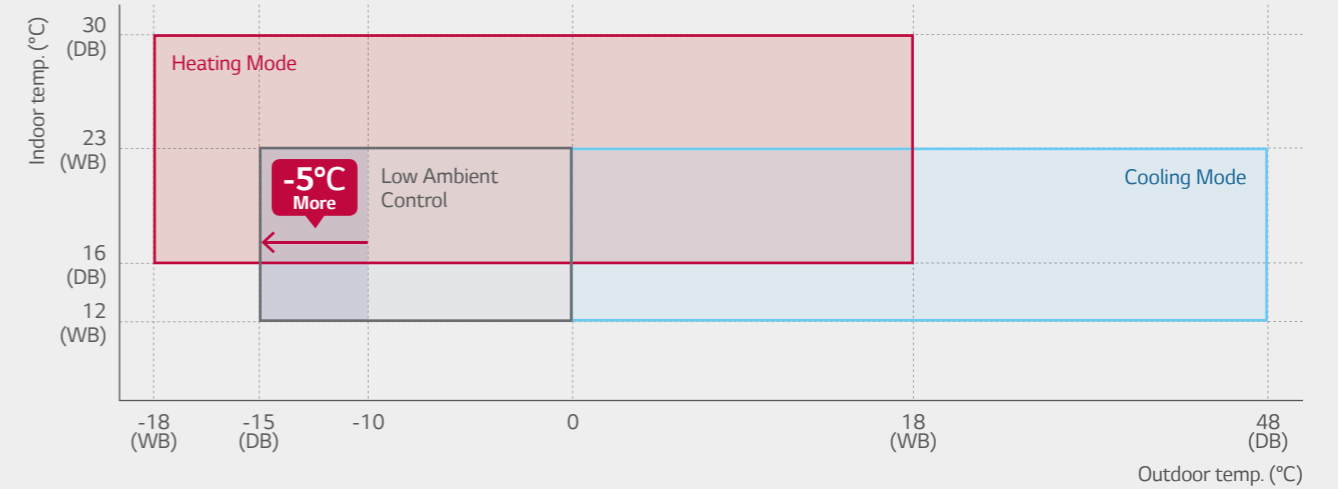

* MU2M15 UL3 / MU2M17 UL3 Cooling Range : -15°C ~ -46°C

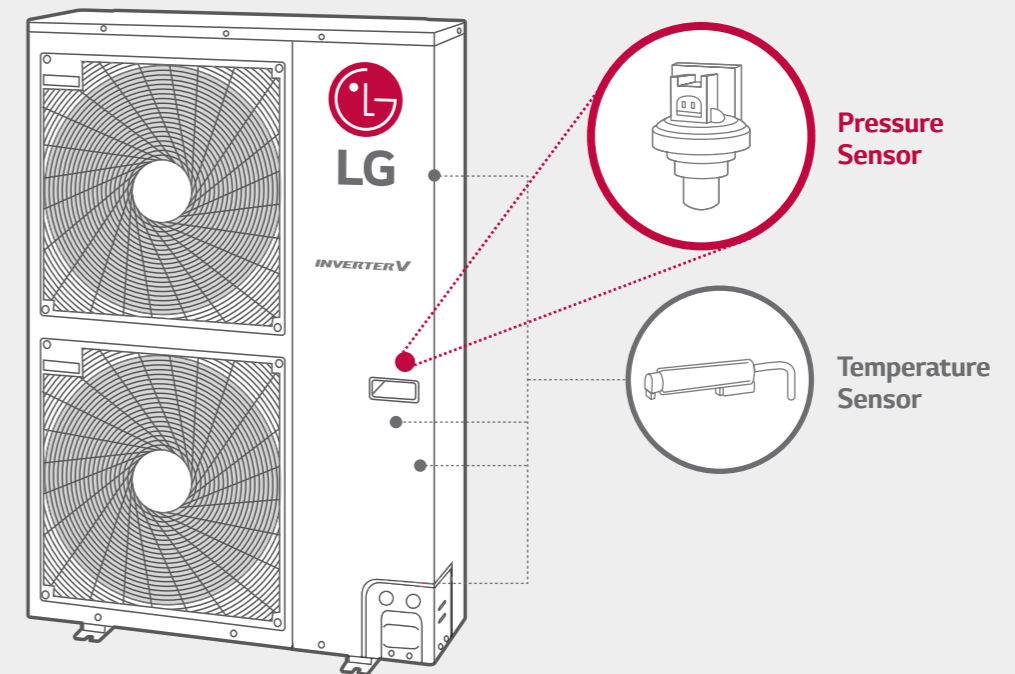


SAVING COST & ENERGY

MULTI SPLIT

Smart Load Control

Startup Operation Energy Saving


If you choose "Smooth mode" by dip switch at ODU, the loads and discharge air temperature will be automatically changed by outdoor and setting temperature. During 30 minutes after startup, you can save 35% power input compared to conventional one.

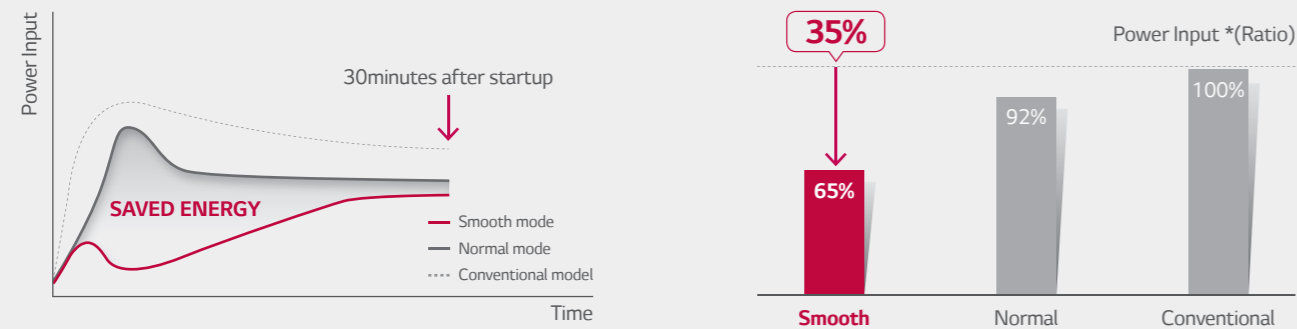

* This image is a schematic diagram to help you understand, represent the trend of the conventional model and the new model.

Real Time Energy Saving


After started up 30 minutes on Smooth mode, ODU changes indoor discharge air temperature continuously according to load.

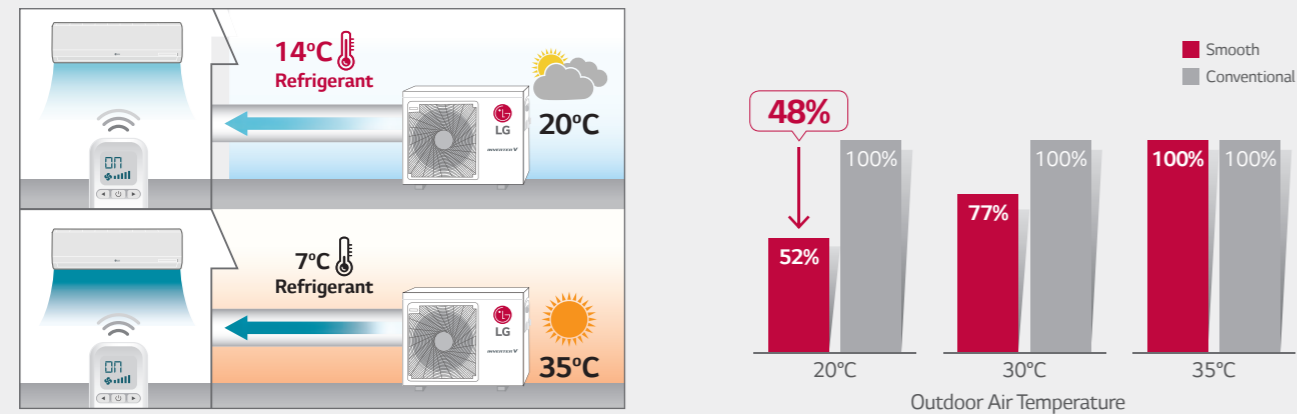

* Applied Models : MU3M19 UE3 / MU3M21 UE3 / MU4M25 U43 / MU4M27 U43 / MU5M30 U43 / MU5M40 U02 / FM40AH U02
 * Tested model / Condition : MU3M19 UE3 / ISO 5151

Peak Current Control


The peak current control function keeps the air conditioner from running at the maximum level while maintaining current system setting, in order to reduce energy consumption. This function can help to cut energy costs during the peak periods of energy use when the energy fee is much higher.

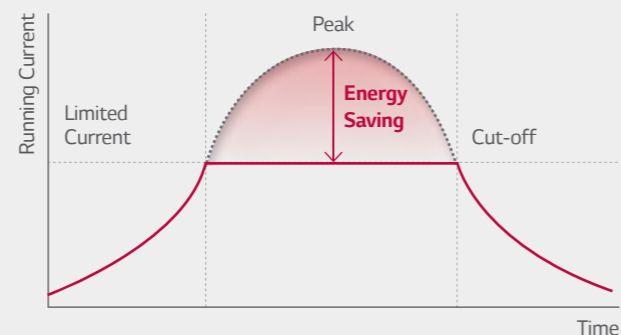

Standby Mode


This function can minimise power consumption by turning power off on the PCB except for the MICOM which receives signals.

* Based on MU3M19 UE3

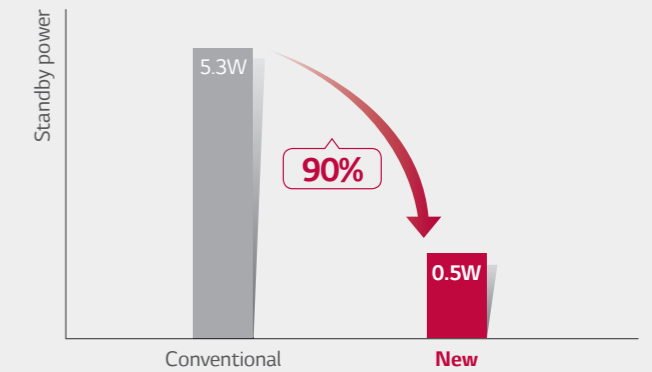

Mode Lock

Setting operation mode to either cooling-only or heating-only by adjusting dip switch, in order to prevent mixed use of cooling and heating.

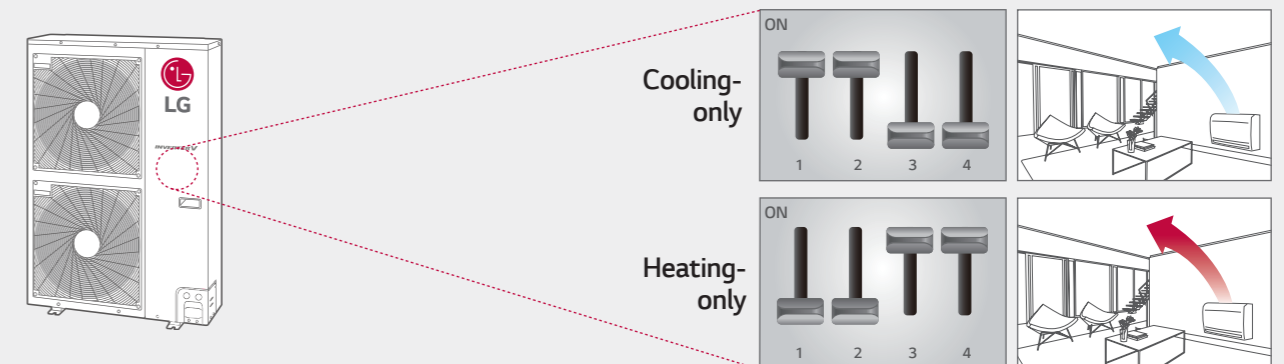

Save Energy in Small Spaces

LG has 1.5kW Indoor unit (Ceiling Mounted Cassette/Wall Mounted Unit) that is enough to small spaces with MULTI Split system.




* 1.5kW : MS05SQ NW0 (Wall Mounted Unit) / MT06AH NR0 (4Way Cassette)

QUIET OPERATION

Night Silent Operation


Night silent operation can reduce noise levels at night time by simply setting the dip switch on the PCB of the outdoor unit

Cooling Mode

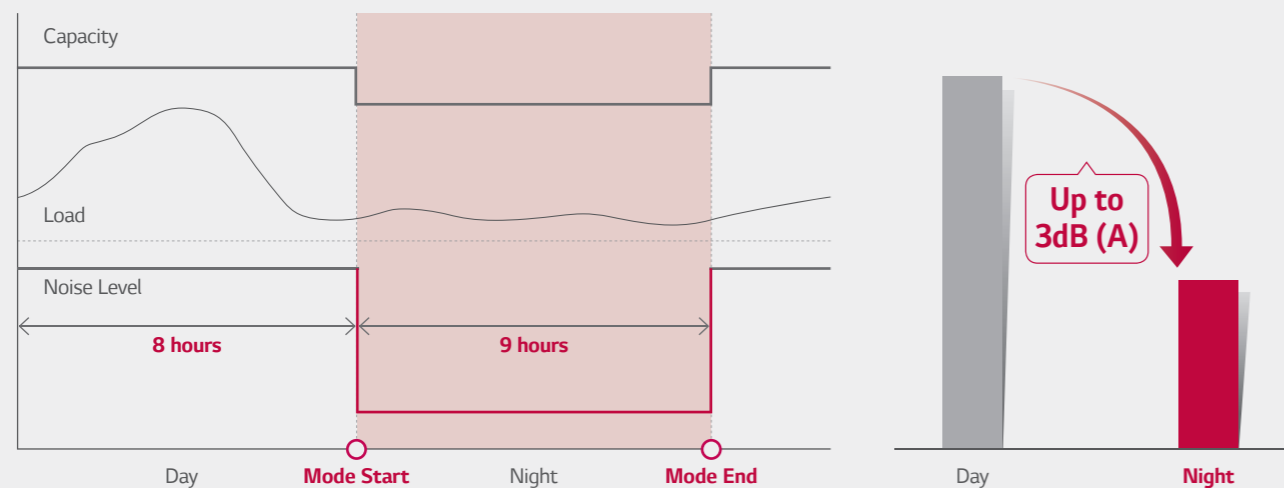

Improved Grille & Fan

The new grille shape design on the outdoor unit helps to disperse air more efficiently which improves heat exchange and reduces noise level. The new axial fan has a thick front edge and smooth rear edge, this provides a high efficiency, low noise, wide fan, as well as improving the air flow rate.

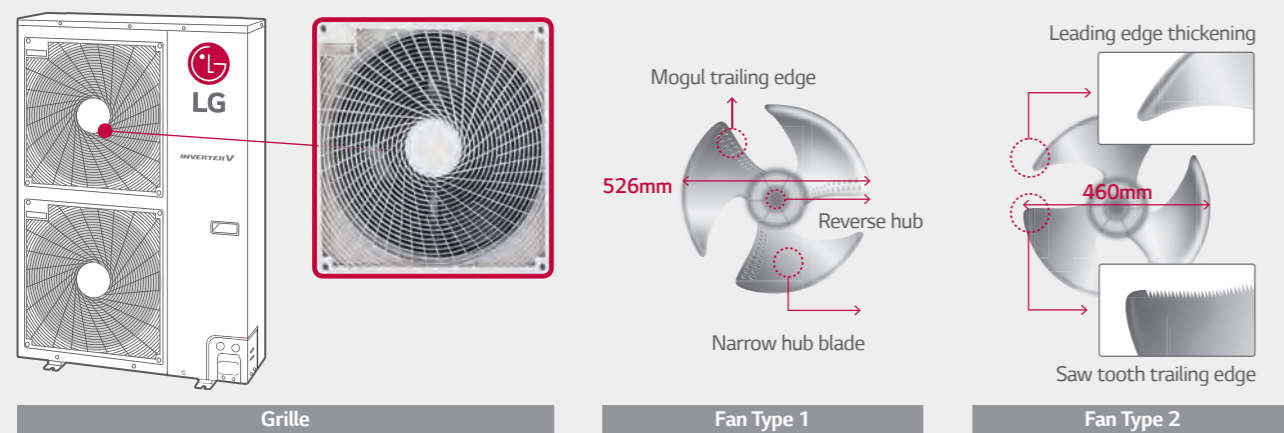

CONVENIENCE

MULTI SPLIT

Wi-Fi Control

LG all MULTI SPLIT can be controlled by Wi-Fi via smart internet devices as Android or iOS based smartphones and Intesis Wi-Fi Module. (Option)

Case 1) Connection with indoor units with IR receiver




¹⁾ This product is provided by INTESIS. For more information, please contact INTESIS directly

Case 2) Connection with duct type indoor units



Outdoor Dry Contact

LG New models have applied outdoor dry contact on outdoor unit. It can make you easily take on and off all indoor units at once.

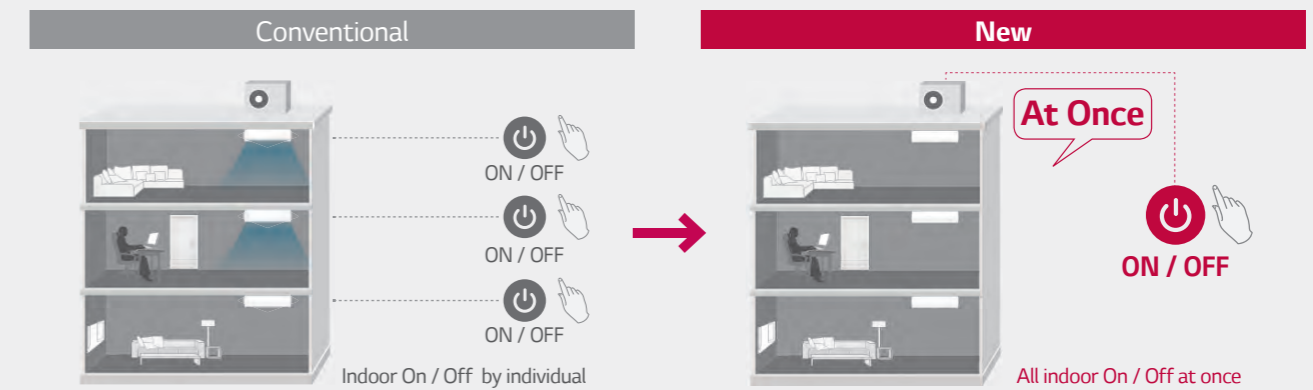


* Applied Models : MU3M19 UE3 / MU3M21 UE3 / MU5M40 UO2 / FM40AH UO2

CONVENIENCE

Wiring Error Check

Installers can check whether the transmission cable has been connected correctly by using the wiring error check function. Previously when the transmission cable was wrongly connected, several checks and reinstallations were needed. However the wiring error check can reduce the time taken to check for transmission cable errors.

Check with Outdoor PCB : When error → LED is turned on

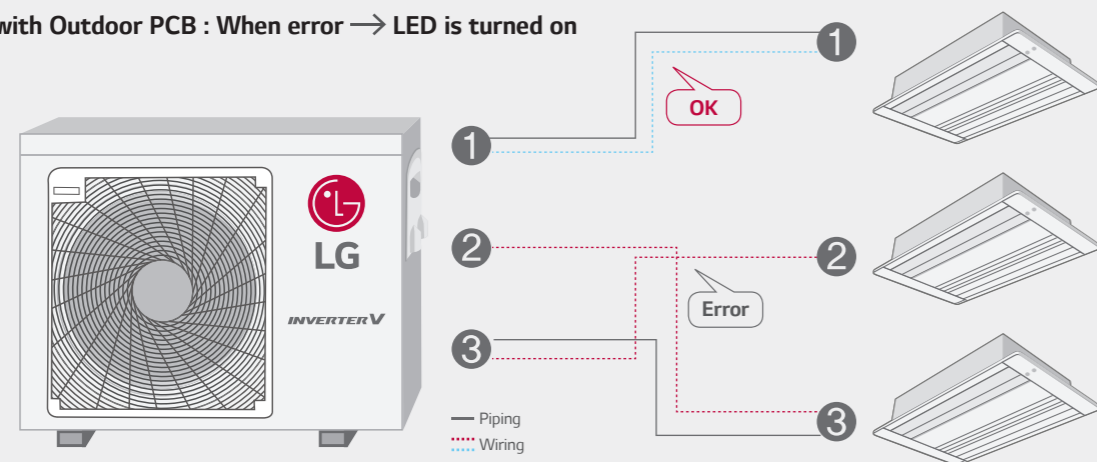

Easy to Access PCB


Users can easily access data by opening the control cover and checking the PCB on the side of the unit.

Easy to check PCB

• Top Cover / PCB Cover



• Control Cover

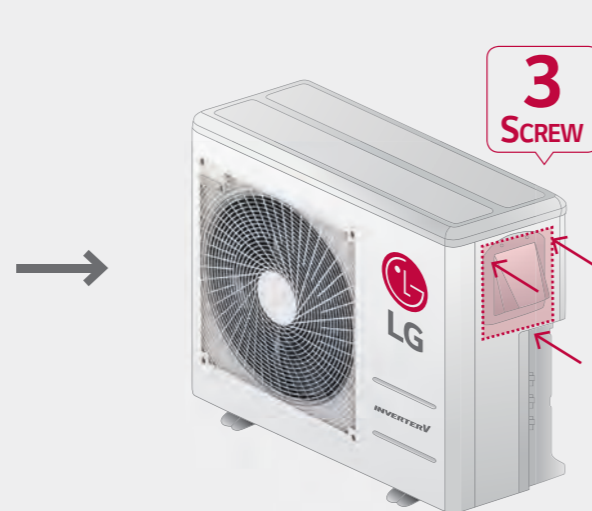


• Applied Models : MU2M15 UL3 / MU2M17 UL3 / MU3M19 UE3 / MU3M21 UE3


Forced Cooling Operation

The forced cooling operation allows refrigerant to be recharged or pumped down, regardless of the indoor temperature. More importantly this function can be used when indoor units are being moved or repaired.

Recharging

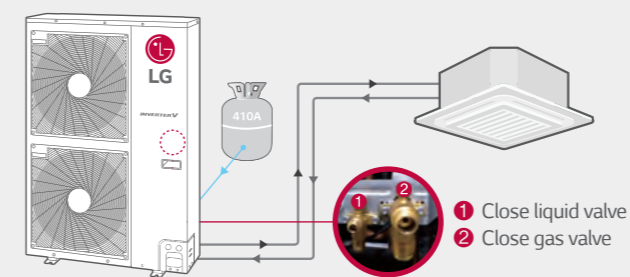

Pump Down

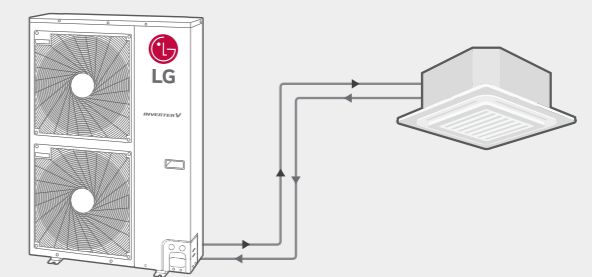


LG MV (Monitoring View)

LG MV helps engineers to inspect and monitor air conditioning units easily. Information is provided by product type. (SINGLE Split & MULTI Split)



- IDU info.
- Cycle & valves
- Actuator info.
- Sensors & Electricity
- ODU info.

LG MV provides cycle information with diagrams and the user can check accumulated data on a graph.

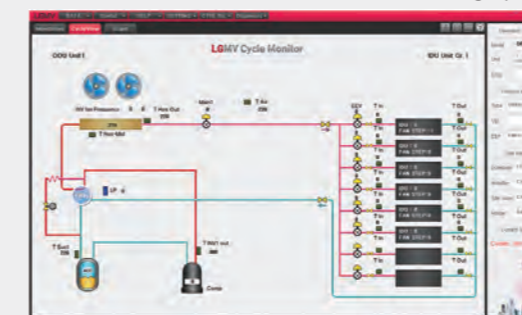

A technician can easily check the error status by looking at the indicator information. (Troubleshooting guide)

Error indicator

Error Code	Contents
01	Air temperature sensor of indoor unit
02	Inlet pipe temperature sensor of indoor unit
03	Communication error : wired remote controller ↔ indoor unit


•
•
•

CONVENIENCE


Compact Size & Light Weight

The MULTI F are more compact and lighter compared to previous models. The reduction in weight makes it easier to carry and install.


Weight

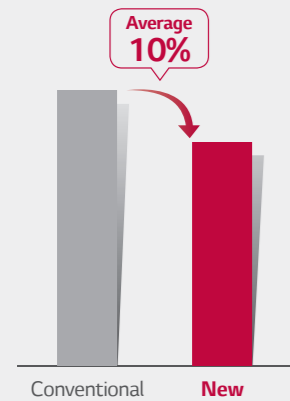

Refrigerant

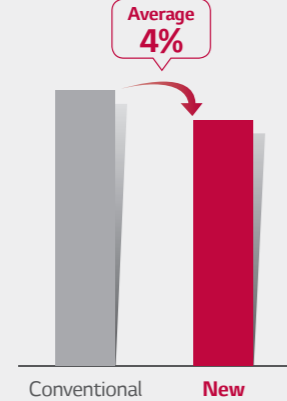


MU3M19 UE3 / MU3M21 UE3

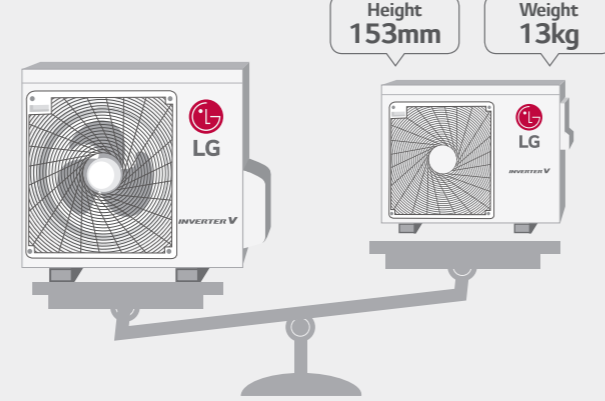


Inner Support

The Multi F has a better design so that the piping cover is enclosed and the size reduced by 80mm and 25mm at the side and back respectively. As a result it is possible to install the unit close to a wall. As well as the easily accessible service valve, it is possible to conveniently service the outdoor unit when installed below a window.

Support enclosed inside

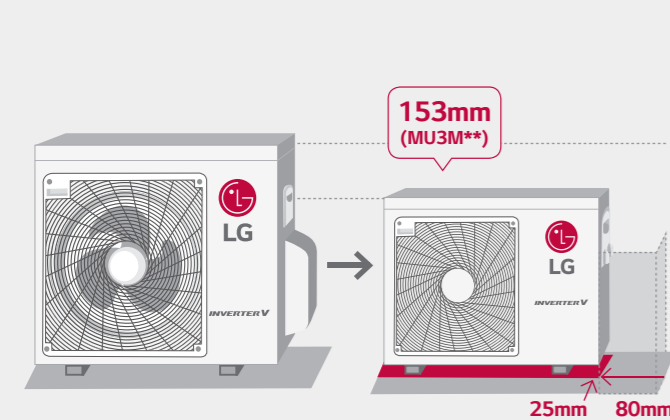

Main service valve raised / Easy manipulation

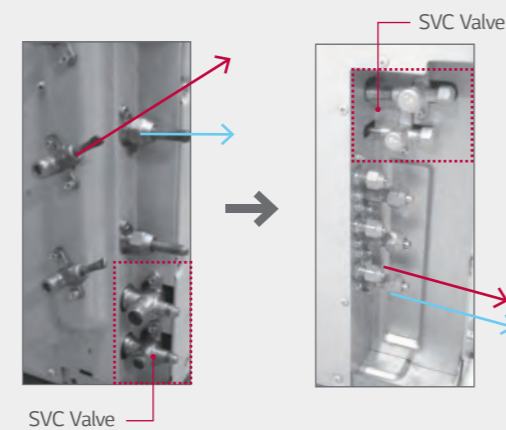

FLEXIBLE COMBINATION

Long and High Elevation Piping



FM56AH supports piping lengths of up to 145m and elevations of up to 30m for more flexible in installations.

* Multiple Piping Type


(m)	MU2M15 MU2M17	MU3M19 MU3M21	MU4M25 MU4M27	MU5M30	MU5M40
Total Piping Length	30	50	70	75	85
Piping Length per Branch	20	25	25	25	25
Max. Elevation	Indoor - Outdoor	15	15	15	15
	Indoor - Indoor	7.5	7.5	7.5	7.5

* Distribution Box Type

(m)	FM40AH	FM41AH	FM48AH FM49AH	FM56AH FM57AH
Total Pipe (A + L1 + L2 + L3)	100	125	135	145
Main Pipe (A)	50	55	55	55
Total Branch Pipe (L1 + L2 + L3)	50	70	80	90
Each Branch Pipe	15	15	15	15
Max. Elevation	Indoor - Outdoor (B)	30	30	30
	Indoor - Indoor (C)	15	15	15

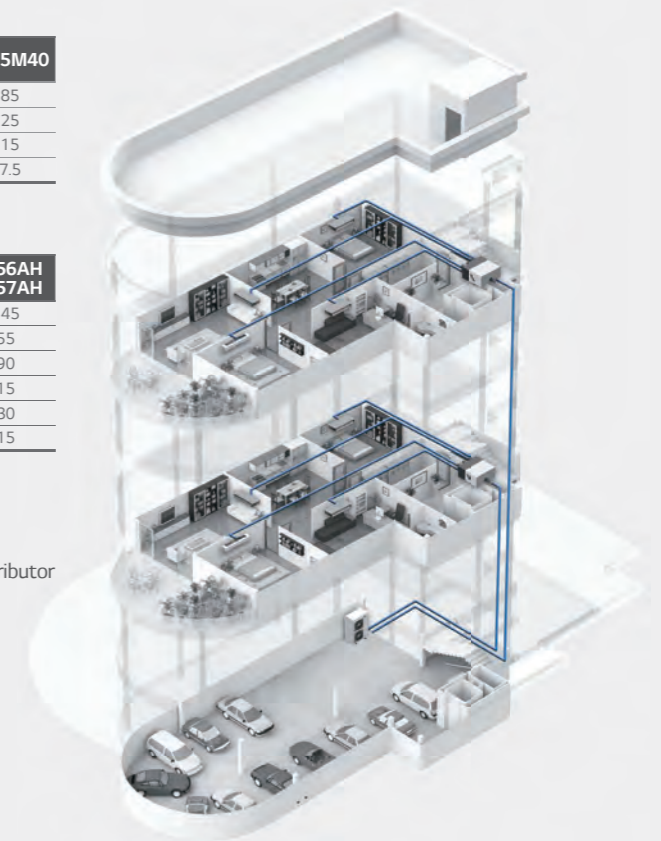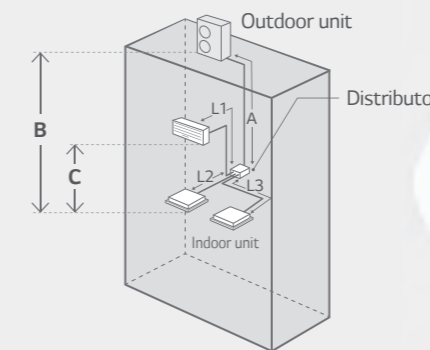


Indoor Capacity Combination

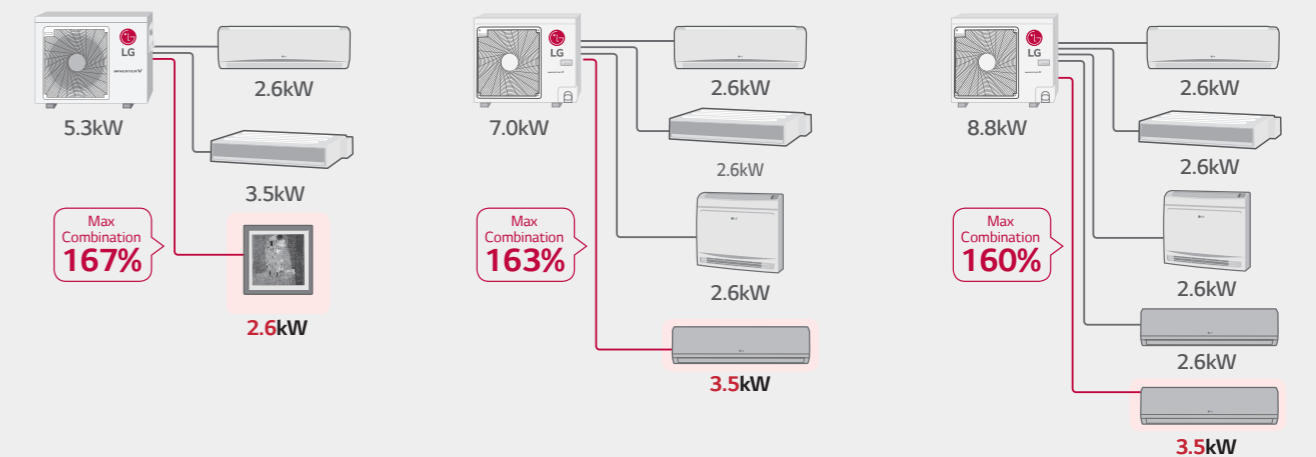

MULTI SPLIT OUTDOOR UNITS

OUTDOOR UNITS

MU2M15 / MU2M17

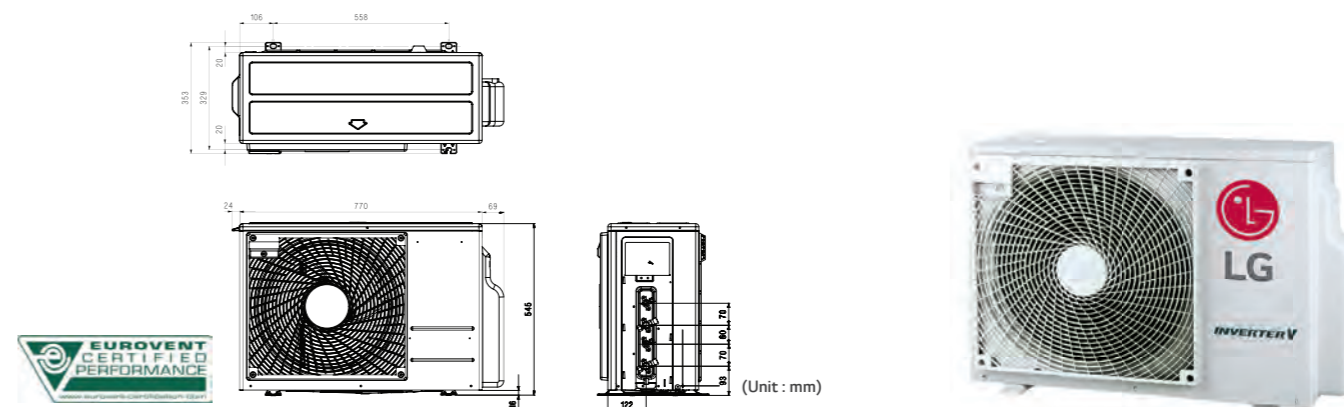


OUTDOOR				MU2M15 UL3	MU2M17 UL3
Compressor	Type			Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	0.9 / 4.1 / 5.4	0.9 / 4.7 / 5.4
	Heating	Min / Nom / Max	kW	1.0 / 4.7 / 5.7	1.0 / 5.3 / 5.7
Low Temperature Capacity	Heating -7°C	Max	kW	3.3	3.7
Power Input *	Cooling	Min / Nom / Max	kW	0.3 / 1.0 / 1.6	0.3 / 1.3 / 1.6
	Heating	Min / Nom / Max	kW	0.3 / 1.1 / 1.7	0.3 / 1.3 / 1.7
Running Current	Cooling	Min / Nom / Max	A	1.3 / 4.6 / 7.4	1.3 / 5.8 / 7.4
	Heating	Min / Nom / Max	A	1.3 / 4.9 / 7.5	1.3 / 5.8 / 7.5
EER				4.02	3.72
COP				4.34	4.12
SEER				7.20	7.20
SCOP				4.12	4.12
Pdesign (@ -10°C)			kW	4.5	4.5
Seasonal Energy Label	Cooling / Heating			A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh		199 / 1,529	228 / 1,529
Airflow Rate		Nom	m ³ / min	28.2	28.2
Sound Pressure	Cooling	Nom	dBA	49	49
	Heating	Nom	dBA	51	51
Sound Power	Cooling	Max	dBA	62	62
Dimensions	W x H x D	mm		770 x 545 x 288	770 x 545 x 288
Net Weight			kg	37.0	37.0
Refrigerant	Type			R410A	R410A
	Charge	g		1,400	1,400
Operation Range (Outdoor)	Additional Charge	g / m		20	20
	Cooling	Min - Max	°C DB	-10 - 46	-10 - 46
Power Supply	Heating	Min - Max	°C WB	-18 - 18	-18 - 18
	Ø / V / Hz			1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm ²	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm ²	4C x 0.75	4C x 0.75
Circuit Breaker			A	15	15
Piping Length Total			m	30	30
Piping Length per Branch	Max	m		20	20
	IDU - ODU	Max	m	15	15
Piping Elevation Difference	IDU - IDU	Max	m	7.5	7.5
	Liquid	mm (inch) x No.		Ø6.35 (1/4) x 2	Ø6.35 (1/4) x 2
Piping Connection	Gas	mm (inch) x No.		Ø9.52 (3/8) x 2	Ø9.52 (3/8) x 2

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)

OUTDOOR UNITS

MU3M19 / MU3M21

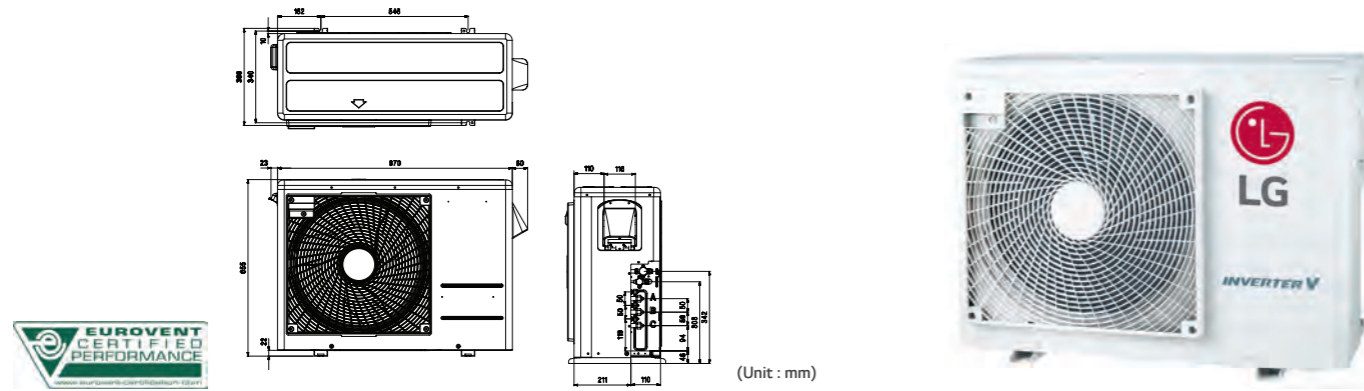


OUTDOOR				MU3M19 UE3	MU3M21 UE3
Compressor	Type			Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	1.4 / 5.3 / 6.3	1.4 / 6.2 / 7.3
	Heating	Min / Nom / Max	kW	1.4 / 6.3 / 7.3	1.5 / 7.0 / 7.8
Low Temperature Capacity	Heating -7°C	Max	kW	4.4	4.9
Power Input *	Cooling	Min / Nom / Max	kW	0.1 / 1.3 / 2.1	0.1 / 1.6 / 2.4
	Heating	Min / Nom / Max	kW	0.2 / 1.5 / 2.6	0.2 / 1.7 / 2.7
Running Current	Cooling	Min / Nom / Max	A	0.6 / 6.0 / 9.0	0.6 / 6.6 / 10.3
	Heating	Min / Nom / Max	A	0.8 / 7.0 / 11.5	0.9 / 7.4 / 11.8
EER				4.10	3.90
COP				4.10	4.11
SEER				7.20	6.90
SCOP				4.21	4.21
Pdesign (@ -10°C)			kW	5.1	5.3
Seasonal Energy Label	Cooling / Heating			A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh		258 / 1,696	314 / 1,762
Airflow Rate	Cooling / Heating	Nom	m ³ / min	50	50
		Max	m ³ / min	50	51
Sound Pressure	Cooling	Nom	dBA	50	51
	Heating	Nom	dBA	52	53
Sound Power	Cooling	Max	dBA	64	64
Dimensions	W x H x D	mm		870 x 655 x 320	870 x 655 x 320
Net Weight			kg	45.0	45.0
Refrigerant	Type			R410A	R410A
	Charge	g		1,700	1,800
Operation Range (Outdoor)	Additional Charge	g / m		20	20
	Cooling	Min - Max	°C DB	-10 - 48	-10 - 48
Power Supply	Heating	Min - Max	°C WB	-18 - 18	-18 - 18
	Ø / V / Hz			1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm ²	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm ²	4C x 0.75	4C x 0.75
Circuit Breaker			A	20	20
Piping Length Total			m	50	50
Piping Length per Branch	Max	m		25	25
		IDU - ODU	Max	m	15
Piping Elevation Difference	IDU - IDU	Max	m	7.5	7.5
	Liquid	mm (inch) x No.		Ø6.35 (1/4) x 3	Ø6.35 (1/4) x 3
Piping Connection	Gas	mm (inch) x No.		Ø9.52 (3/8) x 3	Ø9.52 (3/8) x 3

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)

OUTDOOR UNITS

MU4M25 / MU4M27 / MU5M30

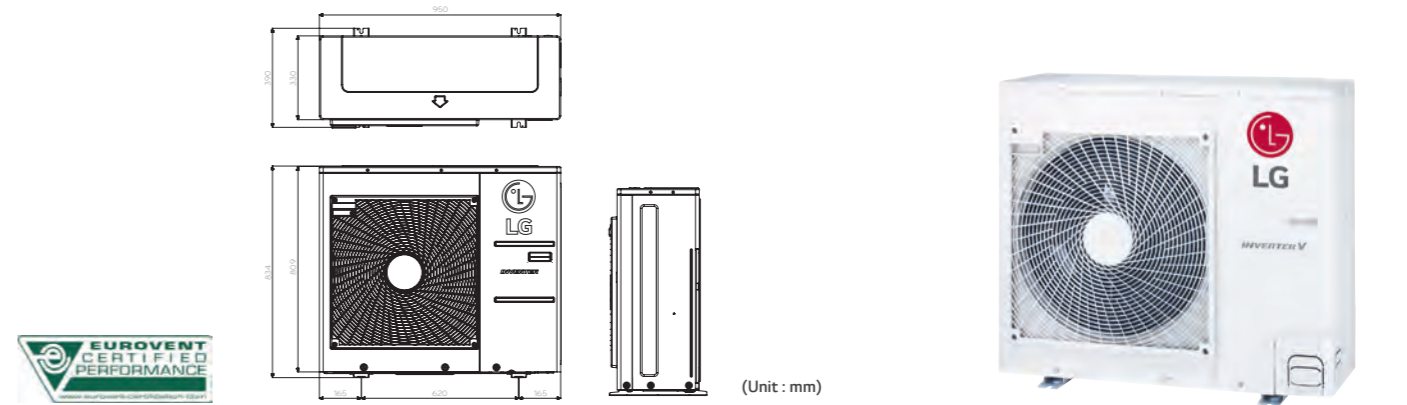


OUTDOOR				MU4M25 U43	MU4M27 U43	MU5M30 U43
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	1.3 / 7.0 / 8.5	1.3 / 7.9 / 9.5	1.3 / 8.8 / 10.6
	Heating	Min / Nom / Max	kW	1.5 / 8.4 / 9.4	1.5 / 9.1 / 10.6	1.5 / 10.1 / 12.1
Low Temperature Capacity	Heating -7°C	Max	kW	5.9	6.4	7.1
Power Input *	Cooling	Min / Nom / Max	kW	0.4 / 1.7 / 2.6	0.4 / 2.0 / 3.0	0.4 / 2.2 / 3.4
	Heating	Min / Nom / Max	kW	0.5 / 1.8 / 3.0	0.5 / 2.0 / 3.6	0.5 / 2.2 / 3.7
Running Current	Cooling	Min / Nom / Max	A	2.0 / 7.2 / 11.1	2.0 / 8.5 / 13.2	2.0 / 9.9 / 16.2
	Heating	Min / Nom / Max	A	2.2 / 8.1 / 12.8	2.2 / 9.1 / 15.8	2.2 / 9.8 / 16.5
EER				4.21	4.00	4.00
COP				4.69	4.52	4.60
SEER				7.01	7.01	7.01
SCOP				4.01	4.01	4.01
Pdesign (@ -10°C)			kW	7.3	7.3	7.4
Seasonal Energy Label	Cooling / Heating			A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh		350 / 2,549	394 / 2,549	434 / 2,584
Airflow Rate	Cooling / Heating	Nom	m ³ / min	60	60	60
		Max	m ³ / min	60	60	60
Sound Pressure	Cooling	Nom	dBA	51	51	51
	Heating	Nom	dBA	53	53	53
Sound Power	Cooling	Max	dBA	62	63	64
Dimensions	W x H x D	mm		950 x 834 x 330	950 x 834 x 330	950 x 834 x 330
Net Weight			kg	64.0	64.0	64.0
Refrigerant	Type			R410A	R410A	R410A
	Charge	g		3,200	3,200	3,200
Operation Range (Outdoor)	Additional Charge	g / m		20	20	20
	Cooling	Min - Max	°C DB	-10 - 48	-10 - 48	-10 - 48
Power Supply	Heating	Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
	Ø / V / Hz			1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm ²	3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm ²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	25	25	25
Piping Length Total			m	70	70	75
Piping Length per Branch	Max	m		25	25	25
		IDU - ODU	Max	m	15	15
Piping Elevation Difference	IDU - IDU	Max	m	7.5	7.5	7.5
	Liquid	mm (inch) x No.		Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 5
Piping Connection	Gas	mm (inch) x No.		Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 5

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)

OUTDOOR UNITS

MU5M40

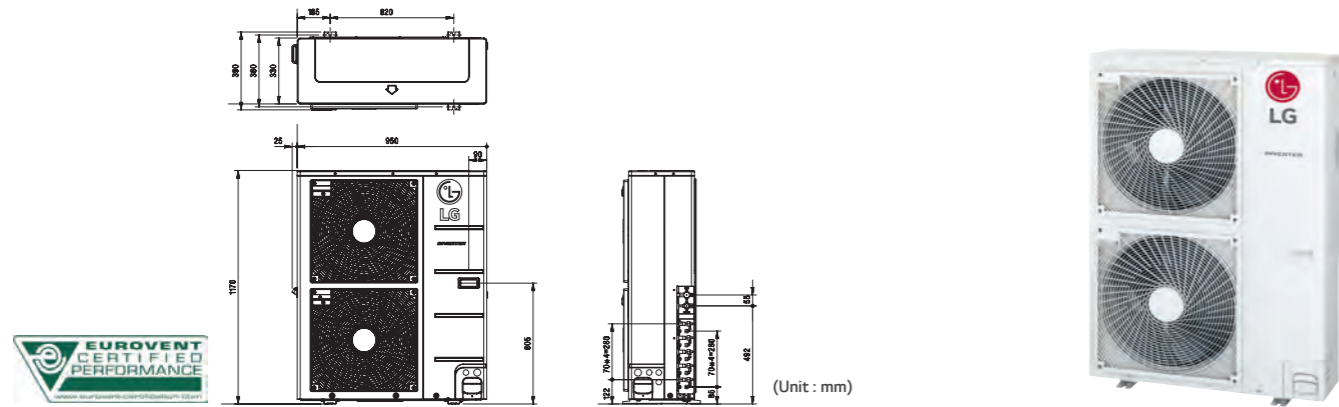


OUTDOOR				MU5M40 UO2			
Compressor	Type			Twin Rotary			
Capacity *	Cooling	Min / Nom / Max	kW	0.9 / 11.2 / 13.5			
	Heating	Min / Nom / Max	kW	1.0 / 12.5 / 15.0			
Low Temperature Capacity	Heating -7°C	Max	kW	11.0			
Power Input *	Cooling	Min / Nom / Max	kW	0.8 / 2.7 / 4.2			
	Heating	Min / Nom / Max	kW	0.8 / 2.8 / 4.5			
Running Current	Cooling	Min / Nom / Max	A	3.5 / 12.1 / 18.4			
	Heating	Min / Nom / Max	A	3.6 / 12.5 / 19.7			
EER				4.10			
COP				4.45			
SEER				5.80			
SCOP				3.81			
Pdesign (@ -10°C)				11.8			
Seasonal Energy Label	Cooling / Heating			A+ / A			
Annual Energy Consumption	Cooling / Heating			643 / 4,236			
Airflow Rate		Nom	m ³ / min	90			
Sound Pressure	Cooling	Nom	dBA	53			
	Heating	Nom	dBA	55			
Sound Power	Cooling	Max	dBA	67			
Dimensions	W x H x D			950 x 1,170 x 330			
Net Weight				84.0			
Refrigerant	Type			R410A			
	Charge			3,800			
Operation Range (Outdoor)	Additional Charge			20			
	Cooling	Min - Max	°C DB	-10 - 48			
Power Supply	Heating	Min - Max	°C WB	-18 - 18			
	Power Supply			Ø / V / Hz			
Power Supply Cable			1 / 220-240 / 50				
Transmission Cable			No. x mm ²				
Circuit Breaker			3C x 3.5				
Piping Length Total			4C x 0.75				
			A				
Piping Length per Branch			30				
			85				
Piping Elevation Difference	IDU - ODU	Max	m	25			
	IDU - IDU	Max	m	15			
Piping Connection			7.5				
	Liquid			mm (inch) x No.			
Gas			Ø6.35 (1/4) x 5				
				Ø9.52 (3/8) x 5			

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)

OUTDOOR UNITS

FM40AH

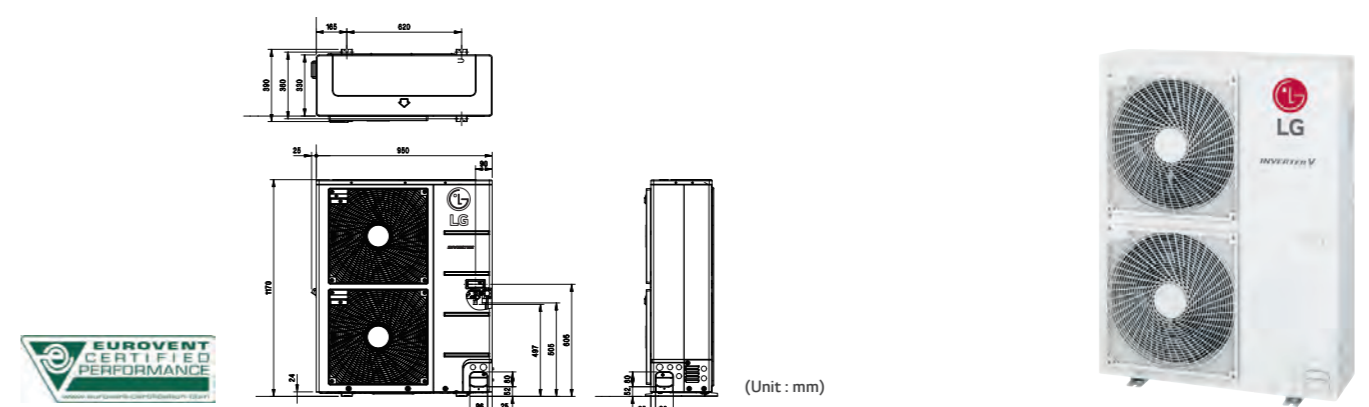


OUTDOOR				FM40AH UO2			
Compressor	Type			Twin Rotary			
Capacity *	Cooling	Min / Nom / Max	kW	2.8 / 11.2 / 13.5			
	Heating	Min / Nom / Max	kW	3.1 / 12.5 / 15.0			
Low Temperature Capacity	Heating -7°C	Max	kW	11.0			
Power Input *	Cooling	Min / Nom / Max	kW	0.8 / 2.7 / 4.2			
	Heating	Min / Nom / Max	kW	0.8 / 2.8 / 4.5			
Running Current	Cooling	Min / Nom / Max	A	3.5 / 12.1 / 18.4			
	Heating	Min / Nom / Max	A	3.6 / 12.5 / 19.7			
EER				4.10			
COP				4.45			
SEER				5.60			
SCOP				3.81			
Pdesign (@ -10°C)				11.8			
Seasonal Energy Label	Cooling / Heating			A+ / A			
Annual Energy Consumption	Cooling / Heating			643 / 4,236			
Airflow Rate		Nom	m ³ / min	90			
Sound Pressure	Cooling	Nom	dBA	53			
	Heating	Nom	dBA	55			
Sound Power	Cooling	Max	dBA	67			
Dimensions	W x H x D			950 x 1,170 x 330			
Net Weight				82.0			
Refrigerant	Type			R410A			
	Charge			3,800			
Operation Range (Outdoor)	Additional Charge			20			
	Cooling	Min - Max	°C DB	-10 - 48			
Power Supply	Heating	Min - Max	°C WB	-18 - 18			
	Power Supply			Ø / V / Hz			
Power Supply Cable			1 / 220-240 / 50				
Transmission Cable			No. x mm ²				
Circuit Breaker			3C x 3.5				
Max Piping Length			4C x 0.75				
			A				
Piping Elevation Difference			30				
			100				
Piping Connection			50				
			50				
Piping Connection			50				
			15				
Piping Connection	IDU - ODU	Max	m	30			
	IDU - IDU	Max	m	15			
Piping Connection	Liquid			mm (inch)			
	Gas			Ø9.52 (3/8)			
				Ø19.05 (3/4)			

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)

OUTDOOR UNITS

FM48AH / FM56AH

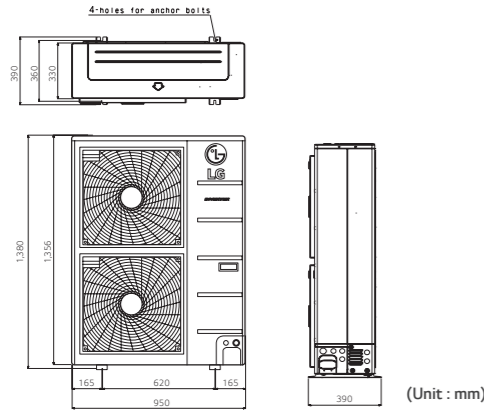


OUTDOOR				FM48AH U32	FM56AH U32
Compressor	Type	Twin Rotary			
	Capacity *	Cooling	Min / Nom / Max	kW	3.3 / 14.0 / 17.0
Capacity *	Heating	Min / Nom / Max	kW	4.5 / 17.4 / 18.8	
	Low Temperature Capacity	Heating -7°C	Max	kW	14.8
Power Input *	Cooling	Min / Nom / Max	kW	0.8 / 3.2 / 5.1	
	Heating	Min / Nom / Max	kW	1.3 / 3.7 / 5.2	
Running Current	Cooling	Min / Nom / Max	A	3.9 / 13.2 / 22.3	
	Heating	Min / Nom / Max	A	6.9 / 15.6 / 22.7	
EER	4.41				
COP	4.37				
SEER	-				
SCOP	-				
Pdesign (@ -10°C)	kW				
Seasonal Energy Label	Cooling / Heating	-			
Annual Energy Consumption	Cooling / Heating	kWh			
Airflow Rate	Cooling / Heating	Nom	m ³ / min	120	
		Sound Pressure	Cooling	Nom	dBA
Sound Power	Cooling	Max	dBA	68	
		Dimensions	W x H x D	mm	950 x 1,380 x 330
Net Weight			kg	96.0	
	Refrigerant	Type	R410A		
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-10 - 48	
		Min - Max	°C WB	-18 - 18	
Power Supply	Ø / V / Hz		1 / 220-240 / 50		
Power Supply Cable	No. x mm ²		3C x 4.0		
Transmission Cable	ODU-BD	No. x mm ²		4C x 1.25	
	BD-IDU	No. x mm ²		4C x 0.75	
Circuit Breaker	A		40		
Max Piping Length	Total Piping (Main + Total Branch)		m		
	Main Piping		m		
	Total Branch Piping		m		
	Each Branch Piping		m		
Piping Elevation Difference	IDU - ODU	Max	m		
	IDU - IDU	Max	m		
Piping Connection	Liquid	mm (inch)		Ø9.52 (3/8)	
	Gas	mm (inch)		Ø19.05 (3/4)	

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)



OUTDOOR UNITS

FM41AH / FM49AH / FM57AH

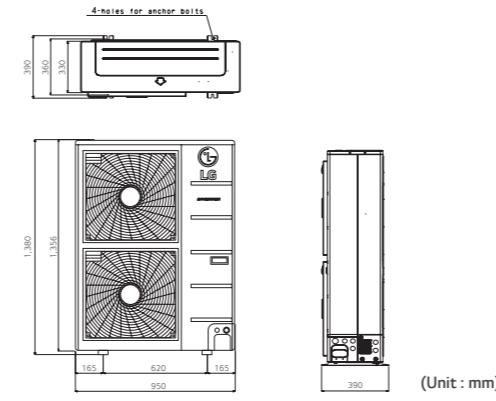

OUTDOOR				FM41AH U32	FM49AH U32	FM57AH U32
Compressor	Type	Twin Rotary				
	Capacity *	Cooling	Min / Nom / Max	kW	2.8 / 12.1 / 14.1	3.3 / 14.0 / 17.0
Capacity *	Heating	Min / Nom / Max	kW	3.2 / 12.5 / 15.2	3.7 / 16.0 / 17.3	4.5 / 17.4 / 18.8
	Low Temperature Capacity	Heating -7°C	Max	kW	11.1	13.6
Power Input *	Cooling	Min / Nom / Max	kW	0.8 / 2.4 / 3.8	0.8 / 3.2 / 5.1	1.0 / 3.9 / 5.9
	Heating	Min / Nom / Max	kW	0.9 / 2.5 / 4.7	1.3 / 3.7 / 5.2	1.5 / 4.2 / 6.2
Running Current	Cooling	Min / Nom / Max	A	1.5 / 3.3 / 5.7	1.8 / 4.4 / 7.3	2.3 / 5.4 / 8.4
	Heating	Min / Nom / Max	A	1.7 / 3.3 / 6.9	2.1 / 5.1 / 7.5	2.5 / 5.5 / 9.0
EER	4.68					
COP	4.92					
SEER	-					
SCOP	-					
Pdesign (@ -10°C)	kW					
Seasonal Energy Label	Cooling / Heating	-				
Annual Energy Consumption	Cooling / Heating	kWh				
Airflow Rate	Cooling / Heating	Nom	m ³ / min	120	120	120
		Sound Pressure	Cooling	Nom	dBA	53
Sound Power	Cooling	Max	dBA	67	68	69
		Dimensions	W x H x D	mm	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	96.0	96.0	96.0
	Refrigerant	Type	R410A			
Operation Range (Outdoor)	Cooling	Min - Max	°C DB	-10 - 48	-10 - 48	-10 - 48
		Min - Max	°C WB	-18 - 18	-18 - 18	-18 - 18
Power Supply	Ø / V / Hz		3 / 380-415 / 50			
Power Supply Cable	No. x mm ²		5C x 2.5			
Transmission Cable	ODU-BD	No. x mm ²		4C x 1.25		
	BD-IDU	No. x mm ²		4C x 0.75		
Circuit Breaker	A		20			
Max Piping Length	Total Piping (Main + Total Branch)		m			
	Main Piping		m			
	Total Branch Piping		m			
	Each Branch Piping		m			
Piping Elevation Difference	IDU - ODU	Max	m			
	IDU - IDU	Max	m			
Piping Connection	Liquid	mm (inch)		Ø9.52 (3/8)		
	Gas	mm (inch)		Ø19.05 (3/4)		

Note : 1. Capacities are based on the following conditions:
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
 2.* - See page "Combination Table".
 3. Due to our policy of innovation some specifications may be changed without notification.
 4. At least two indoor units should be connected.
 5. Minimum combination capacity rate should be more than 40%.
 6. This product contains fluorinated greenhouse gases (R410A)

MULTI SPLIT INDOOR UNITS



WALL MOUNTED UNIT ARTCOOL (GALLERY / MIRROR)


MULTI SPLIT

Indoor Units


Aesthetic Design

You no longer need to be told what your air conditioner should look like. With LG's revolutionary ARTCOOL Gallery, you can change the look of your air conditioner to whatever you want, whenever you want. The ARTCOOL series have outstanding designs and have been awarded the International Forum Design Award, the Reddot Design Award and the G Mark.

Gallery

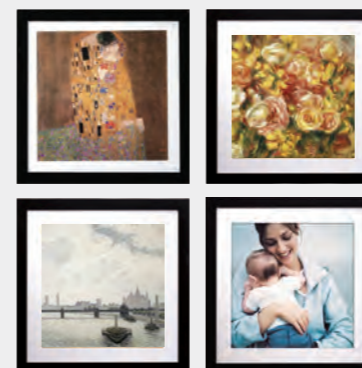

How to change the picture

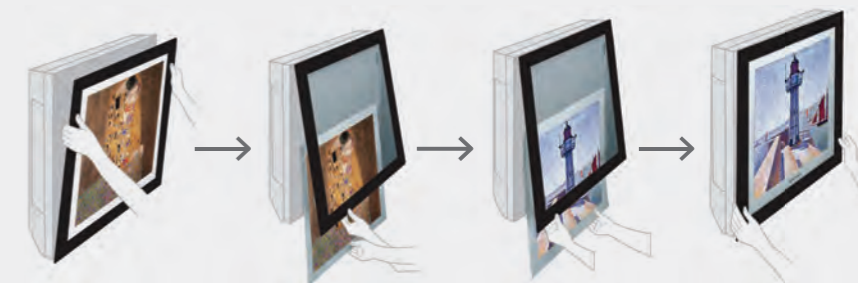

Mirror



Mirror
MS07 / 09 / 12 / 18 / 24AWR



Silver
MS07 / 09 / 12 / 18 / 24AWV




White
MS07 / 09 / 12 / 18 / 24AWW

Digital Air Flow Control

The air flow can be controlled to ensure maximum comfort and convenience.

Normal

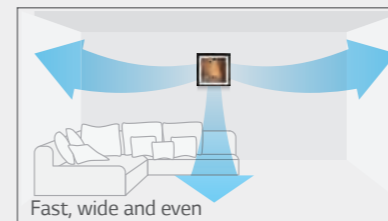


Fast, wide and even

Jet Cool



Speedy and powerful

Sleep Mode

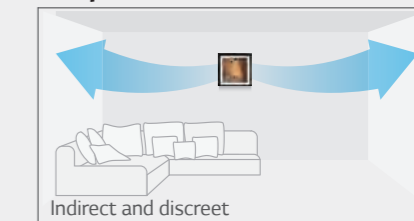

Indirect and discreet

WALL MOUNTED UNIT DELUXE & STANDARD

Filtering (Virus & Allergy Safe Filter)

The virus and allergy safe filters are scientifically proven to deactivate viruses that may pose risks to health.



Virus Deactivation

Allergy Filter
Allergy care filter coated with allergy decomposition substance



Virus Filter
Sterilising filter with anti-virus coating

The LG virus & allergy safe filter blocks neuramidase and hemagglutinin, which is activated when the virus breaks up from host cell to proliferate.

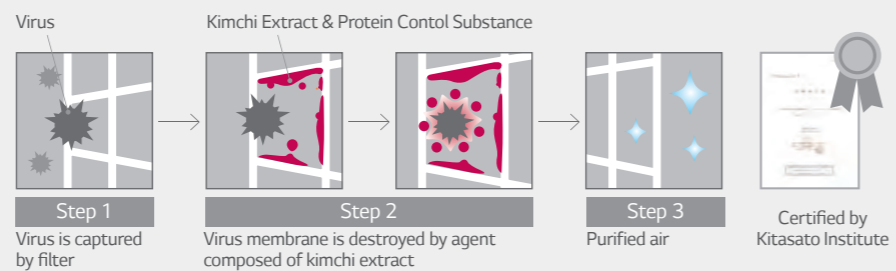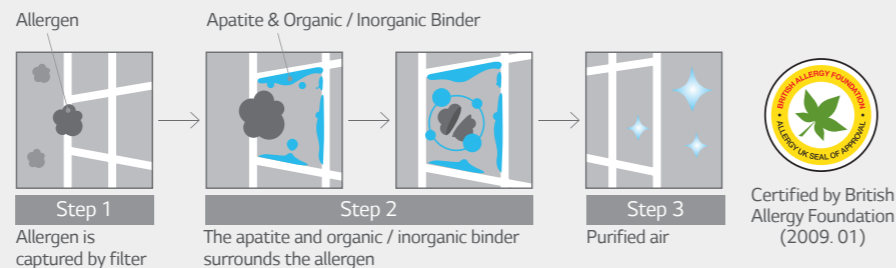

Artcool




Deluxe



Standard
(Allergy Safe Filter Only)

Deodorising (Triple Filter)


The triple filter consists of three special filters that can reduce the side effects caused by some organic compounds including formaldehyde. It has the ability to remove unpleasant odours and can create a more comfortable environment.

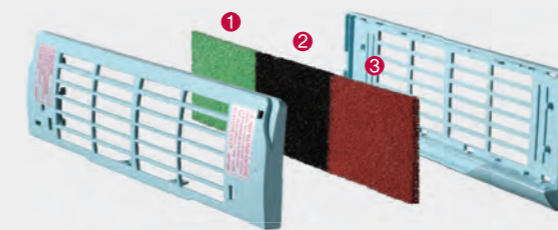

- 1 VOC filter removes odour and hazardous VOCs that are discharged from household materials made out of chemical substances (carpet, paint, cleaners, furniture, etc.) (VOC= Volatile Organic Compound)
- 2 Formaldehyde filter removes formaldehyde, a leading cause of sick building syndrome, and can prevent dermatitis, vomiting, and pneumonia
- 3 Common odour filter removes ordinary odours that can cause migraines and chronic fatigue syndrome


Eliminating (Plasma Filter)

The plasma air purifying system, first developed by LG, reduces the presence of microscopic contaminants that cause allergies and asthma, such as dust particles, mites and pet fur.

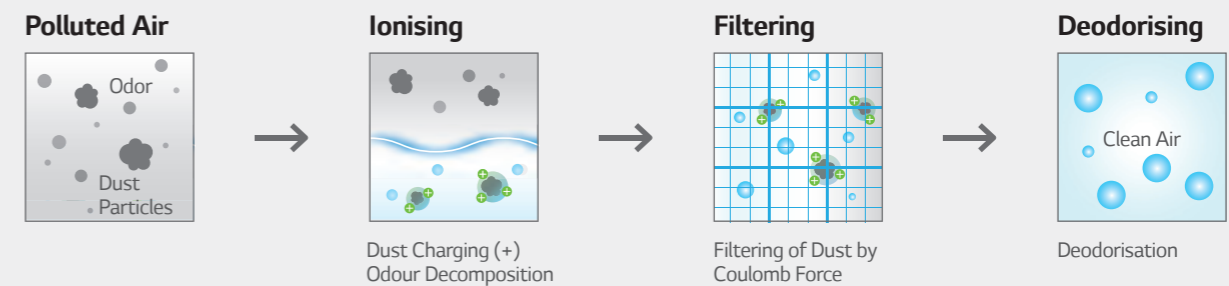


Auto Cleaning

A major cause of air conditioner odours is mould and bacteria that can breed in the heat exchanger. The auto clean function dries the wet heat exchanger to prevent mould and bacteria from breeding which can significantly reduce smells and saves the user from frequent cleaning.

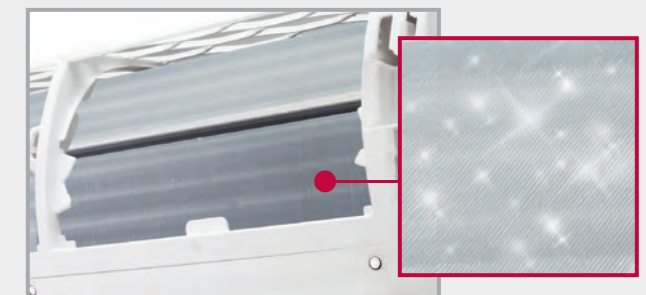

WALL MOUNTED UNIT DELUXE & STANDARD


Detachable Bottom Cover

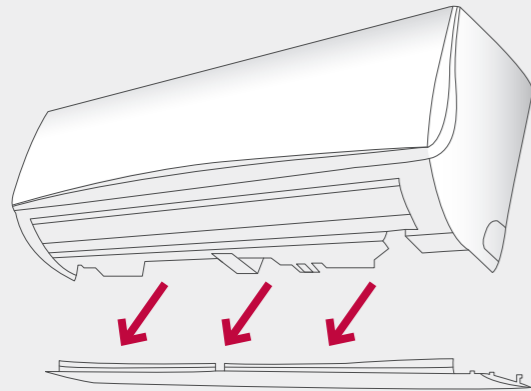

Along with Detachable Bottom Cover, it is unnecessary to disassemble units or additionally support units thanks to the detachable chassis and support. With LG's patented support, the installation can be completed by only one individual.


Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

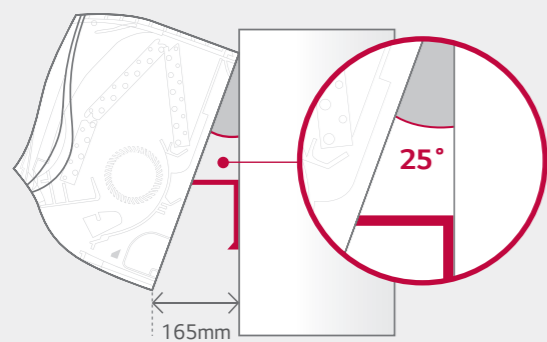

Wider Tubing Space

The tubing space is up to 45% wider than previous models for easier installation. The tubing space is wider than many products currently on the market.

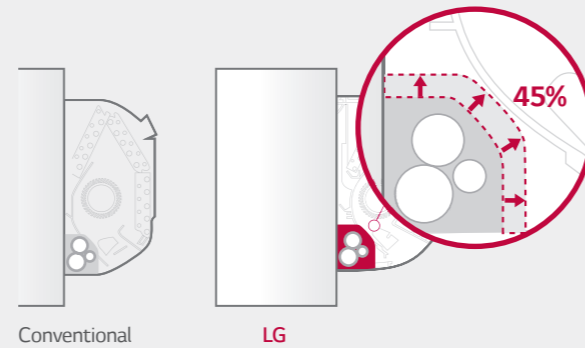

Various Indoor Units

Capacity (kW)	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Standard	MS05SQ NWO	MS07SQ NWO	MS09SQ NBO	MS12SQ NBO	MS15SQ NBO	MS18SQ NCO	MS24SQ NCO
Deluxe		MS07AQ NBO	MS09AQ NBO	MS12AQ NBO		MS18AQ NCO	MS24AQ NCO
ART COOL Mirror		MS07AW* NBO	MS09AW* NBO	MS12AW* NBO		MS18AW* NCO	MS24AW* NCO
ART COOL Gallery			MA09AH1 NF1	MA12AH1 NF1			

ART COOL Mirror Note: * indicates panel color / Mirror (R), Silver (V), White (W)

Specification

INDOOR				MS05SQ NWO	MS07SQ NWO	MS09SQ NBO	MS12SQ NBO	MS15SQ NBO	MS18SQ NCO	MS24SQ NCO
Capacity	Cooling / Heating	Nom	kW	1.5 / 1.6	2.1 / 2.3	2.6 / 2.9	3.5 / 3.9	4.2 / 5.4	5.3 / 5.8	6.7 / 7.5
Power Input		Nom	W	20	20	20	20	20	40	60
Running Current		Nom	A	0.1	0.1	0.2	0.2	0.2	0.3	0.3
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	8.1 / 6.9 / 6.3	8.1 / 6.9 / 6.3	7.0 / 6.5 / 6.0	9.5 / 9.0 / 8.5	10.5 / 9.0 / 7.0	16.2 / 14.2 / 12.3	20.4 / 17.0 / 13.2
Sound Pressure	Cooling	High / Medium / Low	dBA	36 / 30 / 27	36 / 30 / 27	34 / 31 / 27	39 / 36 / 31	43 / 39 / 34	37 / 33 / 28	42 / 39 / 36
Sound Power	Cooling	Max	dBA	57	57	55	55	55	57	62
Dehumidification Rate			l / h	0.9	0.9	1.1	1.2	1.2	1.9	2.6
Dimensions	Body	W x H x D	mm	756 x 270 x 190	756 x 270 x 190	895 x 289 x 215	895 x 289 x 215	895 x 289 x 215	1,030 x 325 x 255	1,030 x 325 x 255
Net Weight	Body		kg	7.2	7.2	9.0	9.0	9.0	13.0	13.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)

INDOOR				MS07AQ NBO	MS09AQ NBO	MS12AQ NBO	MS18AQ NCO	MS24AQ NCO
Capacity	Cooling / Heating	Nom	kW	2.1/2.3	2.6 / 2.9	3.5 / 3.9	5.3 / 5.8	6.7 / 7.5
Power Input		Nom	W	20	20	20	40	60
Running Current		Nom	A	0.1	0.2	0.2	0.3	0.3
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	5.6 / 5.0 / 4.6	7.0 / 6.5 / 6.0	9.5 / 9.0 / 8.5	16.2 / 14.2 / 12.3	20.4 / 17.0 / 13.2
Sound Pressure	Cooling	High / Medium / Low	dBA	33 / 30 / 26	34 / 31 / 27	39 / 36 / 31	37 / 33 / 28	42 / 39 / 36
Sound Power	Cooling	Max	dBA	55	55	55	57	62
Dehumidification Rate			l / h	0.9	1.1	1.2	1.9	2.6
Dimensions	Body	W x H x D	mm	895 x 289 x 210	895 x 289 x 210	895 x 289 x 210	1,030 x 325 x 250	1,030 x 325 x 250
Net Weight	Body		kg	9.5	9.5	9.5	13.8	13.8
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)

INDOOR				MS07AW* NBO	MS09AW* NBO	MS12AW* NBO	MS18AW* NCO	MS24AW* NCO
Capacity	Cooling / Heating	Nom	kW	2.1/2.3	2.6 / 2.9	3.5 / 3.9	5.3 / 5.8	6.7 / 7.5
Power Input		Nom	W	20	20	20	40	60
Running Current		Nom	A	0.1	0.2	0.2	0.3	0.3
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	5.6 / 5.0 / 4.6	7.0 / 6.5 / 6.0	9.5 / 9.0 / 8.5	16.2 / 14.2 / 12.3	20.4 / 17.0 / 13.2
Sound Pressure	Cooling	High / Medium / Low	dBA	33 / 30 / 26	34 / 31 / 27	39 / 36 / 31	37 / 33 / 28	42 / 39 / 36
Sound Power	Cooling	Max	dBA	55	55	55	57	62
Dehumidification Rate			l / h	0.9	1.1	1.2	1.9	2.6
Dimensions	Body	W x H x D	mm	895 x 289 x 205	895 x 289 x 205	895 x 289 x 205	1,030 x 325 x 245	1,030 x 325 x 245
Net Weight	Body		kg	10.2	10.2	10.2	14.2	14.2
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)


INDOOR				MA09AH1 NF1	MA12AH1 NF1
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9
Power Input		Nom	W	40	40
Running Current		Nom	A	0.1	0.1
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	7.7 / 5.9 / 4.4	8.9 / 7.3 / 5.6
Sound Pressure	Cooling	High / Medium / Low	dBA	38 / 32 / 27	44 / 38 / 32
Sound Power	Cooling	Max	dBA	52	54
Dehumidification Rate			l / h	1.2	1.4
Dimensions	Body	W x H x D	mm	600 x 600 x 145	600 x 600 x 145
Net Weight	Body		kg	15.0	15.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)

Note: 1. Capacities are based on the following conditions:
 Cooling - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Due to our policy of innovation some specifications may be changed without notification 4. This product contains fluorinated greenhouse gases (R410A)


CEILING MOUNTED CASSETTE

Wide Air Flow


Improved vanes reduce the curved area and provide better air and temperature distribution.

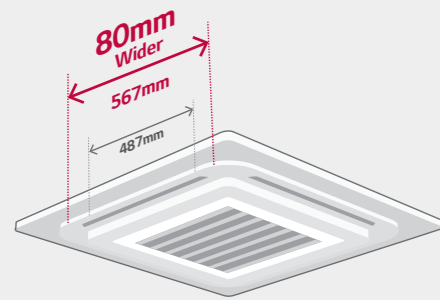

Conventional




LG Cassette




Convenient Panel Installation

The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain connection pipe.


Detachable Corner Design

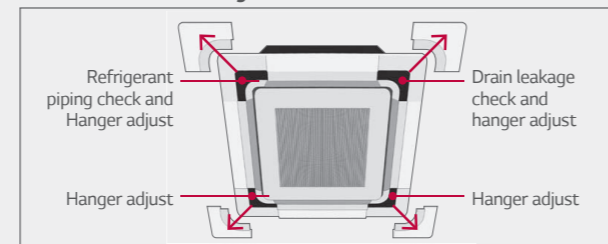

Drain Leakage Check



Hanger Adjust




It is easy to install the panel to the body, using the button type panel design.




Independent Vane Control

The Independent Vane Operation feature uses separate motors, making it possible to control all four vanes independently.

All Vane Operation

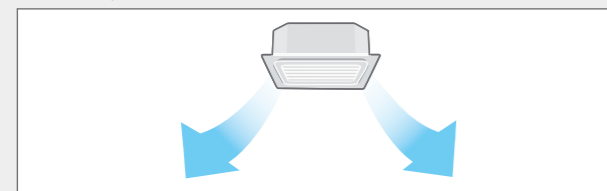

Independent Vane Control

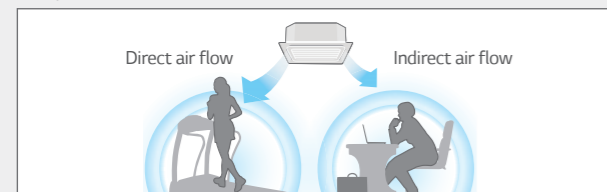


* Wired remote controller PQRCVLSO (QW) applied


Auto Elevation Grille

Easy filter cleaning with elevation grill.


4-Point Support Structure



Auto Leveling



Memory for User's Level




* Operating with wired remote controller PQRCVLSO(QW) and wireless remote controller included in PTEGMO.

* Except CT09 NR2 / CT12 NR2 / CT18 NQ4 * Applied to cassette panel PT-UMC1



Auto Stop Detection



Various Indoor Units

Capacity (kW)	1.5	2.1	2.6	3.5	5.3	7.0
1 Way Cassette	-	-	MT09AH NU1	MT11AH NU1	-	-
4 Way Cassette	MT06AH NRO	MT08AH NRO	CT09 NR2	CT12 NR2	CT18 NQ4	CT24 NP4

Specification

INDOOR				MT09AH NU1	MT11AH NU1	MT06AH NRO	MT08AH NRO
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9	1.5 / 1.6	2.1 / 2.3
Power Input		Nom	W	20	20	20	20
Running Current		Nom	A	0.2	0.2	0.4	0.4
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m³ / min	7.5 / 7.3 / 6.8	8.1 / 7.4 / 7.0	7.5 / 6.0 / 5.0	7.5 / 6.0 / 5.0
Sound Pressure	Cooling	High / Medium / Low	dBA	36 / 34 / 32	37 / 36 / 33	31 / 27 / 24	31 / 27 / 24
Sound Power	Cooling	Max	dBA	54	57	48	48
Dehumidification Rate			l / h	1.1	1.2	0.8	1
Dimensions	Body	W x H x D	mm	860 x 132 x 450	860 x 132 x 450	570 x 214 x 570	570 x 214 x 570
Net Weight	Body		kg	13.5	13.5	14.0	14.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Decoration Panel	Model			PT-UUC1	PT-UUC1	PT-UQC	PT-UQC
	Color			Morning Fog (RAL120-4)	Morning Fog (RAL120-4)	Morning Fog (RAL120-4)	Morning Fog (RAL120-4)
	Dimensions	W x H x D	mm	1,100 x 34 x 500	1,100 x 34 x 500	700 x 22 x 700	700 x 22 x 700
	Weight		kg	4.4	4.4	3.0	3.0

* CT09, CT12, CT18, CT24 are compatible between SCAC and MULTI.

INDOOR				CT09 NR2	CT12 NR2	NEW CT18 NQ4	NEW CT24 NP4
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9	5.3 / 5.8	6.7 / 7.5
Power Input		Nom	W	20	20	20	20
Running Current		Nom	A	0.4	0.4	0.4	0.6
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m³ / min	8.5 / 7.0 / 6.0	9.5 / 8.0 / 7.0	13.0 / 12.0 / 11.0	17.0 / 15.0 / 13.0
Sound Pressure	Cooling	High / Medium / Low	dBA	36 / 33 / 30	38 / 35 / 32	41 / 39 / 36	38 / 36 / 34
Sound Power	Cooling	Max	dBA	48	51	55	57
Dehumidification Rate			l / h	1.4	1.7	2.1	2.4
Dimensions	Body	W x H x D	mm	570 x 214 x 570	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840
Net Weight	Body		kg	14.0	14.0	15.5	20.5
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
Decoration Panel	Model			PT-UQC	PT-UQC	PT-UQC	PT-UMC1
	Color			Morning Fog (RAL 9001)	Morning Fog (RAL 9001)	Morning Fog (RAL 9001)	Morning Fog (RAL 9001)
	Dimensions	W x H x D	mm	700 x 22 x 700	700 x 22 x 700	700 x 22 x 700	950 x 25 x 950
	Weight		kg	3.0	3.0	3.0	5.0

Note: 1. Capacities are based on the following conditions:

Cooling: - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating: - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero


2. Definition of Power Input Nominal conditions - Performance tested under EN14511

3. Due to our policy of innovation some specifications may be changed without notification 4. This product contains fluorinated greenhouse gases (R410A)

CEILING CONCEALED DUCT


E.S.P. (External Static Pressure) Control

E.S.P. control function can make air volume controlled easily with remote controller. The BLDC motor can control fan speed and air volume regardless of the external static pressure. No additional accessories are necessary to control air flow.

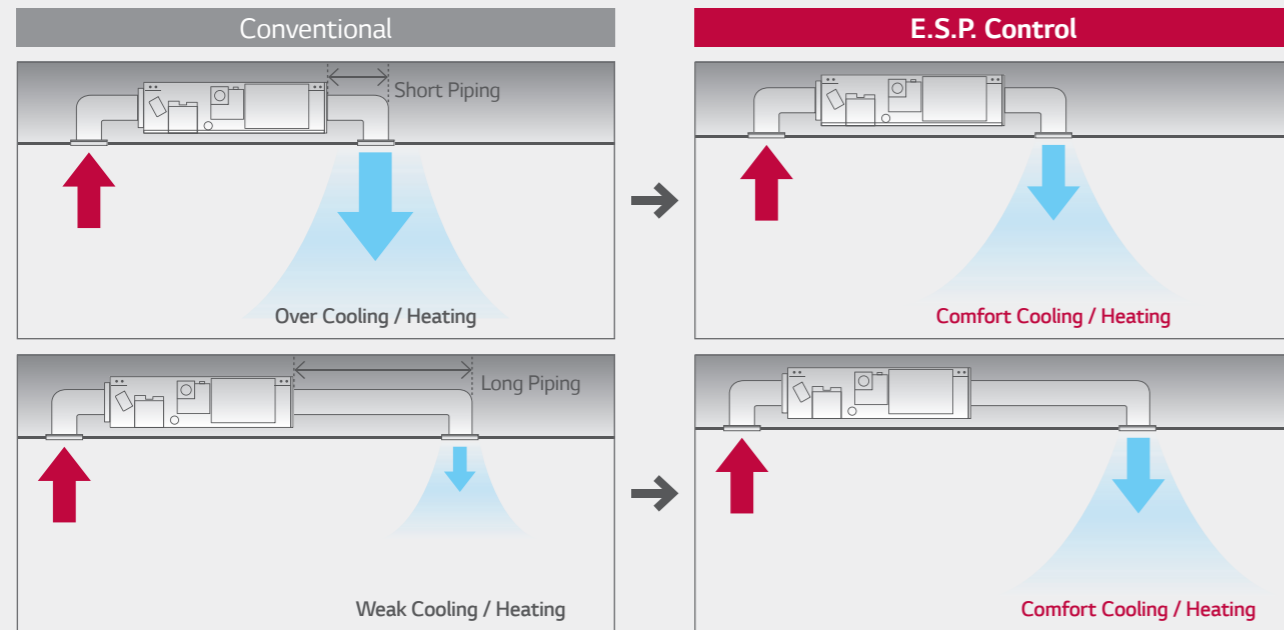


Flexible Installation (Low Static Pressure Only)

Low static duct allows the air intake at the rear or bottom under installation condition.

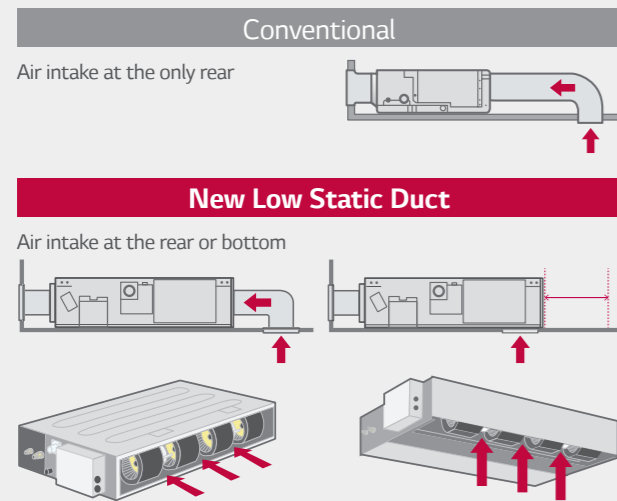

Easy Servicing and Maintenance (Low Static Duct Only)

The drain pump is installed on the surface of the product, which is detachable. Users can detach the drain pump for more convenient servicing and natural drainage.

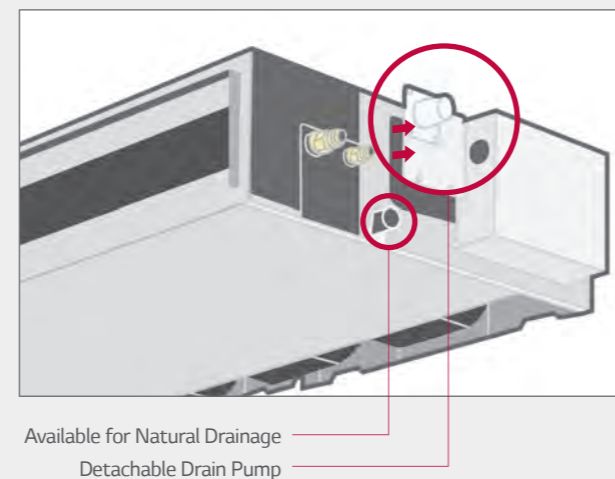

Various Indoor Units

Capacity (kW)		2.6	3.5	5.3	7.0
Ceiling Concealed Duct		CB09L N12	CB12L N22	CB18L N22	CB24L N32
		-	-	CM18 N14	CM24 N14

Specification

* CB09L, CB12L, CB18L, CB24L are compatible between SCAC and MULTI

INDOOR				CB09L N12	CB12L N22	CB18L N22	CB24L N32
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9	5.3 / 5.8	7.0 / 7.7
Power Input		Min / Max (Nom ESP)	W	40 / 60	80 / 100	100 / 140	110 / 160
Running Current		Nom	A	0.4	0.8	0.8	1.0
Power Supply		Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	9.0 / 7.0 / 5.5	10.0 / 8.5 / 7.0	15.0 / 12.5 / 10.0	20.0 / 16.0 / 12.0
Sound Pressure	Cooling	High / Medium / Low	dBA	30 / 26 / 23	31 / 28 / 27	36 / 34 / 31	39 / 35 / 32
Sound Power	Cooling	Max	dBA	49	52	54	58
Dehumidification Rate			l / h	1.1	1.2	1.7	2.2
Dimensions	Body	W x H x D	mm	700 x 190 x 700	900 x 190 x 700	900 x 190 x 700	1,100 x 190 x 700
Net Weight	Body		kg	17.5	23.0	23.0	27.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)
External Static Pressure		Min - Max	mmAq (Pa)	0 - 5 (0 - 49)	0 - 5 (0 - 49)	0 - 5 (0 - 49)	0 - 5 (0 - 49)

* CM18, CM24 are compatible between SCAC and MULTI.


INDOOR				CM18 N14	CM24 N14
Capacity	Cooling / Heating	Nom	kW	5.3 / 5.8	7.0 / 7.7
Power Input		Min / Max (Nom ESP)	W	90 / 160	100 / 180
Running Current		Nom	A	0.9	1.0
Power Supply		Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	16.5 / 14.5 / 13.0	18.0 / 16.5 / 14.5
Sound Pressure	Cooling	High / Medium / Low	dBA	34 / 32 / 30	35 / 34 / 32
Sound Power	Cooling	Max	dBA	59	60
Dehumidification Rate			l / h	2.0	2.5
Dimensions	Body	W x H x D	mm	900 x 270 x 700	900 x 270 x 700
Net Weight	Body		kg	23.8	24.2
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
External Static Pressure		Min - Max	mmAq (Pa)	2.5-15 (25-147)	2.5-15 (25-147)

Note : 1. Capacities are based on the following conditions :
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511
 3. Due to our policy of innovation some specifications may be changed without notification
 4. This product contains fluorinated greenhouse gases (R410A)


CEILING & FLOOR CONVERTIBLE UNIT

Flexible Installation

The ceiling and floor models can be installed either on the ceiling or on the floor. This saves space when installed in the shops or offices.

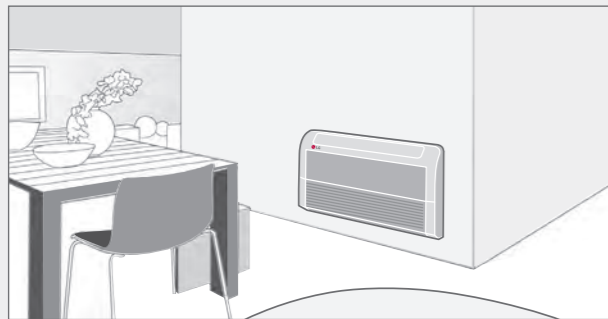


* Ceiling & Floor: CV09 NE2 / CV12 NE2

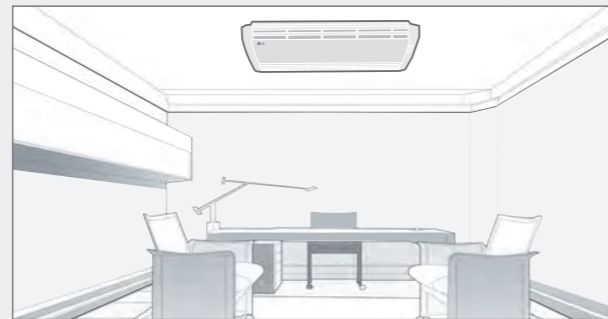


Airflow Direction Control

Vertical airflow direction can be adjusted using remote controller, and horizontal airflow direction can be adjusted manually.


Horizontal

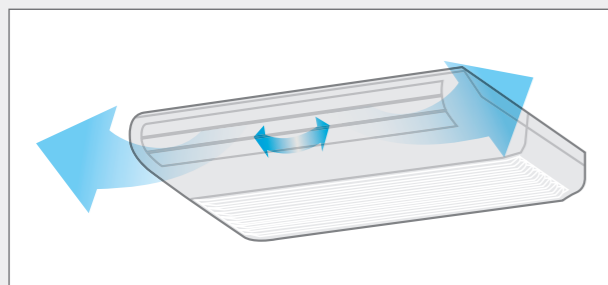


Vertical

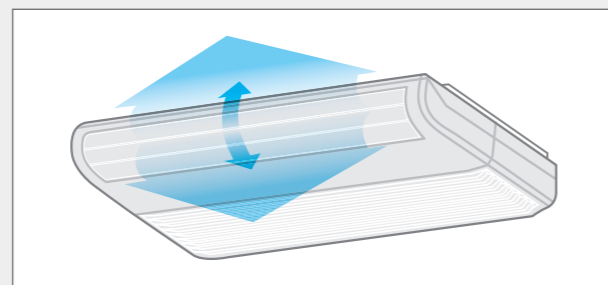

Cooling

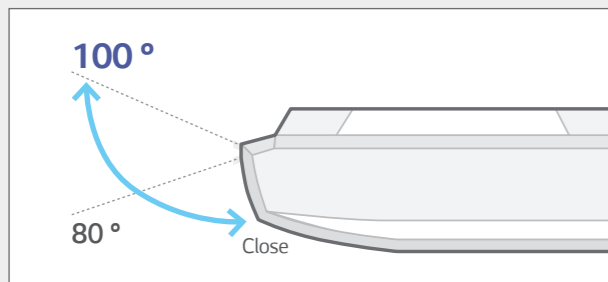

Heating

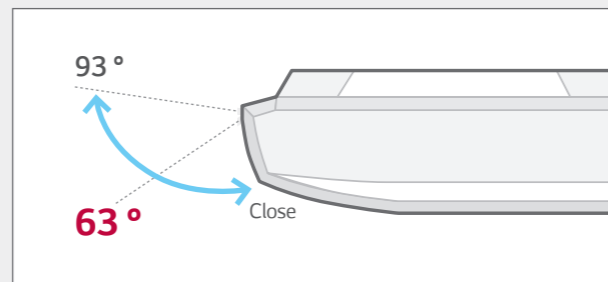

CEILING SUSPENDED UNIT

Various Indoor Units

Capacity (kW)		2.6	3.5	5.3	7.0
Ceiling & Floor Convertible unit		CV09 NE2	CV12 NE2	-	-
Ceiling Suspended unit		-	-	CV18 NJ2	CV24 NJ2

Specification

* CV09, CV12, CV18, CV24 are compatible between SCAC and MULTI.

INDOOR				CV09 NE2	CV12 NE2
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9
Power Input		Nom	W	30	40
Running Current		Nom	A	0.4	0.4
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	7.6 / 6.9 / 6.2	9.2 / 7.6 / 6.6
Sound Pressure	Cooling	High / Medium / Low	dBA	38 / 35 / 32	40 / 36 / 31
Sound Power	Cooling	Max	dBA	52	56
Dehumidification Rate			l / h	1.2	1.2
Dimensions	Body	W x H x D	mm	900 x 490 x 200	900 x 490 x 200
Net Weight	Body		kg	13.7	13.7
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)


INDOOR				CV18 NJ2	CV24 NJ2
Capacity	Cooling / Heating	Nom	kW	5.3 / 5.8	7.0 / 7.7
Power Input		Nom	kW	50	60
Running Current		Nom	A	0.4	0.6
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m ³ / min	12.4 / 11.4 / 10.4	13.9 / 12.9 / 11.9
Sound Pressure	Cooling	High / Medium / Low	dBA	42 / 40 / 39	44 / 43 / 41
Sound Power	Cooling	Max	dBA	57	61
Dehumidification Rate			l / h	2.3	3.2
Dimensions	Body	W x H x D	mm	950 x 650 x 220	950 x 650 x 220
Net Weight	Body		kg	22.0	23.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)

Note: 1. Capacities are based on the following conditions:
 Cooling: - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating: - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero
 2. Definition of Power Input: Nominal conditions - Performance tested under EN14511
 3. Due to our policy of innovation some specifications may be changed without notification
 4. This product contains fluorinated greenhouse gases (R410A)

CONSOLE

Optimised Air Flow for Cooling & Heating

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature especially for floor.

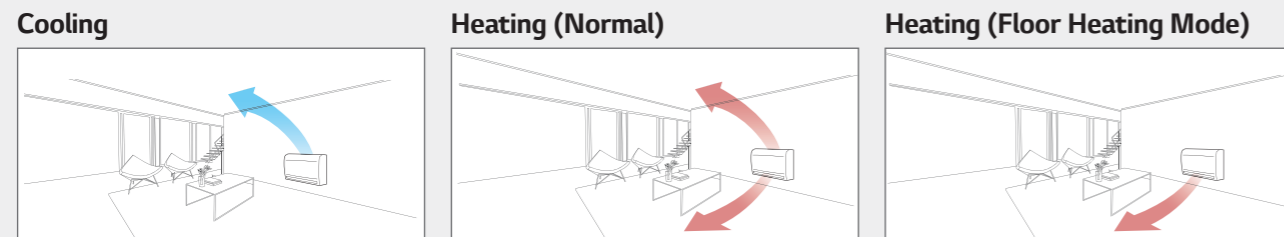

Quick Floor Heating

Console air conditioners offer a fast and powerful performance. Using the floor heating mode, console air conditioners provide faster floor heating and help to reach the desired temperature quickly.

	Company A	Electric Heater	LG	LG Floor Heating Mode
Vertical				
Horizontal				
Lead Time for Heating (13°C - 21°C)	12 minutes 30 seconds	50 minutes	9 minutes 30 seconds	8 minutes 40 seconds

(Test Condition : Target Temp 23°C, Indoor Room : 13°C-, Outdoor Room : 7°C)

5-Step Vane Control

There are 5 different stages to control air flow direction.



Various Indoor Units

Capacity (kW)		2.6	3.5	5.3
Console		CQ09 NAO	CQ12 NAO	CQ18 NAO

Specification

* CQ09, CQ12, CQ18 are compatible between SCAC and MULTI.

INDOOR				CQ09 NAO
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9
Power Input		Nom	W	20
Running Current		Nom	A	0.6
Power Supply			Ø / V / Hz	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m³ / min	8.5 / 6.7 / 5.0
Sound Pressure	Cooling	High / Medium / Low	dB(A)	38 / 32 / 27
Sound Power	Cooling	Max	dB(A)	53
Dehumidification Rate			l / h	1.2
Dimensions	Body	W x H x D	mm	700 x 600 x 210
Net Weight	Body		kg	14.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)

INDOOR				CQ12 NAO	CQ18 NAO
Capacity	Cooling / Heating	Nom	kW	3.5 / 3.9	5.3 / 5.8
Power Input		Nom	W	20	40
Running Current		Nom	A	0.6	0.7
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate		High / Medium / Low	m³ / min	9.0 / 6.9 / 5.2	10.1 / 8.6 / 7.2
Sound Pressure	Cooling	High / Medium / Low	dB(A)	39 / 32 / 27	44 / 39 / 35
Sound Power	Cooling	Max	dB(A)	56	60
Dehumidification Rate			l / h	1.4	2.3
Dimensions	Body	W x H x D	mm	700 x 600 x 210	700 x 600 x 210
Net Weight	Body		kg	14.0	14.0
Piping Connection	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)

Note : 1. Capacities are based on the following conditions :
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero
 2. Definition of Power Input: Nominal conditions - Performance tested under EN14511
 3. Due to our policy of innovation some specifications may be changed without notification
 4. This product contains fluorinated greenhouse gases (R410A)

MULTI SPLIT

ACCESSORIES

ACCESSORIES

Wi-Fi Controller¹⁾

LG-IR-WF-1



Models Applied

- Connectable with the indoor unit having IR receiver
- Control and monitor :
On / Off Mode, Set Temp, Room Temp, Fan Speed
- Power supply includes EU-UK-US-AU heads
- Easy to install : Wall or desktop mounted
- Attractive design
- On/Off status and mode indicated by LED light
- Automatic firmware Updates*

* Internet access is necessary

Model Name	LG-IR-WF-1
Start / Stop Operation	•
Operation Mode	Cool / Heat / Auto / Fan / Dry
Set Point	•
Ambient Temperature	•
Fan Speed	•

Specifications

Model Name	LG-IR-WF-1
Enclosure	ABS (V-0, 5VB) 2,1 mm thickness PC (V-2) 1mm thickness
Dimensions (mm)	81 × 78 × 28
Weight (g)	76
Colour	White
Power Supply	5VDC 0,2 A NEC Class 2 or Limited Power Source (LPS) and SELV Rated Power supply
Mounting	Wall
LED Indicators	1 × Device status
Operating Temperature	From 0°C to 40°C
Operating Humidity	<93% HR, no Condensation
Stock Humidity	<93% HR, no Condensation
RoHS Conformity	Compliant with RoHS Directive (2002 / 95 / CE)
Certifications	Compliant with RoHS Directive (2002 / 95 / CE) CE Conformity to EMC Directive (2004 / 108 / EC) and Low-voltage Directive (2006 / 95 / EC) EN 60950-1 / EN 301489-1 v1.8.1 / EN 300328

1) This product is provided by INTESIS. For more information, please contact INTESIS directly.

ACCESSORIES

Distributor Box

• PMBD3620, PMBD3630, PMBD3640

Easy installation using the range of Distributor Boxes.

For	2 Indoors	3 Indoors	4 Indoors
Distributor	 PMBD3620	 PMBD3630	 PMBD3640

Various distributors can make much easier installation for any sites

• Features

- Distribution of refrigerant to various indoor units.
- 3 models (2, 3, 4 indoor units)
- EEV included
- Controlling PCB inside the unit
- Internally insulated (Prevents any chances of drainage)
- Flare joints for easy and clean installation
- Compact design (Low height)
- Flexible installation



• Specification

Connectable Indoor Units	Number of Indoor Units		PMBD3620	PMBD3630	PMBD3640
	Capacity		1 - 2 5k / 7k / 9k / 12k / 18k / 24k	1 - 3 5k / 7k / 9k / 12k / 18k / 24k	1 - 4 5k / 7k / 9k / 12k / 18k / 24k
Power Source	Ø / V / Hz		1 / 220-240 / 50	1 / 200-240 / 50	1 / 200-240 / 50
Power Consumption	W		10	10	10
Running Current	A		0.05	0.05	0.05
Dimensions	W x H x D	mm (inch)	302 x 143 x 252 (11.9 x 5.6 x 9.9)	302 x 143 x 252 (11.9 x 5.6 x 9.9)	302 x 143 x 252 (11.9 x 5.6 x 9.9)
Net Weight	kg/lb		4.8 / 10.6	4.9 / 10.8	5 / 11
Piping Connection (To Outdoor Unit)	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52(3/8)
	Gas	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05(3/4)
Piping Connection (To Indoor Unit)	Liquid	mm (inch)	Ø6.35 (1/4) x 2EA	Ø6.35 (1/4) x 3EA	Ø6.35 (1/4) x 4EA
	Gas	mm (inch)	Ø9.52 (3/8) x 2EA	Ø9.52 (3/8) x 3EA	Ø9.52 (3/8) x 4EA
Accessories	Hanger (Bracket)	EA	4	4	4
	Screw	EA	8	8	8
	Manual	EA	1	1	1

Note :
1. The piping connection must be suit the piping sizes of the indoor unit which will be connected. (If need, use the connector which is included in the indoor unit)
2. The BD should be installed inside the building.

Note : Due to our policy of innovation some specifications may be changed without notification.

Y Branch and Branch Kit


• PMBL5620 (2 units) / PMBL1203F0 (3 units)







• Features

- Y Branch and Branch kit make Multi FDX installation much easier.
- Y Branch and Branch kit for both gas and liquid are provided.
- Insulation material is also provided for covering the branches.

• Application

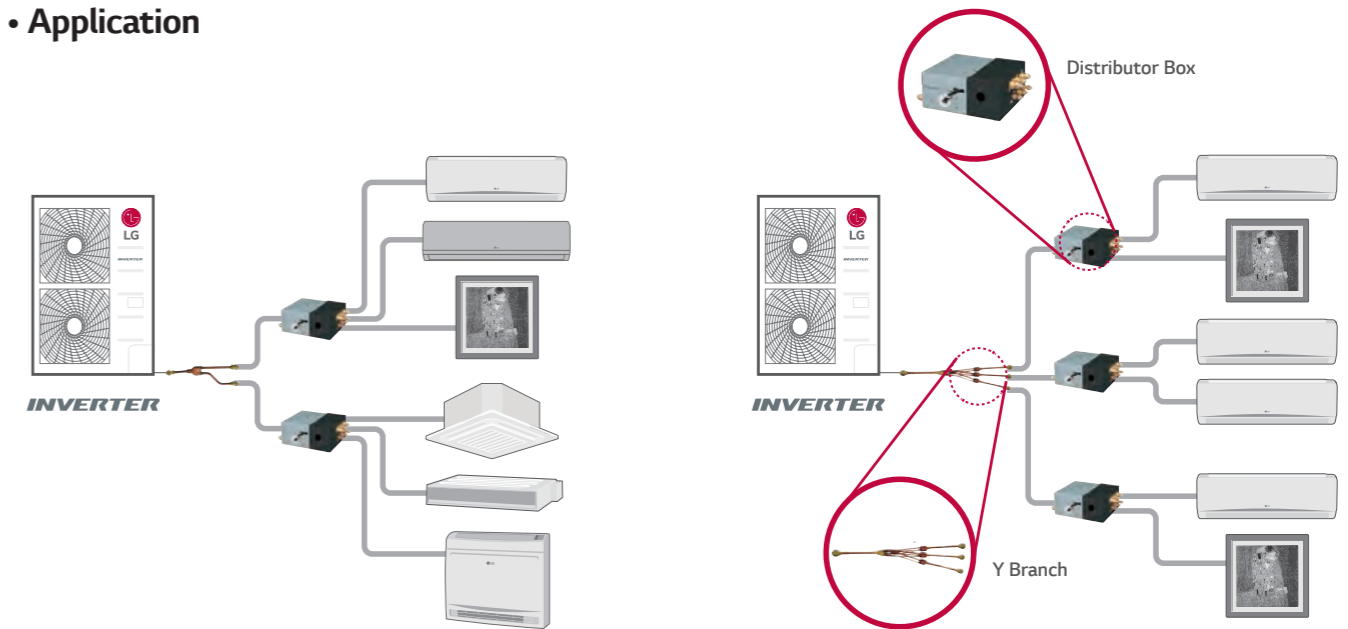

• Accessory Model Name

Model Name	No. of Branch distribution units	Applicable Model	Specification	
			Gas	Liquid
PMBL5620	2 units	1Ø, 3Ø		
PMBL1203F0	3 units	1Ø, 3Ø		

(Unit : mm)

COMBINATION TABLE

MU2M15 UL3

Operation	Combination (kBtu / h)			Cooling										
				Each Capacity (kW)		Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	Total	UNIT-A	UNIT-B	Min		Rated		Max		Min	Rated	Max
					Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	5	1.5	-	3,000	0.9	5,000	1.5	6,000	1.8	290	480	600
	7	-	7	2.1	-	4,200	1.2	7,000	2.1	8,400	2.5	320	520	620
	9	-	9	2.6	-	5,400	1.6	9,000	2.6	10,800	3.2	400	660	850
	12	-	12	3.5	-	7,200	2.1	12,000	3.5	14,400	4.2	530	880	1,220
2Unit	5	5	10	1.5	1.5	6,000	1.8	10,000	2.9	11,500	3.4	480	800	1,090
	5	7	12	1.5	2.1	7,200	2.1	12,000	3.5	13,800	4.0	530	880	1,220
	5	9	14	1.5	2.6	8,400	2.5	14,000	4.1	16,100	4.7	620	1,020	1,450
	7	7	14	2.1	2.1	8,400	2.5	14,000	4.1	16,100	4.7	620	1,020	1,450
	7	9	16	2.1	2.6	9,600	2.8	16,000	4.7	18,400	5.4	770	1,260	1,630
	5	12	17	1.4	3.3	9,600	2.8	16,000	4.7	18,400	5.4	770	1,260	1,630
	9	9	18	2.3	2.3	9,600	2.8	16,000	4.7	18,400	5.4	770	1,260	1,630
	7	12	19	1.7	3.0	9,600	2.8	16,000	4.7	18,400	5.4	770	1,260	1,630
	9	12	21	2.0	2.7	9,600	2.8	16,000	4.7	18,400	5.4	770	1,260	1,630

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The total ability of connected a indoor unit is up to 21kBtu / h
 4. At least two indoor units should be connected.

Operation	Combination (kBtu / h)			Heating										
				Each Capacity (kW)		Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	Total	UNIT-A	UNIT-B	Min		Rated		Max		Min	Rated	Max
					Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	5	1.6	-	3,300	1.0	5,500	1.6	6,000	1.8	290	480	600
	7	-	7	2.5	-	5,100	1.5	8,400	2.5	9,200	2.7	340	560	710
	9	-	9	3.2	-	6,500	1.9	10,800	3.2	11,800	3.5	420	700	890
	12	-	12	3.9	-	8,000	2.3	13,200	3.9	14,500	4.2	520	860	1,120
2Unit	5	5	10	1.6	1.6	6,600	1.9	11,000	3.2	12,100	3.5	450	740	940
	5	7	12	1.6	2.3	8,000	2.3	13,200	3.9	14,500	4.2	520	860	1,090
	5	9	14	1.7	3.0	9,600	2.8	16,000	4.7	17,200	5.0	650	1,080	1,390
	7	7	14	2.3	2.3	9,600	2.8	16,000	4.7	17,200	5.0	650	1,080	1,390
	7	9	16	2.3	3.0	10,800	3.2	18,000	5.3	19,400	5.7	780	1,280	1,660
	5	12	17	1.6	3.7	10,800	3.2	18,000	5.3	19,400	5.7	780	1,280	1,660
	9	9	18	2.6	2.6	10,800	3.2	18,000	5.3	19,400	5.7	780	1,280	1,660
	7	12	19	1.9	3.3	10,800	3.2	18,000	5.3	19,400	5.7	780	1,280	1,660
	9	12	21	2.3	3.0	10,800	3.2	18,000	5.3	19,400	5.7	780	1,280	1,660

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The total ability of connected a indoor unit is up to 21kBtu / h
 4. At least two indoor units should be connected.

MU2M17 UL3

Operation	Combination (kBtu / h)			Cooling										
				Each Capacity (kW)		Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	Total	UNIT-A	UNIT-B	Min		Rated		Max		Min	Rated	Max
					Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	5	1.5	-	3,000	0.9	5,000	1.5	6,000	1.8	290	480	600
	7	-	7	2.1	-	4,200	1.2	7,000	2.1	8,400	2.5	320	520	620
	9	-	9	2.6	-	5,400	1.6	9,000	2.6	10,800	3.2	400	660	850
	12	-	12	3.5	-	7,200	2.1	12,000	3.5	14,400	4.2	530	880	1,220
	15	-	15	4.2	-	8,520	2.5	14,200	4.2	17,040	5.0	663	1,100	1,525
2Unit	5	5	10	1.5	1.5	6,000	1.8	10,000	2.9	11,500	3.4	480	800	1,090
	5	7	12	1.5	2.1	7,200	2.1	12,000	3.5	13,800	4.0	530	880	1,220
	5	9	14	1.5	2.6	8,400	2.5	14,000	4.1	16,100	4.7	620	1,020	1,450
	7	7	14	2.1	2.1	8,400	2.5	14,000	4.1	16,100	4.7	620	1,020	1,450
	7	9	16	2.1	2.6	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	5	12	17	1.4	3.3	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	9	9	18	2.3	2.3	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	7	12	19	1.7	3.0	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	5	15	20	1.2	3.5	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	9	12	21	2.0	2.7	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	7	15	22	1.5	3.2	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	9	15	24	1.8	2.9	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630
	12	12	24	2.3	2.3	9,600	2.8	16,000	4.7	18,400	5.4	760	1,260	1,630

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The total ability of connected a indoor unit is up to 24kBtu / h
 4. At least two indoor units should be connected.

Operation	Combination (kBtu / h)			Heating										
				Each Capacity (kW)		Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	Total	UNIT-A	UNIT-B	Min		Rated		Max		Min	Rated	Max
					Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	5	1.6	-	3,300	1.0	5,500	1.6	6,000	1.8	290	480	600
	7	-	7	2.5	-	5,100	1.5	8,400	2.5	9,200	2.7	340	560	710
	9	-	9	3.2	-	6,500	1.9	10,800	3.2	11,800	3.5	420	700	890
	12	-	12	3.9	-	8,000	2.3	13,200	3.9	14,500	4.2	520	860	1,120
	15	-	15	4.2	-	11,152	3.2	18,400	5.4	20,212	5.8	689	1,140	1,485
2Unit	5	5	10	1.6	1.6	6,600	1.9	11,000	3.2	12,100	3.5	450	740	940
	5	7	12	1.6	2.3	8,000	2.3	13,200	3.9	14,500	4.2	520	860	1,090
	5	9	14	1.7	3.0	9,600	2.8	16,000	4.7	17,200	5.0	650	1,080	1,390
	7	7	14	2.3	2.3	9,600	2.8	16,000	4.7	17,200	5.0	650	1,080	1,390
	7	9	16	2.3	3.0	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	5	12	17	1.6	3.7	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	9	9	18	2.6	2.6	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	7	12	19	1.9	3.3	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	5	15	20	1.3	4.0	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	9	12	21	2.3	3.0	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	7	15	22	1.7	3.6	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	9	15	24	2.0	3.3	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660
	12	12	24	2.6	2.6	10,800	3.2	18,000	5.3	19,400	5.7	770	1,280	1,660

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The total ability of connected a indoor unit is up to 24kBtu / h
 4. At least two indoor units should be connected.

COMBINATION TABLE

MU3M19 UE3

Operation	Combination (kBtu / h)				Cooling												
					Each Capacity (kW)			Total Capacity						Total Input (W)			
	U1NT-A	U1NT-B	U1NT-C	Total	U1NT-A	U1NT-B	U1NT-C	Min		Rated		Max		Min	Rated	Max	
								Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	-	5	1.5	-	-	4,600	1.3	5,000	1.5	6,000	1.8	140	358	578	
	7	-	-	7	2.1	-	-	4,600	1.3	7,000	2.1	8,400	2.5	196	502	809	
	9	-	-	9	2.6	-	-	5,400	1.6	9,000	2.6	10,800	3.2	252	645	1,040	
	12	-	-	12	3.5	-	-	7,200	2.1	12,000	3.5	14,400	4.2	336	860	1,387	
	15	-	-	15	4.2	-	-	8,520	2.5	14,200	4.2	17,040	5.0	420	1,075	1,734	
	18	-	-	18	5.3	-	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
2Unit	5	5	-	10	1.5	1.5	-	6,000	1.8	10,000	2.9	12,000	3.5	280	717	1,156	
	5	7	-	12	1.5	2.1	-	7,200	2.1	12,000	3.5	14,400	4.2	336	860	1,387	
	5	9	-	14	1.5	2.6	-	8,400	2.5	14,000	4.1	16,800	4.9	392	1,003	1,618	
	7	7	-	14	2.1	2.1	-	8,400	2.5	14,000	4.1	16,800	4.9	392	1,003	1,618	
	7	9	-	16	2.1	2.6	-	9,600	2.8	16,000	4.7	19,200	5.6	448	1,147	1,849	
	5	12	-	17	1.5	3.5	-	10,200	3.0	17,000	5.0	20,400	6.0	476	1,218	1,964	
	9	9	-	18	2.6	2.6	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	7	12	-	19	1.9	3.3	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	5	15	-	20	1.3	4.0	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	9	12	-	21	2.3	3.0	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	7	15	-	22	1.7	3.6	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	5	18	-	23	1.5	5.3	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	9	15	-	24	2.0	3.3	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	12	12	-	24	2.6	2.6	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	7	18	-	25	1.5	3.8	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	9	18	-	27	1.8	3.5	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	12	15	-	27	2.4	2.9	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	12	18	-	30	2.1	3.2	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	15	15	-	30	2.7	2.7	-	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
	3Unit	5	5	5	15	1.5	1.5	1.5	9,000	2.6	15,000	4.4	18,000	5.3	420	1,075	1,733
		5	5	7	17	1.5	1.5	2.1	10,200	3.0	17,000	5.0	20,400	6.0	476	1,218	1,964
		5	5	9	19	1.4	1.4	2.5	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080
		5	7	7	19	1.4	1.9	1.9	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080
		5	7	9	21	1.3	1.8	2.3	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080
7		7	7	21	1.8	1.8	1.8	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		5	12	22	1.2	1.2	2.9	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		9	9	23	1.1	2.1	2.1	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
7		7	9	23	1.6	1.6	2.1	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		7	12	24	1.1	1.5	2.6	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		5	15	25	1.1	1.1	3.2	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
7		9	9	25	1.5	1.9	1.9	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		9	12	26	1.0	1.8	2.4	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
7		7	12	26	1.4	1.4	2.4	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		7	15	27	1.0	1.4	2.9	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
9		9	9	27	1.8	1.8	1.8	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
7		9	12	28	1.3	1.7	2.3	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		9	15	29	0.9	1.6	2.7	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
5		12	12	29	0.9	2.2	2.2	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
7		7	15	29	1.3	1.3	2.7	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	
9		9	12	30	1.6	1.6	2.1	10,800	3.2	18,000	5.3	21,600	6.3	504	1,290	2,080	

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The total ability of connected a indoor unit is up to 30kBtu / h
 4. At least two indoor units should be connected.

Operation	Combination (kBtu / h)				Heating												
					Each Capacity (kW)			Total Capacity						Total Input (W)			
	U1NT-A	U1NT-B	U1NT-C	Total	U1NT-A	U1NT-B	U1NT-C	Min		Rated		Max		Min	Rated	Max	
								Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	-	5	1.6	-	-	4,800	1.4	5,500	1.6	6,325	1.9	180	425	733	
	7	-	-	7	2.5	-	-	4,800	1.4	8,400	2.5	9,660	2.8	252	595	1,027	
	9	-	-	9	3.2	-	-	6,480	1.9	10,800	3.2	12,420	3.6	324	765	1,320	
	12	-	-	12	4.2	-	-	8,640	2.5	14,400	4.2	16,560	4.9	432	1,020	1,760	
	15	-	-	15	5.4	-	-	11,040	3.2	18,400	5.4	21,160	6.3	540	1,275	2,200	
	18	-	-	18	6.3	-	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
2Unit	5	5	-	10	1.8	1.8	-	7,200	2.1	12,000	3.5	13,800	4.0	360	850	1,467	
	5	7	-	12	1.8	2.5	-	8,640	2.5	14,400	4.2	16,560	4.9	432	1,020	1,760	
	5	9	-	14	1.8	3.2	-	10,080	3.0	16,800	4.9	19,320	5.7	504	1,190	2,053	
	7	7	-	14	2.5	2.5	-	10,080	3.0	16,800	4.9	19,320	5.7	504	1,190	2,053	
	7	9	-	16	2.5	3.2	-	11,520	3.4	19,200	5.6	22,080	6.5	576	1,360	2,347	
	5	12	-	17	1.8	4.2	-	12,240	3.6	20,400	6.0	23,460	6.9	612	1,445	2,493	
	9	9	-	18	3.2	3.2	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	7	12	-	19	2.3	4.0	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	5	15	-	20	1.6	4.7	-	12,960	3.8	21,600	6.3	24,840	7.2	648	1,530	2,640	
	9	12	-	21	3.2	4.2	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	7	15	-	22	2.0	4.3	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	5	18	-	23	1.8	6.3	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	9	15	-	24	2.4	3.9	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	12	12	-	24	3.2	3.2	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	7	18	-	25	1.8	4.6	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	9	18	-	27	2.1	4.2	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	12	15	-	27	2.8	3.5	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	12	18	-	30	2.5	3.8	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	15	15	-	30	3.2	3.2	-	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
	3Unit	5	5	5	15	1.8	1.8	1.8	10,800	3.2	18,000	5.3	20,700	6.1	540	1,275	2,200
		5	5	7	17	1.8	1.8	2.5	12,240	3.6	20,400	6.0	23,460	6.9	612	1,445	2,493
		5	5	9	19	1.7	1.7	3.0	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640
		5	7	7	19	1.7	2.3	2.3	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640
		5	7	9	21	1.5	2.1	2.7	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640
7		7	7	21	2.1	2.1	2.1	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
5		5	12	22	1.4	1.4	3.5	12,960	3.8	21,600	6.3	24,840	7.3	648	1,530	2,640	
5		9	9	23	1.4												

COMBINATION TABLE

MU3M21 UE3

Operation	Combination (kBtu / h)				Cooling												
					Each Capacity (kW)			Total Capacity						Total Input (W)			
	UNIT-A	UNIT-B	UNIT-C	Total	UNIT-A	UNIT-B	UNIT-C	Min		Rated		Max		Min	Rated	Max	
								Btu / h	kW	Btu / h	kW	Btu / h	kW				
1Unit	5	-	-	5	1.5	-	-	4,800	1.4	5,000	1.5	5,500	1.6	140	376	562	
	7	-	-	7	2.1	-	-	6,300	1.8	7,000	2.1	7,700	2.3	140	527	787	
	9	-	-	9	2.6	-	-	6,300	1.8	9,000	2.6	9,900	2.9	252	677	1,011	
	12	-	-	12	3.5	-	-	7,200	2.1	12,000	3.5	13,200	3.9	336	903	1,349	
	15	-	-	15	4.2	-	-	8,520	2.5	14,200	4.2	15,620	4.7	420	1,129	1,686	
	18	-	-	18	5.3	-	-	10,800	3.2	18,000	5.3	19,800	5.8	504	1,354	2,023	
2Unit	5	5	-	10	1.5	1.5	-	6,000	1.8	10,000	2.9	11,000	3.2	280	752	1,124	
	5	7	-	12	1.5	2.1	-	7,200	2.1	12,000	3.5	13,200	3.9	336	903	1,349	
	5	9	-	14	1.5	2.6	-	8,400	2.5	14,000	4.1	15,400	4.5	392	1,053	1,573	
	7	7	-	14	2.1	2.1	-	8,400	2.5	14,000	4.1	15,400	4.5	392	1,053	1,573	
	7	9	-	16	2.1	2.6	-	9,600	2.8	16,000	4.7	17,600	5.2	448	1,204	1,798	
	5	12	-	17	1.5	3.5	-	10,200	3.0	17,000	5.0	18,700	5.5	476	1,279	1,910	
	9	9	-	18	2.6	2.6	-	10,800	3.2	18,000	5.3	19,800	5.8	504	1,354	2,023	
	7	12	-	19	2.1	3.5	-	11,400	3.3	19,000	5.6	20,900	6.1	532	1,430	2,135	
	5	15	-	20	1.5	4.4	-	12,000	3.5	20,000	5.9	22,000	6.5	560	1,505	2,247	
	9	12	-	21	2.6	3.5	-	12,600	3.7	21,000	6.2	23,100	6.8	588	1,580	2,360	
	7	15	-	22	2.0	4.2	-	12,600	3.7	21,000	6.2	23,100	6.8	588	1,580	2,360	
	5	18	-	23	1.5	5.3	-	12,600	3.7	21,000	6.2	23,100	6.8	588	1,580	2,360	
	9	15	-	24	2.3	3.9	-	12,600	3.7	21,000	6.2	23,100	6.8	588	1,580	2,360	
	12	12	-	24	3.4	3.4	-	13,800	4.0	21,000	6.2	23,100	6.8	588	1,580	2,360	
	7	18	-	25	2.0	5.1	-	14,400	4.2	21,000	6.2	23,100	6.8	588	1,580	2,360	
	9	18	-	27	2.3	4.7	-	14,400	4.2	21,000	6.2	23,100	6.8	588	1,580	2,360	
	12	15	-	27	2.8	3.4	-	14,400	4.2	21,000	6.2	23,100	6.8	588	1,580	2,360	
	12	18	-	30	2.8	4.2	-	14,400	4.2	21,000	6.2	23,100	6.8	588	1,580	2,360	
	15	15	-	30	3.1	3.1	-	14,400	4.2	21,000	6.2	23,100	6.8	588	1,580	2,360	
	15	18	-	33	2.8	3.4	-	14,400	4.2	21,000	6.2	23,100	6.8	588	1,580	2,360	
	3Unit	5	5	5	15	1.5	1.5	1.5	9,000	2.6	15,000	4.4	18,000	5.3	420	1,129	1,686
		5	5	7	17	1.5	1.5	2.1	10,200	3.0	17,000	5.0	20,400	6.0	476	1,279	1,910
		5	5	9	19	1.5	1.5	2.6	11,400	3.3	19,000	5.6	22,800	6.7	532	1,430	2,135
		5	7	7	19	1.5	2.1	2.1	11,400	3.3	19,000	5.6	22,800	6.7	532	1,430	2,135
5		7	9	21	1.5	2.1	2.6	12,600	3.7	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		7	7	21	2.1	2.1	2.1	12,600	3.7	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		5	12	22	1.5	1.5	3.5	13,200	3.9	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		7	9	23	2.1	2.1	2.6	13,800	4.0	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		9	9	23	1.5	2.6	2.6	13,800	4.0	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		7	12	24	1.5	2.1	3.5	13,800	4.0	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		5	15	25	1.2	1.2	3.7	13,800	4.0	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		9	9	25	2.0	2.5	2.5	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		9	12	26	1.4	2.4	3.2	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		7	12	26	1.9	1.9	3.2	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		7	15	27	1.1	1.6	3.4	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
9		9	9	27	2.3	2.3	2.3	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		9	12	28	1.8	2.3	3.0	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		5	18	28	1.3	1.3	4.5	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		9	15	29	1.1	1.9	3.2	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		12	12	29	1.2	2.9	2.9	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		7	15	29	1.5	1.5	3.2	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		7	18	30	1.2	1.6	4.2	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
9		9	12	30	2.1	2.1	2.8	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		9	15	31	1.4	1.8	3.0	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		12	12	31	1.6	2.7	2.7	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		12	15	32	1.0	2.3	2.9	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
5		9	18	32	1.1	2.0	4.0	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
7		7	18	32	1.5	1.5	4.0	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
9		9	15	33	1.7	1.7	2.8	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	
9		12	12	33	1.9	2.6	2.6	14,400	4.2	21,000	6.2	25,000	7.3	588	1,580	2,360	

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The total ability of connected a indoor unit is up to 33kBtu / h
 4. At least two indoor units should be connected.

Operation	Combination (kBtu / h)				Heating											
					Each Capacity (kW)			Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	UNIT-C	Total	UNIT-A	UNIT-B	UNIT-C	Min		Rated		Max		Min	Rated	Max
								Btu / h	kW	Btu / h	kW	Btu / h	kW			
1Unit	5	-	-	5	1.6	-	-	5,000	1.5	5,500	1.6	6,050	1.8	210	407	648
	7	-	-	7	2.3	-	-	7,560	2.2	8,000	2.3	8,800	2.6	210	570	907
	9	-	-	9	2.9	-	-	7,560	2.2	10,000	2.9	10,900	3.2	378	733	1,166
	12	-	-	12	3.9	-	-	7,920	2.3	13,200	3.9	14,500	4.2	504	977	1,554
	15	-	-	15	5.4	-	-	11,040	3.2	18,400	5.4	20,212	5.8	630	1,222	1,943
	18	-	-	18	5.8	-	-	11,880	3.5	19,800	5.8	21,800	6.4	756	1,466	2,331
2Unit	5	5	-	10	1.6	1.6	-	6,600	1.9	11,000	3.2	12,100	3.5	420	814	1,295
	5	7	-	12	1.6	2.5	-	8,340	2.4	13,900	4.1	15,290	4.5	504	977	1,554
	5	9	-	14	1.6	2.9	-	9,300	2.7	15,500	4.5	18,500	5.4	588	1,140	1,813
	7	7	-	14	2.5	2.5	-	10,080	3.0	16,800	4.9	18,500	5.4	588	1,140	1,813
	7	9	-	16	2.5	3.2	-	11,520	3.4	19,200	5.6	21,100	6.2	672	1,303	2,072
	5	12	-	17	1.6	3.9	-	11,220	3.3	18,700	5.5	23,700	6.9	714	1,384	2,202
	9	9	-	18	3.2	3.2	-	12,960	3.8	21,600	6.3	23,700	6.9	756	1,466	2,331
	7	12	-	19	2.5	4.2	-	13,680	4.0	22,800	6.7	25,000	7.3	798	1,547	2,461
	5	15	-	20	1.8	5.3	-	14,400	4.2	24,000	7.0	26,316	7.6	882	1,710	2,720
	9	12	-	21	3.2	4.2	-	15,120	4.4	24,000	7.0	26,500	7.8	882	1,710	2,720
	7	15	-	22	2.2	4.8	-	15,120	4.4	24,000	7.0	26,500	7.8	882	1,710	2,720
	5	18	-	23	1.6	5.8	-	15,180	4.4	24,000	7.0	26,500	7.8	882	1,710	2,720
	9	15	-	24	2.6	4.4	-	15,180	4.4	24,000	7.0	26,500	7.8	882	1,710	2,720
	12	12	-	24	3.9	3.9	-	15,840	4.6	24,000	7.0	26,500	7.8	882	1,710	2,720
	7	18	-	25	2.3	5.9	-	16,680	4.9	24,000	7.0	26,500	7.8	882	1,710	2,720
	12	15	-	27	3.1	3.9	-	16,680	4.9	24,000	7.0	26,500	7.8	882	1,710	2,720
	9	18	-	27	2.8	5.6	-	17,280	5.1	24,000	7.0	26,500	7.8	882	1,710	2,720
	12	18	-	30	3.4	5.1	-	17,280	5.1	24,000	7.0	26,500	7.8	882	1,710	2,720
	15	15	-	30	3.5	3.5	-	17,280	5.1	24,000	7.0	26,500	7.8	882	1,710	2,720
	15	18	-	33	3.2	3.8	-	17,280	5.1	24,000	7.0	26,500	7.8	882	1,710	2,720
	3Unit	5	5	5	15	1.6	1.6	1.6								

COMBINATION TABLE

MU4M25 U43

Operation	Combination (kBtu / h)					Cooling												
						Each Capacity (kW)				Total Capacity				Total Input (W)				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Min		Rated		Max		Min	Rated	Max
										Btu / h	kW	Btu / h	kW	Btu / h	kW			
1Unit	5	-	-	-	5	1.5	-	-	-	4,500	1.3	5,000	1.5	5,500	1.6	444	740	1,029
	7	-	-	-	7	2.1	-	-	-	6,300	1.8	7,000	2.1	7,700	2.3	444	740	1,029
	9	-	-	-	9	2.6	-	-	-	6,300	1.8	9,000	2.6	9,900	2.9	540	900	1,167
	12	-	-	-	12	3.5	-	-	-	7,200	2.1	12,000	3.5	13,200	3.9	660	1,100	1,294
	15	-	-	-	15	4.2	-	-	-	8,520	2.5	14,200	4.2	15,620	4.7	840	1,400	1,647
	18	-	-	-	18	5.3	-	-	-	10,800	3.2	18,000	5.3	19,800	5.8	1,020	1,700	2,225
	24	-	-	-	24	7.0	-	-	-	14,400	4.2	24,000	7.0	25,500	7.5	1,470	2,450	3,088
	5	5	-	-	10	1.5	1.5	-	-	6,000	1.8	10,000	2.9	11,000	3.2	396	660	794
	5	7	-	-	12	1.5	2.1	-	-	7,200	2.1	12,000	3.5	13,200	3.9	408	680	843
	5	9	-	-	14	1.5	2.6	-	-	8,400	2.5	14,000	4.1	15,400	4.5	492	820	980
2Unit	7	7	-	-	14	2.1	2.1	-	-	8,400	2.5	14,000	4.1	15,400	4.5	492	820	980
	7	9	-	-	16	2.1	2.6	-	-	9,600	2.8	16,000	4.7	17,600	5.2	636	1,060	1,294
	5	12	-	-	17	1.5	3.5	-	-	10,200	3.0	17,000	5.0	18,700	5.5	720	1,200	1,451
	9	9	-	-	18	2.6	2.6	-	-	10,800	3.2	18,000	5.3	19,800	5.8	810	1,350	1,676
	7	12	-	-	19	2.1	3.5	-	-	11,400	3.3	19,000	5.6	20,900	6.1	924	1,540	1,843
	5	15	-	-	20	1.5	4.4	-	-	12,000	3.5	20,000	5.9	22,000	6.4	1,026	1,710	2,046
	9	12	-	-	21	2.6	3.5	-	-	12,600	3.7	21,000	6.2	23,100	6.8	1,128	1,880	2,441
	7	15	-	-	22	2.1	4.4	-	-	13,200	3.8	22,000	6.4	24,200	7.1	1,251	2,085	2,707
	5	18	-	-	23	1.5	5.3	-	-	13,800	4.0	23,000	6.7	23,100	6.8	1,374	2,290	2,854
	9	15	-	-	24	2.5	4.2	-	-	13,800	4.0	23,000	6.7	23,100	6.8	1,374	2,290	2,854
	12	12	-	-	24	3.4	3.4	-	-	13,800	4.0	23,000	6.7	25,500	7.5	1,374	2,290	2,854
	7	18	-	-	25	2.0	5.1	-	-	14,400	4.2	24,000	7.0	26,500	7.8	1,410	2,350	3,147
	9	18	-	-	27	2.3	4.7	-	-	14,400	4.2	24,000	7.0	27,500	8.1	1,410	2,350	3,147
	12	15	-	-	27	3.1	3.9	-	-	14,400	4.2	24,000	7.0	27,500	8.1	1,410	2,350	3,147
	5	24	-	-	29	1.2	5.8	-	-	14,400	4.2	24,000	7.0	27,500	8.1	1,410	2,350	3,147
	12	18	-	-	30	2.8	4.2	-	-	14,400	4.2	24,000	7.0	28,800	8.4	1,410	2,350	3,147
	15	15	-	-	30	3.5	3.5	-	-	14,400	4.2	24,000	7.0	28,800	8.4	1,410	2,350	3,147
	7	24	-	-	31	1.6	5.4	-	-	14,400	4.2	24,000	7.0	29,000	8.5	1,410	2,350	3,147
	9	24	-	-	33	1.9	5.1	-	-	14,400	4.2	24,000	7.0	29,000	8.5	1,410	2,350	3,147
	15	18	-	-	33	3.2	3.8	-	-	14,400	4.2	24,000	7.0	29,000	8.5	1,410	2,350	3,147
18	18	-	-	36	3.5	3.5	-	-	14,400	4.2	24,000	7.0	29,000	8.5	1,410	2,350	3,147	
12	24	-	-	36	2.3	4.7	-	-	14,400	4.2	24,000	7.0	29,000	8.5	1,410	2,350	3,147	
3Unit	5	5	5	-	15	1.5	1.5	1.5	-	9,000	2.6	15,000	4.4	18,000	5.3	396	660	1,784
	5	5	7	-	17	1.5	1.5	2.1	-	10,200	3.0	17,000	5.0	20,400	6.0	432	720	1,860
	5	5	9	-	19	1.5	1.5	2.6	-	11,400	3.3	19,000	5.6	22,800	6.7	570	950	1,294
	5	7	7	-	19	1.5	2.1	2.1	-	11,400	3.3	19,000	5.6	22,800	6.7	570	950	1,294
	5	7	9	-	21	1.5	2.1	2.6	-	12,600	3.7	21,000	6.2	25,200	7.4	738	1,230	1,588
	7	7	7	-	21	2.1	2.1	2.1	-	12,600	3.7	21,000	6.2	25,200	7.4	738	1,230	1,588
	5	5	12	-	22	1.5	1.5	3.5	-	13,200	3.9	22,000	6.4	26,400	7.7	828	1,380	1,696
	7	7	9	-	23	2.1	2.1	2.6	-	13,800	4.0	23,000	6.7	27,600	8.1	912	1,520	1,814
	5	9	9	-	23	1.5	2.6	2.6	-	13,800	4.0	23,000	6.7	27,600	8.1	912	1,520	1,814
	5	7	12	-	24	1.5	2.1	3.5	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	5	15	-	25	1.4	1.4	4.2	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	9	9	-	25	2.0	2.5	2.5	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	9	12	-	26	1.4	2.4	3.2	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	7	12	-	26	1.9	1.9	3.2	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	7	15	-	27	1.3	1.8	3.9	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	9	9	9	-	27	2.3	2.3	2.3	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	9	12	-	28	1.8	2.3	3.0	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	5	18	-	28	1.3	1.3	4.5	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	9	15	-	29	1.2	2.2	3.6	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	12	12	-	29	1.2	2.9	2.9	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	7	15	-	29	1.7	1.7	3.6	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	7	18	-	30	1.2	1.6	4.2	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	9	9	12	-	30	2.1	2.1	2.8	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	9	15	-	31	1.6	2.0	3.4	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	12	12	-	31	1.6	2.7	2.7	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	12	15	-	32	1.1	2.6	3.3	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	5	9	18	-	32	1.1	2.0	4.0	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	7	7	18	-	32	1.5	1.5	4.0	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	9	9	15	-	33	1.9	1.9	3.2	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
	9	12	12	-	33	1.9	2.6	2.6	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971
7	9	18	-	34	1.4	1.9	3.7	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
7	12	15	-	34	1.4	2.5	3.1	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
5	5	24	-	34	1.0	1.0	5.0	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
5	12	18	-	35	1.0	2.4	3.6	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
5	15	15	-	35	1.0	3.0	3.0	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
5	7	24	-	36	1.0	1.4	4.7	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
9	12	15	-	36	1.8	2.3	2.9	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
12	12	12	-	36	2.3	2.3	2.3	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
9	9	18	-	36	1.8	1.8	3.5	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
7	12	18	-	37	1.3	2.3	3.4	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
7	15	15	-	37	1.1	2.4	2.4	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
5	9	24	-	38	0.9	1.7	4.4	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
7	7	24	-	38	1.3	1.3	4.4	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
9	12	18	-	39	1.6	2.2	3.2	-	14,400	4.2	24,000	7.0	28,800	8.4	990	1,650	1,971	
9	15	15	-	39	1.6	2.7	2.7	-	14,400	4.2	24,000	7.0	28,800	8.4	956	1,593	1,902	
12	12	15	-	39	2.2	2.2	2.7	-	14,400	4.2	24,000	7.0	28,800	8.4	921	1,535	1,834	

Operation	Combination (kBtu / h)					Cooling											
						Each Capacity (kW)				Total Capacity				Total Input (W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Min		Rated</					

COMBINATION TABLE

MU4M25 U43

Operation	Combination (kBtu / h)					Heating												
						Each Capacity (kW)				Total Capacity				Total Input (W)				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min		Rated		Max		
						Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max	Min	Rated	Max	
1Unit	5	-	-	-	5	1.6	-	-	-	4,950	1.5	5,500	1.6	6,050	1.8	498	830	1,294
	7	-	-	-	7	2.3	-	-	-	7,560	2.2	8,000	2.3	8,800	2.6	510	850	1,294
	9	-	-	-	9	2.9	-	-	-	7,560	2.2	10,000	2.9	10,900	3.2	534	890	1,471
	12	-	-	-	12	3.9	-	-	-	7,920	2.3	13,200	3.9	14,500	4.2	582	970	1,676
	15	-	-	-	15	4.2	-	-	-	11,040	3.2	18,400	5.4	20,212	5.8	867	1,445	2,497
	18	-	-	-	18	5.8	-	-	-	11,880	3.5	19,800	5.8	21,800	6.4	1,152	1,920	2,157
	24	-	-	-	24	7.4	-	-	-	15,240	4.5	25,400	7.4	26,600	7.8	1,416	2,360	3,431
	5	5	-	-	10	1.6	1.6	-	-	6,600	1.9	11,000	3.2	12,100	3.5	720	1,200	1,265
	5	7	-	-	12	1.6	2.5	-	-	8,340	2.4	13,900	4.1	15,290	4.5	732	1,220	2,301
	5	9	-	-	14	1.6	2.9	-	-	9,300	2.7	15,500	4.5	18,500	5.4	762	1,270	2,167
7	7	-	-	14	2.5	2.5	-	-	10,080	3.0	16,800	4.9	18,500	5.4	762	1,270	2,507	
7	9	-	-	16	2.5	3.2	-	-	11,520	3.4	19,200	5.6	21,100	6.2	834	1,390	2,167	
5	12	-	-	17	1.6	3.9	-	-	11,220	3.3	18,700	5.5	23,700	6.9	858	1,430	2,735	
9	9	-	-	18	3.2	3.2	-	-	12,960	3.8	21,600	6.3	23,700	6.9	1,104	1,840	2,931	
7	12	-	-	19	2.5	4.2	-	-	13,680	4.0	22,800	6.7	25,000	7.3	1,206	2,010	3,039	
5	15	-	-	20	1.8	5.3	-	-	14,400	4.2	24,000	7.0	26,316	7.7	1,281	2,135	3,228	
9	12	-	-	21	3.2	4.2	-	-	15,120	4.4	25,200	7.4	27,700	8.1	1,356	2,260	3,225	
7	15	-	-	22	2.4	5.1	-	-	15,180	4.4	25,300	7.4	27,810	8.1	1,440	2,400	3,425	
5	18	-	-	23	1.6	5.8	-	-	15,180	4.4	25,300	7.4	27,830	8.2	1,524	2,540	3,255	
9	15	-	-	24	2.9	4.8	-	-	15,840	4.6	26,400	7.7	29,040	8.6	1,608	2,680	3,434	
12	12	-	-	24	3.9	3.9	-	-	15,840	4.6	26,400	7.7	29,040	8.5	1,608	2,680	3,412	
7	18	-	-	25	2.3	5.9	-	-	16,680	4.9	27,800	8.1	30,000	8.8	1,608	2,680	3,412	
9	18	-	-	27	2.8	5.6	-	-	17,280	5.1	28,800	8.4	31,500	9.2	1,608	2,680	3,412	
12	15	-	-	27	3.8	4.7	-	-	17,280	5.1	28,800	8.4	31,500	9.2	1,608	2,680	3,412	
5	24	-	-	29	1.5	7.0	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
12	18	-	-	30	3.4	5.1	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
15	15	-	-	30	4.2	4.2	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
7	24	-	-	31	1.9	6.5	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
9	24	-	-	33	2.3	6.1	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
15	18	-	-	33	3.8	4.6	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
18	18	-	-	36	4.2	4.2	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
12	24	-	-	36	2.8	5.6	-	-	17,280	5.1	28,800	8.4	32,000	9.4	1,608	2,680	3,412	
5	5	5	-	15	1.6	1.6	1.6	-	9,900	2.9	16,500	4.8	18,150	5.3	870	1,450	1,598	
5	5	7	-	17	1.6	1.6	2.5	-	11,640	3.4	19,400	5.7	21,340	6.3	936	1,560	1,951	
5	5	9	-	19	1.6	1.6	2.9	-	12,600	3.7	21,000	6.2	23,100	6.8	966	1,610	2,373	
5	7	7	-	19	1.6	2.5	2.3	-	13,140	3.9	21,900	6.4	24,090	7.1	966	1,610	2,373	
5	7	9	-	21	1.6	2.5	2.9	-	14,340	4.2	23,900	7.0	26,290	7.7	1,026	1,710	2,873	
7	7	7	-	21	2.5	2.5	2.5	-	15,120	4.4	25,200	7.4	27,700	8.1	1,026	1,710	2,873	
5	5	12	-	22	1.6	1.6	3.9	-	14,520	4.3	24,200	7.1	26,620	7.8	1,050	1,750	3,049	
7	7	9	-	23	2.5	2.5	3.2	-	16,560	4.9	27,600	8.1	30,000	8.8	1,122	1,870	3,275	
5	9	9	-	23	1.6	2.9	2.9	-	15,300	4.5	25,500	7.5	28,050	8.2	1,122	1,870	3,275	
5	7	12	-	24	1.8	2.5	4.2	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
5	5	15	-	25	1.7	1.7	5.1	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
7	9	9	-	25	2.4	3.0	3.0	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
5	9	12	-	26	1.6	2.9	3.9	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
7	7	12	-	26	2.3	2.3	3.9	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
5	7	15	-	27	1.6	2.2	4.7	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
9	9	9	-	27	2.8	2.8	2.8	-	17,280	5.1	28,800	8.4	31,500	9.2	1,188	1,980	3,647	
7	9	12	-	28	2.1	2.7	3.6	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	5	18	-	28	1.5	1.5	5.4	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	9	15	-	29	1.5	2.6	4.4	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	12	12	-	29	1.5	3.5	3.5	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	7	15	-	29	2.0	2.0	4.4	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	7	18	-	30	1.4	2.0	5.1	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	9	12	-	30	2.5	2.5	3.4	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	9	15	-	31	1.9	2.5	4.1	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	12	12	-	31	1.9	3.3	3.3	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	12	15	-	32	1.3	3.2	4.0	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	9	18	-	32	1.3	2.4	4.7	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	7	18	-	32	1.8	1.8	4.7	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	9	15	-	33	2.3	2.3	3.8	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	12	12	-	33	2.3	3.1	3.1	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	9	18	-	34	1.7	2.2	4.5	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	12	15	-	34	1.7	3.0	3.7	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	5	24	-	34	1.2	1.2	6.0	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	12	18	-	35	1.2	2.9	4.3	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	15	15	-	35	1.2	3.6	3.6	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	7	24	-	36	1.2	1.6	5.6	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	12	15	-	36	2.1	2.8	3.5	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
12	12	12	-	36	2.8	2.8	2.8	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	9	18	-	36	2.1	2.1	4.2	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	12	18	-	37	1.6	2.7	4.1	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	15	15	-	37	1.6	3.4	3.4	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
5	9	24	-	38	1.1	2.0	5.3	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
7	7	24	-	38	1.6	1.6	5.3	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	12	18	-	39	1.9	2.6	3.9	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
9	15	15	-	39	1.9	3.2	3.2	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	
12	12	15	-	39	2.6	2.6	3.2	-	17,280	5.1	28,800	8.4	32,000	9.4	1,188	1,980	3,647	

Operation	Combination (kBtu / h)					Heating											
						Each Capacity (kW)				Total Capacity				Total Input (W)			
	UNIT-A	UNIT-B															

COMBINATION TABLE

MU4M27 U43

Operation	Combination (kBtu / h)					Cooling												
						Each Capacity (kW)				Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max				
						Btu / h	kW	Btu / h	kW	Btu / h	kW							
1Unit	5	-	-	-	5	1.5	-	-	-	4,500	1.3	5,000	1.5	5,500	1.6	444	740	1,029
	7	-	-	-	7	2.1	-	-	-	6,300	1.8	7,000	2.1	7,700	2.3	444	740	1,029
	9	-	-	-	9	2.6	-	-	-	6,300	1.8	9,000	2.6	9,900	2.9	540	900	1,167
	12	-	-	-	12	3.5	-	-	-	7,200	2.1	12,000	3.5	13,200	3.9	660	1,100	1,294
	15	-	-	-	15	4.2	-	-	-	8,520	2.5	14,200	4.2	15,620	4.7	840	1,400	1,647
	18	-	-	-	18	5.3	-	-	-	10,800	3.2	18,000	5.3	19,800	5.8	1,020	1,700	2,225
	24	-	-	-	24	7.0	-	-	-	14,400	4.2	24,000	7.0	25,500	7.5	1,470	2,450	3,088
	5	5	-	-	10	1.5	1.5	-	-	6,000	1.8	10,000	2.9	11,500	3.4	396	660	794
	5	7	-	-	12	1.5	2.1	-	-	7,200	2.1	12,000	3.5	13,800	4.0	408	680	843
	5	9	-	-	14	1.5	2.6	-	-	8,400	2.5	14,000	4.1	16,100	4.7	492	820	980
	7	7	-	-	14	2.1	2.1	-	-	8,400	2.5	14,000	4.1	16,100	4.7	492	820	980
	7	9	-	-	16	2.1	2.6	-	-	9,600	2.8	16,000	4.7	18,400	5.4	636	1,060	1,294
5	12	-	-	17	1.5	3.5	-	-	10,200	3.0	17,000	5.0	18,700	5.5	720	1,200	1,451	
9	9	-	-	18	2.6	2.6	-	-	10,800	3.2	18,000	5.3	20,700	6.1	810	1,350	1,676	
7	12	-	-	19	2.1	3.5	-	-	11,400	3.3	19,000	5.6	20,900	6.1	924	1,540	1,843	
5	15	-	-	20	1.5	4.4	-	-	12,000	3.5	20,000	5.9	22,000	6.4	1,026	1,710	2,046	
9	12	-	-	21	2.6	3.5	-	-	12,600	3.7	21,000	6.2	23,100	6.8	1,128	1,880	2,441	
7	15	-	-	22	2.1	4.4	-	-	13,200	3.8	22,000	6.4	24,200	7.1	1,251	2,085	2,707	
5	18	-	-	23	1.5	5.3	-	-	13,800	4.0	23,000	6.7	26,450	7.8	1,374	2,290	2,854	
9	15	-	-	24	2.6	4.4	-	-	14,400	4.2	24,000	7.0	27,600	8.2	1,392	2,320	2,891	
12	12	-	-	24	3.4	3.4	-	-	14,400	4.2	24,000	7.0	26,400	7.7	1,410	2,350	3,147	
7	18	-	-	25	2.0	5.1	-	-	15,000	4.4	25,000	7.3	28,750	8.4	1,542	2,570	3,304	
9	18	-	-	27	2.3	4.7	-	-	16,200	4.7	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
12	15	-	-	27	3.5	4.4	-	-	16,200	4.7	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
5	24	-	-	29	1.2	5.8	-	-	17,400	5.1	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
12	18	-	-	30	2.8	4.2	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
15	15	-	-	30	4.0	4.0	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
7	24	-	-	31	1.6	5.4	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
9	24	-	-	33	1.9	5.1	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
15	18	-	-	33	3.6	4.3	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
18	18	-	-	36	3.5	3.5	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
12	24	-	-	36	2.3	4.7	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
15	24	-	-	39	3.0	4.9	-	-	18,000	5.3	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
5	5	5	-	15	1.5	1.5	1.5	-	9,000	2.6	15,000	4.4	17,250	5.1	396	660	1,784	
5	5	7	-	17	1.5	1.5	2.1	-	10,200	3.0	17,000	5.0	19,550	5.7	432	720	1,860	
5	5	9	-	19	1.5	1.5	2.6	-	11,400	3.3	19,000	5.6	21,850	6.4	570	950	1,294	
5	7	7	-	19	1.5	2.1	2.1	-	11,400	3.3	19,000	5.6	21,850	6.4	570	950	1,294	
5	7	9	-	21	1.5	2.1	2.6	-	12,600	3.7	21,000	6.2	24,150	7.1	738	1,230	1,588	
7	7	7	-	21	2.1	2.1	2.1	-	12,600	3.7	21,000	6.2	24,150	7.1	738	1,230	1,588	
5	5	12	-	22	1.5	1.5	3.5	-	13,200	3.9	22,000	6.4	25,300	7.4	828	1,380	1,696	
7	7	9	-	23	2.1	2.1	2.6	-	13,800	4.0	23,000	6.7	26,450	7.8	912	1,520	1,814	
5	9	9	-	23	1.5	2.6	2.6	-	13,800	4.0	23,000	6.7	26,450	7.8	912	1,520	1,814	
5	7	12	-	24	1.5	2.1	3.5	-	14,400	4.2	24,000	7.0	27,600	8.1	990	1,650	1,971	
5	5	15	-	25	1.6	1.6	4.7	-	16,200	4.7	27,000	7.9	31,050	9.2	1,035	1,725	2,061	
7	9	9	-	25	2.1	2.6	2.6	-	15,000	4.4	25,000	7.3	28,750	8.4	1,080	1,800	2,167	
5	9	12	-	26	1.5	2.6	3.5	-	15,600	4.6	26,000	7.6	29,900	8.8	1,176	1,960	2,529	
7	7	12	-	26	2.1	2.1	3.5	-	15,600	4.6	26,000	7.6	29,900	8.8	1,176	1,960	2,529	
5	7	15	-	27	1.5	2.1	4.4	-	16,200	4.8	27,000	7.9	31,050	9.2	1,212	2,020	2,606	
9	9	9	-	27	2.6	2.6	2.6	-	16,200	4.7	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	9	12	-	28	2.1	2.6	3.5	-	16,800	4.9	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	5	18	-	28	1.5	1.5	5.3	-	16,800	4.9	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	9	15	-	29	1.4	2.5	4.1	-	16,800	4.9	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	12	12	-	29	1.5	3.5	3.5	-	17,400	5.1	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	7	15	-	29	1.9	1.9	4.1	-	17,400	5.1	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	7	18	-	30	1.5	2.1	5.3	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	9	12	-	30	2.6	2.6	3.5	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	9	15	-	31	1.8	2.3	3.8	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	12	12	-	31	2.0	3.4	3.4	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	12	15	-	32	1.2	3.0	3.7	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	9	18	-	32	1.4	2.5	4.9	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	7	18	-	32	1.9	1.9	4.9	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	9	15	-	33	2.2	2.2	3.6	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	12	12	-	33	2.4	3.2	3.2	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	9	18	-	34	1.8	2.3	4.7	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	12	15	-	34	1.6	2.8	3.5	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	5	24	-	34	1.3	1.3	6.2	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	12	18	-	35	1.3	3.0	4.5	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	15	15	-	35	1.1	3.4	3.4	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	7	24	-	36	1.2	1.7	5.9	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	12	15	-	36	2.0	2.6	3.3	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
12	12	12	-	36	2.9	2.9	2.9	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	9	18	-	36	2.2	2.2	4.4	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	12	18	-	37	1.7	2.9	4.3	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	15	15	-	37	1.5	3.2	3.2	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	9	24	-	38	1.2	2.1	5.6	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
5	15	18	-	38	1.0	3.1	3.7	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	7	24	-	38	1.6	1.6	5.6	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	12	18	-	39	2.0	2.7	4.1	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
9	15	15	-	39	1.8	3.0	3.0	-	18,000	5.3	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
12	12	15	-	39	2.4	2.4	3.0	-	18,000	5.3	27,000	7.9	3					

COMBINATION TABLE

MU4M27 U43

Operation	Combination (kBtu / h)					Heating												
						Each Capacity (kW)				Total Capacity				Total Input (W)				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min		Rated		Max		
					Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max	Min	Rated	Max		
1Unit	5	-	-	-	5	1.5	-	-	-	5,000	1.5	5,500	1.6	6,050	1.8	498	830	1,256
	7	-	-	-	7	2.1	-	-	-	7,560	2.2	8,000	2.3	8,800	2.6	510	850	1,256
	9	-	-	-	9	2.6	-	-	-	7,560	2.2	10,000	2.9	11,000	3.2	534	890	1,428
	12	-	-	-	12	3.5	-	-	-	7,920	2.3	13,200	3.9	14,520	4.3	582	970	1,628
	15	-	-	-	15	4.2	-	-	-	11,040	3.2	18,400	5.4	20,240	5.9	867	1,445	2,425
	18	-	-	-	18	5.3	-	-	-	11,880	3.5	19,800	5.8	21,780	6.4	1,152	1,920	2,094
	24	-	-	-	24	7.0	-	-	-	15,240	4.5	25,400	7.4	26,600	7.8	1,416	2,360	3,331
	5	5	-	-	10	1.5	1.5	-	-	7,200	2.1	12,000	3.5	13,800	4.0	720	1,200	1,228
	5	7	-	-	12	1.5	2.1	-	-	8,640	2.5	14,400	4.2	16,560	4.9	732	1,220	2,234
	5	9	-	-	14	1.5	2.6	-	-	10,080	3.0	16,800	4.9	19,320	5.7	762	1,270	2,104
7	7	-	-	14	2.1	2.1	-	-	10,080	3.0	16,800	4.9	19,320	5.7	762	1,270	2,434	
7	9	-	-	16	2.1	2.6	-	-	11,520	3.4	19,200	5.6	22,080	6.5	834	1,390	2,104	
5	12	-	-	17	1.5	3.5	-	-	12,240	3.6	20,400	6.0	22,440	6.6	858	1,430	2,656	
9	9	-	-	18	2.6	2.6	-	-	12,960	3.8	21,600	6.3	24,840	7.3	1,104	1,840	2,846	
7	12	-	-	19	2.1	3.5	-	-	13,680	4.0	22,800	6.7	25,080	7.4	1,206	2,010	2,951	
5	15	-	-	20	1.8	5.3	-	-	14,400	4.2	24,000	7.0	26,400	7.8	1,281	2,135	3,135	
9	12	-	-	21	2.6	3.5	-	-	15,120	4.4	25,200	7.4	27,720	8.1	1,356	2,260	3,132	
7	15	-	-	22	2.4	5.1	-	-	15,180	4.4	25,300	7.4	27,830	8.1	1,440	2,400	3,326	
5	18	-	-	23	1.5	5.3	-	-	16,560	4.9	27,600	8.1	31,740	9.3	1,524	2,540	3,160	
9	15	-	-	24	3.2	5.3	-	-	17,280	5.1	28,800	8.4	33,120	9.7	1,608	2,680	3,334	
12	12	-	-	24	3.4	3.4	-	-	17,280	5.1	28,800	8.4	33,120	9.7	1,608	2,680	3,312	
7	18	-	-	25	2.0	5.1	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,656	2,760	3,474	
9	18	-	-	27	2.3	4.7	-	-	19,440	5.7	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
12	15	-	-	27	4.0	5.0	-	-	19,440	5.7	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
5	24	-	-	29	1.2	5.8	-	-	20,010	5.9	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
12	18	-	-	30	2.8	4.2	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
15	15	-	-	30	4.5	4.5	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
7	24	-	-	31	1.6	5.4	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
9	24	-	-	33	1.9	5.1	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
15	18	-	-	33	4.1	5.0	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
18	18	-	-	36	3.5	3.5	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
12	24	-	-	36	2.3	4.7	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
15	24	-	-	39	3.5	5.6	-	-	20,700	6.1	31,000	9.1	34,100	10.0	1,728	2,880	3,522	
5	5	5	-	15	1.5	1.5	1.5	-	10,800	3.2	18,000	5.3	20,160	5.9	870	1,450	1,551	
5	5	7	-	17	1.5	1.5	2.1	-	12,240	3.6	20,400	6.0	22,848	6.7	936	1,568	1,894	
5	5	9	-	19	1.5	1.5	2.6	-	13,680	4.0	22,800	6.7	25,536	7.5	966	1,610	2,303	
5	7	7	-	19	1.5	2.1	2.1	-	13,680	4.0	22,800	6.7	25,536	7.5	966	1,610	2,303	
5	7	9	-	21	1.5	2.1	2.6	-	15,120	4.4	25,200	7.4	28,224	8.3	1,026	1,710	2,789	
7	7	7	-	21	2.1	2.1	2.1	-	15,120	4.4	25,200	7.4	28,224	8.3	1,026	1,710	2,789	
5	5	12	-	22	1.5	1.5	3.5	-	15,840	4.6	26,400	7.7	29,568	8.7	1,050	1,750	2,960	
7	7	9	-	23	2.1	2.1	2.6	-	16,560	4.9	27,600	8.1	30,912	9.1	1,122	1,870	3,179	
5	9	9	-	23	1.5	2.6	2.6	-	16,560	4.9	27,600	8.1	30,912	9.1	1,122	1,870	3,179	
5	7	12	-	24	1.5	2.1	3.5	-	17,280	5.1	28,800	8.4	32,256	9.5	1,188	1,980	3,541	
5	5	15	-	25	1.8	1.8	5.3	-	18,000	5.3	30,000	8.8	33,600	9.9	1,224	2,040	3,648	
7	9	9	-	25	2.1	2.6	2.6	-	18,000	5.3	30,000	8.8	33,600	9.8	1,260	2,100	3,626	
5	9	12	-	26	1.5	2.6	3.5	-	18,720	5.5	30,000	8.8	33,600	9.8	1,326	2,210	3,626	
7	7	12	-	26	2.1	2.1	3.5	-	18,720	5.5	30,000	8.8	33,600	9.8	1,326	2,210	3,626	
5	7	15	-	27	1.7	2.4	5.0	-	19,344	5.7	31,000	9.1	34,720	10.1	1,377	2,295	3,765	
9	9	9	-	27	2.6	2.6	2.6	-	19,440	5.7	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	9	12	-	28	2.1	2.6	3.5	-	20,160	5.9	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	5	18	-	28	1.5	1.5	5.3	-	20,160	5.9	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	9	15	-	29	1.6	2.8	4.7	-	20,160	5.9	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	12	12	-	29	1.5	3.5	3.5	-	20,880	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	7	15	-	29	2.2	2.2	4.7	-	20,880	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	7	18	-	30	1.5	2.1	5.3	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	9	12	-	30	2.6	2.6	3.5	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	9	15	-	31	2.1	2.6	4.4	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	12	12	-	31	2.0	3.4	3.4	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	12	15	-	32	1.4	3.4	4.3	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	9	18	-	32	1.4	2.5	4.9	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	7	18	-	32	1.9	1.9	4.9	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	9	15	-	33	2.5	2.5	4.1	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	12	12	-	33	2.4	3.2	3.2	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	9	18	-	34	1.8	2.3	4.7	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	12	15	-	34	1.9	3.2	4.0	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	5	24	-	34	1.3	1.3	6.2	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	12	18	-	35	1.3	3.0	4.5	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	15	15	-	35	1.3	3.9	3.9	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	7	24	-	36	1.2	1.7	5.9	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	12	15	-	36	2.3	3.0	3.8	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
12	12	12	-	36	2.9	2.9	2.9	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	9	18	-	36	2.2	2.2	4.4	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	12	18	-	37	1.7	2.9	4.3	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	15	15	-	37	1.7	3.7	3.7	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	9	24	-	38	1.2	2.1	5.6	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
5	15	18	-	38	1.2	3.6	4.3	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
7	7	24	-	38	1.6	1.6	5.6	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	12	18	-	39	2.0	2.7	4.1	-	20,700	6.1	31,000	9.1	34,720	10.2	1,428	2,380	3,730	
9	15	15	-	39	2.1	3.5	3.5	-	20,700	6.1	31,000	9.1	34					

COMBINATION TABLE

MU5M30 U43

Operation	Combination (kBtu / h)					Cooling													
						Each Capacity (kW)					Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Min		Rated		Max		Min	Rated	Max				
1Unit	5	-	-	-	-	5	1.5	-	-	-	4,500	1.3	5,000	1.5	5,500	1.6	444	740	1,029
	7	-	-	-	-	7	2.1	-	-	-	6,300	1.9	7,000	2.1	7,700	2.3	444	740	1,029
	9	-	-	-	-	9	2.6	-	-	-	6,300	1.9	9,000	2.6	9,900	2.9	540	900	1,167
	12	-	-	-	-	12	3.5	-	-	-	7,200	2.1	12,000	3.5	13,200	3.9	660	1,100	1,294
	15	-	-	-	-	15	4.2	-	-	-	8,520	2.5	14,200	4.2	15,620	4.7	840	1,400	1,647
	18	-	-	-	-	18	5.3	-	-	-	10,800	3.2	18,000	5.3	19,800	5.8	1,020	1,700	2,225
	24	-	-	-	-	24	7.0	-	-	-	14,400	4.2	24,000	7.1	25,500	7.5	1,470	2,450	3,088
	5	5	-	-	-	10	1.5	1.5	-	-	6,000	1.8	10,000	2.9	11,500	3.4	396	660	794
	5	7	-	-	-	12	1.5	2.1	-	-	7,200	2.1	12,000	3.5	13,800	4.1	408	680	843
	5	9	-	-	-	14	1.5	2.6	-	-	8,400	2.5	14,000	4.1	16,100	4.7	492	820	980
7	7	-	-	-	14	2.1	2.1	-	-	8,400	2.5	14,000	4.1	16,100	4.7	492	820	980	
7	9	-	-	-	16	2.1	2.6	-	-	9,600	2.8	16,000	4.7	18,400	5.4	636	1,060	1,294	
5	12	-	-	-	17	1.5	3.5	-	-	10,200	3.0	17,000	5.0	18,700	5.5	720	1,200	1,451	
9	9	-	-	-	18	2.6	2.6	-	-	10,800	3.2	18,000	5.3	20,700	6.1	810	1,350	1,676	
7	12	-	-	-	19	2.1	3.5	-	-	11,400	3.4	19,000	5.6	20,900	6.1	924	1,540	1,843	
5	15	-	-	-	20	1.5	4.4	-	-	12,000	3.6	20,000	5.9	22,000	6.4	1,026	1,710	2,046	
9	12	-	-	-	21	2.6	3.5	-	-	12,600	3.7	21,000	6.2	23,100	6.8	1,128	1,880	2,441	
7	15	-	-	-	22	2.1	4.4	-	-	13,200	3.8	22,000	6.4	24,200	7.1	1,251	2,085	2,707	
5	18	-	-	-	23	1.5	5.3	-	-	13,800	4.1	23,000	6.8	26,450	7.8	1,374	2,290	2,854	
9	15	-	-	-	24	2.6	4.4	-	-	14,400	4.2	24,000	7.0	27,600	8.1	1,392	2,320	2,891	
12	12	-	-	-	24	3.5	3.5	-	-	14,400	4.2	24,000	7.1	26,400	7.8	1,410	2,350	3,147	
7	18	-	-	-	25	2.1	5.3	-	-	15,000	4.4	25,000	7.4	28,750	8.5	1,542	2,570	3,304	
9	18	-	-	-	27	2.6	5.3	-	-	16,200	4.8	27,000	7.9	31,050	9.1	1,770	2,950	3,586	
12	15	-	-	-	27	3.5	4.4	-	-	16,200	4.8	27,000	7.9	31,050	9.1	1,821	3,035	3,689	
5	24	-	-	-	29	1.5	7.0	-	-	17,400	5.1	29,000	8.5	31,900	9.4	1,872	3,120	3,667	
12	18	-	-	-	30	3.5	5.3	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
15	15	-	-	-	30	4.4	4.4	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
7	24	-	-	-	31	2.0	6.8	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
9	24	-	-	-	33	2.4	6.4	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
15	18	-	-	-	33	4.4	5.3	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
18	18	-	-	-	36	4.4	4.4	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
12	24	-	-	-	36	2.9	5.9	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
15	24	-	-	-	39	3.4	5.4	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
18	24	-	-	-	42	3.8	5.0	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
24	24	-	-	-	48	4.4	4.4	-	-	18,000	5.3	30,000	8.8	33,000	9.7	1,950	3,250	3,667	
5	5	5	-	-	15	1.5	1.5	1.5	-	9,000	2.6	15,000	4.4	17,250	5.1	396	660	898	
5	5	7	-	-	17	1.5	2.1	-	-	10,200	3.0	17,000	5.0	19,500	5.7	432	740	979	
5	5	9	-	-	19	1.5	2.6	-	-	11,400	3.4	19,000	5.6	21,850	6.4	570	950	1,294	
5	7	7	-	-	19	1.5	2.1	-	-	11,400	3.4	19,000	5.6	21,850	6.4	570	950	1,294	
5	7	9	-	-	21	1.5	2.6	-	-	12,600	3.7	21,000	6.2	24,150	7.1	738	1,230	1,588	
7	7	7	-	-	21	2.1	2.1	-	-	12,600	3.7	21,000	6.2	24,150	7.1	738	1,230	1,588	
5	5	12	-	-	22	1.5	1.5	3.5	-	13,200	3.9	22,000	6.5	25,300	7.4	828	1,380	1,696	
7	7	9	-	-	23	2.1	2.1	2.6	-	13,800	4.1	23,000	6.8	26,450	7.8	912	1,520	1,814	
5	9	9	-	-	23	1.5	2.6	2.6	-	13,800	4.1	23,000	6.8	26,450	7.8	912	1,520	1,814	
5	7	12	-	-	24	1.5	2.1	3.5	-	14,400	4.2	24,000	7.1	27,600	8.1	990	1,650	1,971	
5	5	15	-	-	25	1.5	1.5	4.4	-	15,000	4.3	25,000	7.3	28,750	8.4	1,035	1,725	2,061	
7	9	9	-	-	25	2.1	2.6	2.6	-	15,000	4.4	25,000	7.4	28,750	8.5	1,080	1,800	2,167	
5	9	12	-	-	26	1.5	2.6	3.5	-	15,600	4.6	26,000	7.6	29,900	8.8	1,176	1,960	2,529	
7	7	12	-	-	26	2.1	2.1	3.5	-	15,600	4.6	26,000	7.6	29,900	8.8	1,176	1,960	2,529	
5	7	15	-	-	27	1.5	2.1	4.4	-	16,200	4.8	27,000	7.9	31,050	9.2	1,212	2,020	2,606	
9	9	9	-	-	27	2.6	2.6	2.6	-	16,200	4.8	27,000	7.9	31,050	9.1	1,248	2,080	2,647	
7	9	12	-	-	28	2.1	2.6	3.5	-	16,800	4.9	28,000	8.2	32,200	9.5	1,338	2,230	2,794	
5	5	18	-	-	28	1.5	1.5	5.3	-	16,800	4.9	28,000	8.2	32,200	9.5	1,338	2,230	2,794	
5	9	15	-	-	29	1.5	2.6	4.4	-	17,400	5.1	29,000	8.5	32,480	9.5	1,452	2,420	2,922	
5	12	12	-	-	29	1.5	3.5	3.5	-	17,400	5.1	29,000	8.5	32,480	9.5	1,452	2,420	2,922	
7	7	15	-	-	29	2.1	2.1	4.4	-	17,400	5.1	29,000	8.5	32,480	9.5	1,452	2,420	2,922	
5	7	18	-	-	30	1.5	2.1	5.3	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
9	9	12	-	-	30	2.6	2.6	3.5	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	9	15	-	-	31	2.0	2.6	4.3	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	12	12	-	-	31	2.0	3.4	3.4	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
5	12	15	-	-	32	1.4	3.3	4.1	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
5	9	18	-	-	32	1.4	2.5	4.9	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	7	18	-	-	32	1.9	1.9	4.9	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
9	9	15	-	-	33	2.4	2.4	4.0	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
9	12	12	-	-	33	2.4	3.2	3.2	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	9	18	-	-	34	1.8	2.3	4.7	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	12	15	-	-	34	1.8	3.1	3.9	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
5	5	24	-	-	34	1.3	1.3	6.2	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
5	12	18	-	-	35	1.3	3.0	4.5	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
5	15	15	-	-	35	1.3	3.8	3.8	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
5	7	24	-	-	36	1.2	1.7	5.9	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
9	12	15	-	-	36	2.2	2.9	3.7	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
12	12	12	-	-	36	2.9	2.9	2.9	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
9	9	18	-	-	36	2.2	2.2	4.4	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	12	18	-	-	37	1.7	2.9	4.3	-	18,000	5.3	30,000	8.8	33,600	9.9	1,584	2,640	3,206	
7	15	15	-	-	37	1.7	3.6	3.6	-	18,000	5.3</								

COMBINATION TABLE

MU5M30 U43

Operation	Combination (kBtu / h)						Cooling										Total Input (W)			
							Each Capacity (kW)					Total Capacity								
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Min	Rated	Max	Min	Rated	Max			
	5	5	5	5	5	25	1.5	1.5	1.5	1.5	1.5	15,000	4.4	25,000	7.4	30,000	8.8	1,092	1,820	2,768
	5	5	5	5	7	27	1.5	1.5	1.5	1.5	2.1	16,200	4.8	27,000	7.9	32,400	9.5	1,182	1,970	3,100
	5	5	5	5	9	29	1.5	1.5	1.5	1.5	2.6	17,400	5.1	29,000	8.5	34,800	10.2	1,248	2,080	3,240
	5	5	5	7	7	29	1.5	1.5	1.5	2.1	2.1	17,400	5.1	29,000	8.5	34,800	10.2	1,248	2,080	3,240
	5	5	5	7	9	31	1.4	1.4	1.4	1.4	2.0	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	7	7	31	1.4	1.4	2.0	2.0	2.0	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	5	12	32	1.4	1.4	1.4	1.4	3.3	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	9	9	33	1.3	1.3	1.3	2.4	2.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	7	7	33	1.3	1.3	1.9	1.9	2.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	7	12	34	1.3	1.3	1.3	1.8	3.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	5	15	35	1.3	1.3	1.3	1.3	3.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	7	9	35	1.3	1.8	1.8	1.8	2.3	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	7	7	35	1.8	1.8	1.8	1.8	1.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	9	12	36	1.2	1.2	1.2	2.2	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	7	7	12	36	1.2	1.2	1.7	1.7	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	7	15	37	1.2	1.2	1.2	1.7	3.6	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	9	9	37	1.2	1.2	2.1	2.1	2.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	7	9	37	1.7	1.7	1.7	2.1	2.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	5	18	38	1.2	1.2	1.2	1.2	4.2	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	7	12	38	1.2	1.6	1.6	1.6	2.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	9	15	39	1.1	1.1	1.1	2.0	3.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	12	12	39	1.1	1.1	1.1	2.7	2.7	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	7	7	15	39	1.1	1.1	1.6	1.6	3.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	9	9	39	1.6	1.6	1.6	2.0	2.0	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	9	9	39	1.1	1.6	2.0	2.0	2.0	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	7	18	40	1.1	1.1	1.1	1.5	4.0	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	9	12	40	1.1	1.1	2.0	2.0	2.6	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	9	12	40	1.1	1.5	1.5	2.0	2.6	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	7	12	40	1.5	1.5	1.5	1.5	2.6	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	7	9	15	41	1.1	1.1	1.5	1.9	3.2	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	7	15	41	1.1	1.5	1.5	1.5	3.2	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	9	9	9	9	41	1.1	1.9	1.9	1.9	1.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	9	9	9	41	1.5	1.5	1.9	1.9	1.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	18	12	42	1.0	1.0	1.0	1.9	3.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	12	15	42	1.0	1.0	1.0	2.5	3.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	7	7	18	42	1.0	1.0	1.5	1.5	3.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	9	9	12	42	1.0	1.5	1.9	1.9	2.5	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	9	12	42	1.5	1.5	1.5	1.9	2.5	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	9	15	43	1.0	1.0	1.8	1.8	3.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	9	15	43	1.0	1.4	1.4	1.8	3.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	12	12	43	1.0	1.4	1.4	2.5	2.5	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	7	15	43	1.4	1.4	1.4	1.4	3.1	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	9	9	9	9	43	1.4	1.8	1.8	1.8	1.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	7	12	15	44	1.0	1.0	1.4	2.4	3.0	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	5	24	44	1.0	1.0	1.0	1.0	4.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	7	18	44	1.0	1.4	1.4	1.4	3.6	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	9	9	9	12	44	1.0	1.8	1.8	1.8	2.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	9	9	12	44	1.4	1.4	1.8	1.8	2.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	12	18	45	1.0	1.0	1.0	2.3	3.5	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	15	15	45	1.0	1.0	1.0	2.9	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	9	9	15	45	1.0	1.4	1.8	1.8	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	9	12	12	45	1.0	1.4	1.8	2.3	2.3	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	9	15	45	1.4	1.4	1.4	1.8	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	12	12	45	1.4	1.4	1.4	2.3	2.3	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	9	9	9	9	9	45	1.8	1.8	1.8	1.8	1.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	5	7	24	46	1.0	1.0	1.0	1.3	4.6	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	9	18	46	1.0	1.0	1.7	1.7	3.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	9	12	15	46	1.0	1.0	1.7	2.3	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	12	12	12	46	1.0	1.0	2.3	2.3	2.3	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	9	18	46	1.0	1.3	1.3	1.7	3.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	7	7	12	15	46	1.0	1.3	1.3	2.3	2.9	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	7	7	7	18	46	1.3	1.3	1.3	1.3	3.4	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	7	9	9	9	12	46	1.3	1.7	1.7	1.7	2.3	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	5	7	15	15	47	0.9	0.9	1.3	2.8	2.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	9	9	9	15	47	0.9	1.7	1.7	1.7	2.8	18,000	5.3	30,000	8.8	36,000	10.6	1,280	2,200	3,380
	5	9	9	12	12	47	0.9	1.7	1.7</											

COMBINATION TABLE

MU5M30 U43

Operation	Combination (kBtu / h)						Heating													
							Each Capacity (kW)						Total Capacity						Total Input (W)	
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Min		Rated		Max		Min	Rated	Max					
							Btu / h	kW	Btu / h	kW	Btu / h	kW								
3Unit	7	18	18	-	-	43	1.6	4.2	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775				
	7	12	24	-	-	43	1.6	2.8	5.6	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	5	15	24	-	-	44	1.1	3.4	5.5	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	9	18	18	-	-	45	2.0	4.0	4.0	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	9	12	24	-	-	45	2.0	2.7	5.4	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	12	15	18	-	-	45	2.7	3.4	4.0	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	15	15	15	-	-	45	3.4	3.4	3.4	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	7	15	24	-	-	46	1.5	3.3	5.3	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	5	18	24	-	-	47	1.1	3.9	5.2	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	5	18	24	-	-	47	1.1	3.9	5.2	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	9	15	24	-	-	48	1.9	3.2	5.1	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	12	18	18	-	-	48	2.5	3.8	3.8	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	12	12	24	-	-	48	2.5	2.5	5.1	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	15	15	18	-	-	48	3.2	3.2	3.8	-	-	20,700	6.1	34,500	10.1	38,640	11.3	1,584	2,640	3,775
	5	5	5	5	-	20	1.8	1.8	1.8	1.8	1.8	14,400	4.2	24,000	7.0	28,800	8.4	1,032	1,720	2,382
5	5	5	7	-	22	1.8	1.8	1.8	2.5	-	15,840	4.6	26,400	7.7	31,680	9.3	1,104	1,840	2,824	
5	5	5	9	-	24	1.8	1.8	1.8	3.2	-	17,280	5.1	28,800	8.4	34,560	10.1	1,140	1,900	3,343	
5	5	7	7	-	24	1.8	1.8	2.5	2.5	-	17,280	5.1	28,800	8.4	34,560	10.1	1,140	1,900	3,343	
5	5	7	9	-	26	1.8	1.8	2.5	3.2	-	18,720	5.5	31,200	9.1	37,440	11.0	1,224	2,040	3,647	
5	7	7	7	-	26	1.8	2.5	2.5	2.5	-	18,720	5.5	31,200	9.1	37,440	11.0	1,236	2,060	3,647	
5	5	5	12	-	27	1.8	1.8	1.8	4.2	-	19,440	5.7	32,400	9.5	38,880	11.4	1,260	2,100	3,706	
5	5	9	9	-	28	1.8	1.8	3.2	3.2	-	20,160	5.9	33,600	9.8	40,320	11.8	1,356	2,260	3,706	
5	7	7	9	-	28	1.8	2.5	2.5	3.2	-	20,160	5.9	33,600	9.8	40,320	11.8	1,356	2,260	3,706	
7	7	7	7	-	28	2.5	2.5	2.5	2.5	-	20,160	5.9	33,600	9.8	40,320	11.8	1,356	2,260	3,745	
5	5	7	12	-	29	1.7	1.7	2.4	4.0	-	20,160	5.9	33,350	9.8	40,020	11.7	1,392	2,320	3,745	
5	5	5	15	-	30	1.7	1.7	1.7	5.1	-	20,700	6.1	34,500	10.1	41,400	12.1	1,437	2,395	3,775	
5	7	9	9	-	30	1.7	2.4	3.0	3.0	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	7	9	-	30	2.4	2.4	2.4	3.0	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	9	12	-	31	1.6	1.6	2.9	3.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	7	12	-	31	1.6	2.3	2.3	3.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	7	15	-	32	1.6	1.6	2.2	4.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	9	9	-	32	2.2	2.2	2.8	2.8	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	9	9	9	-	32	1.6	2.8	2.8	2.8	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	5	18	-	33	1.5	1.5	1.5	5.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	9	12	-	33	1.5	2.1	2.8	3.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	7	12	-	33	2.1	2.1	2.1	3.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	9	15	-	34	1.5	1.5	2.7	4.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	12	12	-	34	1.5	1.5	3.6	3.6	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	7	15	-	34	1.5	2.1	2.1	4.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	9	9	9	-	34	2.1	2.7	2.7	2.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	7	18	-	35	1.4	1.4	2.0	5.2	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	9	9	12	-	35	1.4	2.6	2.6	3.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	9	12	-	35	2.0	2.0	2.6	3.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	9	15	-	36	1.4	2.0	2.5	4.2	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	12	12	-	36	1.4	2.0	3.4	3.4	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	7	15	-	36	2.0	2.0	2.0	4.2	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
9	9	9	9	-	36	2.5	2.5	2.5	2.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	9	18	-	37	1.4	1.4	2.5	4.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	12	15	-	37	1.4	1.4	3.3	4.1	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	7	18	-	37	1.4	1.9	1.9	4.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	9	9	12	-	37	1.9	2.5	2.5	3.3	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	9	9	15	-	38	1.3	2.4	2.4	4.0	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	9	15	-	38	1.9	1.9	2.4	4.0	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	12	12	-	38	1.9	1.9	3.2	3.2	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	5	24	-	39	1.3	1.3	1.3	6.2	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	9	18	-	39	1.3	1.8	2.3	4.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	12	15	-	39	1.3	1.8	3.1	3.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
9	9	9	12	-	39	2.3	2.3	3.1	3.1	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	7	18	-	39	1.8	1.8	1.8	4.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	12	18	-	40	1.3	1.3	3.0	4.6	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	9	9	15	-	40	1.8	2.3	2.3	3.8	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	9	12	12	-	40	1.8	2.3	3.0	3.0	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	5	7	24	-	41	1.2	1.2	1.7	5.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	9	12	15	-	41	1.2	2.2	3.0	3.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	12	12	12	-	41	1.2	3.0	3.0	3.0	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	9	18	-	41	1.7	1.7	2.2	4.4	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	7	12	15	-	41	1.7	1.7	3.0	3.7	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
5	7	15	15	-	42	1.2	1.7	3.6	3.6	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
9	9	9	15	-	42	2.2	2.2	2.2	3.6	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
9	9	12	12	-	42	2.2	2.2	2.9	2.9	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	
7	9	12	15	-	43	1.6	2.1	2.8	3.5	-	20,700	6.1	34,500	10.1	41,400	12.1	1,482	2,470	3,775	

COMBINATION TABLE

MU5M40 UO2

Operation	Combination (kBtu / h)					Cooling												
						Each Capacity (kW)					Total Capacity			Total Input (W)				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max			
1Unit	5	1.5	-	-	-	3,000	0.9	5,000	1.5	6,000	1.8	780	1,120	1,703				
	7	2.1	-	-	-	4,200	1.2	7,000	2.1	8,400	2.5	780	1,120	1,703				
	9	2.6	-	-	-	5,400	1.6	9,000	2.6	10,800	3.2	780	1,120	1,703				
	12	3.5	-	-	-	7,200	2.1	12,000	3.5	14,400	4.2	780	1,120	1,703				
	15	4.2	-	-	-	8,520	2.5	14,200	4.2	17,040	5.0	829	1,190	1,809				
	18	5.3	-	-	-	10,800	3.2	18,000	5.3	21,600	6.3	800	1,260	1,915				
	24	7.0	-	-	-	14,400	4.2	24,000	7.0	28,800	8.4	1,042	1,680	2,554				
	5	1.5	1.5	-	-	6,000	1.8	10,000	2.9	12,000	3.5	780	1,120	1,703				
	5	1.5	2.1	-	-	7,200	2.1	12,000	3.5	14,400	4.2	780	1,120	1,703				
	5	1.5	2.6	-	-	8,400	2.5	14,000	4.1	16,800	4.9	780	1,120	1,703				
	7	2.1	2.1	-	-	14	2.1	21	2.1	14	2.1	21	2.1	14	2.1	21	2.1	
	7	2.1	2.6	-	-	16	2.1	2.6	-	9,600	2.8	16,000	4.7	19,200	5.6	780	1,120	1,703
	5	1.2	3.5	-	-	17	1.5	3.5	-	10,200	3.0	17,000	5.0	20,400	6.0	780	1,120	1,809
	9	2.6	2.6	-	-	18	2.6	2.6	-	10,800	3.2	18,000	5.3	21,600	6.3	800	1,260	1,915
	7	1.2	3.5	-	-	19	2.1	3.5	-	11,400	3.3	19,000	5.6	22,800	6.7	825	1,350	2,022
	5	1.5	4.4	-	-	20	1.5	4.4	-	12,600	3.5	20,000	5.9	24,000	7.0	868	1,400	2,128
	9	1.2	3.5	-	-	21	2.6	3.5	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235
	7	1.5	4.4	-	-	22	2.1	4.4	-	13,200	3.8	22,000	6.4	26,400	7.7	954	1,540	2,341
	5	1.8	5.3	-	-	23	1.5	5.3	-	13,800	4.0	23,000	6.7	27,600	8.1	998	1,610	2,447
	9	1.5	4.4	-	-	24	2.6	4.4	-	14,400	4.2	24,000	7.0	28,800	8.5	1,020	1,645	2,500
	12	1.5	3.5	-	-	24	3.5	3.5	-	14,400	4.2	24,000	7.0	28,800	8.4	1,042	1,680	2,554
	9	1.8	5.3	-	-	25	2.1	5.3	-	15,000	4.4	25,000	7.3	30,000	8.8	1,085	1,750	2,660
	5	1.8	4.4	-	-	27	2.6	5.3	-	16,200	4.7	27,000	7.9	32,400	9.5	1,172	1,890	2,873
	12	1.5	4.4	-	-	27	3.5	4.4	-	16,200	4.7	27,000	7.9	32,400	9.5	1,215	1,960	2,979
5	2.4	7.0	-	-	29	1.5	7.0	-	17,400	5.1	29,000	8.5	34,800	10.2	1,259	2,030	3,086	
12	1.8	5.3	-	-	30	3.5	5.3	-	18,000	5.3	30,000	8.8	36,000	10.6	1,302	2,100	3,192	
15	1.5	4.4	-	-	30	4.4	4.4	-	18,000	5.3	30,000	8.8	36,000	10.6	1,324	2,135	3,245	
7	2.4	7.0	-	-	31	2.1	7.0	-	18,600	5.5	31,000	9.1	37,200	10.9	1,345	2,170	3,299	
9	2.4	7.0	-	-	33	2.6	7.0	-	19,800	5.8	33,000	9.7	39,600	11.6	1,432	2,310	3,512	
15	1.8	5.3	-	-	33	4.4	5.3	-	19,800	5.8	33,000	9.7	39,600	11.6	1,497	2,415	3,672	
18	1.8	5.3	5.3	-	36	5.3	5.3	-	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831	
12	2.4	-	-	-	36	3.5	7.0	-	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831	
15	2.4	-	-	-	39	3.7	6.0	-	19,800	5.7	33,000	9.7	39,600	11.6	1,627	2,625	3,991	
18	2.4	-	-	-	42	5.0	6.7	-	24,000	7.0	40,000	11.7	46,000	13.5	1,693	2,730	4,150	
24	2.4	-	-	-	48	5.9	5.9	-	24,000	7.0	40,000	11.7	46,000	13.5	1,693	2,730	4,150	
2Unit	5	5	5	-	-	9,000	2.6	15,000	4.4	18,000	5.3	780	1,120	1,703				
	5	5	7	-	-	10,200	3.0	17,000	5.0	20,400	6.0	780	1,120	1,809				
	5	5	9	-	-	11,400	3.3	19,000	5.6	22,800	6.7	825	1,350	2,022				
	5	7	9	-	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235				
	7	7	7	-	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235				
	5	5	12	-	-	13,800	4.0	23,000	6.7	27,600	8.1	952	1,540	2,341				
	5	7	9	-	-	13,800	4.0	23,000	6.7	27,600	8.1	998	1,610	2,447				
	5	9	9	-	-	14,400	4.2	24,000	7.0	28,800	8.4	1,042	1,680	2,554				
	5	5	15	-	-	15,000	4.4	25,000	7.3	30,000	8.8	1,085	1,750	2,660				
	7	9	9	-	-	15,000	4.4	25,000	7.3	30,000	8.8	1,085	1,750	2,660				
	5	9	12	-	-	15,600	4.6	26,000	7.6	31,200	9.1	1,128	1,820	2,767				
	7	7	12	-	-	15,600	4.6	26,000	7.6	31,200	9.1	1,128	1,820	2,767				
	5	15	15	-	-	19,800	5.7	33,000	9.7	39,600	11.6	1,497	2,415	3,672				
	9	9	9	-	-	19,800	5.7	33,000	9.7	39,600	11.6	1,497	2,415	3,672				
	7	9	12	-	-	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831				
	5	5	18	-	-	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831				
	18	2.4	-	-	-	24,000	7.0	40,000	11.7	46,000	13.5	1,693	2,730	4,150				
	24	2.4	-	-	-	24,000	7.0	40,000	11.7	46,000	13.5	1,693	2,730	4,150				
	3Unit	5	5	5	-	-	9,000	2.6	15,000	4.4	18,000	5.3	780	1,120	1,703			
		5	5	7	-	-	10,200	3.0	17,000	5.0	20,400	6.0	780	1,120	1,809			
		5	5	9	-	-	11,400	3.3	19,000	5.6	22,800	6.7	825	1,350	2,022			
		5	7	9	-	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235			
		7	7	7	-	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235			
		5	5	12	-	-	13,800	4.0	23,000	6.7	27,600	8.1	952	1,540	2,341			
5		7	9	-	-	13,800	4.0	23,000	6.7	27,600	8.1	998	1,610	2,447				
5		9	9	-	-	14,400	4.2	24,000	7.0	28,800	8.4	1,042	1,680	2,554				
5		5	15	-	-	15,000	4.4	25,000	7.3	30,000	8.8	1,085	1,750	2,660				
7		9	9	-	-	15,000	4.4	25,000	7.3	30,000	8.8	1,085	1,750	2,660				
5		9	12	-	-	15,600	4.6	26,000	7.6	31,200	9.1	1,128	1,820	2,767				
7		7	12	-	-	15,600	4.6	26,000	7.6	31,200	9.1	1,128	1,820	2,767				
5		15	15	-	-	19,800	5.7	33,000	9.7	39,600	11.6	1,497	2,415	3,672				
9		9	9	-	-	19,800	5.7	33,000	9.7	39,600	11.6	1,497	2,415	3,672				
7		9	12	-	-	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831				
5		5	18	-	-	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831				
18		2.4	-	-	-	24,000	7.0	40,000	11.7	46,000	13.5	1,693	2,730	4,150				
24		2.4	-	-	-	24,000	7.0	40,000	11.7	46,000	13.5	1,693	2,730	4,150				
4Unit		5	5	5	-	-	9,000	2.6	15,000	4.4	18,000	5.3	780	1,120	1,703			
		5	5	7	-	-	10,200	3.0	17,000	5.0	20,400	6.0	780	1,120	1,809			
		5	5	9	-	-	11,400	3.3	19,000	5.6	22,800	6.7	825	1,350	2,022			
		5	7	9	-	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235			
		7	7	7	-	-	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235			
		5	5	12	-	-	13,800	4.0	23,000	6.7	27,600	8.1	952	1,540	2,341			
	5	7	9	-	-	13,800	4.0	23,000	6.7	27,600	8.1	998	1,61					

COMBINATION TABLE

MU5M40 UO2

Operation	Combination (kBtu / h)						Cooling														
							Each Capacity (kW)						Total Capacity						Total Input (W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Min	Rated	Max	Min	Rated	Max			
	5	5	5	5	5	5	5	5	5	5	5	5	Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max
5	5	5	5	5	5	34	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,476	2,380	3,618
5	5	5	5	5	5	35	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,519	2,450	3,724
5	5	5	5	5	5	36	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,562	2,520	3,831
5	5	5	5	5	5	37	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,605	2,590	3,937
5	5	5	5	5	5	38	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,648	2,660	4,044
5	5	5	5	5	5	39	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,691	2,730	4,151
5	5	5	5	5	5	40	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,734	2,800	4,258
5	5	5	5	5	5	41	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,777	2,870	4,365
5	5	5	5	5	5	42	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,820	2,940	4,472
5	5	5	5	5	5	43	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,863	3,010	4,579
5	5	5	5	5	5	44	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,906	3,080	4,686
5	5	5	5	5	5	45	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,949	3,150	4,793
5	5	5	5	5	5	46	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	1,992	3,220	4,900
5	5	5	5	5	5	47	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,035	3,290	5,007
5	5	5	5	5	5	48	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,078	3,360	5,114
5	5	5	5	5	5	49	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,121	3,430	5,221
5	5	5	5	5	5	50	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,164	3,500	5,328
5	5	5	5	5	5	51	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,207	3,570	5,435
5	5	5	5	5	5	52	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,250	3,640	5,542
5	5	5	5	5	5	53	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,293	3,710	5,649
5	5	5	5	5	5	54	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,336	3,780	5,756
5	5	5	5	5	5	55	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,379	3,850	5,863
5	5	5	5	5	5	56	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,422	3,920	5,970
5	5	5	5	5	5	57	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,465	3,990	6,077
5	5	5	5	5	5	58	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,508	4,060	6,184
5	5	5	5	5	5	59	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,551	4,130	6,291
5	5	5	5	5	5	60	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,594	4,200	6,398
5	5	5	5	5	5	61	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,637	4,270	6,505
5	5	5	5	5	5	62	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,680	4,340	6,612
5	5	5	5	5	5	63	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,723	4,410	6,719
5	5	5	5	5	5	64	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,766	4,480	6,826
5	5	5	5	5	5	65	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,809	4,550	6,933
5	5	5	5	5	5	66	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,852	4,620	7,040
5	5	5	5	5	5	67	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,895	4,690	7,147
5	5	5	5	5	5	68	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,938	4,760	7,254
5	5	5	5	5	5	69	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	2,981	4,830	7,361
5	5	5	5	5	5	70	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,024	4,900	7,468
5	5	5	5	5	5	71	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,067	4,970	7,575
5	5	5	5	5	5	72	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,110	5,040	7,682
5	5	5	5	5	5	73	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,153	5,110	7,789
5	5	5	5	5	5	74	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,196	5,180	7,896
5	5	5	5	5	5	75	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,239	5,250	8,003
5	5	5	5	5	5	76	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,282	5,320	8,110
5	5	5	5	5	5	77	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,325	5,390	8,217
5	5	5	5	5	5	78	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,368	5,460	8,324
5	5	5	5	5	5	79	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,411	5,530	8,431
5	5	5	5	5	5	80	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,454	5,600	8,538
5	5	5	5	5	5	81	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,497	5,670	8,645
5	5	5	5	5	5	82	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,540	5,740	8,752
5	5	5	5	5	5	83	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,583	5,810	8,859
5	5	5	5	5	5	84	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,626	5,880	8,966
5	5	5	5	5	5	85	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,669	5,950	9,073
5	5	5	5	5	5	86	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,712	6,020	9,180
5	5	5	5	5	5	87	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,755	6,090	9,287
5	5	5	5	5	5	88	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,798	6,160	9,394
5	5	5	5	5	5	89	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,841	6,230	9,501
5	5	5	5	5	5	90	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,884	6,300	9,608
5	5	5	5	5	5	91	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,927	6,370	9,715
5	5	5	5	5	5	92	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	3,970	6,440	9,822
5	5	5	5	5	5	93	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	4,013	6,510	9,929
5	5	5	5	5	5	94	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	4,056	6,580	10,036
5	5	5	5	5	5	95	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	4,099	6,650	10,143
5	5	5	5	5	5	96	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000	12.3	4,142	6,720	10,250
5	5	5	5	5	5	97	1.5	1.5	1.5	1.5	1.5	4.4	21,000	6.2	35,000	10.3	42,000				

COMBINATION TABLE

MU5M40 UO2

Operation	Combination (kBtu / h)					Heating															
						Each Capacity (kW)					Total Capacity				Total Input (W)						
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max							
4Unit	5	5	5	5	-	20	1.7	1.7	1.7	1.7	2.4	-	13,860	4.1	23,100	6.8	27,720	8.1	868	1,400	2,282
	5	5	5	7	-	22	1.7	1.7	1.7	2.4	-	15,180	4.4	25,300	7.4	30,360	8.9	955	1,540	2,510	
	5	5	5	9	-	24	1.6	1.6	1.6	2.9	-	15,840	4.6	26,400	7.7	31,680	9.3	1,042	1,680	2,738	
	5	5	7	7	-	24	1.6	1.6	2.3	2.3	-	15,840	4.6	26,400	7.7	31,680	9.3	1,042	1,680	2,738	
	5	5	7	9	-	26	1.6	1.6	2.3	2.9	-	17,160	5.0	28,600	8.4	34,320	10.1	1,128	1,820	2,967	
	5	7	7	7	-	26	1.6	2.3	2.3	2.3	-	17,160	5.0	28,600	8.4	34,320	10.1	1,128	1,820	2,967	
	5	5	5	12	-	27	1.6	1.6	1.6	3.9	-	17,820	5.2	29,700	8.7	35,640	10.4	1,172	1,890	3,081	
	5	5	9	9	-	28	1.6	1.6	2.9	2.9	-	18,480	5.4	30,800	9.0	36,960	10.8	1,215	1,960	3,195	
	5	7	7	9	-	28	1.6	2.3	2.3	2.9	-	18,480	5.4	30,800	9.0	36,960	10.8	1,215	1,960	3,195	
	5	7	7	7	-	28	2.3	2.3	2.3	2.3	-	18,480	5.4	30,800	9.0	36,960	10.8	1,215	1,960	3,195	
	5	5	7	12	-	29	1.6	1.6	2.3	3.9	-	19,140	5.6	31,900	9.3	38,280	11.2	1,259	2,030	3,309	
	5	5	5	15	-	30	1.6	1.6	1.6	4.8	-	19,800	5.8	33,000	9.7	39,600	11.6	1,281	2,065	3,366	
	5	7	9	9	-	30	1.6	2.3	2.9	2.9	-	19,800	5.8	33,000	9.7	39,600	11.6	1,302	2,100	3,423	
	5	7	7	9	-	30	2.3	2.3	2.3	2.9	-	19,800	5.8	33,000	9.7	39,600	11.6	1,302	2,100	3,423	
	5	5	9	12	-	31	1.6	1.6	2.9	3.9	-	20,460	6.0	34,100	10.0	40,920	12.0	1,345	2,170	3,537	
	5	9	9	13	-	31	1.6	2.3	2.3	3.9	-	20,460	6.0	34,100	10.0	40,920	12.0	1,345	2,170	3,537	
	5	5	7	15	-	32	1.6	1.6	2.3	4.8	-	21,120	6.2	35,200	10.3	42,240	12.4	1,367	2,205	3,594	
	5	7	9	9	-	32	2.3	2.3	2.9	2.9	-	21,120	6.2	35,200	10.3	42,240	12.4	1,389	2,240	3,651	
	5	9	9	9	-	32	1.6	2.9	2.9	2.9	-	21,120	6.2	35,200	10.3	42,240	12.4	1,389	2,240	3,651	
	5	5	5	18	-	33	1.6	1.6	1.6	5.8	-	21,780	6.4	36,300	10.6	43,560	12.8	1,432	2,310	3,765	
	5	7	9	12	-	33	1.6	2.3	2.9	3.9	-	21,780	6.4	36,300	10.6	43,560	12.8	1,432	2,310	3,765	
	5	7	7	12	-	33	2.3	2.3	2.3	3.9	-	21,780	6.4	36,300	10.6	43,560	12.8	1,432	2,310	3,765	
	5	5	9	15	-	34	1.6	1.6	2.9	4.8	-	22,440	6.6	37,400	11.0	44,880	13.2	1,454	2,345	3,822	
	5	5	12	12	-	34	1.6	1.6	3.9	3.9	-	22,440	6.6	37,400	11.0	44,880	13.2	1,476	2,380	3,879	
	5	7	7	15	-	34	1.6	2.3	2.3	4.8	-	22,440	6.6	37,400	11.0	44,880	13.2	1,476	2,380	3,879	
	5	9	9	9	-	34	2.3	2.9	2.9	2.9	-	22,440	6.6	37,400	11.0	44,880	13.2	1,476	2,380	3,879	
	5	5	7	18	-	35	1.6	1.6	2.3	5.8	-	23,100	6.8	38,500	11.3	46,200	13.5	1,519	2,450	3,994	
	5	5	12	12	-	35	1.6	1.6	2.9	3.9	-	23,100	6.8	38,500	11.3	46,200	13.5	1,519	2,450	3,994	
	5	7	9	12	-	35	2.3	2.3	2.9	3.9	-	23,100	6.8	38,500	11.3	46,200	13.5	1,519	2,450	3,994	
	5	7	9	15	-	36	1.6	2.3	2.9	4.8	-	23,760	7.0	39,600	11.6	47,520	13.9	1,541	2,485	4,051	
	5	7	9	15	-	36	2.3	2.3	2.9	4.8	-	23,760	7.0	39,600	11.6	47,520	13.9	1,541	2,485	4,051	
	5	7	12	12	-	36	1.6	2.3	3.9	3.9	-	23,760	7.0	39,600	11.6	47,520	13.9	1,562	2,520	4,108	
	5	7	7	15	-	36	2.3	2.3	2.3	4.8	-	23,760	7.0	39,600	11.6	47,520	13.9	1,562	2,520	4,108	
	5	9	9	9	-	36	2.9	2.9	2.9	2.9	-	23,760	7.0	39,600	11.6	47,520	13.9	1,562	2,520	4,108	
	5	5	9	18	-	37	1.6	1.6	2.9	5.8	-	24,420	7.2	40,700	11.9	48,840	14.3	1,606	2,590	4,222	
	5	5	12	15	-	37	1.6	1.6	3.9	4.8	-	24,420	7.2	40,700	11.9	48,840	14.3	1,606	2,590	4,222	
	5	7	7	18	-	37	2.3	2.3	2.3	5.8	-	24,420	7.2	40,700	11.9	48,840	14.3	1,606	2,590	4,222	
	5	7	9	9	-	37	2.3	2.9	2.9	3.9	-	24,420	7.2	40,700	11.9	48,840	14.3	1,606	2,590	4,222	
	5	9	9	12	-	38	1.6	2.9	2.9	4.8	-	25,080	7.4	41,800	12.3	50,160	14.7	1,649	2,660	4,336	
	5	7	9	15	-	38	2.3	2.3	2.9	4.8	-	25,080	7.4	41,800	12.3	50,160	14.7	1,649	2,660	4,336	
	5	7	12	12	-	38	2.3	2.3	3.9	3.9	-	25,080	7.4	41,800	12.3	50,160	14.7	1,649	2,660	4,336	
	5	5	5	24	-	39	1.6	1.6	1.6	7.7	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
	5	7	9	18	-	39	1.6	2.2	2.9	5.8	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
	5	7	12	15	-	39	1.6	2.2	3.9	4.8	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
	5	9	9	12	-	39	2.9	2.9	2.9	3.9	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
	5	7	7	18	-	39	2.2	2.2	2.2	5.8	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
	5	5	12	18	-	40	1.6	1.6	3.8	5.6	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
	5	7	9	15	-	40	2.2	2.8	2.8	4.7	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450	
5	9	12	12	-	40	2.2	2.8	3.8	3.8	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	5	7	24	-	41	1.5	1.5	2.1	7.3	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	5	12	15	-	41	1.5	1.5	3.7	4.6	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	9	18	-	41	2.1	2.1	2.7	5.5	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	12	15	-	41	2.1	2.1	3.7	4.6	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	15	15	-	41	1.5	2.1	4.5	4.5	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	15	15	-	42	2.7	2.7	4.2	4.2	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	12	12	-	42	2.7	2.7	3.6	3.6	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	9	12	-	43	2.0	2.6	3.5	4.4	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	12	12	-	43	2.0	3.5	3.5	3.5	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	9	18	-	43	2.0	2.6	2.6	5.2	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	15	15	-	44	1.6	2.6	4.3	4.3	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	12	18	-	44	2.0	2.0	3.4	5.1	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	15	15	-	44	2.0	2.0	4.3	4.3	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	18	15	-	45	1.4	1.9	5.0	4.2	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	12	15	-	45	2.5	2.5	3.3	4.2	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	12	12	12	-	45	2.5	3.3	3.3	3.3	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	9	15	-	45	2.5	3.3	3.3	3.3	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	7	7	24	-	45	1.9	1.9	1.9	6.7	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	12	18	-	46	1.9	2.4	3.3	4.9	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	9	15	15	-	46	1.9	2.4	4.1	4.1	-	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450		
5	12	12</																			

COMBINATION TABLE

FM40AH U02

Total Indoor Unit Capacity (kBtu/h)	Cooling Capacity						Input (W)			Heating Capacity						Input (W)		
	Min		Rated		Max		Min	Rated	Max	Min		Rated		Max		Min	Rated	Max
	Btu/h	kW	Btu/h	kW	Btu/h	kW				Btu/h	kW	Btu/h	kW	Btu/h	kW			
16	9,600	2.8	16,000	4.7	19,200	5.6	780	1,120	1,703	10,560	3.1	17,600	5.2	21,120	6.2	820	1,120	1,826
18	10,800	3.2	18,000	5.3	21,600	6.3	800	1,260	1,915	11,880	3.5	19,800	5.8	23,760	7.0	820	1,260	2,054
19	11,400	3.3	19,000	5.6	22,800	6.7	825	1,330	2,022	12,540	3.7	20,900	6.1	25,080	7.4	825	1,330	2,168
21	12,600	3.7	21,000	6.2	25,200	7.4	911	1,470	2,235	13,860	4.1	23,100	6.8	27,720	8.1	911	1,470	2,396
23	13,800	4.0	23,000	6.7	27,600	8.1	998	1,610	2,447	15,180	4.4	25,300	7.4	30,360	8.9	998	1,610	2,624
24	14,400	4.2	24,000	7.0	28,800	8.4	1,042	1,680	2,554	15,840	4.6	26,400	7.7	31,680	9.3	1,042	1,680	2,738
25	15,000	4.4	25,000	7.3	30,000	8.8	1,085	1,750	2,660	16,500	4.8	27,500	8.1	33,000	9.7	1,085	1,750	2,853
26	15,600	4.6	26,000	7.6	31,200	9.1	1,128	1,820	2,767	17,160	5.0	28,600	8.4	34,320	10.1	1,128	1,820	2,967
27	16,200	4.7	27,000	7.9	32,400	9.5	1,172	1,890	2,873	17,820	5.2	29,700	8.7	35,640	10.4	1,172	1,890	3,081
28	16,800	4.9	28,000	8.2	33,600	9.8	1,215	1,960	2,979	18,480	5.4	30,800	9.0	36,960	10.8	1,215	1,960	3,195
29	17,400	5.1	29,000	8.5	34,800	10.2	1,259	2,030	3,086	19,140	5.6	31,900	9.3	38,280	11.2	1,259	2,030	3,309
30	18,000	5.3	30,000	8.8	36,000	10.6	1,302	2,100	3,192	19,800	5.8	33,000	9.7	39,600	11.6	1,302	2,100	3,423
31	18,600	5.5	31,000	9.1	37,200	10.9	1,345	2,170	3,299	20,460	6.0	34,100	10.0	40,920	12.0	1,345	2,170	3,537
32	19,200	5.6	32,000	9.4	38,400	11.3	1,389	2,240	3,405	21,120	6.2	35,200	10.3	42,240	12.4	1,389	2,240	3,651
33	19,800	5.8	33,000	9.7	39,600	11.6	1,432	2,310	3,512	21,780	6.4	36,300	10.6	43,560	12.8	1,432	2,310	3,765
34	20,400	6.0	34,000	10.0	40,800	12.0	1,476	2,380	3,618	22,440	6.6	37,400	11.0	44,880	13.2	1,476	2,380	3,879
35	21,000	6.2	35,000	10.3	42,000	12.3	1,519	2,450	3,724	23,100	6.8	38,500	11.3	46,200	13.5	1,519	2,450	3,994
36	21,600	6.3	36,000	10.6	43,200	12.7	1,562	2,520	3,831	23,760	7.0	39,600	11.6	47,520	13.9	1,562	2,520	4,108
37	22,200	6.5	37,000	10.8	44,400	13.0	1,606	2,590	3,937	24,420	7.2	40,700	11.9	48,840	14.3	1,606	2,590	4,222
38	22,800	6.7	38,000	11.1	45,600	13.4	1,649	2,660	4,044	25,080	7.4	41,800	12.3	50,160	14.7	1,649	2,660	4,336
39	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
40	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
41	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
42	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
43	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
44	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
45	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
46	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
47	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
48	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
49	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
50	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
51	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
52	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
53	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450
54	22,920	6.7	38,200	11.2	46,000	13.5	1,693	2,730	4,150	25,620	7.5	42,700	12.5	51,200	15.0	1,742	2,810	4,450

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The rated capacities above show the rise in the total indoor unit capacity when operating frequency is constant.
 Values for changes in capacity are fixed after accounting for variations in operating frequency and should be used as reference values.
 4. Total capacity index of indoor unit should be within 16 - 52 kBtu / h (40% - 130%)
 5. At least two indoor units should be connected.

FM48AH U32

Total Indoor Unit Capacity (kBtu/h)	Cooling Capacity						Input (W)			Heating Capacity						Input (W)		
	Min		Rated		Max		Min	Rated	Max	Min		Rated		Max		Min	Rated	Max
	Btu/h	kW	Btu/h	kW	Btu/h	kW				Btu/h	kW	Btu/h	kW	Btu/h	kW			
19	11,400	3.3	18,535	5.4	20,900	6.1	840	1,222	1,665	12,768	3.7	23,088	6.8	27,365	8.0	1,300	1,728	2,470
20	12,000	3.5	19,510	5.7	22,000	6.4	880	1,282	1,746	13,440	3.9	24,303	7.1	28,482	8.3	1,348	1,863	2,663
21	12,600	3.7	20,486	6.0	23,100	6.8	920	1,341	1,827	14,112	4.1	25,518	7.5	29,600	8.7	1,395	1,997	2,855
22	13,200	3.9	21,461	6.3	24,200	7.1	960	1,401	1,908	14,784	4.3	26,733	7.8	30,869	9.0	1,443	2,132	3,048
23	13,800	4.0	22,437	6.6	25,300	7.4	1,000	1,460	1,989	15,456	4.5	27,948	8.2	32,138	9.4	1,490	2,267	3,240
24	14,400	4.2	23,412	6.9	25,705	7.5	1,085	1,520	2,071	16,023	4.7	28,973	8.5	33,407	9.8	1,579	2,402	3,433
25	15,000	4.4	24,388	7.1	26,776	7.8	1,128	1,579	2,152	16,590	4.9	29,998	8.8	34,676	10.2	1,626	2,473	3,535
26	15,600	4.6	25,363	7.4	27,847	8.2	1,170	1,639	2,233	17,157	5.0	31,024	9.1	35,945	10.5	1,672	2,544	3,637
27	16,200	4.7	26,339	7.7	28,918	8.5	1,213	1,698	2,314	17,724	5.2	32,049	9.4	37,214	10.9	1,719	2,616	3,739
28	16,800	4.9	27,314	8.0	29,989	8.8	1,256	1,758	2,395	18,290	5.4	33,074	9.7	38,483	11.3	1,766	2,687	3,842
29	17,400	5.1	28,290	8.3	31,060	9.1	1,298	1,817	2,476	18,857	5.5	34,099	10.0	39,752	11.7	1,813	2,759	3,944
30	18,000	5.3	29,265	8.6	32,131	9.4	1,355	1,897	2,584	19,424	5.7	35,124	10.3	41,021	12.0	1,860	2,830	4,046
31	18,600	5.5	30,241	8.9	33,202	9.7	1,412	1,976	2,693	19,991	5.9	36,149	10.6	42,290	12.4	1,907	2,902	4,148
32	19,200	5.6	31,216	9.1	34,273	10.0	1,468	2,056	2,801	20,558	6.0	37,174	10.9	43,560	12.8	1,954	2,973	4,250
33	19,800	5.8	32,192	9.4	35,344	10.4	1,525	2,135	2,909	21,125	6.2	38,199	11.2	44,848	13.1	1,973	3,001	4,290
34	20,400	6.0	33,167	9.7	36,415	10.7	1,582	2,215	3,018	21,692	6.4	39,224	11.5	45,736	13.4	1,991	3,029	4,330
35	21,000	6.2	34,143	10.0	37,486	11.0	1,639	2,294	3,126	22,259	6.5	40,249	11.8	46,824	13.7	2,009	3,057	4,370
36	21,600	6.3	35,118	10.3	38,557	11.3	1,696	2,374	3,235	22,825	6.7	41,274	12.1	47,912	14.0	2,028	3,085	4,409
37	22,200	6.5	36,094	10.6	39,628	11.6	1,752	2,453	3,343	23,392	6.9	42,299	12.4	49,000	14.4	2,046	3,112	4,449
38	22,800	6.7	37,069	10.9	40,699	11.9	1,809	2,533	3,451	23,959	7.0	43,324	12.7	50,286	14.7	2,064	3,140	4,489
39	23,400	6.9	38,045	11.2	41,770	12.2	1,866	2,613	3,560	24,526	7.2	44,349	13.0	51,572	15.1	2,082	3,168	4,529
40	24,000	7.0	39,020	11.4	42,841	12.6	1,923	2,692	3,668	25,093	7.4	45,374	13.3	52,858	15.5	2,101	3,196	4,569
41	24,600	7.2	39,996	11.7	43,912	12.9	1,980	2,772	3,776	25,660	7.5	46,399	13.6	54,144	15.9	2,119	3,224	4,609
42	25,200	7.4	40,971	12.0	44,983	13.2	2,037	2,851	3,885	2								

COMBINATION TABLE

FM56AH U32

Total Indoor Unit Capacity (kBtu / h)	Cooling Capacity						Input (W)			Heating Capacity						Input (W)		
	Min		Rated		Max		Input (W)			Min		Rated		Max		Input (W)		
	Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max	Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max
23	13,800	4.0	22,437	6.6	25,300	7.4	1,000	1,460	1,989	15,456	4.5	27,948	8.2	32,138	9.4	1,490	2,267	3,240
24	14,400	4.2	23,412	6.9	25,705	7.5	1,085	1,520	2,071	16,023	4.7	28,973	8.5	33,407	9.8	1,579	2,402	3,433
25	15,000	4.4	24,388	7.1	26,776	7.8	1,128	1,579	2,152	16,590	4.9	29,998	8.8	34,676	10.2	1,626	2,473	3,535
26	15,600	4.6	25,363	7.4	27,847	8.2	1,170	1,639	2,233	17,157	5.0	31,024	9.1	35,945	10.5	1,672	2,544	3,637
27	16,200	4.7	26,339	7.7	28,918	8.5	1,213	1,698	2,314	17,724	5.2	32,049	9.4	37,214	10.9	1,719	2,616	3,739
28	16,800	4.9	27,314	8.0	29,989	8.8	1,256	1,758	2,395	18,290	5.4	33,074	9.7	38,483	11.3	1,766	2,687	3,842
29	17,400	5.1	28,290	8.3	31,060	9.1	1,298	1,817	2,476	18,857	5.5	34,099	10.0	39,752	11.7	1,813	2,759	3,944
30	18,000	5.3	29,265	8.6	32,131	9.4	1,355	1,897	2,584	19,424	5.7	35,124	10.3	41,021	12.0	1,860	2,830	4,046
31	18,600	5.5	30,241	8.9	33,202	9.7	1,412	1,976	2,693	19,991	5.9	36,149	10.6	42,290	12.4	1,907	2,902	4,148
32	19,200	5.6	31,216	9.1	34,273	10.0	1,468	2,056	2,801	20,558	6.0	37,174	10.9	43,560	12.8	1,954	2,973	4,250
33	19,800	5.8	32,192	9.4	35,344	10.4	1,525	2,135	2,909	21,125	6.2	38,199	11.2	44,648	13.1	1,973	3,001	4,290
34	20,400	6.0	33,167	9.7	36,415	10.7	1,582	2,215	3,018	21,692	6.4	39,224	11.5	45,736	13.4	1,991	3,029	4,330
35	21,000	6.2	34,143	10.0	37,486	11.0	1,639	2,294	3,126	22,259	6.5	40,249	11.8	46,824	13.7	2,009	3,057	4,370
36	21,600	6.3	35,118	10.3	38,557	11.3	1,696	2,374	3,235	22,825	6.7	41,274	12.1	47,912	14.0	2,028	3,085	4,409
37	22,200	6.5	36,094	10.6	39,628	11.6	1,752	2,453	3,343	23,392	6.9	42,299	12.4	49,000	14.4	2,046	3,112	4,449
38	22,800	6.7	37,069	10.9	40,699	11.9	1,809	2,533	3,451	23,959	7.0	43,324	12.7	50,286	14.7	2,064	3,140	4,489
39	23,400	6.9	38,045	11.2	41,770	12.2	1,866	2,613	3,560	24,526	7.2	44,349	13.0	51,572	15.1	2,082	3,168	4,529
40	24,000	7.0	39,020	11.4	42,841	12.6	1,923	2,692	3,668	25,093	7.4	45,374	13.3	52,858	15.5	2,101	3,196	4,569
41	24,600	7.2	39,996	11.7	43,912	12.9	1,980	2,772	3,776	25,660	7.5	46,399	13.6	54,144	15.9	2,119	3,224	4,609
42	25,200	7.4	40,971	12.0	44,983	13.2	2,037	2,851	3,885	26,227	7.7	47,425	13.9	55,430	16.2	2,137	3,252	4,648
43	25,800	7.6	41,947	12.3	46,054	13.5	2,093	2,931	3,993	26,794	7.9	48,450	14.2	56,716	16.6	2,156	3,280	4,688
44	26,400	7.7	42,922	12.6	47,125	13.8	2,122	2,971	4,047	27,360	8.0	49,475	14.5	58,000	17.0	2,174	3,308	4,728
45	27,000	7.9	43,898	12.9	48,196	14.1	2,152	3,010	4,102	27,927	8.2	50,500	14.8	59,282	17.1	2,211	3,365	4,812
46	27,600	8.1	44,873	13.2	49,268	14.4	2,179	3,050	4,156	28,494	8.4	51,525	15.1	60,564	17.2	2,246	3,417	4,896
47	28,200	8.3	45,849	13.4	50,339	14.8	2,207	3,090	4,210	29,061	8.5	52,550	15.4	61,848	17.3	2,299	3,498	5,000
48	28,800	8.4	46,824	13.7	51,410	15.1	2,236	3,130	4,265	29,628	8.7	53,575	15.7	63,132	17.3	2,352	3,579	5,116
49	29,400	8.6	47,800	14.0	52,481	15.4	2,264	3,170	4,319	30,195	8.8	54,600	16.0	64,416	17.4	2,406	3,660	5,232
50	30,000	8.8	48,776	14.1	53,552	15.5	2,299	3,219	4,373	30,762	9.0	55,625	16.1	65,700	17.5	2,459	3,741	5,348
51	30,600	9.0	49,752	14.2	54,623	15.6	2,335	3,269	4,428	31,329	9.2	56,650	16.2	67,000	17.7	2,512	3,822	5,464
52	31,200	9.1	50,728	14.3	55,694	15.7	2,370	3,318	4,482	31,896	9.3	57,675	16.3	68,300	17.9	2,566	3,903	5,580
53	31,800	9.3	51,704	14.4	56,765	15.9	2,405	3,367	4,537	32,462	9.5	58,700	16.4	69,600	17.9	2,579	3,924	5,609
54	32,400	9.5	52,680	14.5	57,836	16.0	2,440	3,416	4,591	33,029	9.7	59,725	16.5	70,900	18.0	2,593	3,944	5,638
55	33,000	9.7	53,656	14.6	58,907	16.1	2,476	3,466	4,645	33,596	9.8	60,750	16.6	72,200	18.0	2,606	3,964	5,667
56	33,600	9.8	54,632	14.8	59,978	16.2	2,511	3,515	4,700	34,163	10.0	61,775	16.7	73,500	18.1	2,619	3,985	5,696
57	34,200	10.0	55,608	14.9	61,049	16.3	2,546	3,564	4,754	34,730	10.2	62,800	16.8	74,800	18.1	2,633	4,005	5,725
58	34,800	10.2	56,584	15.0	62,120	16.4	2,581	3,614	4,808	35,297	10.3	63,825	16.9	76,100	18.2	2,646	4,025	5,754
59	35,400	10.4	57,559	15.1	63,191	16.6	2,616	3,663	4,862	35,864	10.5	64,850	17.0	77,400	18.2	2,659	4,046	5,783
60	36,000	10.6	58,535	15.2	64,262	16.7	2,652	3,712	4,916	36,431	10.7	65,875	17.1	78,700	18.3	2,673	4,066	5,812
61	36,600	10.7	59,511	15.3	65,333	16.8	2,687	3,761	4,970	37,000	10.8	66,900	17.2	80,000	18.3	2,686	4,086	5,841
62	37,200	10.9	60,487	15.4	66,404	16.9	2,722	3,811	5,024	37,567	11.0	67,925	17.3	81,300	18.4	2,699	4,107	5,870
63	37,800	11.1	61,463	15.5	67,475	17.0	2,757	3,860	5,078	38,131	11.2	68,950	17.4	82,600	18.4	2,734	4,160	5,900
64	38,400	11.3	62,439	15.6	68,546	17.2	2,776	3,887	5,158	38,698	11.3	69,975	17.5	83,900	18.5	2,726	4,147	5,929
65	39,000	11.4	63,415	15.7	69,617	17.3	2,795	3,913	5,238	39,265	11.5	70,999	17.5	85,200	18.5	2,739	4,168	5,958
66	39,600	11.6	64,391	15.8	70,688	17.5	2,814	3,940	5,318	39,832	11.7	72,024	17.6	86,500	18.5	2,753	4,188	5,987
67	40,200	11.8	65,367	15.9	71,759	17.6	2,833	3,966	5,398	40,399	11.8	73,049	17.7	87,800	18.6	2,766	4,208	6,016
68	40,800	12.0	66,343	16.0	72,830	17.8	2,852	3,993	5,478	40,966	12.0	74,074	17.8	89,100	18.6	2,780	4,229	6,045
69	41,400	12.1	67,319	16.1	73,901	17.9	2,871	4,019	5,558	41,533	12.2	75,099	17.8	90,400	18.6	2,793	4,249	6,074
70	42,000	12.3	68,295	16.3	74,972	18.1	2,890	4,046	5,638	42,100	12.3	76,124	17.9	91,700	18.7	2,806	4,269	6,103
71	42,600	12.5	69,271	16.4	76,043	18.2	2,909	4,072	5,718	42,666	12.5	77,149	18.0	93,000	18.7	2,820	4,290	6,132
72	43,200	12.7	70,247	16.5	77,114	18.4	2,928	4,099	5,798	43,233	12.7	78,174	18.0	94,300	18.7	2,833	4,310	6,161
73	43,800	12.8	71,223	16.6	78,185	18.5	2,947	4,126	5,878	43,800	12.8	79,199	18.1	95,600	18.8	2,846	4,330	6,190

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The rated capacities above show the rise in the total indoor unit capacity when operating frequency is constant.
 Values for changes in capacity are fixed after accounting for variations in operating frequency and should be used as reference values.
 4. Total capacity index of indoor unit should be within 23 ~ 73 kBtu / h (40% ~ 130%)
 5. At least two indoor units should be connected.

FM41AH U32



Total Indoor Unit Capacity (kBtu / h)	Cooling Capacity						Input (W)			Heating Capacity						Input (W)		
	Min		Rated		Max		Input (W)			Min		Rated		Max		Input (W)		
	Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max	Btu / h	kW	Btu / h	kW	Btu / h	kW	Min	Rated	Max
16	9,600	2.8	16,955	5.0	18,513	5.4	800	844	1,279	10,752	3	21,633	6	25,188	7	890	1,066	1,162
18	10,500	3.1	17,759	5.2	19,707	5.8	833	899	1,347	11,760	3	22,407	7	25,913	8	931	1,116	1,258
19	11,400	3.3	18,563	5.4	20,900	6.1	866	953	1,415	12,768	4	23,182	7	26,637	8	972	1,166	1,354
20	12,000	3.5	19,367	5.7	21,741	6.4	898	1,008	1,483	13,440	4	23,956	7	27,362	8	1,013	1,216	1,450
21	12,600	3.7	20,171	5.9	22,582	6.6	931	1,063	1,550	14,112	4	24,731	7	28,087	8	1,055	1,265	1,547
22	13,200	3.9	20,975	6.1	23,423	6.9	964	1,117	1,618	14,784	4	25,505	7	28,811	8	1,096	1,315	1,643
23	13,800	4.0	21,779	6.4	24,264	7.1	997	1,172	1,686	15,456	5	26,279	8	29,536	9	1,137	1,365	1,739
24	14,400	4.2	22,583	6.6	25,105	7.4	1,029	1,227	1,754	16,023	5	27,054	8	30,261	9	1,178	1,415	1,835
25	15,000	4.4	23,387	6.9														

COMBINATION TABLE

FM49AH U32



Total Indoor Unit Capacity (kBtu / h)	Cooling Capacity						Input (W)			Heating Capacity						Input (W)		
	Min		Rated		Max		Min	Rated	Max	Min		Rated		Max		Min	Rated	Max
	Btu / h	kW	Btu / h	kW	Btu / h	kW				Btu / h	kW	Btu / h	kW	Btu / h	kW			
19	11,400	3.3	18,535	5.4	20,900	6.1	840	1,222	1,665	12,768	3.7	23,088	6.8	27,365	8.0	1,300	1,728	2,470
20	12,000	3.5	19,510	5.7	22,000	6.4	880	1,282	1,746	13,440	3.9	24,303	7.1	28,482	8.3	1,348	1,863	2,663
21	12,600	3.7	20,486	6.0	23,100	6.8	920	1,341	1,827	14,112	4.1	25,518	7.5	29,600	8.7	1,395	1,997	2,855
22	13,200	3.9	21,461	6.3	24,200	7.1	960	1,401	1,908	14,784	4.3	26,733	7.8	30,869	9.0	1,443	2,132	3,048
23	13,800	4.0	22,437	6.6	25,300	7.4	1,000	1,460	1,989	15,456	4.5	27,948	8.2	32,138	9.4	1,490	2,267	3,240
24	14,400	4.2	23,412	6.9	26,300	7.7	1,040	1,520	2,071	16,023	4.7	28,973	8.5	33,407	9.8	1,539	2,402	3,433
25	15,000	4.4	24,388	7.1	26,776	7.8	1,128	1,579	2,152	16,590	4.9	29,998	8.8	34,676	10.2	1,626	2,473	3,535
26	15,600	4.6	25,363	7.4	27,847	8.2	1,170	1,639	2,233	17,157	5.0	31,024	9.1	35,945	10.5	1,672	2,544	3,637
27	16,200	4.7	26,339	7.7	28,918	8.5	1,213	1,698	2,314	17,724	5.2	32,049	9.4	37,214	10.9	1,719	2,616	3,739
28	16,800	4.9	27,314	8.0	29,989	8.8	1,256	1,758	2,395	18,290	5.4	33,074	9.7	38,483	11.3	1,766	2,687	3,842
29	17,400	5.1	28,290	8.3	31,060	9.1	1,298	1,817	2,476	18,857	5.5	34,099	10.0	39,752	11.7	1,813	2,759	3,944
30	18,000	5.3	29,265	8.6	32,131	9.4	1,355	1,897	2,584	19,424	5.7	35,124	10.3	41,021	12.0	1,860	2,830	4,046
31	18,600	5.5	30,241	8.9	33,202	9.7	1,412	1,976	2,693	19,991	5.9	36,149	10.6	42,290	12.4	1,907	2,902	4,148
32	19,200	5.6	31,216	9.1	34,273	10.0	1,468	2,056	2,801	20,558	6.0	37,174	10.9	43,560	12.8	1,954	2,973	4,250
33	19,800	5.8	32,192	9.4	35,344	10.4	1,525	2,135	2,909	21,125	6.2	38,199	11.2	44,648	13.1	1,973	3,001	4,290
34	20,400	6.0	33,167	9.7	36,415	10.7	1,582	2,215	3,018	21,692	6.4	39,224	11.5	45,736	13.4	1,991	3,029	4,330
35	21,000	6.2	34,143	10.0	37,486	11.0	1,639	2,294	3,126	22,259	6.5	40,249	11.8	46,824	13.7	2,009	3,057	4,370
36	21,600	6.3	35,118	10.3	38,557	11.3	1,696	2,374	3,235	22,825	6.7	41,274	12.1	47,912	14.0	2,028	3,085	4,409
37	22,200	6.5	36,094	10.6	39,628	11.6	1,752	2,453	3,343	23,392	6.9	42,299	12.4	49,000	14.4	2,046	3,112	4,449
38	22,800	6.7	37,069	10.9	40,699	11.9	1,809	2,533	3,451	23,959	7.0	43,324	12.7	50,286	14.7	2,064	3,140	4,489
39	23,400	6.9	38,045	11.2	41,770	12.2	1,866	2,613	3,560	24,526	7.2	44,349	13.0	51,572	15.1	2,082	3,168	4,529
40	24,000	7.0	39,020	11.4	42,841	12.6	1,923	2,692	3,668	25,093	7.4	45,374	13.3	52,858	15.5	2,101	3,196	4,569
41	24,600	7.2	39,996	11.7	43,912	12.9	1,980	2,772	3,776	25,660	7.5	46,399	13.6	54,144	15.9	2,119	3,224	4,609
42	25,200	7.4	40,971	12.0	44,983	13.2	2,037	2,851	3,885	26,227	7.7	47,425	13.9	55,430	16.2	2,137	3,252	4,648
43	25,800	7.6	41,947	12.3	46,054	13.5	2,093	2,931	3,993	26,794	7.9	48,450	14.2	56,716	16.6	2,156	3,280	4,688
44	26,400	7.7	42,922	12.6	47,125	13.8	2,122	2,971	4,047	27,360	8.0	49,475	14.5	58,000	17.0	2,174	3,308	4,728
45	27,000	7.9	43,898	12.9	48,196	14.1	2,150	3,010	4,102	27,927	8.2	50,500	14.8	59,286	17.4	2,211	3,352	4,812
46	27,600	8.1	44,873	13.2	49,268	14.4	2,179	3,050	4,156	28,494	8.4	51,525	15.1	60,572	17.8	2,246	3,417	4,884
47	28,200	8.3	45,849	13.4	50,339	14.8	2,207	3,090	4,210	29,061	8.5	52,550	15.4	61,858	18.2	2,299	3,498	5,000
48	28,800	8.4	46,824	13.7	51,410	15.1	2,236	3,130	4,265	29,628	8.7	53,575	15.7	63,144	18.6	2,352	3,579	5,116
49	29,400	8.6	47,799	14.0	52,481	15.4	2,264	3,170	4,319	30,195	8.8	54,600	16.0	64,430	19.0	2,406	3,660	5,232
50	30,000	8.8	48,764	14.3	53,552	15.7	2,292	3,210	4,373	30,762	9.0	55,625	16.3	65,716	19.4	2,459	3,741	5,348
51	30,600	9.0	49,739	14.6	54,623	16.0	2,320	3,250	4,427	31,329	9.2	56,650	16.6	67,002	19.8	2,512	3,822	5,464
52	31,200	9.1	50,714	14.9	55,694	16.3	2,348	3,290	4,481	31,896	9.3	57,675	16.9	68,288	20.2	2,566	3,903	5,580
53	31,800	9.3	51,689	15.2	56,765	16.6	2,376	3,330	4,535	32,463	9.5	58,700	17.2	69,574	20.6	2,619	3,984	5,696
54	32,400	9.5	52,664	15.5	57,836	16.9	2,404	3,370	4,589	33,030	9.7	59,725	17.5	70,860	21.0	2,673	4,065	5,812
55	33,000	9.7	53,639	15.8	58,907	17.2	2,432	3,410	4,643	33,597	9.8	60,750	17.8	72,146	21.4	2,727	4,146	5,928
56	33,600	9.8	54,614	16.1	59,978	17.5	2,460	3,450	4,697	34,164	10.0	61,775	18.1	73,432	21.8	2,781	4,227	6,044
57	34,200	10.0	55,589	16.4	61,049	17.8	2,488	3,490	4,751	34,731	10.2	62,800	18.4	74,718	22.2	2,835	4,308	6,160
58	34,800	10.2	56,564	16.7	62,120	18.1	2,516	3,530	4,805	35,298	10.4	63,825	18.7	76,004	22.6	2,889	4,389	6,276
59	35,400	10.4	57,539	17.0	63,191	18.4	2,544	3,570	4,859	35,865	10.6	64,850	19.0	77,290	23.0	2,943	4,470	6,392
60	36,000	10.6	58,514	17.3	64,262	18.7	2,572	3,610	4,913	36,432	10.8	65,875	19.3	78,576	23.4	2,997	4,551	6,508
61	36,600	10.7	59,489	17.6	65,333	19.0	2,600	3,650	4,967	37,000	11.0	66,900	19.6	79,862	23.8	3,051	4,632	6,624
62	37,200	10.9	60,464	17.9	66,404	19.3	2,628	3,690	5,021	37,567	11.2	67,925	19.9	81,148	24.2	3,105	4,713	6,740
63	37,800	11.1	61,439	18.2	67,475	19.6	2,656	3,730	5,075	38,134	11.4	68,950	20.2	82,434	24.6	3,159	4,794	6,856

Note:
 1. Cooling Capacity is based on : indoor temp.27°C DB / 19°C WB, outdoor temp.35°C DB
 2. Heating Capacity is based on : indoor temp.20°C DB, outdoor temp.7°C DB / 6°C WB
 3. The rated capacities above show the rise in the total indoor unit capacity when operating frequency is constant.
 Values for changes in capacity are fixed after accounting for variations in operating frequency and should be used as reference values.
 4. Total capacity index of indoor unit should be within 19 - 62k Btu / h (40% - 130%)
 5. At least two indoor units should be connected.

FM57AH U32



Total Indoor Unit Capacity (kBtu / h)	Cooling Capacity						Input (W)			Heating Capacity						Input (W)		
	Min		Rated		Max		Min	Rated	Max	Min		Rated		Max		Min	Rated	Max
	Btu / h	kW	Btu / h	kW	Btu / h	kW				Btu / h	kW	Btu / h	kW	Btu / h	kW			
23	13,800	4.0	22,437	6.6	25,300	7.4	1,000	1,460	1,989	15,456	4.5	27,948	8.2	32,138	9.4	1,490	2,267	3,240
24	14,400	4.2	23,412	6.9	25,705	7.5	1,085	1,520	2,071	16,023	4.7	28,973	8.5	33,407	9.8	1,579	2,402	3,433
25	15,000	4.4	24,388	7.1	26,776	7.8	1,128	1,579	2,152	16,590	4.9	29,998	8.8	34,676	10.2	1,626	2,473	3,535
26	15,600	4.6	25,363	7.4	27,847	8.2	1,170	1,639	2,233	17,157	5.0	31,024	9.1	35,945	10.5	1,672	2,544	3,637
27	16,200	4.7	26,339	7.7	28,918	8.5	1,213	1,698	2,314	17,724	5.2	32,049	9.4	37,214	10.9	1,719	2,616	3,739
28	16,800	4.9	27,314	8.0	29,989	8.8	1,256	1,758	2,395	18,290	5.4	33,074	9.7	38,483	11.3	1,766	2,687	3,842
29	17,400	5.1	28,290	8.3	31,060	9.1	1,298	1,817	2,476	18,857	5.5	34,099	10.0	39,752	11.7	1,813	2,759	3,944
30	18,000	5.3	29,265	8.6	32,131	9.4	1,355	1,897	2,584	19,424	5.7	35,124	10.3	41,021	12.0	1,860	2,830	4,046
31	18,600	5.5	30,241	8.9	33,202	9.7	1,412	1,976	2,693	19,991	5.9	36,149	10.6	42,290	12.4	1,907	2,902	4,148
32	19,200	5.6	31,216	9.1	34,273	10.0	1,468	2,056	2,801	20,558	6.0	37,174	10.9	43,560	12.8	1,954	2,973	4,250
33	19,800	5.8	32,192	9.4	35,344	10.4	1,525	2,135	2,909	21,125	6.2	38,199	11.2	44,648	13.1	1,973	3,001	4,290
34	20,400	6.0	33,167	9.7	36,415	10.7	1,582	2,215	3,018	21,692	6.4	39,224	11.5	45,736	13.4	1,991	3,029	4,330
35	21,000	6.2	34,143	10.0	37,486	11.0	1,639	2,294	3,126	22,259	6.5	40,249	11.8	46,824	13.7	2,009	3,057	4,370
36	21,600	6.3	35,118	10.3	38,557	11.3	1,696	2,374	3,235	22,825	6.7	41,274	12.1	47,912</				

THERMAV™

- 186 Monobloc Type
- 188 Split Type
- 190 High Temperature Type
- 191 Domestic Hot Water Tank



THERMA V™ LINE-UP

AWHP											
Type	Capacity	Ø	Product	European Certificate	Performance						BLDC Inverter Compressor
					A7 / W35		A-2 / W55		Heating Operating Range		
					COP	Capacity	COP	Capacity	Outdoor Temp.	Leaving Water Temp.	
Monobloc Type	3kW	1Ø			4.11	3.00	2.07	2.07	-20°C ~ 30°C	20°C ~ 57°C	LG Twin Rotary
	5kW	1Ø			4.42	4.99	2.20	3.44	-20°C ~ 35°C	15°C ~ 57°C	LG Twin Rotary
	7kW	1Ø			4.29	7.00	2.14	4.81	-20°C ~ 35°C	15°C ~ 57°C	LG Twin Rotary
	9kW	1Ø			3.95	8.70	2.16	6.19	-20°C ~ 35°C	15°C ~ 57°C	LG Twin Rotary
	12kW	1Ø			4.49	12.00	2.20	8.25	-20°C ~ 35°C	15°C ~ 57°C	LG Twin Rotary
		3Ø			4.49	12.00	2.16	8.35			
	14kW	1Ø			4.44	14.00	2.16	9.90	-20°C ~ 35°C	15°C ~ 57°C	LG Twin Rotary
		3Ø			4.44	14.00	2.15	9.63			
16kW	1Ø			4.20	16.00	2.16	11.00	-20°C ~ 35°C	15°C ~ 57°C	LG Twin Rotary	
	3Ø			4.20	16.00	2.14	11.00				
Split Type	3kW	1Ø			4.75	2.94	2.07	2.07	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary
	5kW	1Ø			4.68	5.01	2.33	3.45	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary
	7kW	1Ø			4.39	7.02	2.21	4.81	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary
	9kW	1Ø			4.38	9.03	2.28	6.19	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary
		3Ø			4.44	12.00	2.05	7.27			
	12kW	1Ø		To be updated	4.44	12.00	2.04	7.31	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary
		3Ø			4.44	12.00	2.03	8.42			
	14kW	1Ø		To be updated	4.39	14.00	2.03	8.40	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary
3Ø				4.39	14.00	2.02	9.56				
16kW	1Ø		To be updated	4.15	16.00	2.02	9.57	-20°C ~ 30°C	15°C ~ 57°C	LG Twin Rotary	
	3Ø			4.15	16.00	2.02	9.57				
Split High Temp. Type	16kW	1Ø			3.40 (A7 / W35)	16.00	2.62	16.60	-15°C ~ 35°C	25°C ~ 80°C	LG Twin Rotary
					2.61 (A7 / W65)	16.00					



Reliability												Convenience				
Control Sensor	Embedded Component	Water Pump	Heat Exchanger Coating	Electric Heater		Timer	Emergency Operation	Dry Contact Connectability	Weather Dependant Operation	PHEX Anti-Freezing Control						
				Size	Capacity Control											
	A-Class Water Pump + PHE (Plate Heat Exchanger)	A CLASS	gold™ Gold-fin	N / A	N / A			1 LEVEL								
	A-Class Water Pump	A CLASS	gold™ Gold-fin	4kW	1 ² STEP			2 LEVEL								
	A-Class Water Pump + PHE (Plate Heat Exchanger)	A CLASS	gold™ Gold-fin	4kW	1 ² STEP			2 LEVEL								
	PHE (Plate Heat Exchanger)	A CLASS	gold™ Gold-fin	4kW	1 ² STEP			2 LEVEL								
	Expansion Tank	A CLASS	gold™ Gold-fin	6kW	1 ² STEP			2 LEVEL								
	Expansion Tank + Electric Heater	A CLASS	gold™ Gold-fin	6kW	1 ² STEP			2 LEVEL								
	A-Class Water Pump	A CLASS	gold™ Gold-fin	4kW	1 ² STEP			1 LEVEL								
	A-Class Water Pump + PHE (Plate Heat Exchanger)	A CLASS	gold™ Gold-fin	4kW	1 ² STEP			2 LEVEL								
	PHE (Plate Heat Exchanger) + Expansion Tank	A CLASS	gold™ Gold-fin	6kW 9kW	1 ² STEP			2 LEVEL								
	Expansion Tank + Electric Heater	A CLASS	gold™ Gold-fin	6kW 9kW	1 ² STEP			2 LEVEL								
	Electric Heater	A CLASS	gold™ Gold-fin	6kW 9kW	1 ² STEP			2 LEVEL								
	PHE (Plate Heat Exchanger)	N / A	gold™ Gold-fin	N / A	N / A			1 LEVEL								

THERMA V

ENERGY EFFICIENCY

BLDC (Brushless Direct Current Motor) Compressor

THERMA V is equipped with a BLDC* compressor that uses a strong neodymium magnet. The compressor has improved efficiency compared to standard AC inverter product and it is optimized for seasonal efficiency.

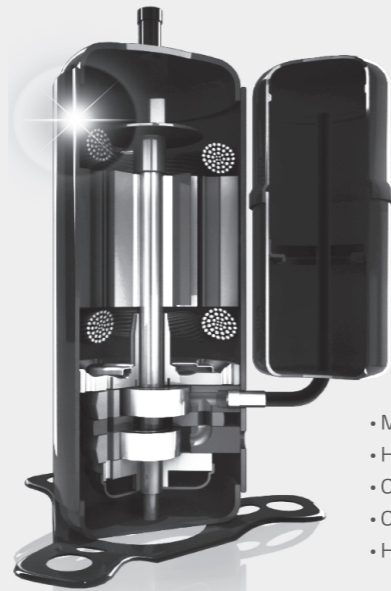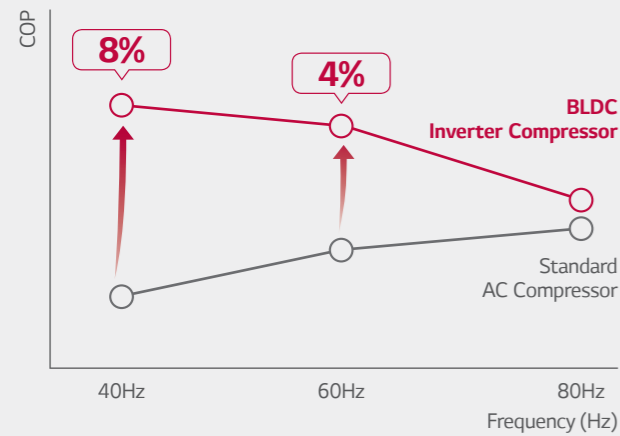


- Minimized oil circulation
- High efficiency motor
- Optimized compression
- Optimized vibration, noise
- High reliability




High Efficient Water Pump

THERMA V is equipped with a high efficiency A-Class water pump. The pump pressure is adjustable, to suit design conditions.

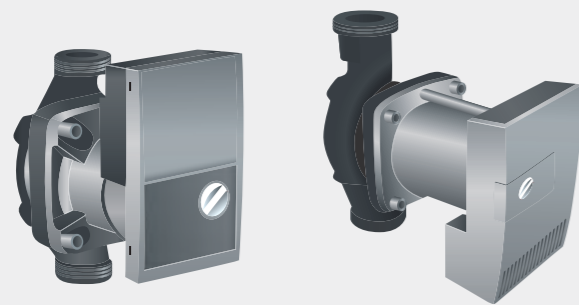

3 / 5 / 7 / 9kW


12 / 14 / 16kW

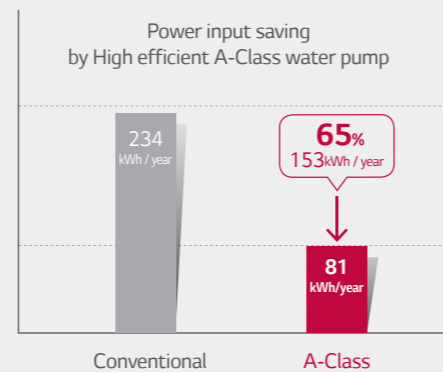

* Condition : 12 hours x 30 days x 5 month (Estimated Value)


Energy Efficiency at -2°C

Energy efficiency is higher than others. (Condition : Ambient temp. -2°C / Leaving water temp. 55°C)

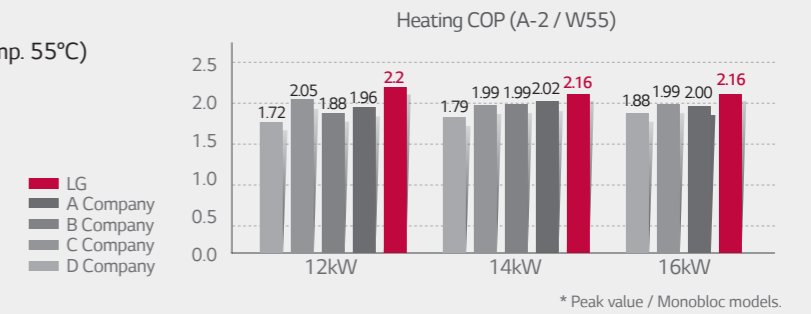

Heat Exchanger Improvement

Efficiency and performance are improved by increased heat exchange rate of wide louver fin & new optimal distributor design applied to the heat exchanger.

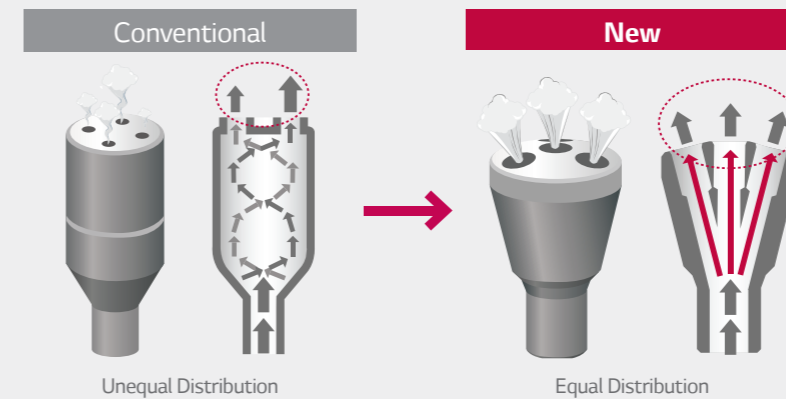


Optimized Heat Exchanger Path
Improved cycle efficiency up to 5% with equal distribution.

Heat Exchange Rate (%)
Heating 123%

Inverter BLDC Fan Motor


LG BLDC fan motor offers additional energy savings up to 40% at low speed and 20% at high speed compared to an AC motor.

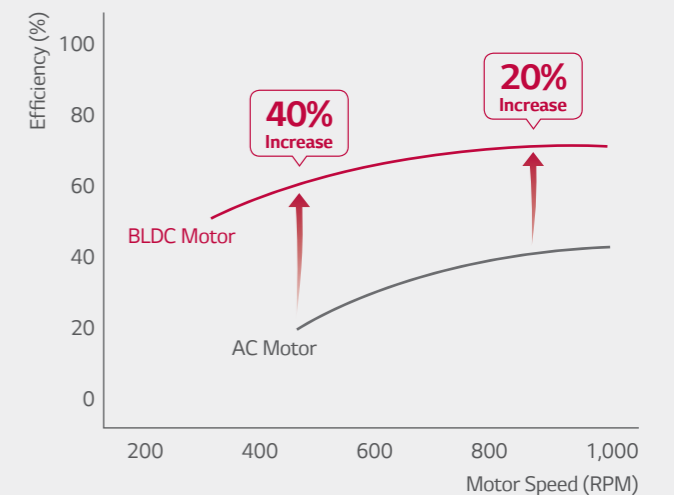

RELIABILITY

Reliability at Low Temperature

Pressure control reinforces heating performance by operating in stable condition at low ambient temperature.

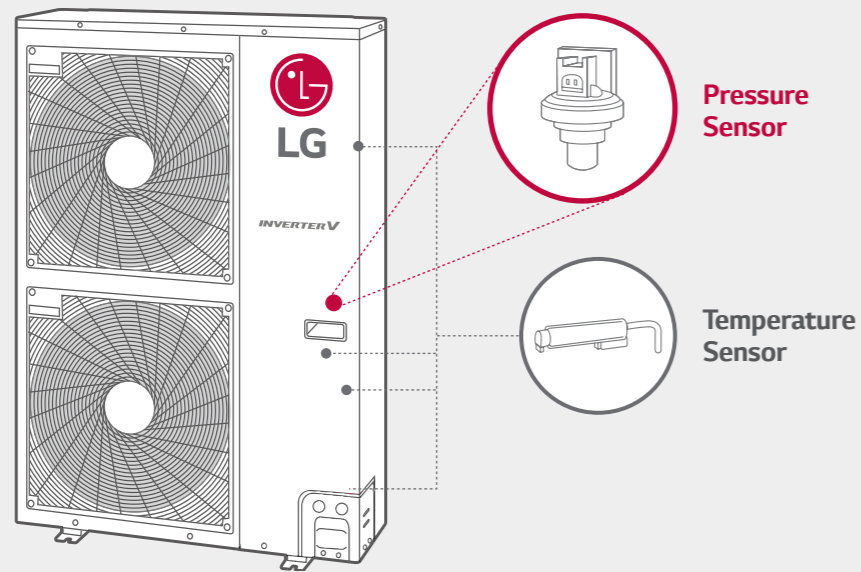

Temperature Control

Temperature Sensor Only

This algorithm is more likely to be affected by temperature change and it takes more time to calculate proper operation range of compressor to target point.


Pressure Control

Temperature Sensor + Pressure Sensor

This ensures to reach target performance point without failing to keep a reliable operation.


Heating Capacity at Low Temperature

High and stable performance at low temperatures.

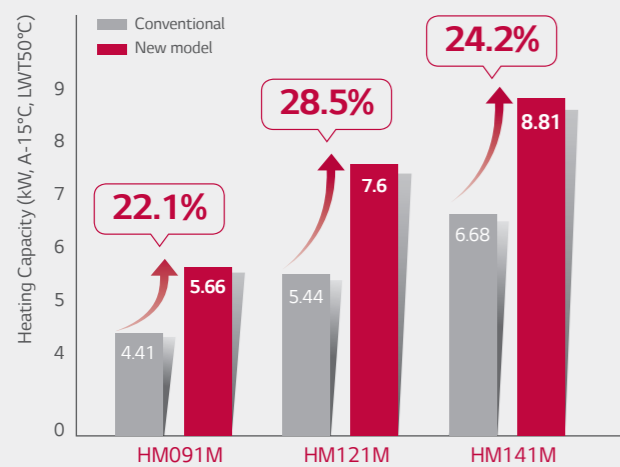

Stable Operation


High and stable heating performance at low temperatures.

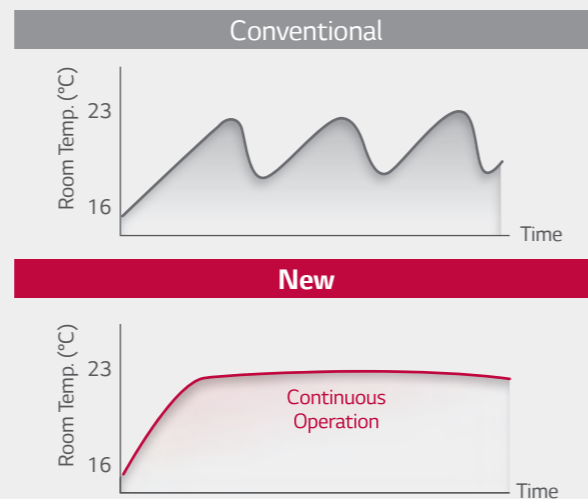

Corrosion Resistant Heat Exchanger

LG's Outdoor Heat Exchanger is coated with a gold-colored anti-corrosive epoxy treatment on the aluminum coil, to prevent corrosion. This maintains excellent heat transfer properties of the coil for an extended time, whereas non-Gold Fin™ coils progressively lose efficiency due to surface corrosion. Gold Fin™ fin is perfect for areas with high pollution or locations exposed to saltwater spray from the sea.

• Composition of Fin Screens

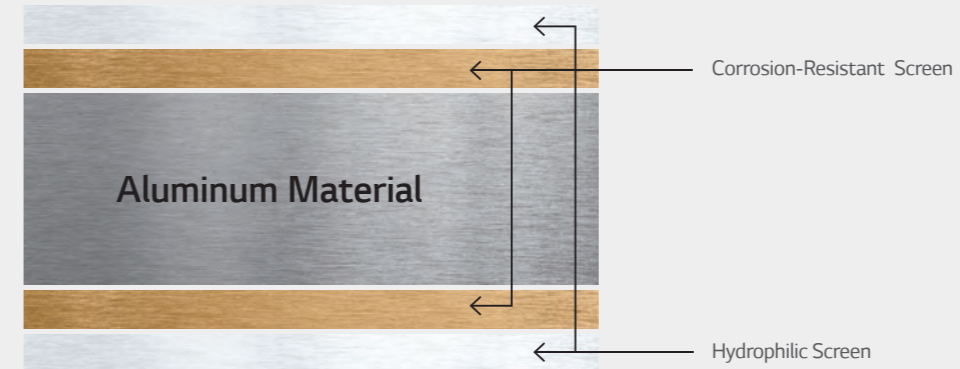


• Salt Spray Test for 15 Days



• Gold Fin is long lasting, durable and makes the Outdoor Unit look prestigious.

Anti-Legionella Function


By setting Anti-legionella operation mode on, THERMA V heats the whole water tank automatically once a week until water temperature reach up to 80°C.

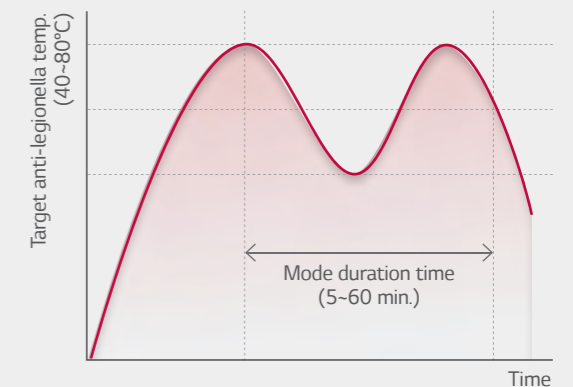

CONVENIENCE

Weather Dependent Operation

If users choose this mode, setting temperature will follow outdoor temperature automatically. If outdoor temperature decreases, heating capacity for the house will increase automatically in order to keep comfortable heating performance according to weather.

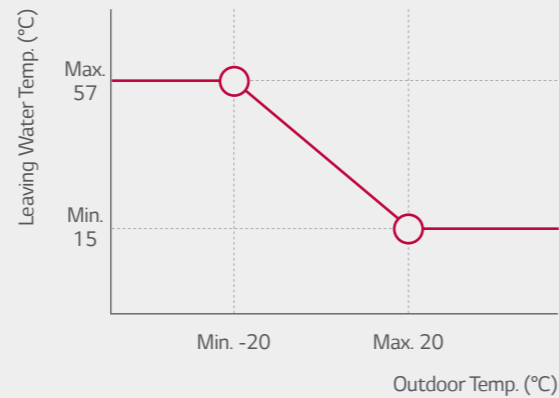


Emergency Operation

Even in case of sudden product error, THERMA V ensures stable heating operation by applying 2 steps of emergency control.




- In case of Minor Error**
 (Mainly caused by sensor)
 - THERMA V = ON, Electric Heater = ON / OFF
- In case of Major Error**
 (Mainly caused by cycle parts)
 - THERMA V = OFF, Electric Heater = ON

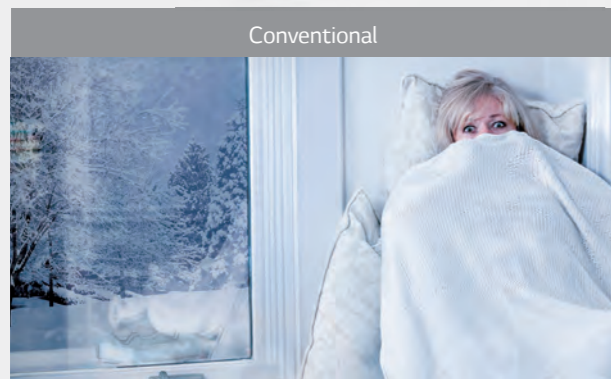

Improved Fan for Low Noise


The New Axial Fan has a narrow hub blade and mogul trailing edge, this provides a high efficiency, low noise as well as improving the air flow rate.

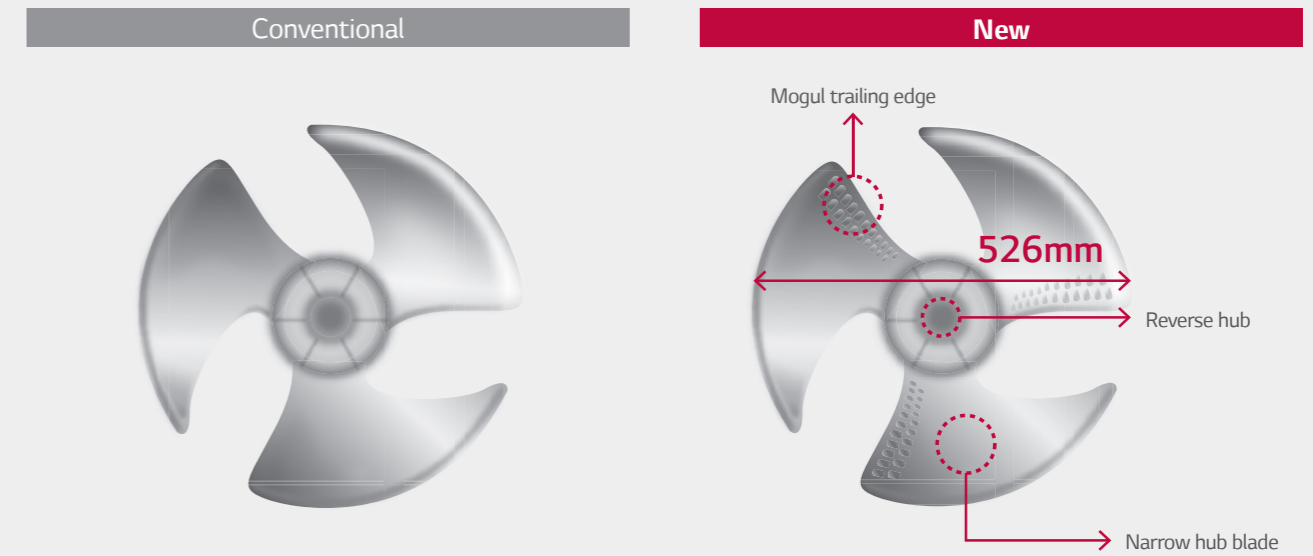

Silent Mode & Scheduler

Silent mode operation can reduce the noise level specially during the setting time by remote controller and users can set the weekly on/off schedule also.


Heating Capacity (kW)	Heating Sound Pressure (dBA)	
	Normal	Silent Mode
3	47	43
5	51	48
7	52	48
9	52	48
12	53	50
14	53	50
16	53	50

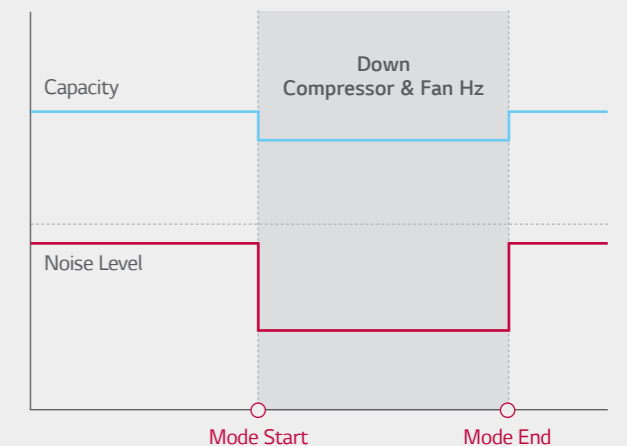

EASY INSTALLATION & SERVICE

All in One Concept

LG will provide fully packaged monobloc with 4 main component. (except 3kW monobloc) basically. No need to work refrigerant piping, easier and quicker installation.

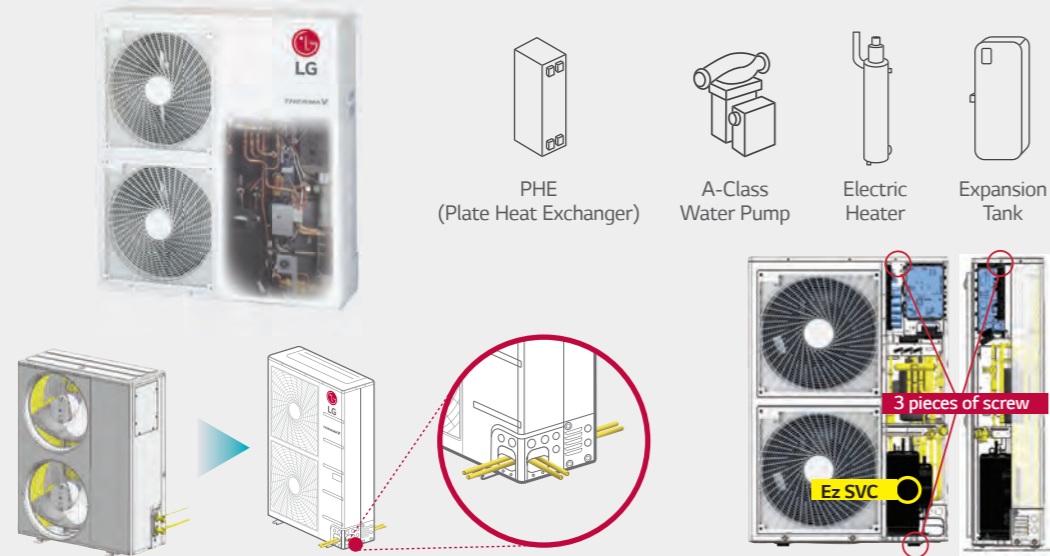


3-Way charging pipe (Split type only)
Refrigerating connection is possible in three directions.

Compact design & Ez SVC
- Remove 3 pieces of screw for SVC
- Front panel removal system

Compact & Slim

Therma V is shaped to minimize the size and weight in order to help easy and efficient work condition for installation.

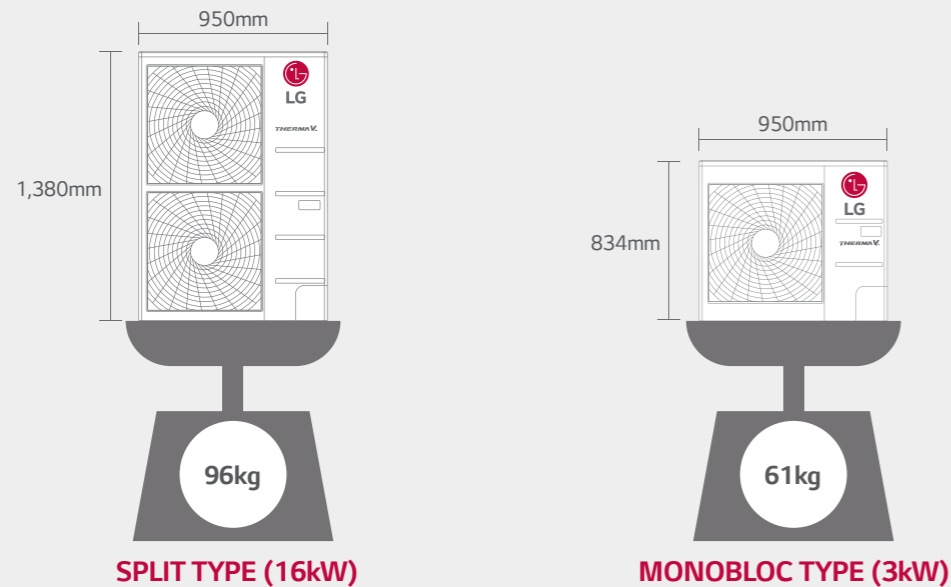

SPLIT TYPE (16kW)


MONOBLOC TYPE (3kW)

THERMA V

LG LATS THERMA V

THERMA V Selection Program


LATS THERMA V simulates quick and easy result of THERMA V's economic benefits. By specifying a number of parameters, this program shows annual energy cost compared with conventional heating system and CO₂ annual amount, monthly energy amount and cost, total amount of thermal energy in kWh as the outside temperature.

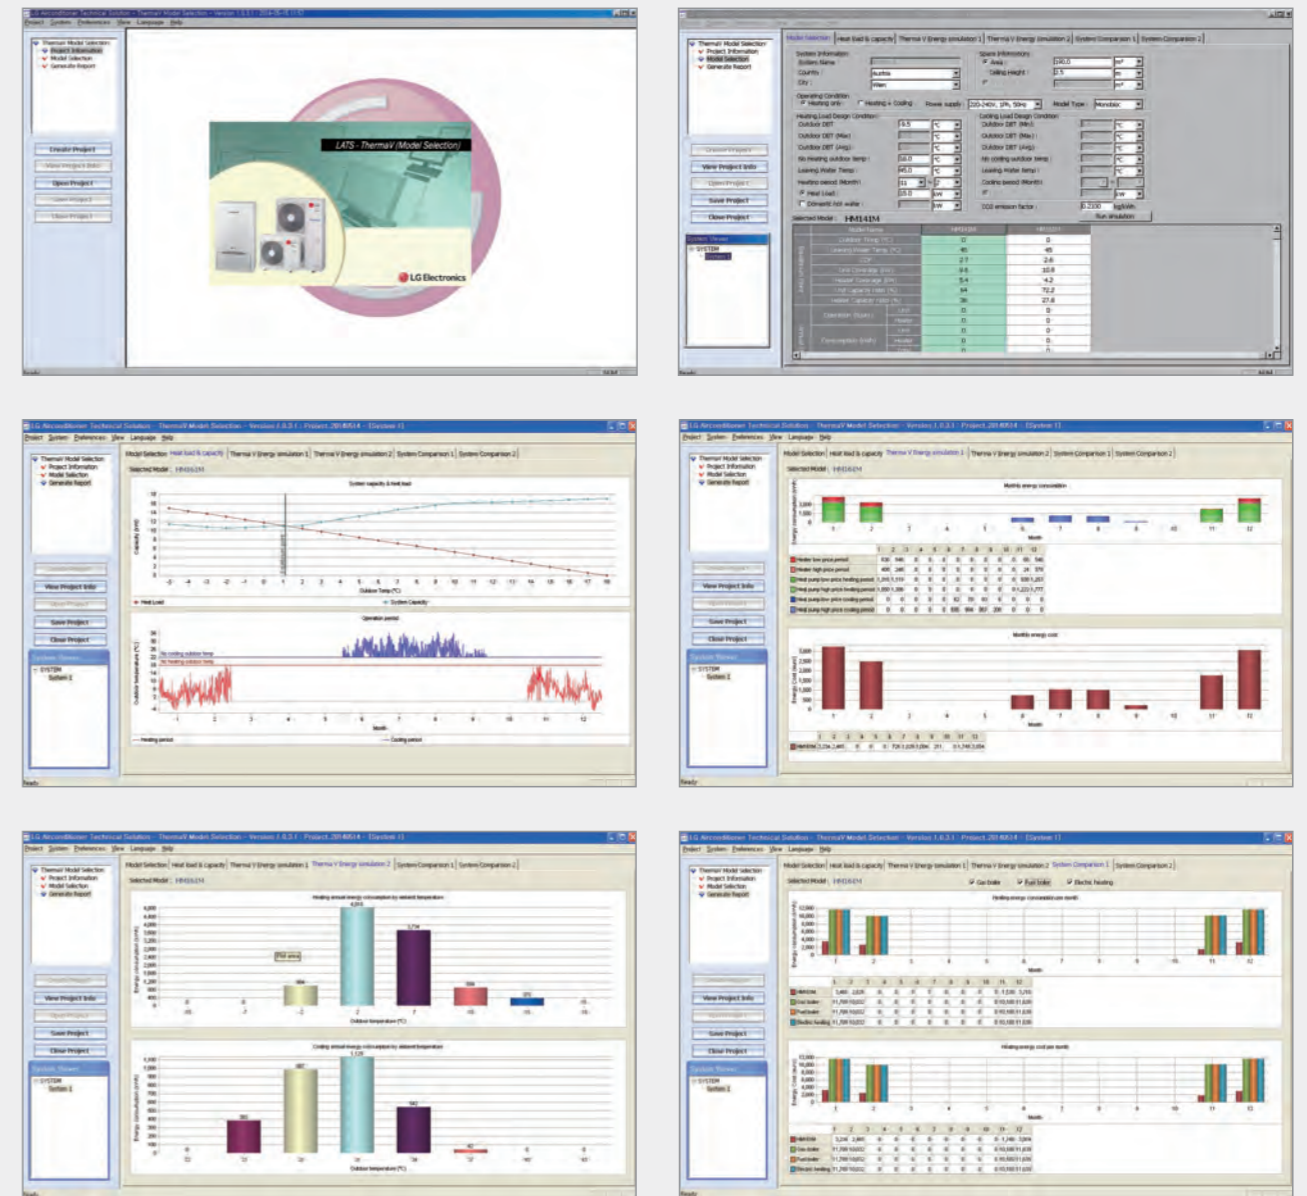

THERMA V HIGH TEMPERATURE

Enhanced Efficiency & Performance

THERMA V high temp. can produce Max. 80°C hot water with high efficiency (Max. COP 4.06 at 24°C ODT & 40/45 EWT/LWT) through cascade 2 stage compression technology.

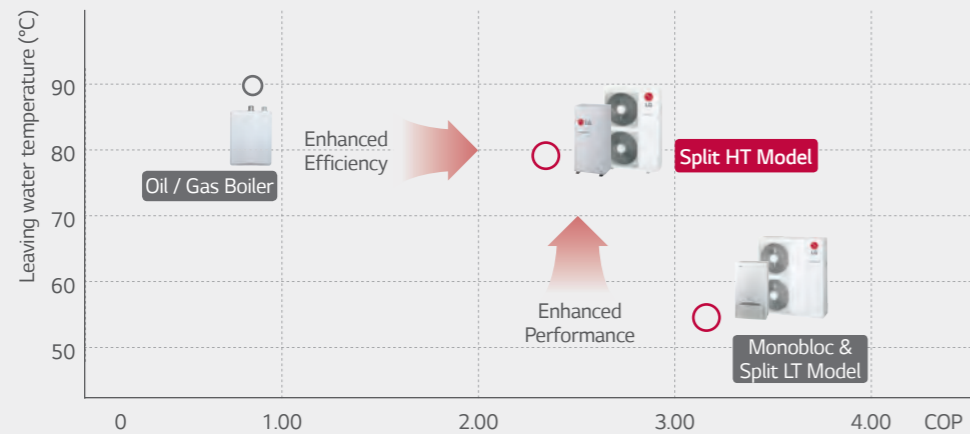


* Condition for HT model : Outdoor air temp.18°C, Entering water temp.70°C
 * Condition for LT model : Outdoor air temp.18°C, Entering water temp.50°C

Cascade 2 Stage Compression Technology


Max. 80°C hot water can be generated through Cascade R410A to R134a BLDC compressor technology and applicable for existing old boiler heating system which demands hot water supply.

High temperature through Cascade cycle technology

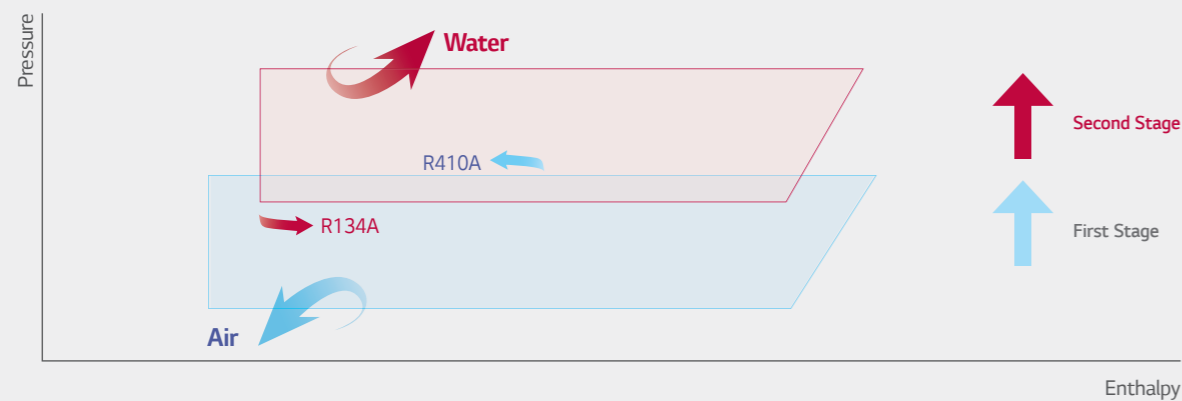

Low Maximum Current Level



LG High Temperature THERMA V can be easily installed without any additional electric connection cost.

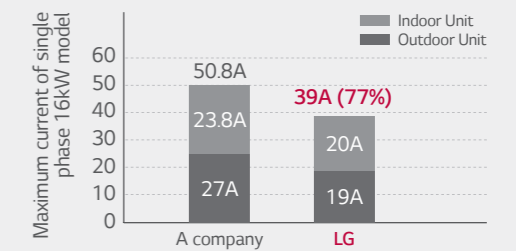

Quick Defrosting


Through R134A compressor controlling technology, necessary time for defrost operation has been minimized effectively. (LG Patent)

As compared to normal reverse cycle defrost, 25% reduction in defrost time, and 10% increase of integrated heating capacity is achieved using hybrid defrosting.

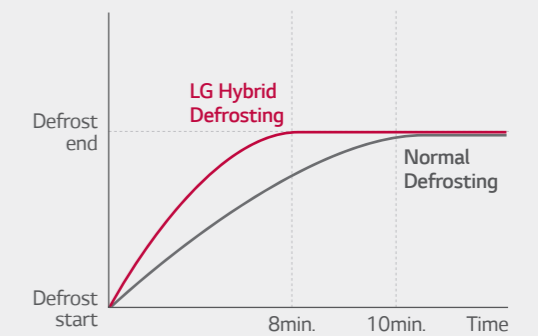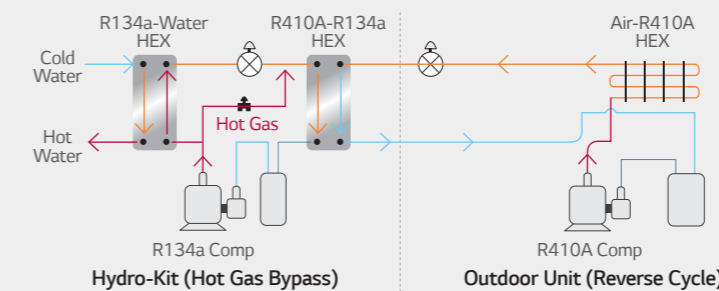



Low Noise Level

Through cutting edge technology for DC inverter compressor, operating noise level of indoor & outdoor unit has been reduced and serves more comfort.

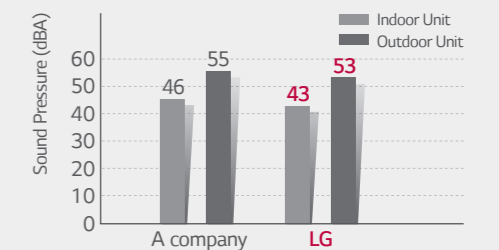



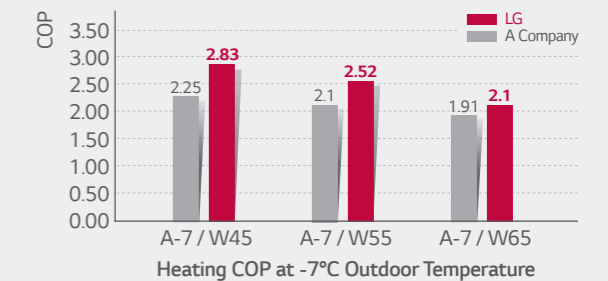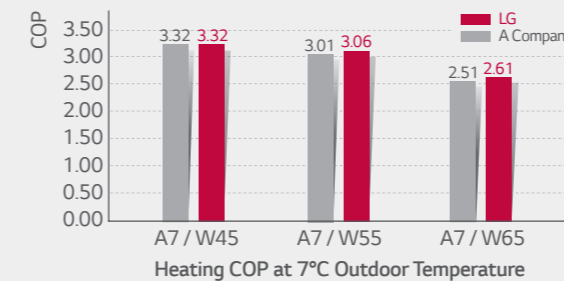



Higher Energy Efficiency

By applying efficient compressor and optimally designed structure, the more energy saving, the lower operating cost make sooner return on initial investment.





ACCESSORY

Accessories Provided by LG

Accessory	Feature
Domestic Hot Water Tank	 <p>Single Coil</p> <p>Double Coil</p>
Domestic Hot Water Tank Kit	<ul style="list-style-type: none"> • PHLTA (1Ø, Split) • PHLTC (3Ø, Split) • PHLTB (Monobloc) <p>Features Easy to install the domestic hot water for monobloc. There is a MCCB to protect the product. Dimension (mm) (H x W x D) : 250 x 170 x 110 Weight (kg) : 2.1</p> <p>To extend THERMA V functionality in generating domestic hot water.</p> <p>* PHLTA, PHLTC is required only when you want to use the electric heater function at the sanitary tank. If not, it's not necessary. Therma V indoor unit itself already has electric heater(back up heating) function. * The sensor (PHRSTAO) can be purchased separately in case of using other brand's Domestic tank.</p>  <p>PHLTA / PHLTC PHLTB</p>
Remote Temperature Sensor	<ul style="list-style-type: none"> • PQRSTAO <p>Features It can help to detect the exact room temperature. Applied to ceiling cassette, ceiling concealed duct, AWHP and Hydro Kit.</p> <p>Parts Included Remote temperature sensor / Extension cable (15m) / Manual</p> 
Solar Thermal Kit	<ul style="list-style-type: none"> • PHLLA <p>Features To interface solar-thermal system with THERMA V and double coil Domestic tank. Installed at the water pipe, between Domestic tank and solar-thermal system. Dimension (mm) (H x W x D) : 110 x 55 x 22</p> 
Dry Contact	<ul style="list-style-type: none"> • PDRYCB000 <p>Features For connection with boiler (Bivalent scene)</p> 
Drain Pan	<ul style="list-style-type: none"> • PHDPA <p>Features Collects condensate water (when dropping to the base is not possible) and drains the water to a pipe</p> 

Optional Accessories Supplied in the Fields

No.	Accessory	Picture	Purpose	Specification
1	Domestic Hot Water Tank		Store and provide hot water for sanitation	Volume : 200 - 400 l Enamel or stainless-steel tank / Insulating foam (e.g. PUR - polyurethane) heat-exchanger surface ≥ 3 m ²
2	3-Way-Valve		Switch between heating and domestic hot water circuit	230V AC SPDT (Single Pole Double Throw) / opening time 30 - 90 sec / final position switch Internal leakage rate < 0,1%
3	Electrical Tank Heater		Supports heating of domestic hot water, when heat pump is blocked or capacity is limited	2 - 6 kW Connector dimension suitable for DHW tank
4	Buffer Tank		Prevents cycling, when water volume is low and / or heating demand is low; secures enough heat for defrosting cycle	Insulating foam (e.g. PUR - polyurethane) Volume : 100 - 200 l (Installation in series with heat pump) 500 ~ 1,000 l (Installation in parallel with heat pump)
5	Bypass Valve		Ensures minimum water flow rate, when flow through heating circuits is limited due to closed valves	Dimensioning according manufacturer adjustable opening pressure
6	2-Way-Valve		Blocks heating circuits, that are not suitable for cooling during cooling operation	230V AC NO or NC type final position switch
7	Expansion Vessel		Absorption of pressure differences in the heating circuits due to temperature increase / decrease of the water	Dimensioning on-site required
8	Strainer		Protects plate-heat-exchanger from blocking particles	1inch / 25.4mm, Mesh size ~ 1 x 1 mm for HM03M1.U42 only (other models are included)
9	Heating Cable		Prevents the condensate pan and the drainage pipe from icing	Thermostatic control depending on outdoor temperature All models do have electric heating cable for prevent frost from condensing water at the condensing pan except 3kW capacity.
10	Antifreeze		Prevents the heating water from freezing, when heat pump is out of order	Monoethyleneglycole Concentration according to lowest possible outdoor temperature
11	Noise Damper		Prevents that structure-born noise is transported via the water piping	EPDM; Operating temperature according climate region (at least -10 ~ + 90°C)
12	Anti-Noise Sockets		Prevents that structure-born noise is transported to the base or to the brackets	Dimensioning on-site required
13	Thermostat		When thermostatic room temperature control is preferred by customer	230V AC When heat pumps operates in heating and cooling mode : thermostat with mode selection
14	Refrigerant Tubes		Pre-fabricated double-pipe to connect split indoor and outdoor unit	Diameter : Please refer to Specification
15	Water Tubes		Pre-fabricated double-pipe to connect monobloc outdoor unit with heating system	When heat pump is used for cooling : diffusion-resistant tubes
16	Bushing Sleeve		Protecting the building against pressing water coming through the duct of the heating tubes	Dimensioning on-site required
17	Insulation Material		Mandatory when heat pump is used for cooling; prevents condensate water on cold pipes and assemblies	Diffusion-resistant

FLEXIBLE APPLICATIONS


Table of the Hydraulic Applications

This shows some examples of how to integrate the THERMA V into the heating system according to each customer needs. Each application is accompanied with the representative connection and installation explanations with symbol icons.


Case	Heating	DHW	Heating & Cooling	Bivalent with boiler	Double Zone Heating
1	•				
2	•	•			
3	•	•	•		
4	•	•			•
5	•	•		•	•
6	•*	•	•		

Combinations of these systems might be possible. Please refer to your local LG heating specialist.
* High Temperature 80°C


Used Symbols

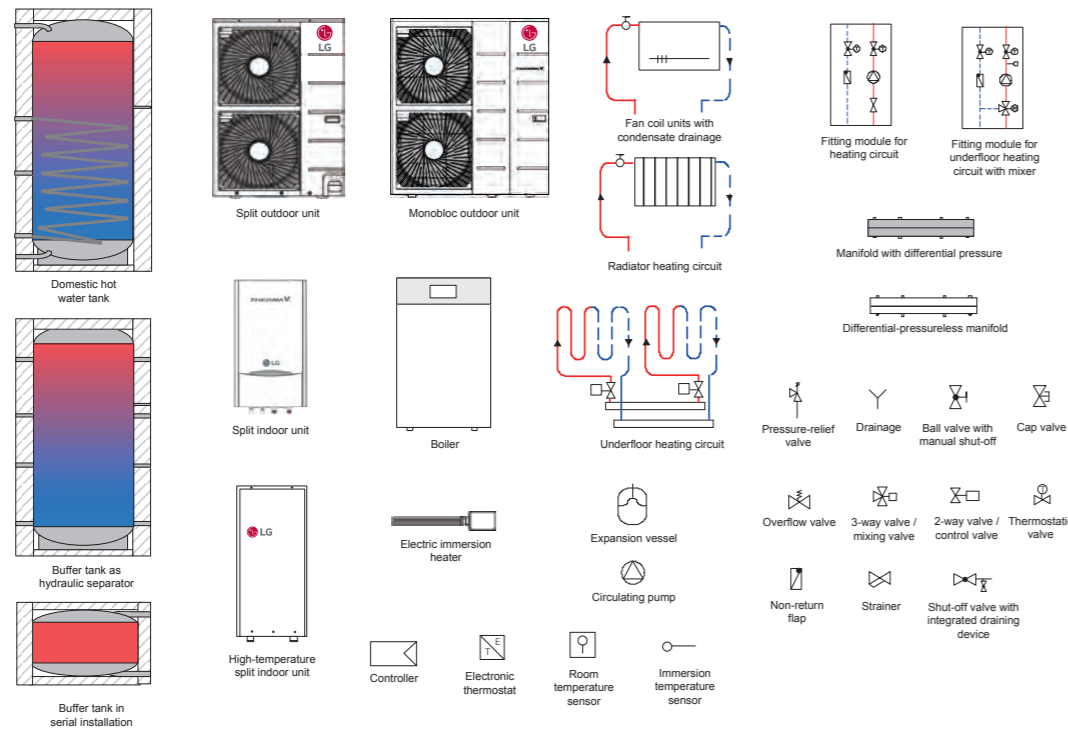

Case 1. Split for Floor Heating

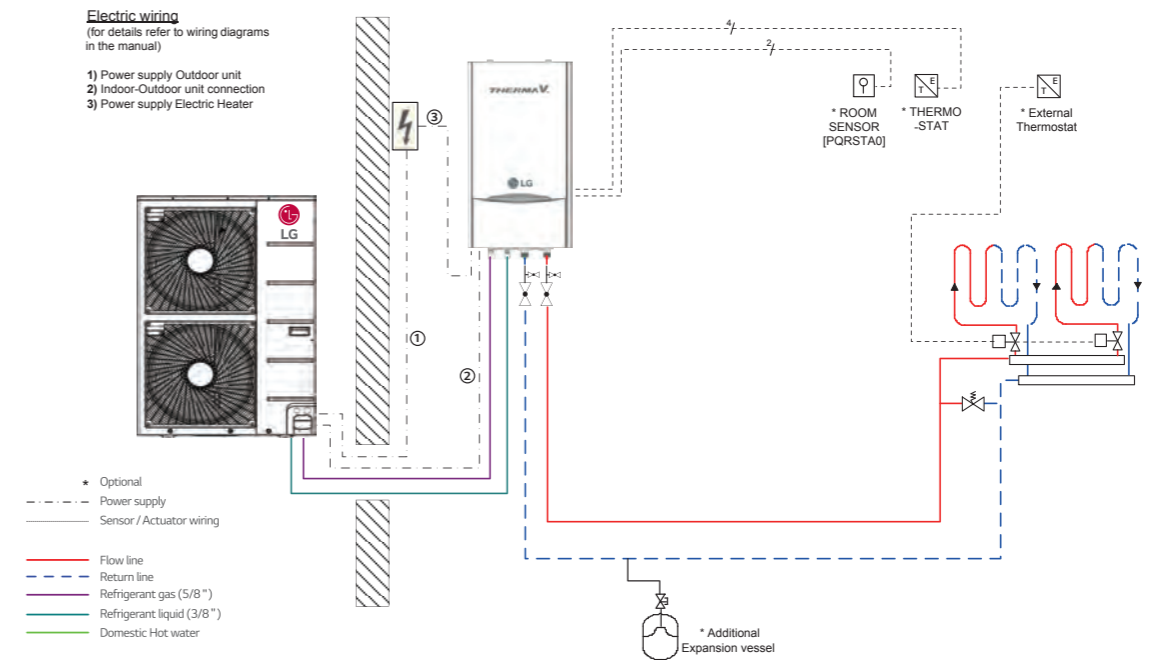


Case 2. Monobloc for Floor Heating & DHW

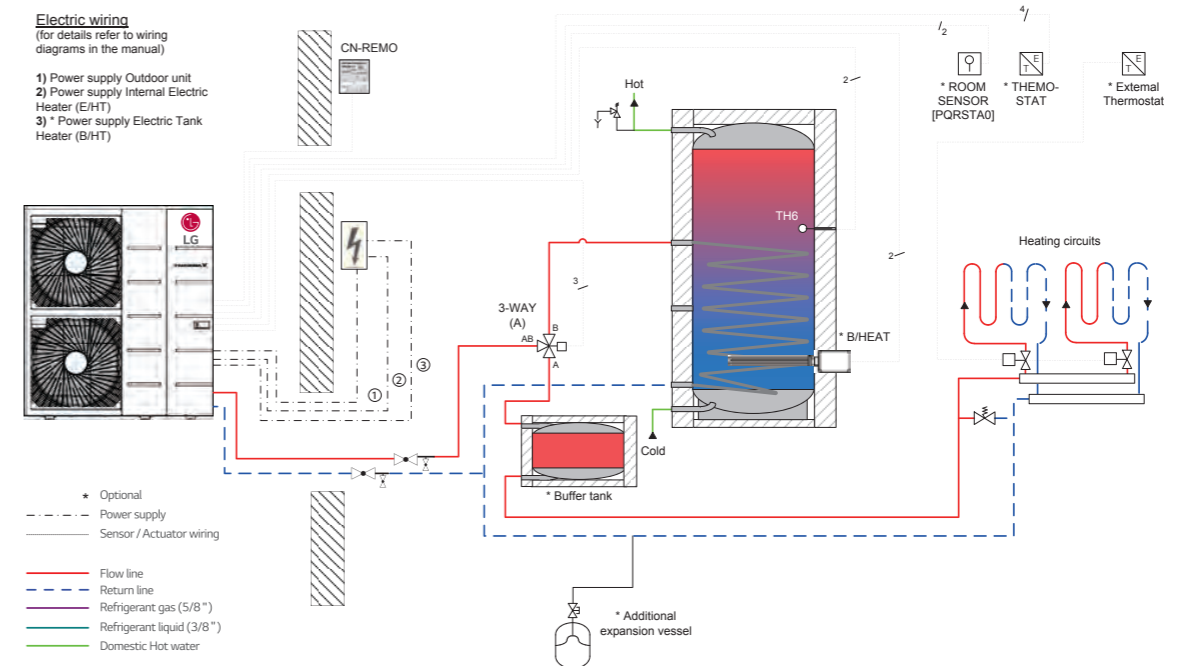


FLEXIBLE APPLICATIONS


Case 3. Split for Floor Heating & DHW & Cooling with Fan Coil Unit

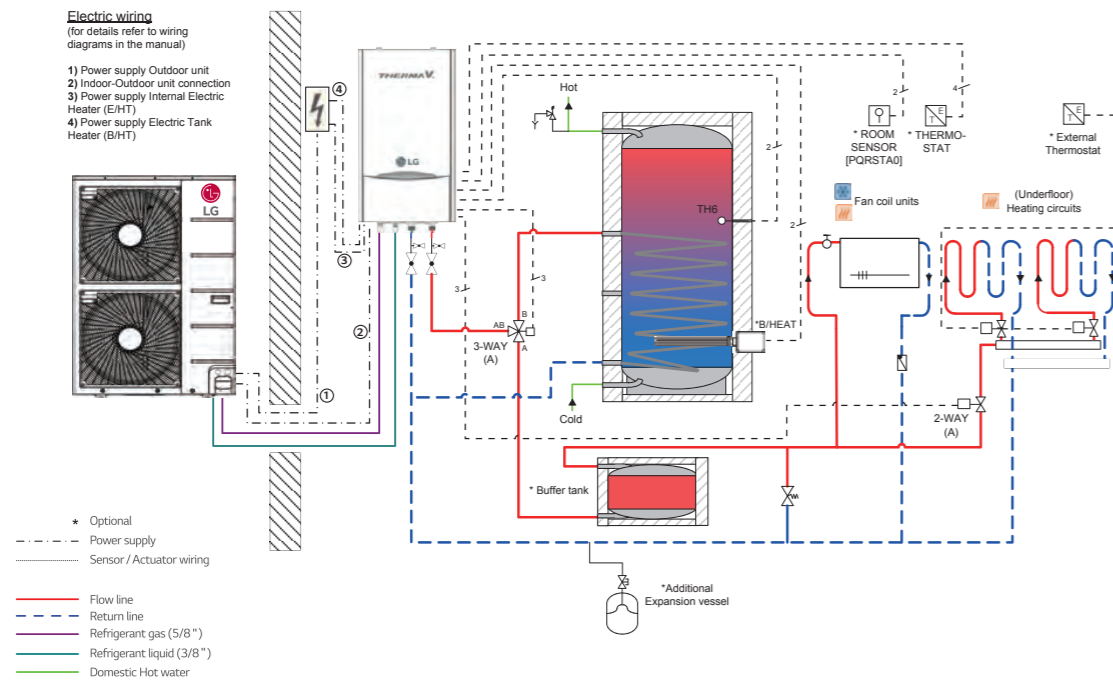


Case 4. Split for Floor Heating & Radiator & DHW (2 Zone Heating)

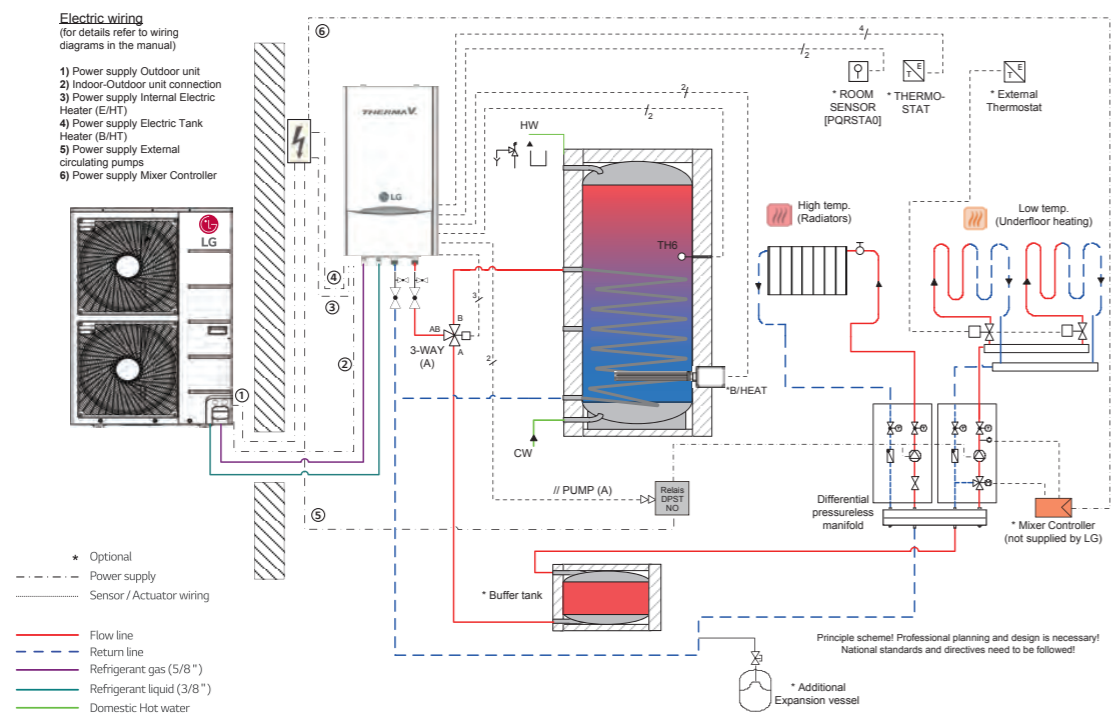

Case 5. Split for Floor Heating & Radiator & DHW with Boiler (Bivalent Scene)

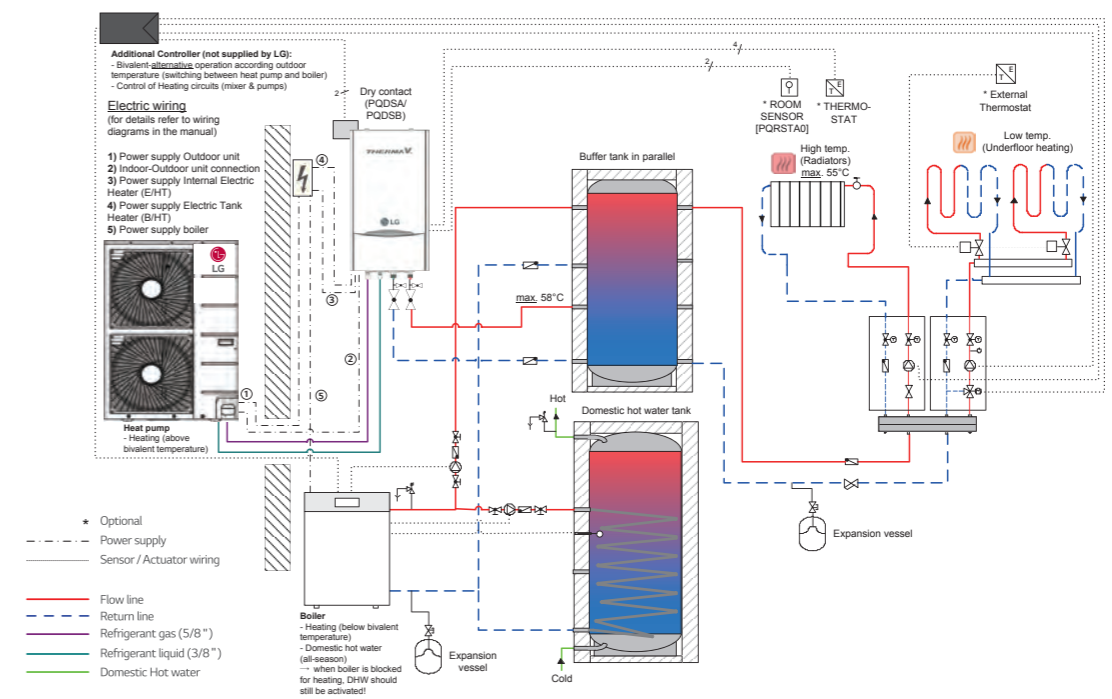

Case 6. Split (High temp.) for Floor Heating & DHW & Fan Coil Units

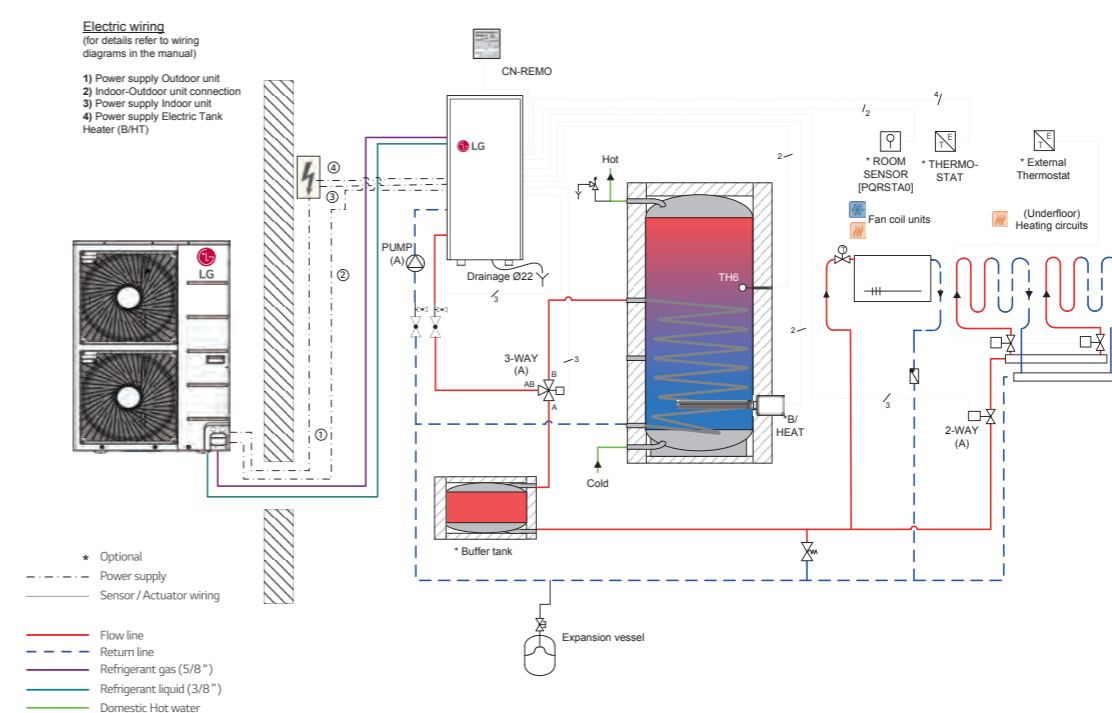

MONOBLOC TYPE

HM031M.U42 / HM051M.U42
HM071M.U42 / HM091M.U42



Monobloc (Outdoor Unit)		Capacity	3kW 1Ø	5kW 1Ø	7kW 1Ø	9kW 1Ø
		Reference	HM031M.U42	HM051M.U42	HM071M.U42	HM091M.U42
Nominal Capacity	Heating (A7 / W35)	kW	3.00	4.99	7.00	8.70
	Heating (A2 / W50)	kW	2.18	3.63	5.08	6.18
	Heating (A-2 / W50)	kW	2.15	3.59	5.02	6.46
	Heating (A-7 / W35)	kW	2.33	3.87	5.42	6.97
	Cooling (A35 / W18)	kW	-	4.99	7.00	9.00
Nominal Power Input	Heating (A7 / W35)	kW	0.73	1.13	1.63	2.20
	Heating (A2 / W50)	kW	0.93	1.46	2.15	2.85
	Heating (A-2 / W50)	kW	0.98	1.52	2.16	2.78
	Heating (A-7 / W35)	kW	0.95	1.63	2.33	2.99
COP	Heating (A7 / W35)		4.11	4.42	4.29	3.95
	Heating (A2 / W50)		2.34	2.49	2.36	2.17
	Heating (A-2 / W50)		2.19	2.36	2.32	2.32
	Heating (A-7 / W35)		2.45	2.37	2.33	2.33
EER	Cooling (A35 / W18)		-	3.62	3.50	3.40
Dimension	W x H x D	mm	950 x 834 x 330	1,239 x 907 x 390	1,239 x 907 x 390	1,239 x 907 x 390
Weight		kg	61	97	98	99
Sound Power Level (Heating)		dB (A)	57	66	66	66
Outdoor Air Operation Range	Heating	°C DB	-20 ~ 30		-20 ~ 35	
	Cooling	°C DB	-		5 ~ 48	
Leaving Water Temp. Range	Heating	°C	20 ~ 57		15 ~ 57	
	Cooling	°C	-		6 ~ 30	
Water Pipe Connection	Inlet	mm (inch)	Female 25.4 (1)			
	Outlet	mm (inch)	Female 25.4 (1)			
Electric Heater	Power Supply	P / V / Hz	-		1 / 220-240 / 50	
	Capacity	kW	-		4	
Water Flowrate Limit		LPM	Min.15			
Max. Water Head		m	6		7	
Power Supply		P / V / Hz	1 / 220-240 / 50			
Recommended Fuse		A	16		20	
Seasonal space heating energy efficiency class	35°C / 55°C		A++ / A	A++ / A+	A++ / A+	A++ / A+
Seasonal space heating energy efficiency (average)	35°C / 55°C	%	153 / 97	159 / 108	154 / 111	161 / 114
Rated heat output (average)	35°C / 55°C	kW	3 / 2	6 / 5	7 / 6	7 / 7
Annual energy consumption (average)	35°C / 55°C	kWh	1,541 / 1,969	3,140 / 3,757	3,652 / 4,691	3,759 / 4,636
Water pump EEI ≤			0.20	0.20	0.20	0.20

This product contains fluorinated greenhouse gases. (R410A)
All models do have electric heating cable for prevent frost from condensing water at the condensing pan except 3kW capacity.
Above table values does include humidification effect in the outdoor temperature below zero.
All specification in based on EN14511 and EN14825.

MONOBLOC TYPE

HM121M.U32 / HM141M.U32 / HM161M.U32
HM123M.U32 / HM143M.U32 / HM163M.U32



Monobloc (Outdoor Unit)		Capacity	12kW 1Ø	14kW 1Ø	16kW 1Ø	12kW 3Ø	14kW 3Ø	16kW 3Ø
		Reference	HM121M.U32	HM141M.U32	HM161M.U32	HM123M.U32	HM143M.U32	HM163M.U32
Nominal Capacity	Heating (A7 / W35)	kW	12.00	14.00	16.00	12.00	14.00	16.00
	Heating (A2 / W50)	kW	8.76	10.41	11.58	8.94	10.43	12.21
	Heating (A-2 / W50)	kW	8.63	10.33	11.45	8.84	10.31	12.07
	Heating (A-7 / W35)	kW	9.31	11.03	12.36	9.33	10.84	12.60
	Cooling (A35 / W18)	kW	14.50	15.50	16.10	14.50	15.50	16.10
Nominal Power Input	Heating (A7 / W35)	kW	2.67	3.15	3.81	2.67	3.15	3.81
	Heating (A2 / W50)	kW	3.51	4.26	4.83	3.65	4.32	5.12
	Heating (A-2 / W50)	kW	3.57	4.45	5.05	3.75	4.45	5.25
	Heating (A-7 / W35)	kW	3.37	4.09	5.08	3.38	4.01	5.29
COP	Heating (A7 / W35)		4.49	4.44	4.20	4.49	4.44	4.20
	Heating (A2 / W50)		2.50	2.44	2.40	2.45	2.41	2.38
	Heating (A-2 / W50)		2.42	2.32	2.27	2.36	2.32	2.30
	Heating (A-7 / W35)		2.76	2.70	2.43	2.76	2.70	2.38
EER	Cooling (A35 / W18)		3.63	3.30	3.18	3.63	3.30	3.17
Dimension	W x H x D	mm	1,239 x 1,450 x 390					
Weight		kg	141			145		
Sound Power Level (Heating)		dB (A)	68					
Outdoor Air Operation Range	Heating	°C DB	-20 ~ 35					
	Cooling	°C DB	5 ~ 48					
Leaving Water Temp. Range	Heating	°C	15 ~ 57					
	Cooling	°C	6 ~ 35					
Water Pipe Connection	Inlet	mm (inch)	Female 25.4 (1)					
	Outlet	mm (inch)	Female 25.4 (1)					
Electric Heater	Power Supply	P / V / Hz	1 / 220-240 / 50			3 / 380-415 / 50		
	Capacity	kW	6			6		
Water Flowrate Limit		LPM	Min.15					
Max. Water Head		m	8					
Power Supply		P / V / Hz	1 / 220-240 / 50			3 / 380-415 / 50		
Recommended Fuse		A	32			20		
Seasonal space heating energy efficiency class	35°C / 55°C		A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Seasonal space heating energy efficiency (average)	35°C / 55°C	%	168 / 121	168 / 121	165 / 121	173 / 124	163 / 124	162 / 124
Rated heat output (average)	35°C / 55°C	kW	11 / 10	12 / 10	12 / 10	11 / 11	12 / 11	11 / 13
Annual energy consumption (average)	35°C / 55°C	kWh	5,478 / 6,698	5,763 / 6,698	6,038 / 6,698	5,193 / 7,078	5,942 / 7,078	6,256 / 7,078
Water pump EEI ≤			0.23	0.23	0.23	0.23	0.23	0.23

This product contains fluorinated greenhouse gases. (R410A)
All models do have electric heating cable for prevent frost from condensing water at the condensing pan except 3kW capacity.
Above table values does include humidification effect in the outdoor temperature below zero.
All specification in based on EN14511 and EN14825.

SPLIT TYPE

HU031.UE2 / HU051.U42
HU071.U42 / HU091.U42



Split (Outdoor Unit)		Capacity Reference	3kW 1Ø HU031.UE2	5kW 1Ø HU051.U42	7kW 1Ø HU071.U42	9kW 1Ø HU091.U42
Nominal Capacity	Heating (A7 / W35)	kW	2.94	5.01	7.02	9.03
	Heating (A2 / W50)	kW	2.18	3.64	5.08	6.54
	Heating (A-2 / W50)	kW	2.15	3.59	5.02	6.46
	Heating (A-7 / W35)	kW	2.45	4.08	5.71	7.34
	Cooling (A35 / W18)	kW	3.00	5.00	7.00	9.00
Nominal Power Input	Heating (A7 / W35)	kW	0.61	1.07	1.59	2.06
	Heating (A2 / W50)	kW	0.93	1.38	2.04	2.54
	Heating (A-2 / W50)	kW	0.98	1.44	2.11	2.64
	Heating (A-7 / W35)	kW	0.95	1.40	2.06	2.58
	Cooling (A35 / W18)	kW	0.75	1.35	2.05	2.65
COP	Heating (A7 / W35)		4.75	4.68	4.39	4.38
	Heating (A2 / W50)		2.34	2.49	2.49	2.57
	Heating (A-2 / W50)		2.19	2.49	2.38	2.45
	Heating (A-7 / W35)		2.58	2.91	2.77	2.84
EER	Cooling (A35 / W18)		4.00	3.70	3.41	3.40
Dimension	W x H x D	mm	870 x 655 x 320	950 x 834 x 330	950 x 834 x 330	950 x 834 x 330
Weight		kg	46	64	64	64
Sound Power Level (Heating)		dB (A)	65	64	64	65
Outdoor Air Operation Range	Heating	°C DB	-20 ~ 30	-20 ~ 30	-20 ~ 30	-20 ~ 30
	Cooling	°C DB	5 ~ 48	5 ~ 48	5 ~ 48	5 ~ 48
Refrigerant (R410a)	Pipe Diameter (Liquid)	mm (inch)	Ø6.35 (1/4)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
	Pipe Diameter (Gas)	mm (inch)	Ø12.7 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Pre-Charged Amount	kg	1	1.55	1.55	1.55
	Chargeless Pipe Length	m	7.5	7.5	7.5	7.5
	Additional Charging Volume	g / m	20	40	40	40
	Minimum	m	-	-	-	-
Ref. Pipe Length	Standard	m	7.5	7.5	7.5	7.5
	Maximum	m	30	50	50	50
		m				
Power Supply	P / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Recommended Fuse	A		20	20	20	20

This product contains fluorinated greenhouse gases. (R410A) / All models do have electric heating cable for prevent frost from condensing water at the condensing pan except 3kW capacity. All specification is based on EN14511 and EN14825.

Split (Indoor Unit)		Capacity Reference	3kW HN0314.NK2	5, 7, 9kW HN0914.NK2
Dimension	W x H x D	mm	490 x 850 x 315	490 x 850 x 315
Weight		kg	46	48
Electric Heater	Power Supply	P / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
	Capacity	kW	4	4
Leaving Water Temp. Range	Heating	°C	15-57	15-57
	Cooling	°C	6-30	6-30
Water Flowrate Limit		LPM	Min.15	Min.15
Max. Water Head		m	6	7
Water Pipe Connection	Inlet	mm (inch)	Male PT 25 (1)	Male PT 25 (1)
	Outlet	mm (inch)	Male PT 25 (1)	Male PT 25 (1)
Seasonal space heating energy efficiency class	35°C / 55°C		A++ / A	A++ / A+
Seasonal space heating energy efficiency (average)	35°C / 55°C	%	152 / 91	171 / 115
Rated heat output (average)	35°C / 55°C	kW	3 / 2	6 / 5
Annual energy consumption (average)	35°C / 55°C	kWh	1,523 / 1,971	2,816 / 3,537
Water pump EEL ≤			0.2	0.20

SPLIT TYPE

HU121.U32 / HU141.U32 / HU161.U32
HU123.U32 / HU143.U32 / HU163.U32



THERMA V

Split (Outdoor Unit)		Capacity Reference	NEW 12kW 1Ø HU121.U32	NEW 14kW 1Ø HU141.U32	NEW 16kW 1Ø HU161.U32	NEW 12kW 3Ø HU123.U32	NEW 14kW 3Ø HU143.U32	NEW 16kW 3Ø HU163.U32
Nominal Capacity	Heating (A7 / W35)	kW	12.00	14.00	16.00	12.00	14.00	16.00
	Heating (A2 / W50)	kW	8.50	9.78	11.03	8.55	9.83	11.29
	Heating (A-2 / W50)	kW	7.94	9.14	10.30	7.99	9.18	10.54
	Heating (A-7 / W35)	kW	11.48	13.11	14.80	11.48	13.11	14.92
	Cooling (A35 / W18)	kW	12.50	14.00	15.10	12.50	14.00	15.10
Nominal Power Input	Heating (A7 / W35)	kW	2.70	3.19	3.86	2.70	3.19	3.86
	Heating (A2 / W50)	kW	3.41	4.00	4.60	3.49	4.07	4.73
	Heating (A-2 / W50)	kW	3.30	3.95	4.63	3.40	4.00	4.63
	Heating (A-7 / W35)	kW	4.16	4.85	5.61	4.16	4.85	5.95
	Cooling (A35 / W18)	kW	3.68	4.55	5.57	3.68	4.55	5.57
COP	Heating (A7 / W35)		4.44	4.39	4.15	4.44	4.39	4.15
	Heating (A2 / W50)		2.49	2.45	2.40	2.45	2.42	2.39
	Heating (A-2 / W50)		2.41	2.31	2.22	2.35	2.30	2.28
	Heating (A-7 / W35)		2.76	2.70	2.64	2.76	2.70	2.51
EER	Cooling (A35 / W18)		3.40	3.08	2.71	3.40	3.08	2.71
Dimension	W x H x D	mm	950 x 1,380 x 330					
Weight		kg	94		96		96	
Sound Power Level (Heating)		dB (A)	68	69	69	68	69	69
Outdoor Air Operation Range	Heating	°C DB	-20 ~ 30					
	Cooling	°C DB	5 ~ 48					
Refrigerant (R410a)	Pipe Diameter (Liquid)	mm (inch)	9.52 (3/8)					
	Pipe Diameter (Gas)	mm (inch)	15.88 (5/8)					
	Pre-Charged Amount	Kg	2.3					
	Chargeless Pipe Length	m	7.5					
	Additional Charging Volume	g / m	40					
	Minimum	m	-					
Ref. Pipe Length	Standard	m	7.5					
	Maximum	m	50					
		m						
Power Supply	P / V / Hz	1 / 220-240 / 50			3 / 380-415 / 50			
Recommended Fuse	A	40			20			

This product contains fluorinated greenhouse gases. (R410A) / All models do have electric heating cable for prevent frost from condensing water at the condensing pan except 3kW capacity. All specification is based on EN14511 and EN14825.

Split (Indoor Unit)		Capacity Reference	12-16kW					
			HN1616.NK2			HN1639.NK2		
Dimension	W x H x D	mm	490 x 850 x 315					
Weight		kg	56			51		
Electric Heater	Power Supply	P / V / Hz	1 / 220-240 / 50			3 / 380-415 / 50		
	Capacity	kW	6			9		
Leaving Water Temp. Range	Heating	°C	15 ~ 57					
	Cooling	°C	6 ~ 30					
Water Flowrate Limit		LPM	Min.15					
Max. Water Head		m	7					
Water Pipe Connection	Inlet	mm (inch)	Male PT 25 (1)					
	Outlet	mm (inch)	Male PT 25 (1)					
Seasonal space heating energy efficiency class	35°C / 55°C		A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Seasonal space heating energy efficiency (average)	35°C / 55°C	%	173 / 122	163 / 122	163 / 122	159 / 115	160 / 115	159 / 115
Rated heat output (average)	35°C / 55°C	kW	10 / 10	10 / 10	11 / 10	10 / 10	10 / 10	11 / 10
Annual energy consumption (average)	35°C / 55°C	kWh	4,651 / 6,564	5,238 / 6,564	5,422 / 6,564	5,121 / 7,046	5,337 / 7,046	5,526 / 7,046
Water pump EEL ≤			0.23	0.23	0.23	0.23	0.23	0.23

Split Type

HIGH TEMPERATURE TYPE

HU161H.U32 / HN1610H.NK2



High Temp. Split (Outdoor Unit)		Capacity Reference	16kW 1Ø HU161H.U32
Nominal Capacity	Heating (A7/W65)	kW	16
	Heating (A2/W65)	kW	14.6
	Heating (A-2/W65)	kW	15.7
Nominal Power Input	Heating (A-7/W65)	kW	15.1
	Heating (A7/W65)	kW	6.13
	Heating (A2/W65)	kW	6.81
	Heating (A-2/W65)	kW	6.96
COP	Heating (A-7/W65)	kW	7.2
	Heating (A7/W65)		2.61
	Heating (A2/W65)		2.14
	Heating (A-2/W65)		2.26
Dimension	W x H x D	mm	950 x 1,380 x 330
	Weight	Kg	105
Sound Power Level (Heating)		dB (A)	68
Outdoor Air Operation Range	Heating	°C DB	-15 ~ 35
Refrigerant (R410a)	Pipe Diameter (Liquid)	mm (inch)	9.52 (3/8)
	Pipe Diameter (Gas)	mm (inch)	15.88 (5/8)
	Pre-Charged Amount	Kg	3.5
	Chargeless Pipe Length	m	10
	Additional Charging Volume	G/m	60
Ref. Pipe Length	Minimum	m	5
	Standard	m	7.5
	Maximum	m	50
Power Supply		P / V / Hz	1 / 220-240 / 50
Recommended Fuse		A	25

This product contains fluorinated greenhouse gases. (R410A)
All specification is based on EN14511 and EN14825.

High Temp. Split (Indoor Unit)		Capacity Reference	16kW 1Ø HN1610H.NK2
Dimension		W x H x D	520 x 1,080 x 330
Weight		kg	94
Sound Power Level (Heating)		dB (A)	57
Nominal Power Input		Heating kW	6.13
Leaving Water Temp. Range		Heating °C	25 ~ 80
Water Flowrate Limit		LPM	Min.15
Refrigerant (R134a)	Pipe Diameter (Liquid)	mm (inch)	9.52 (3/8)
	Pipe Diameter (Gas)	mm (inch)	15.88 (5/8)
	Pre-Charged Amount	kg	2.3
Water Pipe Connection	Inlet	mm (inch)	Male PT 25 (1)
	Outlet	mm (inch)	Male PT 25 (1)
Draining Pipe Connection		mm (inch)	Male PT 25 (1)
Power Supply		P / V / Hz	1 / 220-240 / 50
Recommended Fuse		A	25
Seasonal space heating energy efficiency class		35°C / 55°C	A / A+
Seasonal space heating energy efficiency (average)		35°C / 55°C	%
Rated heat output (average)		35°C / 55°C	kW
Annual energy consumption (average)		35°C / 55°C	kWh

This product contains fluorinated greenhouse gases. (R134a)

DOMESTIC HOT WATER TANK

LGRTV200VE / LGRTV300VE
LGRTV200E / LGRTV300E



Double Coil

Single Coil

Domestic Hot Water Tank – Double Coil

Domestic Hot Water Tank			LGRTV200VE	LGRTV300VE
General Characteristics	Water Volume	L	198	287
	Diameter	mm	580	580
	Height	mm	1,230	1,680
	Empty Weight	kg	50	64
	Tank – Materials		Stainless Steel	Stainless Steel
	Outer Skin – Materials		Paint Epoxy	Paint Epoxy
	Color – White RAL		White NC	White NC
Characteristics of Electrical Back-Up	Additional Electric Heater	kW	3	3
	Adjustable Thermostat	°C	60 ~ 90	60 ~ 90
Characteristics of Exchanger	Exchanger Type		Single	Single
	Material Exchanger		LDX 2101 – Stainless Steel	LDX 2101 – Stainless Steel
	Maximum Water Temperature	°C	80 (With an Heat Pump)	80 (With an Heat Pump)
	Coil Surface	mm	0.94	0.94
Hydraulic Connections – Heat Pump	THERMA V Entry	mm	25	25
	THERMA V Exit	mm	25	25
Hydraulic Connections – Domestic Hot Water Tank	City Water Entry	mm	22	22
	Hot water Exit	mm	22	22
Electric Connection	Supply	Ø / V / Hz	1Ø / 220-240V 50Hz	1Ø / 220-240V 50Hz

MANDATORY OPTIONAL ACCESSORIES

Domestic Hot Water Tank Installation Kit	PHLTA	PHLTA
--	-------	-------

Domestic Hot Water Tank – Single Coil

Domestic Hot Water Tank			LGRTV200E	LGRTV300E
General Characteristics	Water Volume	L	198	287
	Diameter	mm	580	580
	Height	mm	1,230	1,680
	Empty Weight	kg	50	64
	Tank – Materials		Stainless Steel	Stainless Steel
	Outer Skin – Materials		Paint Epoxy	Paint Epoxy
	Color – White RAL		White NC	White NC
Characteristics of Electrical Back-Up	Additional Electric Heater	kW	3	3
	Adjustable Thermostat	°C	60 ~ 90	60 ~ 90
Characteristics of Exchanger	Exchanger Type		Single	Single
	Material Exchanger		LDX 2101 – Stainless Steel	LDX 2101 – Stainless Steel
	Maximum Water Temperature	°C	80 (With an Heat Pump)	80 (With an Heat Pump)
	Coil Surface	mm	0.94	0.94
Hydraulic Connections – Heat Pump	THERMA V Entry	mm	25	25
	THERMA V Exit	mm	25	25
Hydraulic Connections – Domestic Hot Water Tank	City Water Entry	mm	22	22
	Hot water Exit	mm	22	22
Electric Connection	Supply	Ø / V / Hz	1Ø / 220-240V 50Hz	1Ø / 220-240V 50Hz

MANDATORY OPTIONAL ACCESSORIES

Domestic Hot Water Tank Installation Kit	PHLTA	PHLTA
--	-------	-------

MEMO