


Overview


HPE ProLiant DL160 Generation9 (Gen9)

The HPE ProLiant DL160 Gen9 is the next generation 2P 1U value server replacing DL360e Gen8. It delivers the right balance of performance, storage, reliability, manageability and efficiency in a dense and compact chassis, to meet the needs of a diverse set of customers- from SMBs and service providers with a wide range of workloads - from general purpose IT to the New Style of IT, such as, Big Data and Cloud.

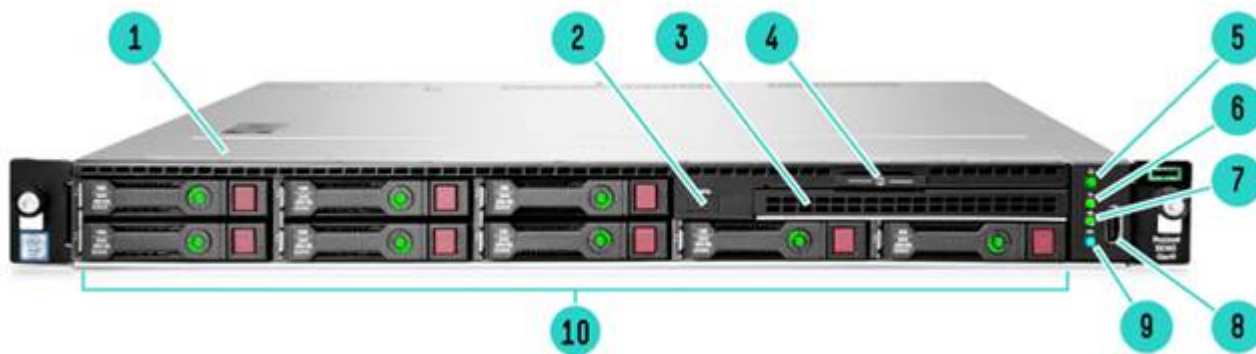

Front View


- | | |
|--|---|
| 1 Access Panel | 2 Optional USB3.0 (optional with 8SFF only) |
| 3 Optical disk drive bay | 4 Serial label pull tab |
| 5 Power On/Standby button and system power LED | 6 Health LED |
| 7 NIC status LED | 8 USB 2.0 connector |
| 9 UID button/LED | 10 8SFF drive cage |

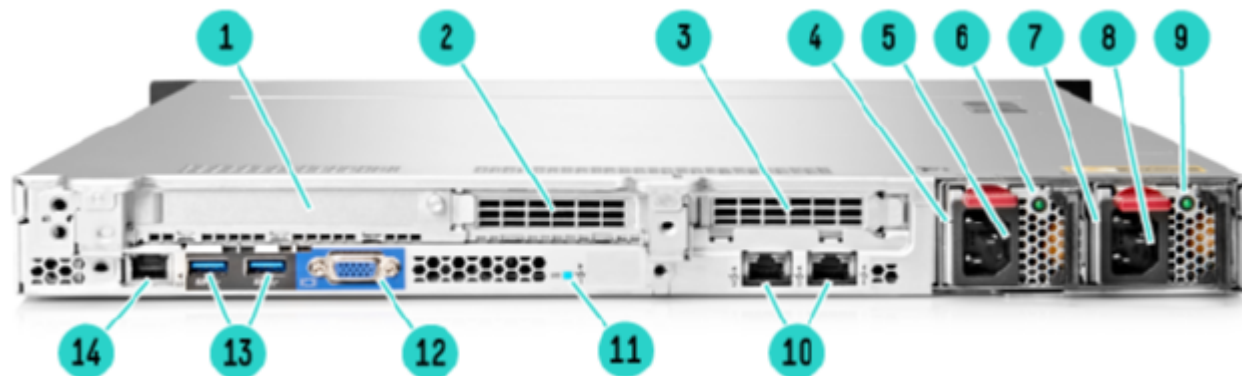

Rear view

- | | |
|---|---|
| 1 PCIe3 slot 1 (primary, associated with processor 1) | 2 PCIe3 slot 2 (primary, associated with processor 1) |
| 3 PCIe3 slot 3 (secondary, associated with processor 2) | 4 Power supply 1 bay |
| 5 Power supply 1 Power Connector (Optional) | 6 Power supply 1 LED (Optional) |
| 7 Power supply 2 bay | 8 Power supply 2 power connector |
| 9 Power Supply 2 LED | 10 Embedded 2x1GbE network adapter |
| 11 Unit ID LED | 12 Video Connector |
| 13 USB3.0 connectors | 14 Dedicated iLO connector (optional) |

Overview

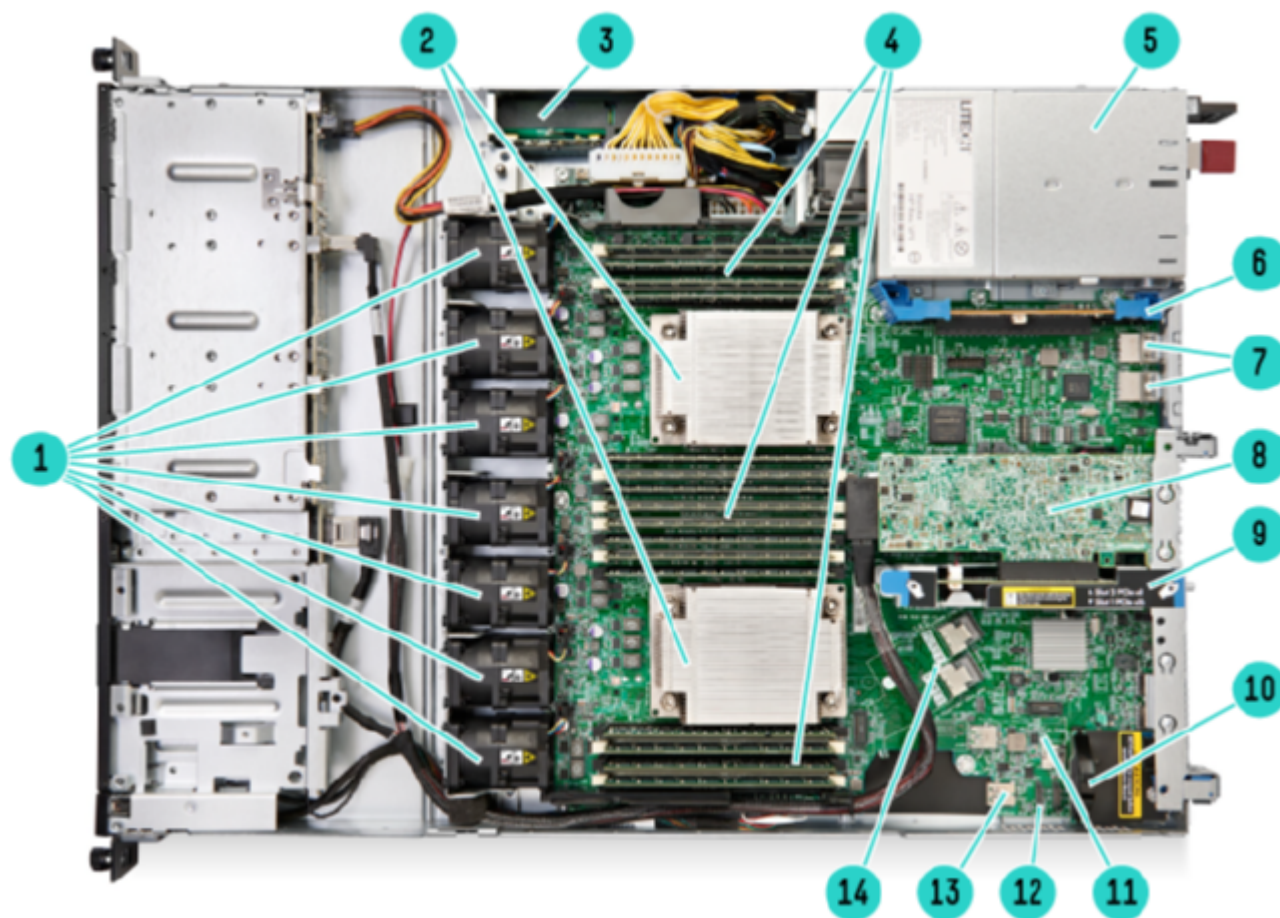

Internal View

- | | | | |
|----|---|----|--|
| 1 | Hot Swappable fans (up to 7) | 2 | Processor heat sinks (processors with HPE Smart Sockets placed below heat sinks) |
| 3 | HPE Smart Storage Battery (optional) | 4 | DDR4 DIMM slots (up to 16) |
| 5 | Entry level power supply bay (1x900W shown) | 6 | Connector for secondary PCIe riser (associated with CPU2) |
| 7 | Embedded 2x1GbE network adapter | 8 | HPE Smart Array P440 controller (optional) |
| 9 | Primary PCIe riser (2 PCIe3 slots associated with CPU1) | 10 | Dedicated iLO module connector (optional) |
| 11 | MicroSD card slot | 12 | Internal SATA ports (one for ODD and another one reserved) |
| 13 | Internal USB 3.0 connector | 14 | Embedded B140i SATA controller (2x SATA ports for up to eight drives) |

What's New

- HPE Smart Memory 2400 MHz memory (up to 64GB)
- Intel Xeon E5-2600v4 processor support (up to 120W)
- HPE Trusted Platform Module (TPM) 2.0
- New 900W AC/ 240VDC power supply
- New HDD offerings

Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

| Processor | Model | CPU frequency | Cores | L3 Cache | Power | QPI | DDR4 Hz |
|---|------------|---------------|-------|----------|---------|---------|---------|
| One of the following depending on model | E5-2660v3 | 2.6GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| | E5-2650v3 | 2.3GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| | E5-2650Lv3 | 1.8GHz | 12 | 30MB | 65W | 9.6GT/s | 2133 |
| | E5-2640v3 | 2.6GHz | 8 | 20MB | 90W | 8.0GT/s | 1866 |
| | E5-2630v3 | 2.4GHz | 8 | 20MB | 85W | 8.0GT/s | 1866 |
| | E5-2630Lv3 | 1.8GHz | 8 | 20MB | 55W | 8.0GT/s | 1866 |
| | E5-2623v3 | 3.0GHz | 4 | 10MB | 105W | 8.0GT/s | 1866 |
| | E5-2620v3 | 2.4GHz | 6 | 15MB | 85W | 8.0GT/s | 1866 |
| | E5-2609v3 | 1.9GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 |
| | E5-2603v3 | 1.6GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 |
| | E5-2695v4 | 2.1GHz | 18 | 45MB | 120W | 9.6GT/s | 2400 |
| | E5-2683v4 | 2.1GHz | 16 | 40MB | 120W | 9.6GT/s | 2400 |
| | E5-2680v4 | 2.4GHz | 14 | 35MB | 120W | 9.6GT/s | 2400 |
| | E5-2660v4 | 2.0GHz | 14 | 35MB | 105W | 9.6GT/s | 2400 |
| | E5-2650v4 | 2.2GHz | 12 | 30MB | 105W | 9.6GT/s | 2400 |
| | E5-2650Lv4 | 1.7GHz | 14 | 35MB | 65W | 9.6GT/s | 2400 |
| | E5-2640v4 | 2.4GHz | 10 | 25MB | 90W | 8.0GT/s | 2133 |
| | E5-2630v4 | 2.2GHz | 10 | 25MB | 85W | 8.0GT/s | 2133 |
| | E5-2630Lv4 | 1.8GHz | 10 | 25MB | 55W | 8.0GT/s | 2133 |
| | E5-2623v4 | 2.6GHz | 4 | 10MB | 85W | 8.0GT/s | 2133 |
| E5-2620v4 | 2.1GHz | 8 | 20MB | 85W | 8.0GT/s | 2133 | |
| E5-2609v4 | 1.7GHz | 8 | 20MB | 85W | 6.4GT/s | 1866 | |
| E5-2603v4 | 1.7GHz | 6 | 15MB | 85W | 6.4GT/s | 1866 | |

| | |
|---|---|
| Chipset | Intel® C610 Series Chipset |
| One of the following depending on model | Intel® E5-2600v3 Processor Family |
| | Intel® E5-2600v4 Processor Family |
| | NOTE: For more information regarding Intel chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/ |

| | |
|---|--|
| On System Management Chipset | HPE iLO4 (Firmware HPE iLO4 2.0 or later), 2GB NAND. |
| One of the following depending on model | NOTE: Read and learn more in the iLO QuickSpecs . |

Standard Features

| | |
|---|---|
| Memory One of the following depending on model | Type: HPE SmartMemory DDR4 Registered (RDIMM) or Load Reduced (LRDIMM) DIMM Slots Available 16 (8 DIMM slots per processor, 4 channels per processor, 2 DIMMs per channel) Maximum Capacity 1TB (16 x 64GB LRDIMM @2400MHz) (LRDIMM) Maximum Capacity 512GB (16 x 32GB RDIMM @2133MHz) (RDIMM) |
|---|---|

| | |
|--|---|
| Memory Protection One of the following depending on model | Advanced ECC Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip. Online spare Memory online spare mode detects a rank that is degrading and switches operation to the spare rank. |
|--|---|

| | |
|--------------------|--|
| Network Controller | 1Gb 361i Ethernet Adapter 2 Ports per controller |
|--------------------|--|

Expansion Slots

| CPU1 PCIe riser slots | Expansion Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes | |
|---|----------------------|-----------|-----------------|------------|-------------------------------|------------------|---|
| | 1 PCIe 3.0 | x16 | x16 | | Full-height, half-length slot | Processor 1 | |
| | 2 PCIe 3.0 | x8 | x8 | | Low profile slot | Processor 1 | |
| NOTE: Bus Width data indicates the number of physical electrical lanes running to the connector. | | | | | | | |
| CPU 1 FlexibleLOM riser slots | Expansion Technology | Bus Width | Connector Width | Bus Number | Device Number | Form Factor | Notes |
| | 1 Flexible LOM | x8 | x8 | | | Flexible LOM | Processor 1 (can only be used for flexibleLOMs) |
| | 2 PCIe 3.0 | x8 | x8 | | | Low profile slot | Processor 1 |
| NOTE: This riser is mandatory for installing flexibleLOMs. | | | | | | | |
| CPU2 riser PCIe slots | Expansion Technology | Bus Width | Connector Width | Bus Number | Device Number | Form Factor | Notes |
| | 3 PCIe 3.0 | x16 | x16 | | | Low profile slot | Processor 2 |
| NOTE: When populating slots on CPU2 riser, second processor must be installed. | | | | | | | |
| NOTE: Only one of the CPU1 PCIe risers can be selected in any given configuration. | | | | | | | |
| NOTE: One of the CPU 1 risers is mandatory for all configurations. | | | | | | | |

Standard Features

| | | |
|---|--------------------|--|
| Storage Controller One of the following depending on model | Entry Models | HPE Dynamic Smart Array B140i Controller |
| | | HPE H240 FIO Smart Host Bus Adapter |
| | Base Models | HPE H240 FIO Smart Host Bus Adapter |
| | Performance Models | HPE Smart Array P440/4G Controller |

NOTE: B140i provides support for up to 8 SATA drives, data transmission speeds up to 6Gb/s and supports RAID 0, 1 & 5.

NOTE: H240 provides support for up to 8 SAS/SATA drives, data transmission speeds up to 12Gb/s and supports RAID 0, 1 & 5.

NOTE: P440 provides support for up to 8 SAS/SATA drives, data transmission speeds up to 12Gb/s.

| | | |
|---|-----------------|---|
| Internal Storage Devices One of the following depending on model | Optical Drives | Optional: DVD-ROM, DVD-RW |
| | Hard Drives | None ship standard |
| | Hard Drive Bays | 8 SFF drive bays total with Optical Bay |
| | | 4 LFF drive bays total with Optical bay |

NOTE: HPE ProLiant DL160 Gen9 server offers both SFF and LFF versions. The Optical Drive bay is available with both models.

NOTE: Drive cage changes are not supported.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HPE SFF Gen9 Hard Drive Blank Kit or P/N 666986-B21: HPE LFF Gen9 Hard Drive Blank Kit. These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server.

| Maximum Internal Storage | | CAPACITY | CONFIGURATION |
|---|-----------------------|----------|---------------|
| One of the following depending on model | Hot Plug SFF SAS | 16.0TB | 8 x 2TB |
| | Hot Plug SFF SATA | 16.0TB | 8 x 2TB |
| | Hot Plug LFF SAS | 32.0TB | 4 x 8TB |
| | Hot Plug LFF SATA | 32.0TB | 4 x 8TB |
| | Hot Plug SFF SAS SSD | 30.72TB | 8 x 3.84TB |
| | Hot Plug SFF SATA SSD | 30.72TB | 8 x 3.84TB |
| | Hot Plug LFF SATA SSD | 15.36TB | 4 x 3.84TB |

Standard Features

Power Supply
 One of the following depending on model

HPE 550W FIO Power Supply
 HPE 900W Redundant Power Supply

Looking for high-efficiency power solutions at an entry-level price for your ProLiant Gen9 Essential Server? Hewlett Packard Enterprise entry-level Power Supplies offer an optimized set of features with options for both redundant and non-redundant power configurations.

The HPE 550W FIO Power Supply offers Silver-certified 80 Plus power efficiency (up to 89%) with an optimized set of features for non-redundant power configurations.

The HPE 900W AC 240VDC Power Input Module with Power Backplane can be configured to support power redundancy in ProLiant servers that offer only a single power supply bay, providing additional protection against power loss. With an 80 Plus Gold power efficiency rating (up to 92%), this power option helps to reduce operating expenses while protecting against trapped power capacity in the data center. Hot-plug AC power input modules allow for better serviceability with fast and easy deployment and replacement.

| | | | |
|---|---|---------------|-----------|
| System Fans One of the following depending on model | | Non-redundant | Redundant |
| | 1P model | 3 fans | 4 fans |
| | 2P model | 6 fans | 7 fans |
| | NOTE: Redundant fan option kit (PN: 725587-B21) can be bought separately if redundancy is required with 1P or 2P configurations. | | |
| | NOTE: Additional fans required with 2P configurations are included in "-B21" processor option kits. | | |

| | | |
|-------------------|---|---|
| Interfaces | Video | 1 (Vaux Support) |
| | HPE iLO Remote Management Network Port | 1 GbE (Optional) |
| | USB | 4 USB ports (standard); 1 (optional) Front: 1xUSB 2.0 std; 1xUSB3.0 optional (with 8SFF models only) Rear: 2xUSB 3.0 Internal: 1xUSB 3.0 |
| | Micro SD Slot | 1 Micro SD |
| | NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered. | |
| | LOM Network Ports | 2x1GbE network ports |

Standard Features

| | |
|---------------------------------------|--|
| Operating Systems and Virtualization | Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) |
| Software Support for ProLiant Servers | Oracle Solaris VMware NOTE: For more information on Hewlett Packard Enterprise's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page http://h20566.www2.hp.com/hpsc/swd/public/readIndex?sp4ts.oid=7268998 . |

| | |
|---|---|
| Upgradeability | Upgradeable to two processors (36 Cores) |
| One of the following depending on model | NOTE: Processor upgrade from E5-2600v3 to E5-2600v4 is supported for processors up to 105W. Up to 16 DIMM slots available NOTE: To take advantage of all 16 DIMMs, second processor must be installed. FlexibleLOM slot for 1Gigabit or 10 Gigabit Ethernet or QDR/FDR InfiniBand networking options Optional 2nd CPU riser slot (x16, low profile) NOTE: 2nd CPU must be installed if this riser is configured. Up to 8 SFF Hard Drive Bays; or 4 LFF Hard Drive Bays Redundant Power Supply Redundant Fan Optical Drive Bay (8 SFF/4 LFF) |

| | |
|------------------------------|---|
| Industry Standard Compliance | ACPI 2.0b Compliant PCIe 3.0 Compliant PXE Support WOL Support Microsoft® Logo certifications USB 3.0 Support ASHRAE A3/A4 NOTE: Supports A3/A4 extended ambient temperature. NOTE: Refer to technical specifications section for more details. |
|------------------------------|---|

| | |
|----------|--|
| Graphics | Integrated Matrox G200eH2 video standard <ul style="list-style-type: none">● 1280 x 1024 (32 bpp)● 1920 x 1200 (16 bpp) |
|----------|--|

Standard Features

HPE Server UEFI/Legacy ROM Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

Form Factor 1U Rack form factor
One of the following depending on model 8SFF and 4LFF version:
 1.7" (4.4cm) Height x 17.1" (43.5cm) Width x 23.9" (60.8cm) Length

Embedded Management HPE Integrated Monitor your servers for ongoing management, service alerting, Lights-Out (HPE iLO) reporting and remote management with HPE iLO. Not available on ML10 Gen9. Learn more at <http://www.hpe.com/info/ilo>.

UEFI Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

RESTful API RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Intelligent Provisioning Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

Embedded Remote The Hewlett Packard Enterprise embedded remote support, when used with Insight Online direct connect or HPE Insight Remote

Standard Features

Support Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at <http://www.hpe.com/info/insightonline/explore>.

NOTE: For more information, visit: <http://www.hp.com/go/ilo> or HPE iLO Management Engine technologies whitepaper.

Server utilities **Smart Update** Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP) and smart components. Learn more at <http://www.hpe.com/servers/smartupdatemanager>.

HPE Systems Insight Manager (HPE SIM) HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/servers/hpsim>.

Scripting Tool Kit and Windows PowerShell Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/proliant/stkor> <http://www.hpe.com/servers/powershell>.

RESTful Interface Tool RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

HPE iLO Mobile Application Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

HPE Insight Online HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <http://www.hpe.com/info/insightonline/explore>.

Standard Features

| | |
|----------|---|
| Security | Power-on password Serial interface control Administrator's password TPM 1.2 TPM 2.0 NOTE: TPM 1.2 is not upgradable to TPM 2.0. UEFI |
|----------|---|

| | |
|----------|---|
| Warranty | <p>This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.</p> |
|----------|---|

NOTE: Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:
<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

Optional Features

| | | |
|---------------------|----------------|--|
| Embedded Management | iLO Essentials | HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials at http://www.hpe.com/servers/iLO/essentials . |
| | iLO Scale-Out | HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more information, visit http://www.hpe.com/servers/iLO/scale-out . |
| | iLO Advanced | HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at http://www.hpe.com/servers/ioloadvanced . |

| | | |
|-------------------|---------------------|--|
| Server Management | HPE Insight Control | HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol . |
|-------------------|---------------------|--|

| | |
|-------------------------------|---|
| Rack and Power Infrastructure | HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at HPE Rack and Power Infrastructure . |
|-------------------------------|---|

| | |
|---------------------------|--|
| High Performance Clusters | HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters . |
|---------------------------|--|

Optional Features

HPC Interconnects

NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects: <http://www.hp.com/techservers/clusters/ucp/index.html>.

Storage Software Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than Hewlett Packard Enterprise storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**
Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**
Hewlett Packard Enterprise storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**
Hewlett Packard Enterprise storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**
Maximize your investment in Hewlett Packard Enterprise storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**
With HPE StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HPE ProLiant Gen9 servers include a 3-year limited license for HPE StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HPE StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at <http://www.hp.com/go/vsa1TB>.

NOTE: For more information about Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>.

Optional Features

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hp.com/SimplifiedConfig/Index>.

Service and Support

HPE Support Services HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

Connect your devices Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.
1- IDC 2 – HP CSC reports 2014 - 2015

Recommended Support Standard: HPE Foundation Care 24x7, three-year Support Service
HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.
<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

Optimized: HPE Proactive Care* with 24x7 coverage, three year Support Service
HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your Hewlett Packard Enterprise servers.
<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

Parts and Materials Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Service and Support

Related Services HPE Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Technology Services Support Credits

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

| | |
|------------------------|--|
| HPE Education Services | Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. http://www.hpe.com/ww/learn |
|------------------------|--|

| | |
|--------------------|--|
| HPE Support Center | The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. |
|--------------------|--|

Learn more <http://www.hpe.com/support/hpesc>

The Hewlett Packard Enterprise Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>

Pre-configured Models

| | Entry Models | | | |
|----------------------|--|--|--|--|
| [SKU Number] | 830570-B21 | 830571-B21 | 769503-B21 | 769504-B21 |
| Model Name | HPE DL160 Gen9 E5-2603v4 1P 8GB-R B140i 4LFF 550W PS Entry Server | HPE DL160 Gen9 E5-2603v4 1P 8GB-R H240 8SFF 550W PS Entry Server | HP ProLiant DL160 Gen9 E5-2603v3 1P 8GB-R B140i 4LFF 550W PS Entry Server | HP ProLiant DL160 Gen9 E5-2603v3 1P 8GB-R H240 8SFF 550W PS Entry Server |
| Processor | Intel® Xeon® E5-2603v4 | | Intel® Xeon® E5-2603v3 | |
| Number of Processors | One | | | |
| Memory | 8GB (1x8GB Registered DIMMs, 2400 MHz) NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1866 MHz in this model. | | 8GB (1x8GB Registered DIMMs, 2133 MHz) NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1600 MHz in this model. | |
| Network Controller | HPE Embedded Dual Port 361i Adapter Network Interface | | | |
| Storage Controller | HPE Dynamic Smart Array B140i | HPE H240 FIO Smart Host Bus Adapter | HPE Dynamic Smart Array B140i | HPE H240 FIO Smart Host Bus Adapter |
| Hard Drive | None ship standard | | | |
| Internal Storage | 4 LFF HDD Bays | 8 SFF HDD Bays | 4 LFF HDD Bays | 8 SFF HDD Bays |
| Optical Drive Bay | 1; (Optional: DVD-ROM, DVD-RW) | | | |
| Optical Drive | Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive) | | | |
| PCI-Express Slots | 2 Standard (1-FH/HL, 1-LP) PCIe 3.0 | | | |
| Power Supply | (1) HPE 550W FIO Power Supply | | | |
| Fans | 3 hot swap fans, non-redundant | | | |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional) | | | |
| Form Factor | Rack (1U), HPE Easy Install Rails | | | |
| Warranty | Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. | | | |

Pre-configured Models

| | Base Models | | Energy Star Models |
|----------------------|---|---|--|
| [SKU Number] | 830572-B21 | 769505-B21 | 769506-B21 |
| Model Name | HPE DL160 Gen9 E5-2620v4 1P 16GB-R H240 8SFF 550W PS Base Server | HP ProLiant DL160 Gen9 E5- 2609v3 1P 16GB-R H240 8SFF 550W PS Base Server | HP ProLiant DL160 Gen9 E5-2630v3 2P 32GB-R P440/4G 8SFF 800W RPS Perf Server |
| Processor | Intel® Xeon® E5-2620v4 | Intel® Xeon® E5-2609v3 | Intel® Xeon® E5- 2630v3 |
| Number of Processors | One | | Two |
| Memory | 16GB (1x16GB Registered DIMMs, 2400 MHz) NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 2133 MHz in this model. | 16GB (2x8GB Registered DIMMs, 2133 MHz) NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1600 MHz in this model. | 32GB (2x16GB Registered DIMMs, 2133 MHz) NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 2133 MHz in this model. |
| Network Controller | HPE Embedded Dual Port 361i Adapter Network Interface | | |
| Storage Controller | HPE H240 FIO Smart Host Bus Adapter | | HPE Smart Array P440/4G FIO Controller |
| Hard Drive | None ship standard | | |
| Internal Storage | 8 SFF HDD Bays | | |
| Optical Drive Bay | 1; (Optional: DVD-ROM, DVD-RW) | | |
| Optical Drive | Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive) | | |
| PCI-Express Slots | 2 Standard (1-FH/HL, 1-LP) PCIe 3.0 | | 3 Standard (1-FH/HL, 2- LP) PCIe 3.0 |
| Power Supply | (1) HPE 550W FIO Power Supply | | HPE 800W Redundant Power Supply |
| Fans | 4 hot swap fans, redundant | | 7 hot swap fans, redundant |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional) | | |
| Energy Star | Does Not Meet Energy Star requirements | | Meets Energy Star requirements |
| Form Factor | Rack (1U), HPE Easy Install Rails | | |
| Warranty | Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. | | |

Smart Buy Models

| | E5-2600v4 Series Smart Buys | | |
|----------------------|--|---|--|
| [SKU Number] | 830574-S01 | 860102-S01 | 830577-S01 |
| Model Name | HP ProLiant DL160 Gen9 E5-2609v4 1.7GHz 8-core 8GB-R B140i 4LFF 550W PS US Server/S-Buy | HP ProLiant DL160 Gen9 E5-2609v4 1.7GHz 8-core 8GB-R B140i 8SFF 550W PS US Server/S-Buy | HP ProLiant DL160 Gen9 E5-2620v4 2.1GHz 8GB-R P440/2GB 8SFF 900W PS US Server/S-Buy |
| Processor | Intel® Xeon® E5-2609v4 | Intel® Xeon® E5-2609v4 | Intel® Xeon® E5-2620v4 |
| Number of Processors | | One | |
| Memory | 8GB (1x8GB Registered DIMMs, 2400 MHz) NOTE: The DIMMs will operate at 1866MHz with this processor | | 8GB (1x8GB Registered DIMMs, 2400 MHz) NOTE: The DIMMs will operate at 2133MHz with this processor |
| Network Controller | HPE Embedded Dual Port 361i Adapter Network Interface | | |
| Storage Controller | HPE Dynamic Smart Array B140i | | HPE Smart Array P400/2GB |
| Hard Drive | | None ship standard | |
| Internal Storage | 4 LFF HDD Bays | | 8 SFF HDD Bays |
| Optical Drive Bay | None Included; Optional: DVD-ROM, DVD-RW | | |
| PCI-Express Slots | 2 Standard (1-FH/HL, 1-LP) PCIe 3.0 | | |
| Power Supply | (1) HPE 550W FIO Power Supply | | (1) HPE 900W Power Supply |
| Fans | 3 hot swap fans, non-redundant | | |
| Management | Standard: iLO Management Optional: iLO Essentials, iLO Advanced, Insight Control | | |
| Form Factor | Rack (1U), HPE Easy Install Rails | | |
| Warranty | 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. | | |

Smart Buy Models

| | E5-2600v3 Series Smart Buys | | | |
|----------------------|--|--|---|--|
| [SKU Number] | 783357-S01 | 783358-S01 | 783359-S01 | 783360-S01 |
| Model Name | HP ProLiant DL160 Gen9 E5-2603v3 1.6GHz 6-core 8GB-R B140i 4LFF 550W PS US Server/S-Buy | HP ProLiant DL160 Gen9 E5-2609v3 1.9GHz 6-core 8GB-R H240 8SFF 550W PS US Server/S-Buy | HP ProLiant DL160 Gen9 E5-2620v3 2.4GHz 6-core 16GB-R H240 8SFF 550W PS US Server/S-Buy | HP ProLiant DL160 Gen9 E5-2640v3 2.6GHz 8-core 2P 32GB-R P440/4G 8SFF 800W RPS US Server/S-Buy |
| Processor | Intel® Xeon® E5-2603v3 | Intel® Xeon® E5-2609v3 | Intel® Xeon® E5-2620v3 | Intel® Xeon® E5-2640v3 |
| Number of Processors | | One | | Two |
| Memory | 8GB (1x8GB Registered DIMMs, 2133 MHz) NOTE: The DIMMs will operate at 1600MHz with this processor | | 16GB (2x8GB Registered DIMMs, 2133 MHz) NOTE: The DIMMs will operate at 1866MHz with this processor | |
| Network Controller | HPE Embedded Dual Port 361i Adapter Network Interface | | | |
| Storage Controller | HPE Dynamic Smart Array B140i | HPE H240 FIO Smart Host Bus Adapter | | HPE Flexible Smart Array P440/4G FIO Controller + Smart Storage Battery |
| Hard Drive | None ship standard | | | |
| Internal Storage | 4 LFF HDD Bays | | | 8 SFF HDD Bays |
| Optical Drive Bay | None Included; Optional: DVD-ROM, DVD-RW | | | |
| PCI-Express Slots | 2 Standard (1-FH/HL, 1-LP) PCIe 3.0 | | | 3 Standard (1-FH/HL, 2-LP) PCIe 3.0 |
| Power Supply | (1) HPE 550W FIO Power Supply | | | (2) HPE 800W Redundant Power Supply |
| Fans | 3 hot swap fans, non-redundant | 4 hot swap fans, redundant | | 7 hot swap fans, redundant |
| Management | Standard: iLO Management Optional: iLO Essentials, iLO Advanced, Insight Control | | | |
| Form Factor | Rack (1U), HPE Easy Install Rails | | | |
| Warranty | 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. | | | |

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

| CTO Server Models | HP ProLiant DL160 Gen9 Hot Plug 8SFF Configure-to-order Server | HP ProLiant DL160 Gen9 Hot Plug 4LFF Configure-to-order Server | HP ProLiant DL160 Gen9 Non-hot Plug 4LFF Configure-to-order Server |
|--------------------|--|--|--|
| SKU Number | 754520-B21 | 754521-B21 | 754522-B21 |
| Processor | 2 (optional) x HPE Smart Socket Guide | | |
| DIMM Slots | 16 DIMM slots for RDIMM, LRDIMM DDR4 Memory | | |
| Storage Controller | HPE Dynamic Smart Array B140i | | |
| PCIe | Optional (None ship standard) | | |
| Drive Cage | 8SFF Hot Plug | 4LFF Hot Plug | 4LFF Non Hot Plug |
| Network Controller | HPE Embedded Dual Port 361i Adapter Network Interface | | |
| Fans | 3 hot swap fans, non-redundant | | |
| Management | iLO Management (standard), Intelligent Provisioning (standard) | | |
| USB | 1 front, 1 internal, 2 rear | | |
| Ears | HPE Thumbscrew Ears | | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | | |
|----------------|---|------------|
| HPE Processors | Entry Processors – E5-2600v3 series Processors | |
| | HP DL160 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit | 733943-L21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit | 763235-L21 |
| | Base Processors – E5-2600v3 series Processors | |
| | HP DL160 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit | 733935-L21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit | 733937-L21 |

Configuration Information - Factory Integrated Models

| | |
|---|------------|
| HP DL160 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit | 733939-L21 |
| HP DL160 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit | 763241-L21 |
| HP DL160 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit | 779386-L21 |
| Performance Processors – E5-2600v3 series Processors | |
| HP DL160 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit | 733931-L21 |
| HP DL160 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit | 733933-L21 |
| HP DL160 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit | 763237-L21 |

NOTE: If two processors are desired, select one xxxxxx-L21 and one corresponding xxxxxx-B21

NOTE: Up to two processors supported. Mixing different processor models is not supported.

NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: When v4 Processor is selected, then only PC4-2400T Memory Kit can be selected.

NOTE: When v3 Processor is selected, then only PC4-2133P Memory Kit can be selected.

NOTE: For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

HPE Memory

NOTE: Select one or more memory kits from below.

NOTE: LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9

NOTE: If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2400MHz, 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>

Registered DIMMs (RDIMMs) for E5-2600v4 Series

| | |
|--|------------|
| HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805347-B21 |
| HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805349-B21 |
| HP 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 836220-B21 |

Configuration Information - Factory Integrated Models

| | | |
|---------------------------|--|------------|
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805351-B21 |
| | Registered DIMMs (RDIMMs) for E5-2600v3 Series | |
| | HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726717-B21 |
| | HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |
| | HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 759934-B21 |
| | HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726719-B21 |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 728629-B21 |
| | Load Reduced DIMMs (RDIMMs) for E5-2600v4 Series | |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit | 805353-B21 |
| | HP 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit | 805358-B21 |
| | Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series | |
| | HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726724-B21 |
| | HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726722-B21 |
| | HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726720-B21 |
| | HPE Standard Memory for E5-2600v4 Series | |
| | HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Standard Memory Kit | 851353-B21 |
| | HPE Standard Memory for E5-2600v3 Series | |
| | HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit | 803026-B21 |
| | HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit | 803028-B21 |
| | NOTE: HPE Standard Memory DIMMs have no SmartMemory features. | |
| HPE I/O Expansion Options | HP DL160 Gen9 CPU1 Riser FIO Kit | 725585-B21 |
| | NOTE: This riser enables two PCIe3 slots. | |
| HPE Power Supplies | NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor | |
| | NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server. | |
| | HPE Entry-Level Power Supplies | |

Configuration Information - Factory Integrated Models

HP 550W FIO Power Supply Kit 730941-B21

HP 800W Gold (Redundant)/900W (Non-Redundant) AC Power Input FIO Module 813534-B21

NOTE: HP Server RPS FIO Backplane Kit (P/N: 813535-B21) is required for this power supply.

NOTE: Up to two of these option kits can be installed in one system.

NOTE: With just one power supply module installed, up to 900W wattage is supported while with both power supply modules installed in RPS mode, up to 800W is supported.

HP Server Redundant Power Supply FIO Backplane Kit 813535-B21

NOTE: Required for RPS capability.

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

HPE Storage Controllers

NOTE: One of the cable options below is required to be selected depending on combinations of CTO Server and Storage Controller. If not using the embedded B140i controller, must select one of the following HP Storage Controllers and Cable Options noted below.

NOTE: HP ProLiant DL160 Gen9 NHP 4LFF CTO Server (P/N: 754522-B21) includes SATA Cables required to support the embedded B140i controller and no cable option is required.

HPE Smart Array Controllers

HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller 761872-B21

NOTE: Includes the HP Smart Storage Battery

NOTE: If HP ProLiant DL160 Gen9 8SFF CTO Server (P/N: 754520-B21) or HP ProLiant DL160 Gen9 4LFF CTO Server (P/N: 754521-B21) is selected in Step 1 above.

HPE Smart Host Bus Adapters

HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter 761873-B21

NOTE: Includes the HP Smart Storage Battery

NOTE: If HP ProLiant DL160 Gen9 8SFF CTO Server (P/N: 754520-B21) or HP ProLiant DL160 Gen9 4LFF CTO Server (P/N: 754521-B21) is selected in Step 1 above.

HPE Cable Options

HP DL160 Gen9 4LFF Smart Array B140i SATA Cable FIO Kit 768775-B21

NOTE: Required if using the embedded B140i as the primary controller with the HP ProLiant DL160 Gen9 4LFF CTO Server (P/N: 754521-B21).

HP DL160 Gen9 8SFF Smart Array B140i SATA Cable FIO Kit 774611-B21

NOTE: Required if using the embedded B140i as the primary controller with the HP ProLiant DL160 Gen9 8SFF CTO Server (P/N: 754520-B21).

HP DL160 Gen9 4LFF Smart Array P440 SAS Cable Kit 725593-B21

NOTE: Required with the HP ProLiant DL160 Gen9 4LFF CTO Server (P/N: 754521-B21) if Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller (P/N: 761872-B21) is selected.

HP DL160 Gen9 8SFF Smart Array P440 SAS Cable Kit 774619-B21

NOTE: Required with the HP ProLiant DL160 Gen9 8SFF CTO Server (P/N: 754520-B21) if Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller (P/N: 761872-B21) is selected.

Configuration Information - Factory Integrated Models

| | | |
|--|---|------------|
| | HP DL160 Gen9 4LFF Smart Array H240 SAS Cable Kit | 725590-B21 |
| | NOTE: Required with the HP ProLiant DL160 Gen9 4LFF CTO Server (P/N: 754521-B21) if HP H240 12Gb 1-port Int FIO Smart HBA (P/N: 761873-B21) is selected. | |
| | HP DL160 Gen9 8SFF Smart Array H240 SAS Cable Kit | 774621-B21 |
| | NOTE: Required with the HP ProLiant DL160 Gen9 8SFF CTO Server (P/N: 754520-B21) if HP H240 12Gb 1-port Int FIO Smart HBA (P/N: 761873-B21) is selected. | |
| HPE Insight Software | HPE Insight Control | |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License | C6N36A |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO E-LTU | C6N36ABE |
| HPE Converged Infrastructure Management Software | HPE OneView (with HPE iLO Advanced) | |
| | HP OneView for ProLiant DL Server incl 3yr 24x7 Supp FIO Bundle Physical 1 Svr Lic | E5Y43A |
| | HPE OneView (without HPE iLO Advanced) | |
| | HP OneView w/o iLO including 3yr 24x7 Support FIO 1 Server LTU | P8B31A |
| HPE Security | HP DL160 Gen9 Quick Release Ear FIO Kit | 774609-B21 |
| | NOTE: Required for Security Bezel option | |
| BIOS Mode | HP Legacy FIO Mode Setting | 758959-B22 |
| | NOTE: If B140i is the primary controller, then this option cannot be selected. | |
| | NOTE: Selecting this option changes the default UEFI BIOS setting into Legacy BIOS setting | |
| Controller State | HP Mfg FIO Enable HBA Mode Setting | 792962-B21 |
| | NOTE: Can only be selected with H240 FIO Smart Host Bus Adapter | |
| | NOTE: If H240 is the primary controller then RAID is not allowed with this selection. | |
| | HP AHCI-Enable FIO Setting | 801845-B21 |
| | NOTE: If B140i is the primary controller then RAID is not allowed with this selection. | |

Step 4: Choose Additional Options for Factory Integration from Core and Additional Options sections below

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

| | | |
|--------------------|--|------------|
| HPE Unique Options | HP DL180 Gen9 Dedicated iLO Management Port Kit | 725581-B21 |
| | HP DL160 Gen9 Low Profile PCIe CPU2 Riser Kit | 725586-B21 |
| | NOTE: CPU 2 is required if this riser is to be installed, enables one PCIe3 slot. | |
| | HP DL160 Gen9 Front USB 3.0 Enablement Kit | 725594-B21 |
| | NOTE: This kit is required to enable a front USB3.0 port on SFF models only. | |
| | HP DL160 Gen9 FlexibleLOM Enablement Kit | 781844-B21 |
| | NOTE: This riser kit is required when FlexibleLOM is selected. | |

| | | |
|----------------|---|------------|
| HPE Processors | Entry Processors - E5-2600v4 series Processors | |
| | HP DL160 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) Processor Kit | 801287-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) Processor Kit | 801288-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) Processor Kit | 801289-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W) Processor Kit | 801290-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) Processor Kit | 801291-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) Processor Kit | 801301-B21 |
| | Entry Processors - E5-2600v3 series Processors | |
| | HP DL160 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit | 733943-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit | 763235-B21 |
| | Base Processors - E5-2600v3 series Processors | |
| | HP DL160 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit | 733935-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit | 733937-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit | 733939-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit | 763241-B21 |
| | HP DL160 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit | 779836-B21 |
| | Performance Processors - E5-2600v4 series Processors | |

Core Options

| | |
|--|------------|
| HPE DL160 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) Processor Kit | 801283-B21 |
| HPE DL160 Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) Processor Kit | 801284-B21 |
| HPE DL160 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) Processor Kit | 801285-B21 |
| HPE DL160 Gen9 Intel® Xeon® E5-2680v4 (2.4GHz/14-core/35MB/120W) Processor Kit | 825494-B21 |
| HPE DL160 Gen9 Intel® Xeon® E5-2695v4 (2.1GHz/18-core/45MB/120W) Processor Kit | 825498-B21 |
| HPE DL160 Gen9 Intel® Xeon® E5-2683v4 (2.1GHz/16-core/40MB/120W) Processor Kit | 825500-B21 |
| HPE DL160 Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) Processor Kit | 801286-B21 |
| Performance Processors - E5-2600v3 series Processors | |
| HP DL160 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit | 733931-B21 |
| HP DL160 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit | 733933-B21 |
| HP DL160 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit | 763237-B21 |

NOTE: Processor upgrade from E5-2600v3 to E5-2600v4 is supported for processors up to 105W. Please refer to DL160 Gen9 User Guide for more details.

| | | |
|------------|--|------------|
| HPE Memory | Registered DIMMs (RDIMMs) for E5-2600v4 Series | |
| | HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805347-B21 |
| | HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805349-B21 |
| | HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 836220-B21 |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805351-B21 |
| | NOTE: These Memory DIMMs are supported only on E5-2600v4 processors. | |
| | Registered DIMMs (RDIMMs) for E5-2600v3 Series | |
| | HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726717-B21 |
| | HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |
| | HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 759934-B21 |
| | HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726719-B21 |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 728629-B21 |
| | NOTE: These Memory DIMMs are supported only on E5-2600v3 processors. | |
| | Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series | |

Core Options

HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Registered Memory Kit 805353-B21

HP 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Registered Memory Kit 805358-B21

NOTE: These Memory DIMMs are supported only on E5-2600v4 processors.

Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726720-B21

HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726722-B21

HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726724-B21

NOTE: These Memory DIMMs are supported only on E5-2600v3 processors.

HPE Standard Memory for E5-2600v4 Series

HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Standard Memory Kit 851353-B21

NOTE: These Memory DIMMs are supported only on E5-2600v4 processors.

HPE Standard Memory for E5-2600v3 Series

HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit 803026-B21

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit 803028-B21

NOTE: These Memory DIMMs are supported only on E5-2600v3 processors.

| | | |
|--------------------|--|------------|
| HPE Optical Drives | HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive | 726536-B21 |
| | HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive | 726537-B21 |

| | | |
|------------|--|------------|
| HPE Drives | SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives | |
| | HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 781518-B21 |
| | HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive | 718162-B21 |
| | HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 785069-B21 |
| | HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652589-B21 |
| | HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759212-B21 |
| | HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 781516-B21 |
| | HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652583-B21 |
| | HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759210-B21 |
| | HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652572-B21 |
| | HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759208-B21 |

Core Options

| | |
|---|------------|
| HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 785067-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652564-B21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652605-B21 |
| HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive | 748387-B21 |
| HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive | 791034-B21 |
| SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives | |
| HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652745-B21 |
| HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652749-B21 |
| HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765464-B21 |
| HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765466-B21 |
| HPE 1TB 12G SAS 7.2K rpm SFF (2.5in) SC Midline 1yr Warranty Hard Drive | 832514-B21 |
| SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives | |
| HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 765424-B21 |
| HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 737394-B21 |
| HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 737261-B21 |
| SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765259-B21 |
| HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 761477-B21 |
| HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818367-B21 |
| HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765257-B21 |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 695510-B21 |
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652766-B21 |
| HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818365-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652757-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652753-B21 |

Core Options

| | |
|--|------------|
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793699-B21 |
| HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793703-B21 |
| SAS Hot Plug LFF (3.5-inch) Performance Drives | |
| HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793669-B21 |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793671-B21 |
| SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives | |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655710-B21 |
| HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655708-B21 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765453-B21 |
| HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765455-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765255-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 753874-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765253-B21 |
| HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 693687-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793683-B21 |
| HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793695-B21 |
| SATA Hot Plug LFF (3.5-inch) Performance Drives | |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives | 793665-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793667-B21 |
| SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |

Core Options

| | |
|---|------------|
| HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801888-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 628065-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801886-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659339-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801884-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659337-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801882-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659341-B21 |
| 12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 1.6TB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779176-B21 |
| HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779172-B21 |
| HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779168-B21 |
| HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779164-B21 |
| HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802578-B21 |
| HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802582-B21 |
| HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802586-B21 |
| HPE 800GB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846430-B21 |
| HPE 1.6TB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846432-B21 |
| 12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762263-B21 |
| HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762261-B21 |
| HP 1.92TB 12G SAS Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802891-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762270-B21 |
| HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762272-B21 |
| 12G SAS Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State | |

Core Options

| | |
|---|------------|
| HPE 480GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816562-B21 |
| HPE 960GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816568-B21 |
| HPE 1.92TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816572-B21 |
| HPE 3.84TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816576-B21 |
| 12G SAS Hot Plug SFF (2.5-inch) MU-3 SC SSD | |
| HPE 400GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822555-B21 |
| HPE 800GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822559-B21 |
| HPE 800GB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846434-B21 |
| HPE 1.6TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822563-B21 |
| HPE 1.6TB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846436-B21 |
| HPE 3.2TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822567-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804639-B21 |
| HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804665-B21 |
| HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804671-B21 |
| HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804677-B21 |
| HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691862-B21 |
| HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691866-B21 |
| HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691868-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives | |
| HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739898-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756636-B21 |
| 6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value G1 Solid State Drives | |

Core Options

| | |
|--|------------|
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756657-B21 |
| HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 789145-B21 |
| HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804575-B21 |
| HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804581-B21 |
| HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804587-B21 |
| HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804593-B21 |
| HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804599-B21 |
| HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804605-B21 |
| 6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives | |
| HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816929-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816919-B21 |
| HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816909-B21 |
| HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816899-B21 |
| HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816879-B21 |
| 6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1 Solid State Drives | |
| HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764929-B21 |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764927-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764925-B21 |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764923-B21 |
| HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804613-B21 |
| HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804625-B21 |
| HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804631-B21 |
| HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 832414-B21 |
| HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816889-B21 |
| 6G SATA Hot Plug MU-3 SFF (2.5-inch) SC Solid State Drives | |

Core Options

| | |
|---|------------|
| HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 817011-B21 |
| HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816995-B21 |
| HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816985-B21 |
| HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816975-B21 |
| HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816965-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804642-B21 |
| HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804668-B21 |
| HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804674-B21 |
| HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804680-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value G1 Solid State Drives | |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756660-B21 |
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789147-B21 |
| HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804578-B21 |
| HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804584-B21 |
| HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804590-B21 |
| HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804596-B21 |
| HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804602-B21 |
| HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804608-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD | |

Core Options

| | |
|--|------------|
| HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816933-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816923-B21 |
| HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816913-B21 |
| HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816903-B21 |
| HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816893-B21 |
| HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816883-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756639-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives | |
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764945-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764943-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764941-B21 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764939-B21 |
| HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804616-B21 |
| HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804628-B21 |
| HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804634-B21 |
| HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 832417-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD | |
| HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 817015-B21 |
| HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816999-B21 |
| HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816989-B21 |
| HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816979-B21 |
| HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816969-B21 |
| M.2 SSD | |

Core Options

| | |
|---|------------|
| HPE 340GB Read Intensive-2 Solid State M.2 Enablement Kit for ProLiant ML/DL Servers | 835563-B21 |
| HPE Dual 340GB Read Intensive-2 Solid State M.2 Enablement Kit for ProLiant ML/DL Servers | 835565-B21 |
| HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers | 777894-B21 |
| HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers | 777894-B21 |
| HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers | 788028-B21 |
| NOTE: M.2 drives go in PCIe slots and use B140i SATA controller only. | |
| Hard Drive Blank Kits | |
| HP Large Form Factor Hard Drive Blank Kit | 666986-B21 |
| HP Small Form Factor Hard Drive Blank Kit | 666987-B21 |

HPE Networking 1 Gigabit Ethernet adapters

| | |
|-------------------------------------|------------|
| HP Ethernet 1Gb 2-port 361T Adapter | 652497-B21 |
| HP Ethernet 1Gb 4-port 366T Adapter | 811546-B21 |
| HP Ethernet 1Gb 4-port 331T Adapter | 647594-B21 |
| HP Ethernet 1Gb 2-port 332T Adapter | 615732-B21 |

10 Gigabit Ethernet adapters

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 530SFP Adapter | 652503-B21 |
| HP Ethernet 10Gb 2-port 530T Adapter | 656596-B21 |
| HP Ethernet 10Gb 2-port 560SFP+ Adapter | 665249-B21 |
| HP Ethernet 10Gb 2-port 561T Adapter | 716591-B21 |
| HP Ethernet 10Gb 2-port 546SFP+ Adapter | 779793-B21 |
| HPE Ethernet 10Gb 2-port 562SFP+ Adapter | 727055-B21 |

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. See cables/options below.

FlexibleLOM Adapters

| | |
|---|------------|
| HP Ethernet 1Gb 4-port 331FLR Adapter | 629135-B22 |
| HP Ethernet 1Gb 4-port 366FLR Adapter | 665240-B21 |
| HP Ethernet 10Gb 2-port 561FLR-T Adapter | 700699-B21 |
| HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter | 700751-B21 |
| HP FlexFabric 10Gb 2-port 533FLR-T Adapter | 700759-B21 |
| HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter | 779799-B21 |
| HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter | 665243-B21 |
| HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter | 727054-B21 |
| HPE FlexFabric 10Gb 2-port 556FLR-T Adapter | 794525-B21 |

NOTE: FlexibleLOM riser kit (P/N: 781844-B21) is required when any FlexibleLOM is selected.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

| | | |
|---|--|------------|
| HPE InfiniBand | HP InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
| | HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter | 764284-B21 |
| | QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA | 583211-B21 |
| NOTE: Please see the HPE InfiniBand Options for HPE ProLiant and Integrity Servers | | |

Core Options

[QuickSpecs](#)

for additional information.

| | | |
|---------------------------|---|---|
| HPE I/O Expansion Options | <p>HP DL160 Gen9 Low Profile PCIe CPU2 Riser Kit NOTE: CPU 2 is required if this riser is to be installed, enables one PCIe3 slot.</p> <p>HP DL160 Gen9 FlexibleLOM Enablement Kit NOTE: This enablement kit is required when FlexibleLOM is selected.</p> | <p>725586-B21</p> <p>781844-B21</p> |
| HPE Power Supplies | <p>NOTE: Supports Silver-level efficiency (89%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.</p> <p>HPE ProLiant Gen9 Essential Server Power Supplies – Redundant HPE 900W AC 240VDC Power Input Module NOTE: This part number can only be bought standalone and is for field integration only. NOTE: RPS Backplane is mandatorily needed with this power input module.</p> <p>HPE 900W AC 240VDC RPS Power Backplane NOTE: This part number can only be bought standalone and is for field integration only. NOTE: This RPS backplane is mandatorily needed with 900W RPS input module.</p> <p>HPE 900W AC 240VDC Redundant Power Supply Kit NOTE: This Redundant Power supply kit includes 2 power supply input module and 1 backplane kit. NOTE: This part number is both factory installed option and filed integrable option. NOTE: This Power supply supports both 100-240V AC and 240V DC. NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers. NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21) must be used with Power Backplane (814835-B21). NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules. NOTE: Redundant AC Power Input Modules do not share power. Redundant AC Power Input Module #1 is the primary AC Power Input Module. Redundant AC Power Input Module #2 is the backup AC Power Input Module. NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server. NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.</p> | <p>775595-B21</p> <p>814835-B21</p> <p>820792-B21</p> |

Core Options

| | | |
|---------------------|--|------------|
| HPE Cooling Options | HP DL160 Gen9 Redundant Fan Kit NOTE: This kit includes one fan and is required for enabling fan redundancy with 1P and 2P configurations. | 725587-B21 |
|---------------------|--|------------|

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

| | | |
|----------------------|---|----------|
| HPE Insight Software | HPE Insight Control | |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License | C6N27A |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License | C6N28ABE |
| | HP Insight Management Media Kit | C6N31A |

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the [HPE Insight Control QuickSpecs](#).

| | | |
|---------------------|--|------------|
| Embedded Management | HPE iLO Advanced | |
| | HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License | 512485-B21 |
| | HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates | BD505A |
| | HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU | E6U59ABE |
| | HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU | E6U64ABE |
| | HPE iLO Essentials | |
| | HP Integrated Lights-Out Essentials including 3yr 24x7 Technical Support and Updates E-LTU | E6U61ABE |
| | HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License | BD774A |
| | HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License | BD775A |
| | HP Integrated Lights-Out Essentials including 1yr 24x7 Technical Support and Updates E-LTU | E6U62ABE |
| | HPE iLO Scale-out | |

Additional Options

| | |
|---|----------|
| HP Integrated Lights-Out Scale-Out 3yr 24x7 Tech Support and Updates Flex Quantity License | BD776A |
| HP Integrated Lights-Out Scale-Out including 3yr 24x7 Tech Support and Updates Tracking License | BD777A |
| HP Integrated Lights-Out Scale-Out including 3yr 24x7 Tech Support and Updates Flex Qty E-LTU | BD776AAE |
| HP Integrated Lights-Out Scale-Out 1yr 24x7 Tech Support and Updates Flex Quantity License | BD778A |
| HP Integrated Lights-Out Scale-Out including 1yr 24x7 Tech Support and Updates Flex Qty E-LTU | BD778AAE |
| HP Integrated Lights-Out Scale-Out including 1yr 24x7 Tech Support and Updates Tracking License | BD779A |

| | | |
|--|---|----------|
| HPE Converged Infrastructure Management Software | HPE OneView | |
| | HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic | E5Y34A |
| | HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU | E5Y35AAE |
| | HP Operations Analytics for HP OneView LTU | K8G29A |
| | HP Operations Analytics for HP OneView E-LTU | K8G29AAE |
| | HP OneView w/o iLO including 3yr 24x7 Support 1 Server LTU | P8B24A |
| | HP OneView w/o iLO including 3yr 24x7 Support Flex Quantity E-LTU | P8B26AAE |
| | HP OneView w/o iLO including 3yr 24x7 Support Track 1 Server LTU | P8B25A |
| | HP OneView Media Kit Phys No Lic | E5Y37A |

NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.

NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of this software (USB flash drive).

NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at:

<http://www.hp.com/go/oneview>.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

| | | |
|---------------------------|--|--------|
| High Performance Clusters | HPE Cluster Management Utility | |
| | HP Insight Cluster Management Utility 1yr 24x7 Flexible License | QL803B |
| | HP Insight Cluster Management Utility 3yr 24x7 Flexible License | BD476A |
| | NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement. | |
| | HP Insight Cluster Management Utility Media | BD477A |
| | NOTE: For additional license kits please see the HPE Insight Cluster Management Utility QuickSpecs . | |

Additional Options

| | | |
|---------------------------------------|---|------------|
| HPE PCIe Workload Accelerator Options | Value Endurance (VE) PCIe Workload Accelerators | |
| | HP 6.4TB FH/HL Value Endurance (VE) PCIe Workload Accelerator | 763840-B21 |
| | HP 3.2TB HH/HL Value Endurance (VE) PCIe Workload Accelerator | 763838-B21 |
| | HP 1.6TB HH/HL Value Endurance (VE) PCIe Workload Accelerator | 763836-B21 |
| | HP 1.3TB HH/HL Value Endurance (VE) PCIe Workload Accelerator | 763834-B21 |
| | HPE 1.3TB Read Intensive-2 HH/HL PCIe Workload Accelerator | 831733-B21 |
| | HPE 1.6TB Read Intensive-2 HH/HL PCIe Workload Accelerator | 831735-B21 |
| | HPE 3.2TB Read Intensive-2 HH/HL PCIe Workload Accelerator | 831737-B21 |
| | HPE 6.4TB Read Intensive-2 FH/HL PCIe Workload Accelerator | 831739-B21 |
| | Light Endurance (LE) PCIe Workload Accelerators | |
| | HP 5.2TB FH/HL Light Endurance (LE) PCIe Workload Accelerator | 775672-B21 |
| | HP 2.6TB HH/HL Light Endurance (LE) PCIe Workload Accelerator | 775670-B21 |
| | HP 1.3TB HH/HL Light Endurance (LE) PCIe Workload Accelerator | 775668-B21 |
| | HP 1.0TB HH/HL Light Endurance (LE) PCIe Workload Accelerator | 775666-B21 |
| | NOTE: Please see the HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs for Technical Specifications and additional information. | |

| | | |
|--------------|---|------------|
| HPE Security | HP 1U Security Bezel Kit | 664918-B21 |
| | NOTE: Quick Release Ear option kit (P/N 774609-B21) is required for installing security bezel. | |
| | HP Trusted Platform Module 2.0 Kit | 745823-B21 |
| | NOTE: HPE Trusted Platform Module 2.0 Option works with Gen9 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants. | |
| | NOTE: HPE Gen9 servers purchased earlier may need the latest firmware update to be compatible with the TPM 2.0 Option. | |
| | NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module. | |
| | HP Trusted Platform Module Option | 488069-B21 |
| | NOTE: The HPE Trusted Platform Module Option (488069-B21) is the TPM 1.2 version. Compatible server platforms include Gen8 and Gen9 servers. | |
| | NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module. | |

Additional Options

HPE Storage Controllers

SAS Controllers

HPE Smart Array Controllers

HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller 726821-B21

HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller 820834-B21

NOTE: Includes the HPE Smart Storage Battery.

HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller 726825-B21

HPE Smart Host Bus Adapters

HP H240 12Gb 2-ports Int Smart Host Bus Adapter 726907-B21

HP H241 12Gb 2-ports Ext Smart Host Bus Adapter 726911-B21

HPE Cable Options

HP DL160 Gen9 4LFF Smart HBA H240 SAS Cable Kit 725590-B21

HP DL160 Gen9 8SFF Smart HBA H240 SAS Cable Kit 774621-B21

HP DL160 Gen9 4LFF Smart Array P440 SAS Cable Kit 725593-B21

HP DL160 Gen9 8SFF Smart Array P440 SAS Cable Kit 774619-B21

NOTE: One of the above cables is required to be selected depending on the combination of server and storage controller. Cable option kit descriptions include the right server and storage controller names. **NOTE:** NHP server model includes SATA cables required to connect drives to embedded B140i SATA controller.

Optional Software

HP SmartCache No Media 24x7 Technical Support 1 Svr License D7S26A

HP SmartCache No Media 24x7 Technical Support Flexible License D7S27A

HP SmartCache No Media 24x7 Technical Support Electronic License D7S27AAE

NOTE: HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers 727258-B21

Servers

NOTE: This option is mandatorily required with HPE Smart Array controllers. One server can accommodate only 1 Smart Storage Battery that would suffice the requirement of all HPE Smart Array controllers.

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HPE tape backup products see: <http://www.hp.com/storage/SPOCK> and <http://www.hp.com/go/ebs>.

NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

Tape Drives

Additional Options

SAS Rack-Mount Tape Solutions

| | |
|---|--------|
| HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive | EH964A |
| HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit | C0L99A |
| HP StoreEver LTO-6 Ultrium 6250 External Tape Drive | EH970A |
| HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount | EJ014B |
| HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive | EH958B |
| HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive | EH900B |
| HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit | EH946C |
| HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive | EH920B |
| HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive | EH848B |
| HP StoreEver 1U SAS Rack-mount Kit | AE459B |
| HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 2m Cable | K2R09A |
| HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 4m Cable | K2R10A |
| HPE StoreEver LTO-7 Ultrium 15000 Internal Tape Drive | BB873A |
| HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive | BB874A |
| HPE DAT Autoloader | |
| HPE StoreEver 1/8 G2 LTO-6 Ultrium 6250 Fibre Channel Tape Autoloader | C0H19A |
| HPE MSL2024 Tape Library | |
| HPE StoreEver MSL2024 0-drive Tape Library | AK379A |
| HPE MSL4048 Tape Library | |
| HPE StoreEver MSL4048 0-drive Tape Library | AK381A |
| HPE StoreEver MSL6480 | |
| HPE StoreEver MSL6480 Scaleable Expansion Module | QU626A |
| HPE StoreEver MSL6480 Scalable Base Module | QU625A |

HPE Disk Backup HPE RDX Removable Disk Backup System

| | |
|---|--------|
| HP RDX+ 500GB External Backup System | B7B66B |
| HP RDX+ 1TB External Backup System | B7B69B |
| HP RDX+ External Docking System | C8S07B |
| HP RDX 2TB USB3.0 External Disk Backup System | E7X53B |
| HP D3700 Enclosure | QW967A |
| HP D3600 Enclosure | QW968A |
| HPE StoreOnce 3100 8TB System | BB913A |
| HPE StoreOnce 3540 24TB System | BB914A |
| HPE StoreOnce 5100 48TB System | BB915A |
| HPE StoreOnce 3520 12TB System | BB922A |

Additional Options

| | | |
|---------------------|--|--------|
| HPE Storage Options | Emulex Fibre Channel HBAs | |
| | HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AJ762B |
| | HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ763B |
| | HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter | C8R38A |
| | HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter | C8R39A |
| | QLogic Fibre Channel HBAs | |
| | HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ764A |
| | HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AK344A |
| | HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter | QW971A |
| | HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter | QW972A |
| | Converged Network Adapter | |
| | HP StoreFabric CN1200E 10Gb Converged Network Adapter | E7Y06A |
| | HP StoreFabric CN1100R Dual Port Converged Network Adapter | QW990A |
| | HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter | N3U51A |
| | HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter | N3U52A |

| | | |
|--------------------------|---|--------|
| HPE Disk Storage Systems | Disk Enclosures | |
| | HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle | E7W30A |
| | HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle | E7W31A |
| | HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle | E7W32A |
| | HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 420TB Bundle | M0T57A |
| | HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle | M0T58A |
| | HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB Bundle | M0T59A |
| | HP D6000 Dual I/O Module Disk Enclosure | QQ695A |
| | HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle | QQ697A |
| | HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle | QQ699A |
| | HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle | QQ698A |
| | HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle | QQ700A |

Additional Options

HPE Data Center HPE Advanced Series Racks

| | | |
|-------|--|--------|
| Racks | HPE 11648 1075mm Pallet Universal Rack | H6J87A |
| | HPE 11648 1075mm Shock Universal Rack | H6J88A |
| | HPE 11642 1075mm Pallet Universal Rack | H6J65A |
| | HPE 11642 1075mm Shock Universal Rack | H6J66A |
| | HPE 11642 1200mm Pallet Universal Rack | H6J67A |
| | HPE 11642 1200mm Shock Universal Rack | H6J68A |
| | HPE 11636 1075mm Pallet Universal Rack | H6J77A |
| | HPE 11636 1075mm Shock Universal Rack | H6J78A |
| | HPE 11622 G2 1075mm Shock Universal Rack | H6J83A |
| | HPE 11622 G2 1075mm Shock Universal Rack | H6J84A |
| | HPE 11614 1075mm Shock Universal Rack | H6J82A |

NOTE: Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Enterprise Series Racks

| | | |
|--|---|--------|
| | HPE 647 1075mm Pallet Intelligent Series Rack | BW911A |
| | HPE 647 1075mm Shock Intelligent Series Rack | BW912A |
| | HPE 647 1200mm Pallet Intelligent Series Rack | BW913A |
| | HPE 647 1200mm Shock Intelligent Series Rack | BW914A |
| | HPE 642 1075mm Pallet Intelligent Series Rack | BW903A |
| | HPE 642 1075mm Shock Intelligent Series Rack | BW904A |
| | HPE 642 1200mm Pallet Intelligent Series Rack | BW907A |
| | HPE 642 1200mm Shock Intelligent Series Rack | BW908A |
| | HPE 636 1075mm Pallet Intelligent Series Rack | BW895A |
| | HPE 636 1075mm Shock Intelligent Series Rack | BW896A |
| | HPE 842 1075mm Pallet Intelligent Series Rack | BW917A |
| | HPE 842 1075mm Shock Intelligent Series Rack | BW918A |

NOTE: Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Standard Series Rack

| | | |
|--|---|--------|
| | HPE V142 1075mm deep Pallet 100 series Rack | AF046A |
|--|---|--------|

NOTE: Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

| | |
|-----------|--|
| HPE Power | HPE Basic Power Distribution Units (PDU) |
|-----------|--|

Additional Options

| | | |
|---------------------------|---|------------|
| Distribution Units (PDUs) | HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU | H5M54A |
| | HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU | H5M56A |
| | HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU | H5M55A |
| | HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU | H5M57A |
| | HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU | H5M58A |
| | HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU | H5M61A |
| | HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU | H5M59A |
| | HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU | H5M60A |
| | HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU | H5M75A |
| | HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU | H5M63A |
| | HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU | H5M64A |
| | HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU | H5M62A |
| | HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU | H5M67A |
| | HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer | H3X09A |
| | HPE Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (4) C19/Horizontal NA/JP PDU | 252663-D71 |
| | HPE Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (4) C19/Horizontal NA/JP Core Only PDU | 252663-D74 |
| | HPE Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (4) C19/Horizontal NA/JP PDU | 252663-D75 |
| | HPE Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF512A |
| | HPE Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF519A |
| | HPE Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF511A |
| | NOTE: Please see the HPE Basic Power Distribution Units (PDU) QuickSpecs for information on additional options and product specifications. | |
| | HPE Metered Power Distribution Units (PDU) | |

Additional Options

| | |
|---|--------|
| HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU | D9N43A |
| HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU | D9N46A |
| HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU | D9N44A |
| HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU | D9N45A |
| HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Vertical NA/JP PDU | G9Z05A |
| HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU | D9N47A |
| HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU | D9N51A |
| HPE Metered 3Ph 5.7kVA/L21-20P 16A/120-208V Outlets (13) C13 (3)5-20R/Vertical NA/JP PDU | D9N52A |
| HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU | D9N53A |
| HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU | D9N49A |
| HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N58A |
| HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3) C19/Vertical NA/JP PDU | D9N61A |
| HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N62A |
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3) C19/Vertical NA/JP PDU | D9N54A |
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N59A |
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | G9Z07A |
| HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF-203P-HP/Vertical NA PDU | D9N63A |
| HP Environmental Sensor for Remote Monitored and Managed PDUs | E2D53A |
| NOTE: Please see the HPE Metered Power Distribution Units (PDU) QuickSpecs for information on additional options and product specifications. | |
| HPE Intelligent Power Distribution Unit (PDU) | |

Additional Options

| | |
|--|--------|
| HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF520A |
| HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF521A |
| HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF522A |
| HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6) C19/Horizontal NA/JP PDU | AF523A |
| HPE Intelligent Modular 3Ph 11kVA/L22-20P 16A/240V Outlets (6) C19/Horizontal NA/JP PDU | AF900A |
| HPE Intelligent Modular 3Ph 17.3kVA/60309 30A 5-wire 24A/240V (6) C19/Horizontal NA/JP PDU | AF901A |
| HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU | AF535A |
| HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 30A 5-wire 24A/240V (12) C19/Horizontal NA/JP PDU | AF537A |
| HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU | AF531A |
| HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU | AF532A |
| HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF533A |
| HP 5xC13 Intelligent PDU Extension Bar G2 Kit | AF547A |
| HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar | AF528A |
| NOTE: Please see the HPE Intelligent Power Distribution Units QuickSpecs for information on additional options and product specifications. | |
| HPE Metered and Switched Power Distribution Units (PDU) | |
| HPE Metered Switched 2.8kVA/L5-30P 24A/120V Outlets (24) 5-20R /Vertical NA/JP PDU | H8B48A |
| HPE Metered Switched 3.6kVA/60320 C20 Detachable 16A/230V Outlets (7) C13 (1) C19/Vertical WW PDU | H8B49A |
| HPE Metered Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU | H8B50A |
| HPE Metered Switched 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (6) C19/Vertical NA/JP PDU | H8B52A |
| HPE Metered Switched 3Ph 8.6kVA/L2190-30P 24A/208V Outlets (23) C13 C19 (1) 520R/Vertical NA/JP PDU | H8B53A |
| HPE Metered Switched 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | H8B55A |
| HPE Metered Switched 3Ph 17.3kVA/60309 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | H8B56A |
| NOTE: Please see the HPE Metered and Switched Power Distribution Units (PDU) QuickSpecs for information on additional options and product specifications. | |
| NOTE: To learn more, please visit the HPE Uninterruptible Power Systems (UPS) web page . | |

Additional Options

| | | |
|--|---|--|
| HPE Rack Mount Consoles, KVM Switches, and Keyboards | HPE Location Discovery Services HP Location Discovery Services LCD8500 Kit HPE Rack Mount Consoles HP LCD8500 1U US Rackmount Console Kit HP LCD8500 1U US TAA Rackmount Console Kit HPE KVM Switches HP 0x1x8 G3 KVM Console Switch HP 0x2x16 G3 KVM Console Switch HP TAA 0x2x16 G3 KVM Console Switch HP USB Remote Access Key for G3 KVM Console Switches HP KVM Console USB Interface Adapter HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter HP 1x4 USB/PS2 KVM Console Switch HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software HPE USB Keyboard and Mouse HP USB BFR with PVC Free US Keyboard/Mouse Kit | TL052A AF630A AF645A AF651A AF652A AF653A AF650A AF628A AF618A AF619A AF629A AF611A AF620A AF621A AF622A 631341-B21 |
| | Rail Kits HP 1U Small Form Factor Easy Install Rail Kit HP 1U Cable Management Arm for Easy Install Rail Kit HP 1U Short Friction Rail Kit | 734807-B21 734811-B21 775612-B21 |
| | HPE Other Options HP Rack LED Light Kit HP Kit LCD 1.83m Latch Display Port Cable HP Advanced Power Manager Kit HP ConvergedSystem Door Branding Kit HP ConvergedSystem Rack Light Kit HP ConvergedSystem Rack Side Panel 1075mm Kit | BW939A G7T29A 741192-B21 TK815A TK816A TK817A |

HPE UninterruptibleHPE DirectFlow Three Phase UPS

Additional Options

| | | |
|------------------------|--|--------|
| Power Systems (UPS) | Power Unit (1U UPS) | |
| | HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System | G9Y75A |
| | HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System | AF478A |
| | Input/Output Module Options for 1U UPS | |
| | HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module | AF489A |
| | HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module | AF491A |
| | HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module | AF492A |
| | HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module | G9Y76A |
| | HP DirectFlow UPS Management Card | AF493A |
| | Power Unit (2U UPS) | |
| | HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System | AF479A |
| | Input/Output Module Options for 2U UPS | |
| | HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module | AF486A |
| | HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module | AF487A |
| | HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module | D9Q02A |
| | HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module | AF484A |
| | NOTE: All Input/Output Modules support dual output outlets except the AF484A. | |
| | Battery Pack Options | |
| | HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack | AF480A |
| | HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack | AF482A |
| | HP WW DirectFlow Secondary Battery Cable | AF497A |
| | NOTE: Please see the HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs for information on additional options and product specifications. | |
| | HPE Tower UPS | |
| | HPE T750 G4 UPS Models | |
| | HP T750 G4 NA/JP Uninterruptible Power System | J2P85A |
| | HPE T1000 G4 UPS Models | |
| | HP T1000 G4 NA/JP Uninterruptible Power System | J2P86A |
| | HPE T1500 G4 UPS Models | |
| | HP T1500 G4 NA/JP Uninterruptible Power System | J2P87A |
| | HPE Rack/Tower UPS | |

Additional Options

| | |
|--|--------|
| HPE R/T2200 G4 UPS Models | |
| HP R/T2200 G4 NA/JP Uninterruptible Power System | J2R00A |
| HPE R/T3000 G4 UPS Models | |
| HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System | J2R01A |
| HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System | J2R02A |
| R1500 G4 Models | |
| HP R1500 G4 NA Uninterruptible Power System | J2Q99A |
| R7000 Uninterruptible Power System (UPS) | |
| HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System | AF462A |
| R5000 Uninterruptible Power System (UPS) | |
| HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System | AF460A |
| HPE UPS Options | |
| HP R/T2200 G4 Extended Runtime Module | J2R09A |
| HP R/T3000 G4 Extended Runtime Module | J2R10A |
| HP 2U Rack/Tower UPS Shipping Kit | L4Q11A |

NOTE: Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on additional options and product specifications.

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).


| | | |
|---|--|------------|
| HPE USB and SDHPE Enterprise Mainstream Flash Media Kits for Memory Cards Options | | |
| HP 8GB microSD Enterprise Mainstream Flash Media Kit | | 726116-B21 |
| HP Dual 8GB microSD Enterprise Midline USB Kit | | 741279-B21 |
| HP DL160 Gen9 Front USB 3.0 Enablement Kit | | 725594-B21 |

NOTE: This enablement kit is required to enable front 1xUSB3.0 port with 8SFF models.

| | | |
|------------------------|---|--------|
| HPE Care Pack Services | Foundation Care | |
| | HPE 3 year Foundation Care 24x7 DL160 Gen9 Service | U7AZ7E |
| | HPE 3 year Foundation Care 24x7 wDMR DL160 Gen9 Service | U7AZ8E |
| | HPE 3 year Foundation Care 24x7 wCDMR DL160 Gen9 Service | U7AZ9E |
| | Proactive Care | |
| | HPE 3 year Proactive Care 24x7 DL160 Gen9 Service | U7BA0E |
| | HPE 3 year Proactive Care 24x7 with DMR DL160 Gen9 Service | U7BA1E |
| | HPE 3 year Proactive Care 24x7 with CDMR DL160 Gen9 Service | U7BA2E |
| | Installation & Start-up Services | |
| | HPE Installation ProLiant DL160/DL360e Service | U6E11E |
| | HPE Installation and Startup Entry ML DL Server Service | U6E13E |

Memory

Memory Population guidelines

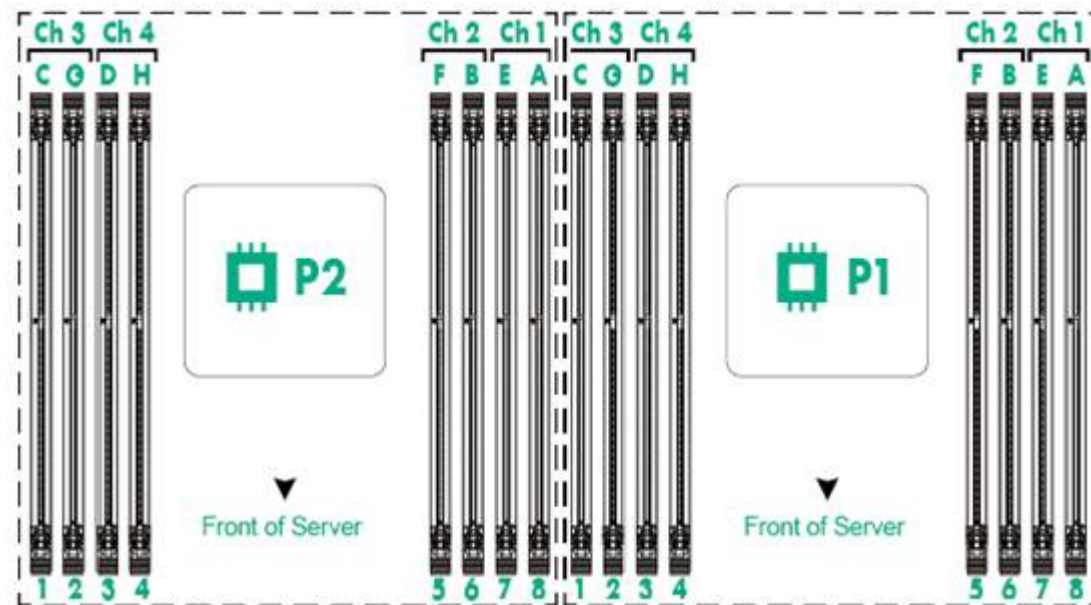

General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- . If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- . To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- . When two processors are installed, balance the DIMMs across the two processors
- . Place the DIMMs with the highest number of ranks in the white slot when mixing DIMMs of different ranks on the same channel.
- . Do not mix RDIMMs or LRDIMMs.
- . Quad rank RDIMMs are not supported in HPE ProLiant DL160 Gen9 servers
- . Quad rank LRDIMMs are capable of up to two DIMMs per channel.
- . DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- . The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- . The maximum memory capacity is a function of the memory type and number of installed processors.
- . To realize the performance memory capabilities listed in this document, HPE SmartMemory is required

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v4 Series Processor Family

Memory

Memory Bandwidth and Capacity

| [DIMM Type] | Registered DIMMs (RDIMMs) | | | Load Reduced (LRDIMMs) | | |
|------------------------------------|---------------------------|---------------------|---------------------|------------------------|---------------------|---------------------|
| DIMM Rank | Single Rank | Single Rank | Dual Rank | Dual Rank | Dual Rank | Quad Rank |
| DIMM Capacity | 8GB | 16GB | 16GB | 32GB | 32GB | 64GB |
| DIMM Native Speed (MT/s) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |
| Voltage | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V |
| SLOTS THAT CAN BE POPULATED | | | | | | |
| 16 slot servers | 16 | 16 | 16 | 16 | 16 | 16 |
| MAXIMUM CAPACITY (GB) | | | | | | |
| | 128 | 256 | 256 | 512 | 512 | 1024 |
| POPULATED DIMM SPEED (MT/s) | | | | | | |
| 1 DIMM Per Channel | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |
| 2 DIMM Per Channel | 2133 | 2133 | 2133 | 2133 | 2400 | 2400 |
| 3 DIMM Per Channel | 1866 | 1866 | 1866 | 1866 | 2400 | 2400 |

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity

| [DIMM Type] | Registered DIMMs (RDIMMs) | | | | Load Reduced (LRDIMMs) | | | |
|------------------------------------|---------------------------|---------------------|---------------------|---------------------|------------------------|---------------------|---------------------|---------------------|
| DIMM Rank | Single Rank | Single Rank | Dual Rank | Dual Rank | Dual Rank | Dual Rank | Quad Rank | Quad Rank |
| DIMM Capacity | 4GB | 8GB | 8GB | 16GB | 32GB | 16GB | 32GB | 64GB |
| DIMM Native Speed (MT/s) | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 |
| Voltage | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V |
| SLOTS THAT CAN BE POPULATED | | | | | | | | |
| 16 slot servers | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| MAXIMUM CAPACITY (GB) | | | | | | | | |
| | 64 | 128 | 128 | 256 | 512 | 256 | 512 | 1024 |
| POPULATED DIMM SPEED (MT/s) | | | | | | | | |



Memory

| | | | | | | | | |
|--------------------|------|------|------|------|------|------|------|------|
| 1 DIMM Per Channel | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 |
| 2 DIMM Per Channel | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 |
| 3 DIMM Per Channel | 1600 | 1600 | 1600 | 1600 | 1600 | 1866 | 1866 | 1866 |

NOTE: DL160 has 2 DIMMs per channel and hence 3 DIMMs per channel memory speeds are not applicable on DL160

DIMM slot and configuration diagram

DIMM slot and configuration diagrams

Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A,CPU1-B,CPU2-B,CPU1-C, CP2-C

CPU #1 IS PROCESSOR ON RIGHT - LOOKING FROM FRONT OF SERVER

| | CPU 1 | | CPU 2 | |
|--------|--------|------------------|--------|------------------|
| | Slot # | population order | Slot # | population order |
| Chnl 3 | 1 | C | 1 | C |
| | 2 | G | 2 | G |

| | CPU 1 | | CPU 2 | |
|--------|--------|------------------|--------|------------------|
| | Slot # | population order | Slot # | population order |
| Chnl 4 | 3 | D | 3 | D |
| | 4 | H | 4 | H |

| | CPU 1 | | CPU 2 | |
|--------|--------|------------------|--------|------------------|
| | Slot # | population order | Slot # | population order |
| Chnl 2 | 5 | F | 5 | F |
| | 6 | B | 6 | B |

| | CPU 1 | | CPU 2 | |
|--------|--------|------------------|--------|------------------|
| | Slot # | population order | Slot # | population order |
| Chnl 1 | 7 | E | 7 | E |
| | 8 | A | 8 | A |

Memory

| Memory Speed by Processor Model | Processor Models | Supported Memory Speeds |
|---------------------------------|---|-------------------------|
| | E5-2609v3, E5-2603v3 | 1600MHz |
| | E5-2640v3, E5-2630v3, E5-2620v3, E5-2630Lv3, E5-2623v3 | 1866MHz |
| | E5-2660v3, E5-2650v3, E5-2650Lv3 | 2133MHz |
| | E5-2609v4, E5-2603v4 | 1866MHz |
| | E5-2620v4, E5-2630Lv4, E5-2623v4, E5-2640v4, E5-2630v4 | 2133MHz |
| | E5-2650Lv4, E5-2660v4, E5-2650v4, E5-2680v4, E5-2695v4, E5-2683v4 | 2400MHz |

| Standard and Maximum Memory Capacity (Pre-configured Models) | Pre Configured Models | Standard Memory | Maximum Memory Plus Optional Memory | Standard Memory Replaced with Optional Memory |
|--|-----------------------|-----------------|-------------------------------------|---|
| | E5-2603v4, E5-2603v3 | 8GB (1x8GB) | 968GB (15x64GB, 1x8GB) | 1024GB (16x64GB) |
| | E5-2620v4 | 16GB (1x16GB) | 976GB (15x64GB, 1x16GB) | 1024GB (16x64GB) |
| | E5-2609v3 | 16GB (2x8GB) | 912GB (14x64GB, 2x8GB) | 1024GB (16x64GB) |
| | E5-2630v3 | 32GB (2x16GB) | 928GB (14x64GB, 2x16GB) | 1024GB (16x64GB) |

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB



Storage



1-8

8 x SFF SATA/SAS/SSD Hot Pluggable
Hard Drive Bays



1-4

4 x LFF SATA/SAS/SSD Hot Pluggable
Hard Drives Bays

Technical Specifications

| | | |
|--|--|---|
| System Unit | Dimensions | 8 SFF - 1.69 x 17.11 x 23.92 inches (4.29 x 43.46 x 60.76 cm) |
| | (H x W x D) | 4 LFF - 1.7 x 17.1 x 23.9 inches (4.29 x 43.46 x 60.76 cm) |
| Weight (approximate) | Maximum: | 33.04 lb (15kg) |
| | (all hard drives, power supplies, and processors installed) | |
| | Minimum: | 22.03 lb (10kg) |
| | (one hard drive, power supply, and processor installed) | |
| Input Requirements | Rated Line Voltage | 100 to 240 VAC |
| (for Standard 460W PSU, see power specifications tables for detail on 460W, 750W and 1200W power supplies) | Rated Input Current | For 550W Power Supply: 6.7 A (at 100 VAC) 3.3 A (at 100 VAC) |
| | Rated Input Frequency | 47 to 63 Hz |
| | Rated Input Power | For 550 W Power Supply: < 670 W (at 100 VAC), < 660 W (at 200 VAC), |
| | BTU Rating | Maximum For 550 W Power Supply: 2201 BTU/hr (at 100 VAC), 2153 BTU/hr (at 200 VAC) |
| Power Specifications | To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: http://www.hp.com/go/proliant-energy-efficient or http://www.hp.com/go/hppoweradvisor - Click on the system of interest. Example: DL160 Gen9- Follow the instructions of the next screens. | |
| Power Supply Output | Rated Steady-State Power | For 550 W Power Supply: 550 W (at 100 VAC), 550 W (at 200 VAC), |
| | Maximum Peak Power | For 550 W Power Supply: 550 W (at 100 VAC), 550 W (at 200 VAC), |

Technical Specifications

| | | |
|--------------------------|------------------------------------|---|
| System Inlet Temperature | Standard Operating Support | <p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).</p> |
| | Extended Ambient Operating Support | <p>For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae.</p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae.</p> <p>System performance may be reduced if operating in the extended ambient operating range or with a fan fault.</p> <p>NOTE: Supports A3 and A4 extended ambient.</p> |
| Relative Humidity | Operating | <p>Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.</p> |
| (non-condensing) | Non-operating | <p>5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.</p> |
| Altitude | Operating | <p>3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).</p> |
| | Non-operating | <p>9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).</p> |
| Acoustic Noise | | <p>Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the</p> |

Technical Specifications

product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

Idle

| | |
|-------|---|
| L WAd | Entry 5.1 B Base 5.2 B Performance 5.0 B |
| L pAm | Entry 34.2 dBA Base 35.9 dBA Performance 34.9 dBA |

Operating

| | |
|-------|---|
| L WAd | Entry 5.3 B Base 5.3 B Performance 5.6 B |
| L pAm | Entry 36.3 dBA Base 36.2 dBA Performance 39.7 dBA |

| | | |
|--------------------------------|--------------------------------|---|
| Emissions Classification (EMC) | FCC Rating Normative Standards | Class A CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22; K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |
|--------------------------------|--------------------------------|---|

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

| | | |
|--|----------------------------------|--------------------------------|
| HPE Dynamic Smart Array B140i Controller | Number of PCI links | Four |
| | PCI link rate | 4 Gb/s |
| | Storage protocol support | SATA |
| | SAS/SATA peak data transfer rate | 6 Gb/s |
| | Number of SAS/SATA links | 10 links |
| | SAS/SATA connectivity | 2x4 connectors; 2x1 connectors |
| | Expander support | No |
| | Drives supported (max) | Up to 10 Internal Drives |
| | RAID support | 0, 1, 10, 5 SATA |
| | Software management | HPE SSA, SMH, SIM |
| | Warranty | Server warranty |
| | HPE Secure Encryption license | Not Supported |
| | HPE SmartCache License | Not Supported |

Technical Specifications

| | | |
|-------------------------------------|---------------------------------|--|
| | HPE Smart Storage Administrator | Supported |
| HPE Embedded Dual Port 361i Adapter | Network Interface Compatibility | 10Base-T/100Base-TX/1000Base-TX |
| | | IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX IEEE 1588, IEEE 802.1AS IEEE 802.3az - Energy Efficient Ethernet (EEE) |
| | Data Transfer Method | PCI Express v 2.0, 5.0 GT/s, two lanes (x2) |
| | Controller | Intel I350 Powerville |
| | Network Transfer Rate | 10Base-T (Half-Duplex) 10 Mb/s per port, 40 Mb/s combined 10Base-T (Full-Duplex) 20 Mb/s per port, 80 Mb/s combined 100Base-TX (Half-Duplex) 100 Mb/s per port, 400 Mb/s combined 100Base-TX (Full-Duplex) 200 Mb/s per port, 800 Mb/s combined 1000Base-TX (Half and Full-Duplex) 1000Mb/s per port, 4000 Mb/s combined |
| | Connector | Two RJ-45 |
| | Cable Support | 10 Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m) 10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m) |

Environment-friendly Products and Approach **End-of-life Management and Recycling**

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------------|---------|---|
| 08-Apr-2016 | From Version 13 to 14 | Changed | HPE Processors section was revised. |
| 31-Mar-2016 | From Version 12 to 13 | Added | Added new HPE Smart Memory 2400 MHz memory, Intel Xeon E5-2600v4 processor support, new HPE Trusted Platform Module (TPM) 2.0, new 900W AC/ 240VDC power supply, and new HDD offerings. |
| | | Changed | Maximum Internal Storage, Power Supplies, Upgradeability, Embedded Management, Security, Service and Support, Pre-configured Models, and Memory sections were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 16-Feb-2016 | From Version 11 to 12 | Added | New HDD offering was added to HPE Drives. |
| | | Changed | HPE Power Supplies, HPE Data Center Racks, and HPE Power Distribution Units (PDUs) were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 17-Dec-2015 | From Version 10 to 11 | Added | Smart Buy models were added to the NA version. |
| 1-Dec-2015 | From Version 9 to 10 | Added | New HDD offering was added to HPE Drives. |
| | | Changed | New options added to HPE PCIe Workload Accelerator Options, HPE Disk Backup, and HPE Disk Storage Systems. On System Management Chipset, Maximum Internal Storage, Embedded Management, and Server utilities were revised. |
| | | Removed | Product images were updated. Obsolete SKUs were removed from the QuickSpecs. |
| 28-Sep-2015 | From Version 8 to 9 | Added | Added new 6Gb SATA Solid State Drives. Added new HP OneView management software. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 17-Aug-2015 | From Version 7 to 8 | Added | New Solid Stated Drives offering was added to Core Options. |
| | | Removed | Obsolete SKUs were removed from QuickSpecs. |
| 1-Jun-2015 | From Version 6 to 7 | Added | New Hard Drives were added to Core Options. HP OneView LTUs were added to HP |

Summary of Changes

| | | | |
|-------------|---------------------|----------------------|--|
| | | Changed Removed | <p>Converged Infrastructure Management Software.</p> <p>New RDX+ external backup options were added.</p> <p>Maximum Internal Storage was revised.</p> <p>Obsolete SKUs were removed from QuickSpecs.</p> |
| 30-Mar-2015 | From Version 5 to 6 | Added Changed | <p>New Hard Drives offering.</p> <p>Optional Software added to HP Storage Controllers.</p> <p>HP Memory, HP Power Supplies, HP Storage Controllers, and HP Disk Storage Systems were revised.</p> |
| 9-Feb-2015 | From Version 4 to 5 | Added Changed | <p>Added Network controller, new HP Drives, and new G4 UPS models.</p> <p>HP Drives, HP Tape Backup, HP Disk Backup, HP Rack Mount Consoles, KVM Switches, and Keyboards, HP Uninterruptible Power Systems (UPS), HP Networking, and HP Power Distribution Units (PDUs) sections were revised.</p> |
| 1-Dec-2014 | From Version 3 to 4 | Changed | <p>Changes made throughout the entire QuickSpecs.</p> |
| 13-Oct-2014 | From Version 2 to 3 | Added Changed | <p>6G SATA Enterprise Value G1 Solid State Drives were added to the Core Option section.</p> <p>HPE PCIe Workload Accelerator Options and HPE USB and SD options were added to the Additional Options section.</p> <p>Standard Features and Optional Features sections were revised.</p> |
| 19-Sep-2014 | From Version 1 to 2 | Changed | <p>Changes made throughout the entire QuickSpecs.</p> |

Summary of Changes



hpe.com/qref/dl160gen9

[f](#) [t](#) [in](#) [✉](#)
Sign up for updates

★ Rate this document

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04375607 - 15031 - North America - V14 - 8-April-2016

