

*Please note that not all products listed are available in Australia.
Some products are unavailable due to country specific requirements.
Check [festool.com.au](https://www.festool.com.au) for full list of available products.*

07 Dust extraction





164 Systainer dust extractor
CTL SYS



166 CLEANTEC dust extractors
CT MINI I, MIDI I



168 CLEANTEC dust extractor
CT 15



170 CLEANTEC dust extractors
CT 26, CT 36, CT 48



174 CLEANTEC dust extractors
AUTOCLEAN CT 26 AC,
CT 36 AC, CT 48 AC



176 CLEANTEC dust extractor
AUTOCLEAN CT 36 AC PLANEX



177 CLEANTEC dust extractors
AUTOCLEAN Heavy Duty
CT 26 AC HD, CT 36 AC HD



180 CLEANTEC special dust
extractors CTH 26, CTH 48



181 CLEANTEC special dust
extractor CT 48 EC



181 CLEANTEC special dust
extractors CT 48 EC/ B22



182 Pre-separator
CT-VA

We recommend using a dust extraction system.

We strongly recommend:

Choose the right extractor when selecting a dust extraction system.

When working in a dusty environment and especially when handling materials that generate large quantities of dust, your main priority should be protecting your health! How harmful the dust is to your health depends on the size of the dust particles as well as the quantity and time that the materials remain inside your lungs.

The smaller the dust particles are, the deeper they can penetrate into the lung tissue and this is why finer dust particles are much more harmful to the airways. Many dust particles are even categorised as extremely hazardous to health.

For example, crystalline silicon dioxide is closely associated with the development of lung cancer. In the interests of your own health, it is imperative that you keep the air clean when handling mineral dust that invariably contains quartziferous substances and always work with a certified and approved dust extractor or safety extractor.

Your Industrial Employers' Liability Insurance Association will provide you with detailed information and specially prepared lists of substances that exceed specified OEL (occupational exposure limits).



CTL SYS
CTL MINI/MIDI
CTL 26/36/48/48 EC

Specialists for dust with OEL > 1 mg/m³.



CTM 26/36/48/48 EC

Specialists for dust with OEL > 0.1 mg/m³.
For quartziferous mineral dust and wood dust.



CTH 26/48

Specialists for dust with OEL < 0.1 mg/m³.
For carcinogenic and pathogenic dust, such as asbestos and mould.




CTL 48 LE EC/B 22
CTM 48 LE EC/B 22

Specialised in the extraction of flammable and explosive dust.

Dust categories in accordance with EN 60335-2-69, Appendix AA

	Appropriate	Max. permeability (test)	Disposal	Contamination risk
L (Low)	> Dust with OEL > 1 mg/m ³	1 % (filter material)		
M (Medium)	> Dust with OEL ≥ 0.1 mg/m ³ > mineral dust > wood dust	0.1 % (complete machine incl. upholstery nail test)	Dust-free	Cap for transportation
H (High)	> Dust with OEL < 0.1 mg/m ³ > carcinogenic dust > Dust containing pathogens	0.005 % (complete machine incl. upholstery nail test)	dust-free	Cap for transportation

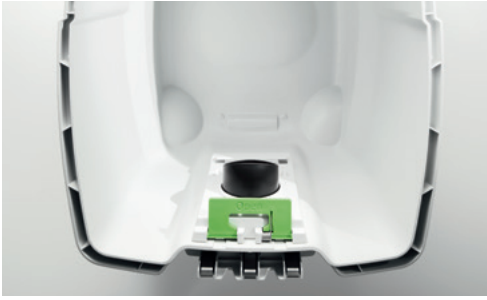

Full utilisation of container volume

The sophisticated container geometry, compatible SELFCLEAN filter bag and space-saving flat filter combine to produce a net volume that corresponds almost exactly to the gross volume of the container.



New and now even better: SYS DOCK

Simple transportation, better organisation and endless flexibility. The SYS Dock with T-LOC for secure connection of SYSTAINER, SORTAINER and SYS-ToolBox units.



Cable holder

The new cord holder helps you wind up the cord quickly and tidily. And lets you take it off again easily without time-consuming unwinding, thanks to the smart folding mechanism. Now also as a brand new feature on the compact extractors CT MINI and MIDI.



Hose garage

The integral hose holder eliminates the need for annoying external hooks and protects the suction hose and mains cable from damage. The suction hose winds around the holder for clean, compact transportation.



Smooth suction hose with CLEANTEC coupling sleeve

The new suction hose: smooth and elastic – with a smooth outer skin so it glides perfectly across surfaces, plus longer life and higher suction power. The new CLEANTEC suction coupling sleeve ensures a secure hold on the tool.



AUTOCLEAN automatic main filter cleaning system

Less cleaning work and constant suction power. The AUTOCLEAN automatic cleaning system eliminates the need to clean the main filter manually. Individual cleaning intervals can be defined to guarantee powerful, constant suction.

Simply the best for dust-free work.

The best way to stay healthy when you're out and about: the new compact extractors CT MINI and MIDI. With new special features, such as the innovative touch control concept, internal hose garage for the smooth suction hose, flat storage tray and manual cleaning with fast access to the main filter from outside.

As CTM MIDI: approved for the first time for dust class M (European standard) and equipped with suction hose detection for automatic setting to the correct section hose diameter.

Likewise already integrated in the CT MINI and MIDI and easy to retrofit on the CT 26/36/48 dust extractors: the innovative Bluetooth® technology, which pays off just as much for quick cleaning between work steps as it does when using cordless tools.





Communication made easy: Dust extraction with Bluetooth® control.

Directly integrated or easily retrofittable

Directly integrated on the CT MINI and MIDI; easily retrofittable on the CLEANTEC dust extractors CT 26/36/48 on the spare plug-in slot*: the Bluetooth® module – letting you easily control the dust extractor by wireless remote control from the suction hose or from the Bluetooth® battery pack on your cordless tool.

Bluetooth® remote control

Saves you going to and from the dust extractor: gives you the option of switching on the dust extractor directly from the suction hose – even when the extractor is in AUTO mode. Ideal for quick cleaning between work steps.

Bluetooth® battery packs

To communicate with the Bluetooth® module on the dust extractor – and also to ensure that a cordless tool starts automatically when the dust extractor is switched on. Available as an accessory and included automatically with many Festool cordless products.



* Bluetooth® module available as an accessory. Installation must be carried out by a qualified and certified electrician.

Cleanliness has never been so compact.

The dust extractor in Systainer size.

The CLEANTEC CTL SYS is the ideal companion for quick, mobile use for small on-site tasks and maintenance work: very compact, light, quiet, and designed to connect to the Systainer system.



Systainer dust extractor **CTL SYS**

With T-LOC to connect to the Systainer system for optimum organisation of your workspace.

Technical data	CTL SYS
Power consumption (W)	1.000
Airflow max. (l/min)	3.000
Max. vacuum (Pa)	20.000
Filter surface area (cm ²)	5.357
Rubber-insulated mains cable (m)	5
Container/Filter bag capacity (l)	4,5/3,5
Dimension (L x W x H) (mm)	396 x 296 x 270
Maximum wattage of connected tool (W)	1.200
Weight (kg)	6,9



Spotless, right down to the very last corner

The CTL SYS has an integrated crevice nozzle and upholstery nozzle always close at hand for a clean finish, even in hard-to-reach places.



Easy to transport, for less running around

Thanks to the shoulder strap supplied with it, the CTL SYS is easy to carry, leaving your hands free for any other tools or materials you might need.



Mobile dust extraction


When combined with the SYS-Cart, the CTL SYS gets a set of wheels, allowing it to follow you with the concentrated suction power of the 1,000 watt turbine virtually every step of the way.



Simply smooth

Smooth, elastic and extremely tough. The smooth suction hose boasts improved handling and longer service life. It glides over any edge, and its tapered shape ensures improved extraction performance.

Scope of delivery

Scope of delivery		Order no.
CTL SYS		
	CTL SYS fitted filter bag, suction hose, smooth Ø 27 x 3 m-AS/CT with angled rotating adapter on extractor end, integrated hose garage, SYS-Dock with T-LOC function, upholstery nozzle D 36 PD, crevice nozzle D 36 FD-150, SYS-CT carrying strap, in carton	This product is not available in Australia 575279

Compact. Mobile. Smart.

The CT MINI and CT MIDI dust extractors.

Low weight, compact dimensions and a wealth of innovative details – the new CT MINI/MIDI compact dust extractors impress in every way. With intuitive touch control and a flat storage tray for tools and work materials. And with internal hose garage, SYSTAINER T-LOC coupling and practical cord holder for fast and tidy work.



Dust extractor **CLEANTEC CT MINI I**



10 l container capacity for dust of class L (European standard).



Dust extractor **CLEANTEC CT MIDI I**



With automatic suction hose detection and 15 l container capacity for dust of class L and M (European standard).





Touch control

Innovative and intuitive touch control panel instead of knobs and dials – perfectly easy to operate, even with gloves and in dirty environments. The extractor goes into automatic mode as soon as it is switched on. The automatic switch-on function for corded and Bluetooth® cordless tools and for the Bluetooth® remote control is activated.



Filter replacement from outside

Quick, easy, no tools required.



Smooth suction hose

With tapered shape for improved suction and smooth outer skin so it glides perfectly across all surfaces and edges.

Communication made easy. Bluetooth® technology built in.

For automatic activation of the dust extractor via the remote control or the Bluetooth® battery pack. No retrofitting required. Perfect for work with Bluetooth® cordless tools.

For more information, see page 23



The specialist for cleaning jobs.

The practical dust extractor.

Ideal for cleaning on worksites, in workshops and in offices: with a container capacity of 15 l, the CLEANTEC CT 15 vacuums up dust, dirt and water. Its design allows the full container capacity to be used almost completely – for long periods of work without having to change the filter bag.



Dust extractor CT 15

Cleaning accessories included as standard.
Dust extractor with 15 l container capacity.

Cleaning accessories included

The crevice and upholstery nozzles can be stowed in the dust extractor.



Touch control

Intuitive touch control panel instead of knobs and dials – perfectly easy to operate, even with gloves and in dirty environments.



Technical data	CT MINI I	CT MIDI I	CTM MIDI I	CT 15
Power consumption (W)	350 - 1.200	350 - 1.200	350 - 1.200	350 - 1.200
Airflow max. (l/min)	3.700	3.700	3.700	3.700
Max. vacuum (Pa)	24.000	24.000	24.000	24.000
Filter surface area (cm ²)	3.369	3.369	3.369	3.369
Rubber-insulated mains cable (m)	7,5	7,5	7,5	7,5
Container/Filter bag capacity (l)	10/7,5	15/12,5	15/12,5	15/12,5
Dimension (L x W x H) (mm)	470 x 320 x 455	470 x 320 x 495	470 x 320 x 495	470 x 320 x 430
Maximum wattage of connected tool (W)	1.200	1.200	2.200	2.200
Weight (kg)	11	11,3	11,3	10,8

Scope of delivery

Order no.

CT MINI I

**CT MINI I HEPA AUS**

suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, Bluetooth® functionality for extractor, remote switch-on for cordless tools, SELFCLEAN filter bag SC-FIS-CT MINI/MIDI-2, integrated hose garage, cable wrap, SYS-Dock with T-LOC function, in carton

This product is not available in Australia

574846

CT MIDI I

All models: suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, Bluetooth® functionality for extractor, remote switch-on for cordless tools, SELFCLEAN filter bag SC-FIS-CT MINI/MIDI-2, integrated hose garage, cable wrap, in carton

**CTM MIDI I**

suction coupling sleeve with bypass, SYS-Dock with T-LOC function

576740

CT 15

**CT 15 HEPA**

suction hose Ø 27/32 x 3.5 m, SELFCLEAN filter bag SC-FIS-CT MINI/MIDI-2, crevice nozzle D 36 FD-150, upholstery nozzle D 36 PD, in carton

574866

Small on the outside, big on the inside.

The all-purpose dust extractors.

Compact, yet big. Lightweight, yet powerful. Whether on site or in the workshop, the CLEANTEC CT 26/36/48 offer a lot of volume in compact dimensions, thanks to their generous container geometry. Their extremely compact high-power turbines provide the matching suction power, with a flow rate of 3900 l/min. With antistatic function to prevent static charging during work.



Dust extractor **CLEANTEC CT 36**

36 l container capacity for dust of classes L and M (European standard).



Dust extractor **CLEANTEC CT 48**

48 l container capacity for dust of classes L and M (European standard).



Dust extractor **CLEANTEC CT 26**

26 l container capacity for dust of classes L and M (European standard).



Large capacity

The flat filter and smooth inner contours of the dust container allow the filter bag to unfold easily so that it fills evenly, utilising almost 100% of the filter bag capacity.



Simply smooth

Smooth, elastic and extremely tough. The smooth suction hose boasts improved handling and longer service life. It glides over any edge, and its tapered shape ensures improved extraction performance.



Secure transportation

Use the SYS-Dock on the dust extractor to easily attach accessories and tools stored in a SYSTAINER, SORTAINER or SYS-ToolBox with T-LOC.



Expandabl

The dust extractor can be fitted out with additional modules, as required. For example: compressed air module, EAA module, or Bluetooth® module.

Our service.
Your success.




The direct, practical and comprehensive service for you and your tool. Along with excellent tools, we also offer outstanding quality services. Everything we do is for your satisfaction and your confidence in Festool. Because we are only satisfied when you are satisfied.

For more information, see page 4





Technical data	CT 26	CT 36	CT 48
Power consumption (W)	350 – 1.200	350 – 1.200	350 – 1.200
Airflow max. (l/min)	3.900	3.900	3.900
Max. vacuum (Pa)	24.000	24.000	24.000
Filter surface area (cm ²)	6.318	6.318	6.318
Rubber-insulated mains cable (m)	7,5	7,5	7,5
Container/Filter bag capacity (l)	26/24	36/34	48/46
Dimension (L x W x H) (mm)	630 x 365 x 540	630 x 365 x 596	740 x 406 x 1.005
Maximum wattage of connected tool (W)	2.400	2.400	2.400
Weight (kg)	13,9	14,4	18,8

Scope of delivery		Order no.
CT 26	All models: suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, integrated hose garage, cable wrap, Floor Nozzle Set 27 mm / 36 mm, Plastic Curved Hand Tube, Plastic Tube Set 36 mm in carton	
	CT 26 E HEPA HEPA filter, SELFCLEAN filter bag, SYS-Dock with T-LOC function	574931
	CTM 26 E SELFCLEAN filter bag, end cap for intake adapter, Sys dock	575758
CT 36		
	CTM 36 E AU HEPA filter, SELFCLEAN filter bag, suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, integrated hose garage, SYS-Dock with T-LOC function, cable wrap, Floor Nozzle Set 27 mm / 36 mm, Plastic Curved Hand Tube, Plastic Tube Set 36 mm, in carton	576741
CT 48		
	CTL 48 E SELFCLEAN filter bag, suction hose Ø 27 mm x 3.5 m long, anti-static, integrated hose garage, Sys dock, cable wrap, handle, in carton	This product is not available in Australia 201626

Fully automatic filter cleaning. The self-cleaning dust extractors.

No more clogged filters – the automatic AUTOCLEAN (AC) main filter cleaning function keeps the filter free of material, ensuring constantly high suction power for large volumes of fine dust. With antistatic function to prevent static charging during work.



Dust extractor **CLEANTEC CT 26 AC**

26 l container capacity for dust of classes L and M (European standard).



Dust extractor **CLEANTEC CT 36 AC**

36 l container capacity for dust of classes L and M (European standard).



Dust extractor **CLEANTEC CT 48 AC**

48 l container capacity for dust of classes L and M (European standard).





Adjustable to suit your requirements

The rotary switch allows fully variable adjustment of the cleaning intervals. The shorter the intervals, the more intensive the cleaning.



Simply smooth

Smooth, elastic and extremely tough. The smooth suction hose boasts improved handling and longer service life. It glides over any edge, and its tapered shape ensures improved extraction performance.



Expandabl

The dust extractor can be fitted out with additional modules, as required. For example: compressed air module, EAA module, or Bluetooth® module.

Secure transportation
Use the SYS-Dock on the dust extractor to easily attach accessories and tools stored in a SYSTAINER, SORTAINER or SYS-ToolBox with T-LOC.



Ideal for demanding everyday work on construction site.
The CT-VA pre-separator.

Handles high levels of dust thanks to cyclone technology. Ensures constantly high suction power thanks to removal of load from the main filter.

For more information, see page 182



Ideal for use on plasterboard.

The dust extractor for the PLANEX long-reach sander.

The mighty CLEANTEC CTM 36 AC PLANEX with 36 l container capacity is perfectly designed for the extreme material removal rates of the PLANEX long-reach sander. With a kink-resistant hose, and ComfortClean closing slide fitted as standard for even more effective filter cleaning.




Dust extractor CLEANTEC CT 36 AC PLANEX

36 l container capacity for dust of classes L and M (European standard).



Dust extractor CLEANTEC CT 36 AC LHS

36 l container capacity for dust of classes L and M (European standard).



Maximum flexibility
Highly sensitive, kink-resistant suction hose.

Saves you time and is easy to use
The long-reach sander sits firmly and securely on the tool holder, allowing you to change abrasives quickly and easily or to extend the range of the PLANEX in a few easy steps. With practical carry handle.

Heavy-duty tool.

The construction site dust extractor with automatic filter cleaning.

With very large amounts of dust, such as the dust generated by concrete grinders and diamond grinders, the dust extractors of the AC HD range are in their element. Their extremely sturdy construction, with large wheels, steel axle and swivel castors, provides stability on any substrate – and high mobility at the same time.



Dust extractor **CLEANTEC CT 36 AC HD**

36 l container capacity for dust of classes L and M (European standard).



Dust extractor **CLEANTEC CT 26 AC HD**

With 26 l container capacity for dust of class L (European standard).



Manual cleaning

Even heavily clogged filters can be freed up again immediately: manually closing off the container inlet with the ComfortClean sealing slide creates a powerful vacuum that cleans the filter with maximum force.









Flexible loading

Large storage and set-down area for power tools and Systemair.

07 Dust extraction



Technical data	CT 26 AC	CT 36 AC	CT 48 AC	CT 36 AC PLANEX	CT 26 AC HD	CT 36 AC HD
Power consumption (W)	350 – 1.200	350 – 1.200	350 – 1.200	350 – 1.200	350 – 1.200	350 – 1.200
Airflow max. (l/min)	3.900	3.900	3.900	3.900	3.900	3.900
Max. vacuum (Pa)	24.000	24.000	24.000	24.000	24.000	24.000
Filter surface area (cm ²)	6.318	6.318	6.318	6.318	6.318	6.318
Rubber-insulated mains cable (m)	7,5	7,5	7,5	7,5	7,5	7,5
Container/Filter bag capacity (l)	26/24	36/34	48/46	36/34	26/24	36/34
Dimension (L x W x H) (mm)	630 x 365 x 540	630 x 365 x 596	740 x 406 x 1.005	630 x 365 x 596	673 x 365 x 455	673 x 365 x 522
Maximum wattage of connected tool (W)	2.400	2.400	2.400	2.400	2.400	2.400
Weight (kg)	14,7	15,2	19,6	15,2	14,5	15,2

Scope of delivery			Order no.
CT 26 AC			
	CTL 26 E AC High-performance main filter, SELFCLEAN filter bag, disposal bag, suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, integrated hose garage, SYS-Dock with T-LOC function, cable wrap, in carton	This product is not available in Australia	574945
CT 36 AC			
	CTL 36 E AC High-performance main filter, SELFCLEAN filter bag, disposal bag, suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, integrated hose garage, SYS-Dock with T-LOC function, cable wrap, in carton	This product is not available in Australia	574958
CT 48 AC			
	CTL 48 E AC High-performance main filter, SELFCLEAN filter bag, disposal bag, suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, integrated hose garage, SYS-Dock with T-LOC function, cable wrap, handle, in carton	This product is not available in Australia	574974
CT 36 AC PLANEX All models: disposal bag, comfort clean closing slide, integrated hose garage, cable wrap, in carton			
	CT 36 E AC-LHS High-performance main filter, SELFCLEAN filter bag, Press & Clean Extractor Attachment, kink-resistant suction hose D36x3.5-AS/LHS 225		574934
	CT 36 E AC-LHS High-performance main filter, SELFCLEAN filter bag, Smooth Anti Static Suction Hose D 36 mm / 32 mm, Basic cleaning set 27 mm / 36 mm		575835
	CTM 36 E AC-LHS High-performance main filter, SELFCLEAN filter bag, Floor Nozzle Set 27 mm / 36 mm, Rotating Connecting Sleeves, Plastic Tube Set 36 mm, Plastic Curved Hand Tube 36 mm, kink-resistant suction hose D36x3.5-AS/LHS 225		575838
CT 26 AC HD			
	CTL 26 E AC HD High-performance main filter, SELFCLEAN filter bag, disposal bag, suction hose, smooth Ø 36/32 x 3.5 m-AS with rotating connecting sleeves, comfort clean closing slide, Accessory case, in carton	This product is not available in Australia	575291
CT 36 AC HD			
	CTL 36 E AC HD High-performance main filter, SELFCLEAN filter bag, disposal bag, suction hose, smooth Ø 36/32 x 3.5 m-AS with rotating connecting sleeves, comfort clean closing slide, Accessory case, in carton	This product is not available in Australia	575292

Hazardous dust doesn't stand a chance.

The special dust extractors.

The CLEANTEC CTH safely extracts hazardous dust such as mould and asbestos, wood treated with hazardous protective agents, fibrous mineral dust, lead, cadmium, nickel and zinc chromate. The vac with 99.995% filtering efficiency is the specialist for the extraction of carcinogenic and pathogenic dusts.



Dust extractor **CLEANTEC CTH 26**

26 l container capacity for dust of class H (European standard).



Dust extractor **CLEANTEC CTH 48**

48 l container capacity for dust of class H (European standard).



Technical data	CTH 26	CTH 48
Power consumption (W)	350 – 1.000	350 – 1.000
Airflow max. (l/min)	3.900	3.900
Max. vacuum (Pa)	24.000	24.000
Filter surface area (cm ²)	6.318	6.318
Rubber-insulated mains cable (m)	7,5	7,5
Container/Filter bag capacity (l)	26/24	48/46
Dimension (L x W x H) (mm)	630 x 365 x 540	740 x 406 x 1.005
Maximum wattage of connected tool (W)	2.400	2.400
Weight (kg)	13,9	18,8

Scope of delivery

All models: suction hose, smooth Ø 27/32 x 3.5 m-AS/CT, integrated hose garage, SYS-Dock with T-LOC function, cable wrap, in carton

CTH 26 E / a
safety filter bag

This product is
not available in
Australia

574939

CTH 48 E/a
safety filter bag, handle

201482

System accessories
from page

184

Dust extractor CLEANTEC CT 48 EC

Tough continuous operation is its speciality and the EC-TEC brushless drive concept guarantees greater reliability and a longer life. For relentless suction power when processing plastic, ceramic, wooden or painted surfaces.

Technical data	CT 48 EC
Power consumption (W)	150 – 1.100
Airflow max. (l/min)	3.400
Max. vacuum (Pa)	23.000
Rubber-insulated mains cable (m)	7,5
Container/Filter bag capacity (l)	48/46
Dimension (L x W x H) (mm)	630 x 406 x 640
Weight (kg)	17,9



Perfect results achieved more quickly

With durable EC-TEC drive system: for long-term, heavy-duty use and for semi-stationary operation in connection with an EAA energy box.

Scope of delivery		Order no.
CTL 48 E LE EC SELF-CLEAN filter bag, suction hose Ø 27 mm x 3.5 m long, anti-static, cable wrap, compressed air module, in carton	This product is not available in Australia	575300

Dust extractor CLEANTEC CT 48 EC/B22

For greatest possible safety, the CT 48 EC/B22 special dust extractor conforms to ATEX Directive 94/9/EC for Zone 22, ensuring reliable extraction of dry, flammable dust from power tools and equipment.

Technical data	CT 48 EC B22
Power consumption (W)	150 – 1.100
Airflow max. (l/min)	3.400
Max. vacuum (Pa)	23.000
Rubber-insulated mains cable (m)	7,5
Container/Filter bag capacity (l)	48/46
Dimension (L x W x H) (mm)	630 x 406 x 640
Weight (kg)	18,6



Convenient and secure


The rugged ABS plastic dust container is equipped with additional flame retardance, making it suitable for safe extraction of aluminium and paper dust, soot and paint powder, and even glass-fibre and carbon-fibre reinforced plastics.

Scope of delivery		Order no.
CTL 48 E LE EC/B22 R1 SELF-CLEAN filter bag, suction hose Ø 27 mm x 3.5 m long, anti-static, cable wrap, compressed air module, in carton	This product is not available in Australia	575275

Handles large dust volumes. Efficient, easy and reliable.

The pre-separator.

Now, large quantities of dust and chips are no longer a problem, neither for the main filter nor for suction power. Up to 80% of mineral dust is separated out and collected in the collection container, and up to 95% of coarse dust such as sawing chips. That means less work for the main filter and ensures constantly high suction power throughout the entire work process.

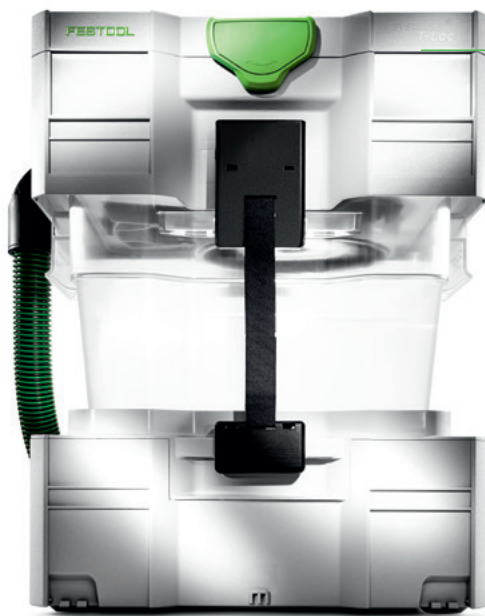

Pre-separator CT-VA


Handles high levels of dust thanks to cyclone technology. Approved for dust classes L and M (European standard).

Technical data	CT-VA
Dimension (L x W x H) (mm)	395 x 295 x 515
Max. container capacity (l)	20
Weight (kg)	7

System accessories
from page

184

Scope of delivery

CT-VA	Order no.
 <p>CT-VA-20 cyclone Systainer, VAB-20 collection container, Systainer pan, connecting hose, disposal bag, container lid, in carton</p>	204083



Easy retrofitting

Can be combined with the Festool dust extractors CT 26/36/48 with or without AC cleaning. Approved for dust classes L and M (European standard).



Flexible to us





Work flexibly with or without CT pre-separator, depending on the job. The Sys-Dock system allows the dust extractor and the CT pre-separator to be joined together easily.
















Easy disposal












Convenient and secure transportation thanks to stackable collection containers with compact dimensions and sturdy construction.

Accessories












		Order no.
	<p>Waste bag ENS-VA-20/10 ideal shape for CT-VA 20 pre-separator collection container, for class L and M dust, for use in VAB-20 collection container, includes 10 cable ties, qty. in pack 10 Units, max. container capacity 20 l, in carton</p>	204296
	<p>Collection container All models: for CT-VA 20 pre-separator, can be stacked, with compact dimensions, good handle options and robust design, can be well sealed for transportation using the cover (included in scope of delivery), dimension (L x W x H) 395 x 295 x 350 mm, max. container capacity 20 l, in carton</p> <p>VAB-20/1</p>	204294
	<p>VAB-20/3 qty. in pack 3 Units</p>	204295
	<p>Connecting cable CT-VA AK for CT-VA 20 pre-separator, for retrofitting the CT-VA pre-separator with additional electrical outlet module, enables particularly easy connection of the plug it suction hose with the CT-VA pre-separator, maximum wattage of connected tool 2.400 W, cable length 0,85 m, in carton</p>	<p>This product is not available in Australia 575667</p>

07 Dust extraction

CLEANTEC cleaning sets		Order no.
	Cleaning set D 27 / D 36 D-RS crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, suction brush D 36 SP, in self-service display pack	492392
	Standard cleaning set D 27/D 36 S-RS curved hand tube D 36 HR-K AS, extension tubes D 36 VR-K AS, 4-piece floor nozzle D 36 BD270, crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, in carton	203428
	Standard cleaning set D 27/D 36 B-RS curved hand tube D 36 HR-K AS, extension tubes D 36 VR-K AS, 4-piece floor nozzle D 36 BD270, in carton	This product is not available in Australia 205109
	Professional cleaning set D 27/36 P-RS curved hand tube D 36 HR-K AS, extension tube, special steel 3-piece D 36 VR-M3x, D 36 TD II carpet nozzle, crevice nozzle D 36 FD-210, in carton	203429
	Compact cleaning set D 27/D 36 K-RS-Plus curved hand tube D 36 HR-K AS, extension tubes D 36 VR-K AS, 4-piece floor nozzle D 36 BD270, crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, in SYSTAINER SYS 1 T-LOC	203430
	Cleaning set for tradesmen D 36 HW-RS-Plus suction hose, smooth D 36 x 3.5 m antistatic, curved hand tube D 36 HR-K AS, extension tube, special steel 3-piece D 36 VR-M3x, D 36 TD II carpet nozzle, crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, suction brush D 36 SP, in SYSTAINER SYS 5 T-LOC	203408
	Cleaning set for the workshop D 36 WB-RS-Plus suction hose, smooth D 36 x 3.5 m antistatic, curved hand tube D 36 HR-K AS, extension tube, special steel 3-piece D 36 VR-M3x, floor nozzle, D 36 BD 370, in SYSTAINER SYS 5 T-LOC	203409
	Universal cleaning set D 36 UNI-RS-Plus suction hose D 36 x 3.5 m, curved hand tube D 36 HR-K AS, extension tubes D 36 VR-K AS, floor nozzle, D 36 BD 300, crevice nozzle D 36 FD-210, suction brush D 36 SP, upholstery nozzle D 36 PD, in SYSTAINER SYS 5 T-LOC	This product is not available in Australia 203435
	Masonry renovation cleaning set D 36 RS-M-Plus curved hand tube D 36 HR-K AS, extension tube, special steel 3-piece D 36 VR-M3x, D 36 TD II carpet nozzle, crevice nozzle D 36 FD-210, upholstery nozzle D 36 PD, in SYSTAINER SYS 2 T-LOC	203431
	Floor cleaning set D 36 BD 370 RS-Plus curved hand tube D 36 HR-K AS, extension tube, special steel 3-piece D 36 VR-M3x, floor nozzle, D 36 BD 370, in SYSTAINER SYS 2 T-LOC	This product is not available in Australia 203432
	Construction cleaning set D 36 BA-RS for all CT and VCP (except VCP 30 E), construction set, Suction hose D 36 x 3 m, curved hand tube D 36 HR-K AS, stainless steel extension tubes, 2-piece, 4-piece floor nozzle D 36 BD270, crevice nozzle D 36 FD-210, suction brush D 36 SP, in carton	This product is not available in Australia 203433
	Cleaning set D 36 BU-RS for all CT and VCP (except VCP 30 E), office set, Suction hose D 36 x 3 m, curved hand tube D 36 HR-K AS, stainless steel extension tubes, 2-piece, D 36 TD II carpet nozzle, upholstery nozzle D 36 PD, crevice nozzle D 36 FD-210, in carton	This product is not available in Australia 203434
	Cleaning set for industrial use D 50 GS-RS suction hose Ø 50 x 2,5m, extension tubes D50VR-K, floor nozzle D 50 BD370, square nozzle D 50 QD, suction brush D 50 SP, crevice nozzle D 50 FD, in carton	This product is not available in Australia 454770

Accessories for mobile dust extractors CT and dust extractors SR		Order no.
CLEANTEC suction hose anti-static version		
	Suction hose D 27x3,0m-AS-90°/CT for CTL-SYS, antistatic, temperature-resistant to +70°C, with rotating angle adapter at extractor side, smooth, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 27 mm, length 3 m, in carton	201665
Suction hose All models: antistatic, temperature-resistant to +70°C, smooth, conical, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 27 /32 mm, in carton		
	D 27/32x3,5m-AS-90°/CT for CTL MINI / MIDI up to date of manuf. 12/2018, with rotating angle adapter at extractor side, length 3,5 m	500680
	D27/32x3,5m-AS/CTR for CT 26/36/48, for CT MINI and CT MIDI from YOM 2019 onwards, with rotating adapter and tool end connector, length 3,5 m	204921
	D27/32x5m-AS/CTR for CT 26/36/48, for CT MINI and CT MIDI from YOM 2019 onwards, with rotating adapter and tool end connector, length 5 m	204922
Suction hose All models: for cleaning work with CT dust extractors, not suitable for dust extractors with Autoclean, antistatic, temperature-resistant to +70°C, with rotating adapter and tool end connector, smooth, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 36 mm, in carton		
	D36x3,5m-AS/CTR length 3,5 m	204924
	D36x5m-AS/CTR length 5 m	204925
	D36x7m-AS/CTR length 7 m	204926
	Suction hose D36/32x3,5m-AS/R suitable for dust extractors with Autoclean, antistatic, temperature-resistant to +70°C, for work with masonry renovator and cleaning tasks, smooth, conical, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 36 /32 mm, length 3,5 m, in carton	204923
	Suction hose D 36x3,5-AS/KS/LHS 225 for long-reach sander PLANEX, antistatic, temperature-resistant to +70°C, extremely flexible, kink-resistant suction hose, diameter 36 mm, length 3,5 m, bleeder resistor (DIN IEC 312) <1 mΩ/m, in carton	496972
Suction hose All models: antistatic, temperature-resistant to +70°C, ordered by metre (without rotating adapter or end connector), bleeder resistor (DIN IEC 312) <1 mΩ/m, in carton		
	D 27 MW-AS diameter 27 mm	This product is not available in Australia 452384
	D 36 MW-AS diameter 36 mm	This product is not available in Australia 452385
Suction hose All models: antistatic, temperature-resistant to +70°C, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 50 mm, in carton		
	D 50x2,5m-AS with 2x rotating adapters, length 2,5 m	452888
	D 50x4m-AS with 2x rotating adapters, length 4 m	452890
	D 50 MW-AS ordered by metre (without rotating adapter or end connector)	This product is not available in Australia 452386

07 Dust extraction

Accessories for mobile dust extractors CT and dust extractors SR		Order no.
CLEANTEC suction hose anti-static version		
<p>Suction hose All models: for all electric tools with D 27 and D 36 flange (all Festool electric tools) and cleaning accessories, with plug it-connection, antistatic, specially designed for sanding applications, with rotating adapter and reducing sleeve with bayonet fitting, temperature-resistant to +70°C, smooth, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 27 /22 mm, in carton</p>		
	<p>D 27/22x3,5m-AS-GQ/CT length 3,5 m</p>	200050
	<p>D 27/22x5m-AS-GQ/CT length 5 m</p>	201763
	<p>Suction hose D 32/22x10m-AS-GQ/CT for all electric tools with D 27 and D 36 flange (all Festool electric tools) and cleaning accessories, with plug it-connection, antistatic, specially designed for sanding applications, with rotating adapter and reducing sleeve with bayonet fitting, temperature-resistant to +70°C, smooth, length 10 m, bleeder resistor (DIN IEC 312) <1 mΩ/m, diameter 32 /22 mm, in carton</p>	<p>This product is not available in Australia 200051</p>
		Order no.
CLEANTEC suction hose		
	<p>Suction hose D 21,5 x 5m HSK for direct connection (without coupling sleeve) to the hand sanding block with dust extraction, diameter 21,5 mm, length 5 m, in a bag</p>	495019
<p>Suction hose All models: temperature-resistant to +70°C, diameter 27 mm, in carton</p>		
	<p>D 27x3,5m/CT with rotating adapter and tool end connector, length 3,5 m</p>	452877
	<p>D 27x5m/CT with rotating adapter and tool end connector, length 5 m</p>	452879
	<p>D 27 MW ordered by metre (without rotating adapter or end connector)</p>	<p>This product is not available in Australia 452383</p>
	<p>Suction hose D 27/32x3,5m for CT 15, temperature-resistant to +70°C, with rotating adapter and tool end connector, diameter 27/32 mm, length 3,5 m, in carton</p>	<p>This product is not available in Australia 205201</p>
<p>Suction hose All models: temperature-resistant to +70°C, diameter 36 mm, in carton</p>		
	<p>D 36x3,5m/CT with rotating adapter and tool end connector, length 3,5 m</p>	452881
	<p>D 36x5m/CT with rotating adapter and tool end connector, length 5 m</p>	452883
	<p>D 36x7m/CT with rotating adapter and tool end connector, length 7 m</p>	452885
	<p>D 36 MW ordered by metre (without rotating adapter or end connector)</p>	<p>This product is not available in Australia 454157</p>
	<p>Suction hose D 36/32x3m for all CT and VCP (except VCP 30 E), temperature-resistant to +70°C, with dust extraction coupling, rotary, diameter 36/32 mm, length 3 m, in carton</p>	768114
	<p>Suction hose D 50 MW ordered by metre (without rotating adapter or end connector), temperature-resistant to +70°C, diameter 50 mm, in carton</p>	<p>This product is not available in Australia 454158</p>
	<p>Adapter hose AD-D 36/CS50/CS70/CMS for CS 50, CS 70, CMS, 0,5 m hose D36 with two rotating adapters and antistatic connector sleeve D50/D50 VM-AS, for Y-connector together with CTL MINI/MIDI, diameter 36 mm, length 0,5 m, in carton</p>	499196

Accessories for mobile dust extractors CT and dust extractors SR

Order no.

CLEANTEC hose sleeves

Rotating adapter
All models: antistatic, hose connector to fit inlet nozzle of dust extractor, external Ø 58 mm, in self-service display pack



D 27 DAG-AS
for antistatic suction hose D 27, diameter 27 mm

452892



D32/27 DAG-AS/CTR
for antistatic suction hose D 27/32

This product is not available in Australia

204919



D36 DAG-AS/CTR
for antistatic suction hose D 36, diameter 36 mm

204920



D 50 DAG-AS
for antistatic suction hose D 50

452896



D 36 DAG-AS-GQ/CT
for antistatic suction hose D27/22x3.5 AS-GQ/CT and D27/22x 5 AS-GQ/CT, diameter 36 mm

This product is not available in Australia

202931



D 50 DAG-AS-GQ/CT
for antistatic suction hose D32/22x10 AS-GQ/CT, diameter 50 mm

This product is not available in Australia

203206

Rotating angle adapter
All models: hose connector to fit inlet nozzle of dust extractor, external Ø 58 mm, in self-service display pack



D 27 DAG90-AS/CT
for antistatic suction hoses D 22 and D 27 on CT MINI and CT MIDI up to date of manuf. 08/2013 and CTL SYS, diameter 27 mm

202505

D 32/27 DAG/90°-AS/CT
for antistatic suction hose D 32/27 on CTL MINI and CTL MIDI, antistatic, for CTL MINI and CTL MIDI with date of manuf. 09/2013 onwards

This product is not available in Australia

500673

Reducing sleeve
All models: antistatic, in self-service display pack



D 27 DM-AS/CT
for suction hose D 27, for all electric tools with D 27 flange and cleaning accessories, hose connector for electric tool or suction nozzle, the bayonet fitting creates a secure connection between the mobile dust extractor and the power tool, diameter 27 mm

202346



D 27/22 DM-AS/CT
for all electric tools with D 27 and D 36 flange (all Festool electric tools) and cleaning accessories, only for the smooth suction hoses with integrated plug it-cable, for connection on the tool end (electric tool or suction nozzle), secure connection between the mobile dust extractor and power tool, thanks to the bayonet fitting, diameter 27 /22 mm

500668



D 36 DM-AS/CT
for suction hose D 36, for all D36 flange electric tools and cleaning accessories, hose connector for electric tool or suction nozzle, the bayonet fitting creates a secure connection between the mobile dust extractor and the power tool, diameter 36 mm

500670



D 36/32 DM-AS
for suction hose D 36/32, for all D36 flange electric tools and cleaning accessories, hose connector for electric tool or suction nozzle

500671















Suction coupling sleeve D27 BP-AS/CT
for all sanders, for improved guidance; recommended especially for RTS 400, RTSC 400, DTS 400, DTSC 400, ETS 125 and ETSC 125, prevents suction-clamping onto smooth surfaces, in self-service display pack

This product is not available in Australia












204822

07 Dust extraction

Accessories for mobile dust extractors CT and dust extractors SR		Order no.
CLEANTEC hose sleeves		
	Reducing sleeve All models: in self-service display pack	
	RM D 36/27-AS for suction hose D 36, for reducing to D 27 (on the power tool side), sleeve change required	498528
	DC-D 36/27-AS for all VCP/CT models, for attachment on power tool, reduction from Ø 36 to 27 mm, can be attached if needed, diameter 36 mm	768135
	Reducing sleeve D 36 DM-AS-LHS 225 for suction hose D 36, for long-reach sander PLANEX, antistatic, hose connector for electric tool or suction nozzle, diameter 36 mm, in self-service display pack	495013
	Extraction adapter D 50/D 36 for connecting a D 50 suction hose with D 36 accessories, in self-service display pack	452897
	Star connector D 50 SV-AS/D 50 V for D 50/D 36/D 27, antistatic, for connection of two dust extraction hoses, with plug, simultaneous operation is not permissible with extractors approved for hazardous dusts, in self-service display pack	452898
	Plug D 50/V for closing off the inlet nozzle, for retrofit on all CTM/CTH mobile dust extractors, in self-service display pack	452899
	Connector sleeve D 50/D 50 VM-AS antistatic, to connect suction hoses D 50/D 36/D 27, with D 27/D 36 hoses the reducing sleeve on one hose must be replaced by rotating adapter D 27/D 36, in self-service display pack	493047
		Order no.
Tubes		
	Hand tube D 36 HR-K AS for D 27/D 36, antistatic, with sliding air regulator for suction power adjustment, with Bayonet connection for secure connection to the suction hose, curved, diameter 36 mm, in self-service display pack	This product is not available in Australia 203129
Extension pipe		
	D 36 VR-M 3x for D 27/D 36, of stainless steel, 3-piece, qty. in pack 3 Units, length 950 mm, in self-service display pack	This product is not available in Australia 452902
	D 36 VR-K AS 3x for D 27/D 36, antistatic, 3-piece, qty. in pack 3 Units, length 950 mm, in self-service display pack	This product is not available in Australia 203137
	D 50 VR-M for D 50, anodised aluminium, 1 piece, length 1.100 mm, in carton	This product is not available in Australia 447599
	D 50 VR-K 2x for D 50, plastic, 2 pieces, qty. in pack 2 Units, length 970 mm, in carton	440412
		Order no.
Carpet and combination suction hose		
	Carpet nozzle D 36 TD II for D 27/D 36, with sliding base, changeover from carpet to smooth floor, width 292 mm, in self-service display pack	203797
	Turbo combination suction brush D 36 TKB II for D 27/D 36, for textile and linoleum floors, with 4 castors, brush rollers driven by intake air, width 270 mm, in carton	203809








Accessories for mobile dust extractors CT and dust extractors SR		Order no.
Floor nozzles		
Floor nozzle		
	D 36 BD 370 for D 27/D 36, high-quality industrial design, aluminium, with 2 castors and 2 brush inserts, diameter 36 mm, width 370 mm, in carton	452908
	D 50 BD 450 for D 50, high-quality industrial design, aluminium, with 2 castors and 2 brush inserts, width 450 mm, in carton	This product is not available in Australia 452910
	D 36 BD 300 for D 27/D 36, plastic, with 2 castors and 2 brush inserts, diameter 36 mm, width 300 mm, in self-service display pack	452907
	D 36 BD 270 for D 27/D 36, 4 pieces, plastic, with 3 replaceable inserts (brush insert, tile cleaning insert, carpet cleaning insert), diameter 36 mm, width 270 mm, in self-service display pack	452906
Accessories for CT dust extractors		
Special nozzles/brushes		
Crevice nozzle All models: plastic, in self-service display pack		
	D 36 FD-300 for D 27/D 36, diameter 36 mm, length 300 mm	452904
	D 36 FD-210 for D 27/D 36, diameter 36 mm, length 210 mm	492391
	D 36 FD-150 for D 27/D 36, for CTL-SYS, fits in the accessory holder on the CTL SYS, diameter 36 mm, length 150 mm	500593
	D 50 FD for D 50, length 200 mm	This product is not available in Australia 452912
Suction brush All models: Plastic, in self-service display pack		
	D 36 SP for D 27/D 36, diameter 70 mm	440404
	D 50 SP for D 50, diameter 85 mm	This product is not available in Australia 440419
	Upholstery nozzle D 36 PD for D 27/D 36, for CTL-SYS, plastic, with brush insert, fits in the accessory holder on the CTL SYS, width 120 mm, in self-service display pack	500592
	Universal brush nozzle D 36 UBD for D 27/D 36, plastic, with brush ring and rotary hinge, in self-service display pack	498527
	Flat nozzle D 27 FDG for D 27, special rubber, oil resistant, diameter 27 mm, width 100 mm, in self-service display pack	This product is not available in Australia 440408

07 Dust extraction

Accessories for CT dust extractors		Order no.
Modules for attachment system CTL/CTM/CTH 26/36/48		
	Energy box module EAA CT 26/36/48 for CT 26/36/48, to connect a CT mobile dust extractor with the energy box / boom arm, dust extractor must not be LE model, in carton	496143
	Compressed air module DL CT 26/36/48 for CT 26/36/48, for upgrading LE model mobile dust extractors, with additional compressed air automatic On and Off switching mechanism, in carton	496141
Remote control All models: the remote control allows the dust extractor to be switched on directly from the suction hose (easy switchover to cleaning mode even when the dust extractor is set to AUTO), reach 10 m, technology Bluetooth®, in carton		
	CT-F I/M-Set for CT 26, 36, 48, retrofit set for CT 26, 36, 48, module to be installed in the spare module slot, remote operation via remote control (included in set) or via cordless tool (in combination with Bluetooth® battery pack), allows the mobile dust extractor to start automatically when the cordless tool is switched on (requires compatible Bluetooth® battery pack), receiver module (for CT 26, 36, 48)	202097
	CT-F I suitable for all dust extractors with Bluetooth® (in combination with Bluetooth® receiver module), two strip clamps for D27 and D36 suction hoses	202098
		Order no.
CT boom arm		
Boom arm All models: pipe set with connections, length 2.119 mm, width 1.136 mm, in carton		
	CT-ASA for CT 44, CT 48, without handle	492766
	CT-ASA CT 26/36/SB for CT 26/36, with the SB-CT 26/36 handle, boom arm for mounting on all CT 26/36 models (except CT 26/36 AC HD), handle	This product is not available in Australia 496372
	Tool holder WHR/CT-ASA for CT-ASA, CT-ASA/SB, CT-ASA CT 26/36/SB, for safe, ergonomic storage of two electric power or pneumatic tools, in carton	493558
		Order no.
CLEANTEC filter		
	Filter cartridge HF-CT 17 for CT 17 E, VCP 170 E, VCP 320 E, for dry extraction, in carton	769134
Main filter All models: in self-service display pack		
	HF-CT MINI/MIDI-2/CT 15 for CT MINI and CT MIDI manufactured 2019 or later and CT 15, main filter surrounded by practical plastic frame, easy replacement of filter cartridge from outside without opening the mobile dust extractor	204200
	HF-CT-MINI/MIDI for CT MINI and CT MIDI up to year of manuf. 2018	456790
	HF-CT 26/36/48 for CT 26/36/48 and TURBO II, High-performance main filter, not suitable for dust extractors with AUTOCLEAN	496170

Accessories for CT dust extractors		Order no.
CLEANTEC filter		
Main filter		
	HF-CT 26/36/48 HP for CT AC, VCP 260 AC, 360 AC, 480 AC, main filter optimised for cleaning, with PTFE coating, in self-service display pack	203759
	HF CTH 26/48 for CTH 26, CTH 48, specialised filter meeting the requirements of dust class H, in self-service display pack	498995
	HF-CT/2 for CT 11, 22, 33, 44, 55, qty. in pack 2 Units, in carton	452923
	HF-CT SYS for CTL-SYS, in self-service display pack	500558
	Long-life main filter Longlife-HF-CT/2 for CT 11, 22, 33, 44, 55, used only for extraction of dust types which are not hazardous to health, qty. in pack 2 Units, in carton	454869
Wet filter All models: for liquid suction		
	NF-CT MINI/MIDI-2/CT 15 for CT MINI and CT MIDI manufactured 2019 or later and CT 15, wet filter surrounded by practical plastic frame, easy replacement of filter cartridge from outside without opening the mobile dust extractor	204202
	NF-CT MINI/MIDI for CT MINI and CT MIDI up to year of manuf. 2018, in self-service display pack	456805
	NF-CT 26/36/48 for CT 26/36/48, in self-service display pack	496169
	NF-CT/2 for CT 11, 22, 33, 44, 55, qty. in pack 2 Units, in carton	452924
	NF-CT 17 for CT 17 E, VCP 170 E, VCP 320 E, VCP 171 E-L, VCP 321 E-L, in carton	769135
CLEANTEC filter bags		
	Filter bag FIS-CT 17/5 for CT 17 E, VCP 170 E, VCP 171 E-L, double-wall, qty. in pack 5 Units, in carton	769136
Selfclean filter bag All models: qty. in pack 5 Units		
	SC FIS-CT SYS/5 for CTL-SYS, optimum utilisation of filter bag capacity and non-woven filter for high tear resistance, non-woven SELFCLEAN filter bag, in carton	500438
	SC-FIS-CT MINI/MIDI-2/5/CT 15 for CT MINI and CT MIDI manufactured 2019 or later and CT 15, optimum utilisation of filter bag volume thanks to SELFCLEAN filter material (optimised for cleaning), max. 15 l capacity, in self-service display pack	204308
	SC FIS-CT MINI/5 for CTL MINI up to year of manuf. 2018, optimum utilisation of filter bag volume and constant suction power, thanks to SELFCLEAN filter bag, in carton	498410
	SC FIS-CT MIDI/5 for CTL MIDI up to year of manuf. 2018, optimum utilisation of filter bag volume and constant suction power, thanks to SELFCLEAN filter bag, in carton	498411

07 Dust extraction

Accessories for CT dust extractors		Order no.
CLEANTEC filter bags		
Selfclean filter bag All models: optimum utilisation of filter bag volume and constant suction power, thanks to SELF-CLEAN filter bag, qty. in pack 5 Units, in carton		
	SC FIS-CT 26/5 for CT 26	496187
	SC FIS-CT 36/5 for CT 36	496186
	SC FIS-CT 48/5 for CT 48	497539
Waste bag All models: not suitable for the standard CT model (without AC), qty. in pack 5 Units, in carton		
	ENS-CT 26 AC/5 for CT 26 AC	496216
	ENS-CT 36 AC/5 for CT 36 AC/CTL 36 E AC HD	496215
	ENS-CT 48 AC/5 for CT/CTL/CTM 48 AC	497540
Safety filter bag All models: two-layer, qty. in pack 3 Units, in carton		
	FIS-CTH 26/3 for CTH 26	497541
	FIS-CTH 48/3 for CTH 48	497542
Longlife filter bag All models: used only for extraction of dust types which are not hazardous to health, from high strength, 3-layer polyester fleece with a long service life, not suitable for fine dust		
	Longlife-FIS-CT SYS for CTL-SYS, multi-ply filter bag for dust disposal, in self-service display pack	500642
	LL-FIS-CT MINI/MIDI-2/CT 15 for CT MINI and CT MIDI manufactured 2019 or later and CT 15, max. 15 l capacity, in carton	204309
	Longlife-FIS-CTL MINI for CT MINI and CT MIDI up to year of manuf. 2018, in carton	499703
	Longlife-FIS-CTL MIDI for CT MINI and CT MIDI up to year of manuf. 2018, in carton	499704
	Longlife-FIS-CT 26 for CT 26, in carton	496120
	Longlife-FIS-CT 36 for CT 36, in carton	496121
	Longlife-FIS-CT 48 for CT 48, in carton	498506

Accessories for CT dust extractors

Order no.

CLEANTEC filter bags

Longlife filter bag

All models: used only for extraction of dust types which are not hazardous to health, from high strength, 3-layer polyester fleece with a long service life, not suitable for fine dust, in carton



Longlife-FIS-CT 22
for CT 22

456737

Longlife-FIS-CT 33
for CT 33

456738

Filter bag

All models: in carton

FIS-CT 22/5

for CT 22, qty. in pack 5 Units

452970

FIS-CT 22/20

for CT 22, qty. in pack 20 Units

494631



FIS-CT 33/5

for CT 33, qty. in pack 5 Units

452971

FIS-CT 33/20

for CT 33, qty. in pack 20 Units

494632

FIS-CT 44/5

for CT 44, qty. in pack 5 Units

452972

FIS-CT 55/5

for CT 55, qty. in pack 5 Units

452973

FIS-CT 22 SP VLIIES/5

for CT 22, with spunbond outer layer, extremely durable and tear-resistant, for extracting fine dust particles, qty. in pack 5 Units

456870



FIS-CT 33 SP VLIIES/5

for CT 33, with spunbond outer layer, extremely durable and tear-resistant, for extracting fine dust particles, qty. in pack 5 Units

456871

FIS-CT 44 SP VLIIES/5

for CT 44, with spunbond outer layer, extremely durable and tear-resistant, for extracting fine dust particles, qty. in pack 5 Units

456874

Accessories for SR dust extractors

Order no.



Waste bag ENS-SRM 45-LHS 225/5

for SRM 45 E-PLANEX, VCP 450 E-L, VCP 450 E-M, qty. in pack 5 Units, in carton

495015

SR filters

Order no.

Absolute filter

All models: in carton



AB-FI SRM 45/70

for SRM 45 LE-EC, SRM 70 LE-EC

493826



AB-FI SRH 45

for SRH 45

493825










Main filter NANO HF-SRM 45-LHS 225

for SRM 45 E-PLANEX, VCP 450 E-L, VCP 450 E-M, nano, in carton

496406

07 Dust extraction

Accessories for SR dust extractors		Order no.
SR filter bags		
Filter bag All models: qty. in pack 5 Units, in carton		
	FIS-SRM 45 /5 for SRM 45 LE-EC	493775
	FIS-SRM 45-LHS 225 /5 for SRM 45 E-PLANEX, VCP 450 E-L, VCP 450 E-M	495014
	FIS-SRM 70 /5 for SRM 70 LE-EC	493777
	FIS-SRH 45 /5 for SRH 45 E	493776
SR filters and filter bags for discontinued models		
Absolute filter All models: in carton		
	AB-FI/U for SR 5, SR 200, SR 201	485808
	AB-FI for SR151	488461
	AB-FI/C for SR 6, SR 12, SR 14, SR 202, SR 203, SR 212, SR 301, SR 302, SR 303, application category C/M	This product is not available in Australia 486241
Two-ply filter bag All models: qty. in pack 5 Units, in carton		
	FIS-SR 5/6 /5 for SR 5, SR 6, double-layered	483143
	FIS-SR 12/14 /5 for SR 12, SR 14	483142
	FIS-SR 150 /5 for SR 151, SRM 152	488460
	FIS-SR 200 /5 for SR 200, SR 201, SR 203	487070
	FIS-SR 300 /5 for SR 301, SR 303, SRM 312	487790
	FIS-SR 15 /5 for SR15, SR12, SR14, for substances with dust exposure limits and carcinogens as defined by GefStoffV35, BIA-approved	483889
	FIS-SR 202 /5 for SR 202, SR 212, SRH 204, SR 200, SR 201, SR 203	487482
	Accessories for mobile dust extractors CT and dust extractors SR	
CT accessories		
	Hose garage CT-SG for CT 11, 22, 33, 44, 55, for storing the suction hose and mains cable, suitable hose sizes: plug it-hose D 22 x 3.5 m / D 27 x 3.5 m / D 27 x 5 m / D 36 x 3.5 m / D 50 x 2.5 m / IAS 2-3500 AS, dimension [L x W x H] 530 x 360 x 110 mm, in carton	494388

Accessories for mobile dust extractors CT and dust extractors SR		Order no.
CT accessories		
Tool holder All models: in carton		
	WHR-CT for CT 26/36, tool holder for sanders, made of galvanised steel, for stable and ergonomic placement of an electrical or compressed air power tool	496122
	WHR-CT 36-LHS 225 for CT 36 PLANEX, with practical carry handle, for storage of PLANEX, not for PLANEX easy	495964
Handle All models: in carton		
	SB-CT 26/36 for CT 26/36, for pushing the dust extractors along easily, with nozzle holder	495802
	SB-CT 48 for CT 48, for pushing the dust extractors along easily, with nozzle holder	This product is not available in Australia 497295
	SB-CT MINI/MIDI-2/CT 15 for CT MINI and CT MIDI manufactured 2019 or later and CT 15, handle can be lowered when not in use, made from steel and aluminium tubes, with practical holder for storage of cleaning accessories (hand tube, extension pipes and floor nozzle) and parking position for inserted suction tube with floor nozzle; cord holder	This product is not available in Australia 204310
	Sealing slide VS-CT AC/SRM45 PLANEX for CT AC / CT 36 AC PLANEX, provides extreme vacuum in the container, the filter is cleaned even more effectively, in carton	497926
	Adapter AD-WCR adapter for attaching the WCR and/or service unit VE CT 26/36/48 for CT 48 EC and CT 48 EC B22, in carton	This product is not available in Australia 498805
	Sys-Adapter SYS-AP-CT 36 HD for CT 36 E HD-AC, CT 26 HD, VCP 260 E-L AC, VCP 260 E-M AC, VCP 260 E-H, from YOM 2011, for VCP 360 E-L AC, VCP 360 E-M AC, VCP 480 E-L AC, VCP 480 E-M AC, for connecting SYSTAINER to dust extractor, in self-service display pack	768115
	Vacuum clamping nozzle CT-W for CT dust extractors and D 27 suction hose, flexible aid for temporary clamping and securing of workpieces on horizontal and vertical surfaces, max. clamping height 50 mm, max. load 3 kg, dimension (L x W x H) 130 x 80 x 50 mm, weight 0,35 kg, in self-service display pack	500312
	Shoulder strap SYS-TG for CT-SYS and all SYSTAINERS T-LOC, easy transport of the CTL SYS and SYSTAINERS T-LOC, max. load 20 kg, in self-service display pack	500532
CT compressed air accessories		
	Service unit VE-CT 26/36/48 for the LE version of the CT 26/36/48, pressure controller, condensate quick discharge, oiler and oil-free compressed air outlet with quick coupling, in carton	This product is not available in Australia 495886
	Assembly set MS DH VE-CT-ASA-CT26/36 for assembly of supply unit VE-CT 26/36 in conjunction with CT-ASA CT 26/36 SB, in carton	496862