



MC9300 Technical Accessory Guide







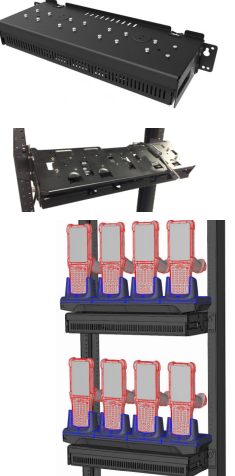

NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.


* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.

Cradles and Charging


Cradles

| Part Number | Picture | Description | Notes | Required Items |
|--------------------|---|---|---|--|
| CRD-MC93-2SUCHG-01 |  | Single Slot Charge/Communication Cradle | <ul style="list-style-type: none"> ▶ Provides USB support ▶ Supports MC9300 terminal and spare battery charging. ▶ Supports fast-charging of MC9300 device and MC9300 battery: <ul style="list-style-type: none"> - charges battery from 0-90% in about 3.5 hours. ▶ LED notification of spare battery charging status. | <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) - or KIT-PWR-12V50W which includes both. ▶ AC Line Cord (23844-00-00R). ▶ USB-C cable (CBL-TC5X-USBC2A-01 or CBL-TC2X-USBC-01) or similar 3rd party USB-C standard cable |
| CRD-MC93-4SCHG-01 |  | 4-Slot Charge-Only ShareCradle | <ul style="list-style-type: none"> ▶ Will charge up to four MC9300 units. ▶ Does not charge spare batteries. ▶ Supports fast-charging of MC93: <ul style="list-style-type: none"> - charges battery from 0-90% in about 3.5 hours. ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01) | <ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F) |
| CRD-MC93-4SETH-01 |  | 4-Slot Ethernet/Charging ShareCradle | <ul style="list-style-type: none"> ▶ Allows network speeds up to 1 Gb ▶ Will charge up to four MC9300 units. ▶ Supports fast-charging of MC93: <ul style="list-style-type: none"> - charges battery from 0-90% in about 3.5 hours. ▶ Provides Ethernet daisy chaining support for connecting multiple cradles together. ▶ Can be racked/mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01) | <ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F) |



| ADP-MC93-CRDCUP-01 |  | MC9300 Adapter Cup to MC90/MC91/MC92 Legacy Cradles | <ul style="list-style-type: none"> ▶ Allows MC9300 to be used with MC90/MC91/MC92 Single Slot and Multi-Slot Cradles. ▶ Adapter Cup includes circuitry to convert between voltages differences of MC90/MC91/MC92 and MC9300. ▶ NOTE: Adapter Cup does not provide communications support (USB, Serial, Ethernet). Will only provide charging support. ▶ Does NOT support fast-charging of MC9300. MC9300 used in legacy cradles will be charged at standard rate: <ul style="list-style-type: none"> - charges battery from 0-90% in about 5.8 hours at standard charging rate. ▶ Order one Adapter Cup for Single Slot Cradles and four Adapter Cups for Multi-Slot Cradles. | |
|-------------------------|---|---|---|--|
| BRKT-SCRD-SMRK-01 |  | 4-Slot ShareCradle Mounting Bracket | <ul style="list-style-type: none"> ▶ Allows for rack and wall mounting of one MC9300 4-Slot ShareCradle, up to four MC9300 Single Slot ShareCradles, or up to four MC9300 4-Slot Battery Chargers. ▶ Bracket can be mounted on standard 19" network rack or on a wall. ▶ Has cable routing slots and removable power supply tray that stores and conceals power supplies. ▶ Adjustable tabs & screw mounts for easy hanging/installation. ▶ Adjustable orientations: <ul style="list-style-type: none"> - 25° High Density (5-Slot Charge Only Cradle) - Horizontal (Single Slot Cradle or 4-Slot Battery Chargers). ▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket. | |
| Battery Charging | | | | |
| Part Number | Picture | Description | Notes | Required Items |
| SAC-MC93-4SCHG-01 |  | 4-Slot Battery Charger | <ul style="list-style-type: none"> ▶ This cradle charges MC9300 spare batteries only. ▶ Supports fast-charging of MC9300 batteries: <ul style="list-style-type: none"> - charges battery from 0-90% in about 3.3 hours vs. 5.8 hours for standard charging rate. ▶ Can be used standalone or up to four chargers can be installed on Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01). | <p><u>To power single 4-slot Charger:</u></p> <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R) <p><u>To power two sets of 4-slot Chargers from one power supply:</u></p> <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V108W0WW) ▶ DC Y-Cable Line Cord (CBL-DC-523A1-01) ▶ AC Line Cord (23844-00-00R) <p><u>To power four 4-slot Chargers:</u> Use MC9300 16-Slot Battery Charger (SAC-MC93-16SCHG-01) instead.</p> |



| | | | | |
|--------------------|---|-------------------------|---|--|
| SAC-MC93-16SCHG-01 |  | 16-Slot Battery Charger | <ul style="list-style-type: none"> ▶ Charges MC9300 spare batteries. ▶ Uses 5-Slot ShareCradle with four 4-Slot Battery Chargers (SAC-MC93-4SCHG-01) attached. ▶ Supports fast-charging of MC9300 batteries: <ul style="list-style-type: none"> - charges battery from 0-90% in about 3.3 hours vs. 5.8 hours for standard charging rate. ▶ Can be racked/mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01). | <ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V108W0WWW) ▶ DC Line Cord (CBL-DC-381A1-01) ▶ AC Line Cord (23844-00-00R) |
|--------------------|---|-------------------------|---|--|

Direct to Device Charging

| Part Number | Picture | Description | Notes | Required Items |
|--------------------|---|--|--|--|
| CBL-MC93-USBCHG-01 |  | USB Communication/Charging Cable Adapter | <ul style="list-style-type: none"> ▶ Attaches to charge/communication port on bottom of MC9300. ▶ Provides both USB communications and charging support. ▶ Will charge battery in MC9300 from 0-90% in as little as 3.5 hours when used with USB Power Supply (PWR-WUA5V12W0xx) | <ul style="list-style-type: none"> ▶ USB-C cable (CBL-TC5X-USBC2A-01 or CBL-TC2X-USBC-01) or similar 3rd party USB-C standard cable ▶ USB charger... Indoor use: order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx) In Vehicle use: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01) |


Communication Cables

| Part Number | Picture | Description | Notes | Required Items |
|--------------------|---|--|---|---|
| CBL-TC5X-USBC2A-01 |  | USB-C cable for Charging/Communication | <ul style="list-style-type: none"> ▶ USB-A to USB-C cable ▶ Attaches to MC9300 Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the MC9300 USB Communication-Charging Cable Adapter (CBL-MC93-USBC-01). ▶ Cable length is 1M (~3.25 ft.) | <ul style="list-style-type: none"> For use with MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBC-01): ▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version) ▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01) |
| CBL-TC2X-USBC-01 |  | USB-C cable for Charging/Communication | <ul style="list-style-type: none"> ▶ USB-A to USB-C cable ▶ Attaches to MC9300 Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the MC9300 USB Communication-Charging Cable Adapter (CBL-MC93-USBC-01). ▶ Cable length is 1.5M (~5 ft.) | <ul style="list-style-type: none"> For use with MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBC-01): ▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version) ▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01) |

| | | | | |
|--------------------------|---|---|---|---|
| 3rd party * |  | USB-C cable for Charging/Communication | <ul style="list-style-type: none"> ▶ Attaches to MC9300 Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the MC9300 USB Communication-Charging Cable Adapter (CBL-MC93-USBCHG-01). | <p>For use with MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01):</p> <ul style="list-style-type: none"> ▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version) ▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01) |
| PSAK-UCE-C (3rd party) * |  | Portsmith USB Ethernet Adapter Kit for MC9300 | <ul style="list-style-type: none"> ▶ Connects to MC9300 via Single Slot USB cradle or Snap-On USB Cable. ▶ Requires no separate power supply, has grounded wiring from both the USB and Ethernet ports, and operates on very low power draw directly from the USB connection. ▶ Molded end caps enable the adapters to be aligned side by side or top to bottom, for efficient use of desktop space and organization of cables. ▶ Kit includes: PSA1U1E adapter and USB-C cable for connecting to the MC9300. ▶ Does not require any additional drivers on MC9300. | <p>MC9300 Charge/Communication Cradle (CRD-MC93-2SUCHG-01)</p> <p>or</p> <p>MC9300 Charge/Communication Cable Adapter (CBL-MC93-USBCHG-01)</p> |

<http://www.portsmith.com>

Snap-On Accessories






| Part Number | Picture | Description | Notes | Required Items |
|--------------------|--|--|--|--|
| CBL-MC93-USBCHG-01 |  | USB Communication/Charging Cable Adapter | <ul style="list-style-type: none"> ▶ Attaches to charge/communication port on bottom of MC9300. ▶ Provides both USB communications and charging support. ▶ Will charge battery in MC9300 from 0-90% in as little as 3.5 hours when used with USB Power Supply (PWR-WUA5V12W0xx) | <ul style="list-style-type: none"> ▶ USB-C cable (CBL-TC5X-USBC2A-01 or CBL-TC2X-USBC-01) or similar 3rd party USB-C standard cable ▶ USB charger... <p>Indoor use: order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx)</p> <p>In Vehicle use: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</p> |



Soft Goods - Cases/Holsters

| Part Number | Picture | Description | Notes | Required Items |
|-------------|---------|-------------|-------|----------------|
|-------------|---------|-------------|-------|----------------|

| | | | | |
|---|---|---|---|--|
| <p>SG-MC9X-SHLSTG-01</p> |  | <p>MC9x Gun Holster</p> | <ul style="list-style-type: none"> ▶ Holster secures the MC9x-G on the user's waist and has the ability to also be used with a durable nylon adjustable belt or an adjustable nylon shoulder strap. (Belt and shoulder strap purchased separately). ▶ Ballistic nylon case ▶ Weep hole at bottom of case ▶ Compatible with all MC9x-Gun configurations, including MC9300. ▶ Padding on side of Holster is slightly thicker than SG-MC9121112-01R. ▶ Compatible with MC9300 units using Rubber Boot (SG-MC93-RBTG-01), although the fit will be tight. | |
| <p>S5716DWSP (3rd party) *</p> <p>http://www.ultimacase.com</p> |  | <p>Fabric Holster Assy with Waist Pad for MC9x-G</p>  | <ul style="list-style-type: none"> ▶ Ergonomically designed waist pad keeps the holster snug to body and prevents it from flopping while walking ▶ Holster is attached to the waist pad with a low profile D-swivel at top and hook & loop at bottom ▶ Sleek vinyl lining inside the holster facilitates easy insertion and removal of the unit ▶ Retainer strap over handle prevents accidental drop of the unit ▶ A safety strap secures the unit to waist pad ▶ Exterior pocket is used for storing spare battery ▶ Designed for left or right handed users | |
| <p>A1232ST (3rd party) *</p> <p>https://shilpitradng.com</p> |  | <p>MC9x-G Holster</p> | <ul style="list-style-type: none"> ▶ Foam Padded Soft Holster. ▶ Belt Loops on sides for left or right handed users. ▶ Belt Loop on back for attachment to rail. ▶ D-rings for wearing with optional shoulder strap. ▶ Retaining strap keeps device in holster to prevent accidental drops. ▶ Can be used with optional Waist Belt for Holster (A1227ST) or Shoulder Strap (A1236ST) | |
| <p>U6003DWSPROS2 (3rd party) *</p> <p>http://www.ultimacase.com</p> |  | <p>Large Replacement Swivel Belt Clips for holsters</p>  | | |



| | | | | |
|---|---|-------------------------------------|--|--|
| (3rd party) * http://www.ultimacase.com | Agora Edge website | Additional Holsters for MC9x series | | |
| (3rd party) * http://www.logisterra.com | Logisterra website | Additional Holsters for MC9x series | | |
| 11-08062-02R |  | Belt for holster | <ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Has improved buckle and softer belt material | |
| A1227ST (3rd party) * https://www.shilpitrading.com |  | Belt for Holster | <ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Quick on/off snap buckle | |
| V6198DW (3rd party) * http://www.ultimacase.com |  | Belt Extender | <ul style="list-style-type: none"> ▶ Used to extend the holster belt (11-08062-02R) an additional 10 inches | |
| 58-40000-007R |  | Shoulder Strap for MC9x Gun Holster | <ul style="list-style-type: none"> ▶ 1.5" wide, 22 to 50" max. length | |
| A1236ST (3rd party) * https://www.shilpitrading.com |  | Universal Shoulder Strap | <ul style="list-style-type: none"> ▶ Belt is 1 inch wide ▶ Extends to 54 inches ▶ Moulded shoulder pad ▶ Plastic swivel snap hooks | |
| SG-MC93-RBTG-01 |  | Rubber Boot | <ul style="list-style-type: none"> ▶ Works with both Laser and Imager gun units ▶ Devices with Boot will also fit into Gun Holster (SG-MC9X-SHLSTG-01). The fit will be tight though. ▶ Only compatible with MC9300. ▶ Does not increase drop spec of device. Designed to protect the device from the everyday nicks and dings. ▶ Not compatible with Forklift Holder (MNT-MC93-FLCH-01). ▶ Bottom portion of boot must be removed before inserting into Single Slot and Multi-Slot cradles. | |

| KT-70147-01R |  | Belt Clip | Allows MC9x-G to be hooked onto the Belt Clip using the unit's handstrap | |
|-------------------------------|---|---|---|----------------|
| Misc | | | | |
| Part Number | Picture | Description | Notes | Required Items |
| SG-MC93-HDSTPG-01 |  | Handstrap for MC9300 Gun (single strap) | ▶ This is an optional handstrap, not included on MC9300 units. | |
| SG-TC7X-STYLUS-03 (pack of 3) |  | MC9300 Stylus Kit with Tether | <ul style="list-style-type: none"> ▶ Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHR1-03) ▶ Conductive Carbon-filled plastic material w/ 5mm tip. ▶ Length of stylus is 3.5". ▶ Rigid plastic stylus is optimized for enterprise durability. ▶ Clip & tether point to reduce loss. Tether to Handstrap ▶ When not being used stylus can be stored in loop on Handstrap or in the optional Holster | |
| SG-TC5X-STYLUS-01 (pack of 3) |  | Fiber Tipped Stylus | <ul style="list-style-type: none"> ▶ Black Passive Stylus with Zebra logo ▶ 5" length ▶ Heavy duty - made from stainless steel and brass. No plastic parts - real pen feel. ▶ Can be used in rain. ▶ Micro-Knit Hybrid Mesh Fiber Tip provides silent, smooth gliding use. ▶ Big improvement over rubber tipped or plastic tipped stylus. ▶ Compatible with all capacitive touch screen devices. ▶ Can be tethered to device using KT-TC7X-TETHR1-03 or SG-ET5X-SLTETR-01. ▶ Expected to be available May 2020. | |
| KT-TC7X-TETHR1-03 (pack of 3) |  | Replacement Coiled Tether for Stylus | ▶ This tether is included with Stylus Kit with Tether (SG-TC7X-STYLUS-03) | |

| | | | | |
|----------------------------------|---|--|--|--|
| SG-ET5X-SLTETR-01 (single) |  | Replacement Coiled Tether for Stylus | ► This tether is typically used with the ET5X series' stylus but can be used with MC9300 Stylus. | |
| MISC-MC93-SCRN-01 (pack of 5) |  | MC9300 Tempered Glass Screen Protector (pack of 5) | ► Tempered glass ► Includes alcohol wipes, cleaning cloth and tools needed for screen protector installation. | |

Vehicle/Forklift Cradles and Holders

Powered Cradles and Holders (provides device charging)

| Part Number | Picture | Description | Notes | Required Items |
|---|---|--|---|---|
| 712134 (Standard cradle) 712135 (Cradle with Swiveling Top Support) (3rd party) * |  | ProClip MC9300 Charge-Only Vehicle Mount Cradle with Cigarette Lighter Adapter | <ul style="list-style-type: none"> ► Front Facing - allows user to access screen and keyboard while cradled. ► Compatible with 12-24V vehicle systems and provides 3A current for fast device charging. ► Mount ready via AMPS hole pattern to ProClip pedestal or forklift mounts. ► Fits devices with or without hand strap attached. | Mount on vehicle using ProClip Pedestal or Forklift Mount - see ProClip website |
| http://www.proclipusa.com/category/zebra | | | | |
| 713134 (Standard cradle) 713135 (Cradle with Swiveling Top Support) 216096 (High Vibration Cradle with Swiveling Top Support) (3rd party) * |  | ProClip MC9300 Charge-Only Vehicle Mount Cradle with Hard Wired Adapter | <ul style="list-style-type: none"> ► Front Facing - allows user to access screen and keyboard while cradled. ► Compatible with 12-24V vehicle systems and provides 3A current for fast device charging. ► Mount ready via AMPS hole pattern to ProClip pedestal or forklift mounts. ► Fits devices with or without hand strap attached. ► High Vibration cradle includes additional dampener to protect device when mounting on higher vibration vehicles (i.e. fork lifts). | Mount on vehicle using ProClip Pedestal or Forklift Mount - see ProClip website |
| http://www.proclipusa.com/category/zebra | | | | |

Un-Powered Cradles and Holders (passive holders, no charging support)

| Part Number | Picture | Description | Notes | Required Items |
|-------------|---------|-------------|-------|----------------|
|-------------|---------|-------------|-------|----------------|


| | | | | |
|--------------------|---|---|---|--|
| MNT-MC93-FLCHKT-01 |  | MC9X Forklift Holder KIT (passive - unpowered) | <ul style="list-style-type: none"> ▶ Bracket holds MC9X for convenient mounting on fork lift. ▶ Installs on a roll bar or square surface of the forklift and allows the device to be used in landscape or portrait mode. ▶ Kit includes MC9X Forklift Holder (MNT-MC93-FLCH-01), RAM Mount Arm for Fork Lift Cradle (MNT-RAM-B201U) and RAM Mount Base for Fork Lift Cradle (MNT-RAM-B247U25) ▶ Does NOT provide device charging. ▶ Not compatible with devices with rubber boot attached. | |
| MNT-MC93-FLCH-01 |  | MC9X Forklift Holder (passive - unpowered) | <ul style="list-style-type: none"> ▶ Bracket holds MC9X for convenient mounting on fork lift. ▶ Installs on a roll bar or square surface of the forklift and allows the device to be used in landscape or portrait mode. ▶ Includes RAM B size ball (1" diameter) on back of holder. ▶ Does NOT provide device charging. ▶ Not compatible with devices with rubber boot attached. | |
| MNT-RAM-B201U |  | RAM Mount Arm for MC9X00 Fork Lift Cradle | <ul style="list-style-type: none"> ▶ Used with Fork Lift Holder (MNT-MC93-FLCH-01) ▶ RAM Double Sock Arm for 1" ball (B size) ▶ Uses RAM Mount P/N RAM-B-201U | |
| MNT-RAM-B247U25 |  | RAM Mount Base for MC9X00 Fork Lift Cradle | <ul style="list-style-type: none"> ▶ Used with Fork Lift Holder (MNT-MC93-FLCH-01) ▶ Attaches to square shaped rail/post of forklift. ▶ 2.5" Max Width Square Rail Base with 1" diameter ball (B size) ▶ Uses RAM Mount P/N RAM-B-247U-25 | |




| | | | | |
|---|---|--|--|--|
| <p>710134 (Standard holder)</p> <p>710135 (Holder with Swiveling Top Support)</p> <p>(3rd party) *</p> <p>http://www.proclipusa.com/category/zebra</p> |  | <p>ProClip MC9300 Vehicle Mount Holder (unpowered)</p> | <ul style="list-style-type: none"> ▶ Front Facing - allows user to access screen and keyboard while cradled. ▶ Mount ready via AMPS hole pattern to ProClip pedestal or forklift mounts. ▶ Fits devices with or without hand strap attached. | <p>Mount on vehicle using ProClip Pedestal or Forklift Mount - see ProClip website</p> |
| <p>RAP-450U</p> <p>(3rd party) *</p> <p>https://www.rammount.com</p> |  | <p>RAM Power-Grip™ XL Universal Scanner Gun Holder</p> | <ul style="list-style-type: none"> ▶ Universal scanner gun holder is designed for use with several large form factor scanner guns. ▶ Compatible with a full range of ball and socket forklift mounting systems. ▶ Uses high-strength composite materials. ▶ Holder features two attachment points: (1) the hole pattern on the back of the holder allows for the connection of the RAM-202U or the RAM-D-254U (hardware is included for these attachments) or (2) the hole pattern on the bottom of the holder allows for the connection of a 2" x 3" plate – RAM-202U-23 or RAM-D-202U-23 – or a drill-down mount (hardware is not included for these attachments). | |
| <p>Y6911DWSP (formerly S5691DWSP)</p> <p>(3rd party) *</p> <p>http://www.ultimacase.com</p> |  | <p>Wall Mountable/Fork lift Mountable Holster for MC9xxx-G</p>  | <ul style="list-style-type: none"> ▶ Mounting holes reinforced with grommets for 3 mounting options: back, left side, or right side. ▶ Stiffeners in all walls provide structure and rigidity for forklift or wall mount. ▶ Sleek vinyl lining inside for easy insertion and removal of the unit. ▶ Retainer strap over handle to prevent accidental drops. ▶ Pocket on each side for marker/pen | |
| <p>A1233ST</p> <p>(3rd party) *</p> <p>https://shilpitradng.com</p> |  | <p>Wall Mountable/Fork lift Mountable Holster for MC9xxx-G</p> | <ul style="list-style-type: none"> ▶ Grommetted holes on 3-sides for multiple mounting options. Includes two plastic cable tie-wraps. ▶ Two pockets for keeping markers. ▶ Stiffeners for structure and rigidity. ▶ Retaining strap keeps device in holster to prevent accidental drops. | |



| | | | | |
|---|---|--|--|--|
| <p>SY-VM90G-TOP (3rd party) *</p> <p>http://www.logisterra.com</p> |  | <p>MC9x Gun Vehicle Mount Cradle</p> | | |
| <p>00-8053SP (3rd party) *</p> <p>http://www.ultimacase.com</p> |  | <p>Kydex Holster w/Metal Bracket for MC90xx Gun, Brick, or Short</p> | <ul style="list-style-type: none"> ▶ Custom molded ruggedized Kydex plastic holster for industrial application. ▶ A metal bracket is fastened to holster which allows mounting to a Fork truck or other rigid surfaces ▶ Metal bracket facilitates the holster to swing for operating the unit in multiple positions. | |
| <p>7160-0854 (3rd party) *</p> <p>https://www.gamberjohnson.com</p> |  | <p>Gamber-Johnson Barcode Scanner/Mobile Computer Mount</p> | <ul style="list-style-type: none"> ▶ Attaches to the overhead guard leg on forklift trucks. It is designed to fit rectangular pillars between 1.5" to 2.5" wide with easy installation ▶ Heavy gauge steel construction for long-term durability in a rugged environment. ▶ Black powdercoat finish for maximum corrosion resistance. ▶ Designed to securely fit most handheld barcode scanners and mobile computers. ▶ Works with wireless and wired devices | |
| <p>7160-1306 (3rd party) *</p> <p>https://www.gamberjohnson.com</p> |  | <p>Gamber-Johnson Scanner Pocket Mount with Small Back Plate</p> | <ul style="list-style-type: none"> ▶ Scanner mount is designed to support scanner or handheld computer in a rugged environment by holding it securely to the overhead guard leg of fork lift vehicle. ▶ Adjustable in width, and offers 3 mounting orientations from the overhead guard leg or one of Gamber-Johnson's extension bars. ▶ Designed to hold most handheld computers and scanners. ▶ Adjustable to fit 3.5" to 4.5" width and set at 2.5" tall ▶ Designed to be orientated inside, outside, or inline with the overhead guard leg. ▶ Attaches to rectangular overhead guard legs that are 1.5 in to 2.5 in (3.81 cm to 6.35 cm) wide. | |

| | | | | |
|--|---|---|--|--|
| <p>SG-MOT-90-BT or SG-MOT-90-BT (for Gun units with attached rubber boot - 11-67218-04R) (3rd party) *</p> <p>http://www.smart-grip.com</p> |  | <p>MC9x Gun or Brick Vehicle Mount Cradle</p> | <ul style="list-style-type: none"> ▶ Can be used on forklifts, carts, work benches, etc. ▶ Readable screen while in holder ▶ Useable Keyboard while in Holder ▶ Fully Adjustable Mounting ▶ Open End Supports Adapter and Cables ▶ Angled Fingers Support Terminal ▶ Angle and Tapered Sides for Secure Support ▶ All Steel Construction ▶ Supports RFID configurations also. | |
| <p>127 - 12 12 Volt Heated holder 127 - 24 24 Volt Heated holder 127 - 3648 36 - 48 Volt Heated holder (3rd party) *</p> <p>http://www.jlcsolutions.biz</p> |  | <p>MC9x Gun Heated Vehicle Mount holster/holder</p> | <ul style="list-style-type: none"> ▶ Eliminates the “Fogging” and “Freezing” on the laser scanner lens and on the terminal’s display screen caused by temperature and humidity changes. ▶ This is accomplished by placing two thermostatically controlled heating pads designed to put the right amount of heat at both key points. ▶ Can be used on forklifts, carts, work benches, etc. | |
| <p>(3rd party) *</p> <p>http://www.ultimacase.com</p> | <p>Agora Edge website</p> | <p>Additional Vehicle Holders/Cradles for MC90xx series</p> | | |




Headset/Audio Accessories
NOTE: Wired headsets not supported on MC9300. Use Bluetooth headset instead.








| Part Number | Picture | Description | Notes | Required Items |
|---|---|--|---|---|
| <p>See HS2100-HS3100 Accessories Document</p> |  | <p>HS3100 Rugged Bluetooth Headset</p> | <ul style="list-style-type: none"> ▶ HD Voice, also known as Wide Band Audio, brings incredible audio clarity ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Swap batteries on the fly – without losing the Bluetooth connection ▶ Split-second tap-to-pair simplicity using NFC. ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing users to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene ▶ 15 hours of battery power | <p>▶ See HS2100/HS3100 Accessories Document for headset accessories</p> |

| | | | | |
|---|---|---|--|--|
| <p>various Bluetooth models B550-XT B350-XT C400-XT C300-XT</p> <p>(3rd party) *</p> <p>http://www.blueparrott.com</p> |  | <p>BlueParrott Bluetooth Headsets</p> | <ul style="list-style-type: none"> ▶ Various Bluetooth models available with options that include: <ul style="list-style-type: none"> - Blocking out 96% of background noise - Over 24 hours of talk time - NFC Tap to Pair capable - Bluetooth wireless range capable up to 300 ft. - Convertible wearing options: over the head, behind the neck. <p>See BlueParrot site for model specific options.</p> | |
| <p>APTT1 (3rd party) *</p> <p>https://www.aina-wireless.com/</p> |  | <p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p> | <ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Features several buttons which the application developers can assign to different functions. ▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts. ▶ Device is ruggedized, MIL-STD 810G and IP67. ▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ Can be easily paired to mobile computer using NFC tap-to-pair. | |
| <p>H3-B-1 (3rd party) *</p> <p>https://www.dellking.com</p> |  | <p>Wandfu H3 Push-To-Talk (PTT) Bluetooth Remote Speaker/Mic (RSM)</p> | <ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. | |

| | | | | |
|--|--|---|---|--|
| <p>BTR-155 (3rd party) *</p> <p>K551011 (Zebra orderable SKU) ▶ Discontinued 3/2019, now order from Savox</p> <p>https://www.savoxaccessories.com</p> |  | <p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p> | <ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Rugged wireless speaker microphone IP55. ▶ Allows cable-free movement ▶ Familiar speaker microphone functions; PTT and volume buttons ▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ LED status indication ▶ High speaker volume ▶ Includes: <ul style="list-style-type: none"> - Savox RSM - Modular Wired earpiece - Wall Charger - USB Cable - Quick Start Guide - Carrying Strap | |
| <p>BTH-101 (3rd party) *</p> <p>https://www.savoxaccessories.com</p> |  | <p>Savox Push-To-Talk (PTT) Bluetooth Headset</p> | <ul style="list-style-type: none"> ▶ Bluetooth headset designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Also operates as standard Bluetooth headset for taking phone calls. ▶ Device is lightweight and ruggedized, IP55. | |






Power Cords/Power Supplies

| Part Number | Picture | Description | Notes | Required Items |
|------------------|---|---------------|---|--|
| CBL-DC-388A1-01 |  | DC Power Cord | <ul style="list-style-type: none"> ▶ Used along with Power Supply PWR-BGA12V50W0WW to power CRD9000-1001S, ADP9000, and MSR9000. ▶ Cable length is 1.8 meters | |
| CBL-DC-395A1-01 |  | DC Power Cord | <p>Used along with Power Supply PWR-BGA12V50W0WW to power SAC9000 4-Slot Battery Charger</p> | |
| PWR-BGA12V50W0WW |  | Power Supply | <ul style="list-style-type: none"> ▶ Used to power CRD9000-1001S, ADP9000, and MSR9000. ▶ 100-240 VAC, 12V, 4.16A, 50W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-148R | DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R) |

| | | | | |
|--|---|--|--|--|
| KIT-PWR-12V50W |  | Power Supply Kit for Single Slot Cradle and Snap-Ons | <ul style="list-style-type: none"> ▶ Used to power CRD9000-1001S, ADP9000, and MSR9000 ▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) | AC Line Cord (23844-00-00R) |
| KT-PWR-50W395A1-01 |  | Power Supply Kit for 4-Slot Battery Charger | <ul style="list-style-type: none"> ▶ Used to power SAC9000 Battery Charger ▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-395A1-01) | AC Line Cord (23844-00-00R) |
| CBL-DC-382A1-01 |  | DC Power Cord | ▶ Used with Power Supply PWR-BGA12V108W0WW to power Four Slot Cradles. | |
| CBL-DC-523A1-01 |  | 2-Way DC Y Power Cord | ▶ Used to power two 4-Slot Battery Chargers with one Power Supply (PWR-BGA12V108W0WW) | |
| PWR-BGA12V108W0WW |  | Power Supply | <ul style="list-style-type: none"> ▶ Used to power Four Slot Cradles and SAC9000 Battery Charger ▶ 100-240 VAC, 12V, 9A, 108W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-241R | CBL-DC-382A1-01 and 23844-00-00R |
| 23844-00-00R |  | AC Cable | ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. | |
| PWR-WUA5V12W0US (US plug style) PWR-WUA5V12W0GB (UK plug style) PWR-WUA5V12W0EU (EU plug style) PWR-WUA5V12W0AU (Australia plug style) PWR-WUA5V12W0CN (China plug style) PWR-WUA5V12W0IN (India plug style) PWR-WUA5V12W0KR (Korea plug style) PWR-WUA5V12W0BR (Brazil plug style) |  | USB Power Supply for MC93 | <ul style="list-style-type: none"> ▶ Used with MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01) to provide a lower cost charging solution than using a Cradle. ▶ Provides higher current (2.5A) for faster charging ▶ 100-240 VAC, 5 V, 2.5 A | <ul style="list-style-type: none"> ▶ MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01) ▶ USB-C Cable (CBL-TC2X-USBC-01) or (CBL-TC5X-USBC2A-01) |
| CHG-AUTO-USB1-01 CHG-AUTO-USB1-BR (for Brazil) |  | USB Cigarette Lighter Adapter for MC93 | <ul style="list-style-type: none"> ▶ Used with MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01) to provide in-vehicle charging. ▶ Includes two USB A ports providing higher current (2.5A) for faster charging | <ul style="list-style-type: none"> ▶ MC9300 USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01) ▶ USB-C Cable (CBL-TC2X-USBC-01) or (CBL-TC5X-USBC2A-01) |
| Batteries | | | | |
| Part Number | Picture | Description | Notes | Required Items |

| | | | | |
|---|---|--|--|--|
| <p>BTRY-MC93-STN-01 (single)</p> <p>BTRY-MC93-STN-10 (10 pack)</p> <p>BTRY-MC93-STN-IN (for use in India)</p> |  | <p>MC9300 Spare Standard Battery with PowerPrecision Plus (7000 mAh - 25Wh)</p>  | <ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device). - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Only compatible with MC9300. | |
| <p>BTRY-MC93-FRZ-01 (single)</p> <p>BTRY-MC93-FRZ-10 (10 pack)</p> |  | <p>MC9300 Spare Freezer Battery with PowerPrecision Plus (5000 mAh - 18Wh)</p>  | <ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device). - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Lower battery capacity (5000 mAh) compared to standard battery (7000 mAh) is capable of providing more power at typical freezer temperature than the standard battery. ▶ Only compatible with MC9300. | |
| <p>BTRY-MC93-NI-01 (single)</p> <p>BTRY-MC93-NI-10 (10 pack)</p> |  | <p>MC9300 Spare Non-Incendive Battery with PowerPrecision Plus (7000 mAh - 25Wh)</p>  | <ul style="list-style-type: none"> ▶ Battery is designed to be used with MC9300 NI (Non-Incendive) devices. ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device). - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Only compatible with MC9300. | |

Replacement Keyboards for MC9300

| Part Number | Picture | Description | Notes | Required Items |
|--|---|--|--|----------------|
| KYPD-MC9329NMR-01 (single) KYPD-MC9329NMR-10 (pack of 10) |  | 29-Key Numeric Primary keyboard for MC93 | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |
| KYPD-MC9334FNR-01 (single) KYPD-MC9334FNR-10 (pack of 10) |  | 34-Key keyboard for MC93 | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |
| KYPD-MC9343FN-01 (single) KYPD-MC9343FN-10 (pack of 10) |  | 43-Key keyboard for MC93 | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |
| KYPD-MC9353ANR-01 (single) KYPD-MC9353ANR-10 (pack of 10) |  | 53-Key Standard keyboard for MC93 | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |
| KYPD-MC9353VT-01 (single) KYPD-MC9353VT-10 (pack of 10) |  | 53-Key VT keyboard for MC93 | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |

| | | | | |
|---|---|---|--|--|
| <p>KYPD-MC93535250-01 (single)</p> <p>KYPD-MC93535250-10 (pack of 10)</p> |  | <p>53-Key 5250 keyboard for MC93</p> | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |
| <p>KYPD-MC9358ANR-01 (single)</p> <p>KYPD-MC9358ANR-10 (pack of 10)</p> |  | <p>58-Key Alpha-Numeric keyboard for MC93</p> | <ul style="list-style-type: none"> ▶ Freezer compatible ▶ Backlight compatible ▶ Indoor / Outdoor use | |