



# HQR

EXCLUSIVE COLLECTION

**THE DESIGN WAY**  
HIGH SEDUCTION HIGH TRAFFIC



## HIGH COMFORT

---

# A COMBINATION OF DIFFERENT MATERIALS PROVIDING A COMBINATION OF BENEFITS

---

### 1 EASY TO LAY

**SAVES MONEY AND TIME:**

product ready to lay, no preparation of the floor and no adhesive required

**UNROLL... IT'S DONE!**

GFT takes up the unevenness of the existing floor and can be laid directly

Ideal for refurbishment and rented properties

### 2 ULTRA COMFORTABLE

**ACOUSTIC INSULATION:**

ideal for rooms on upper floors and for apartments

**THERMAL INSULATION:**

flooring that never feels cold underfoot

**COMFORTABLE TO WALK ON:**

its pliable fibres make it feel springy

### 3 EASY TO LIVE WITH

**EASY-CLEAN:**

hygienic and antiallergenic  
Simply rinse with soapy water

**TOTALLY WATERTIGHT:**

prevents moisture rising and mould  
Suitable for wet areas

HIGH TRAFFIC

# IDEAL PROPERTIES FOR PROFESSIONAL USE

## IDEAL FOR INTENSIVE/ HIGH TRAFFIC USE:

As it is 3.10 mm thick and has a 0.50 mm wearlayer.

## MULTI-PURPOSE APPLICATIONS:

Hardwearing, suitable for domestic and semi commercial use: housing, residences, offices, waiting rooms, independent shops and hotels...

## DURABLE:

Warranty: 15 years for residential use and 5 years for commercial use.






# HOR

WOODSTOCK



1985 - Walden Blond



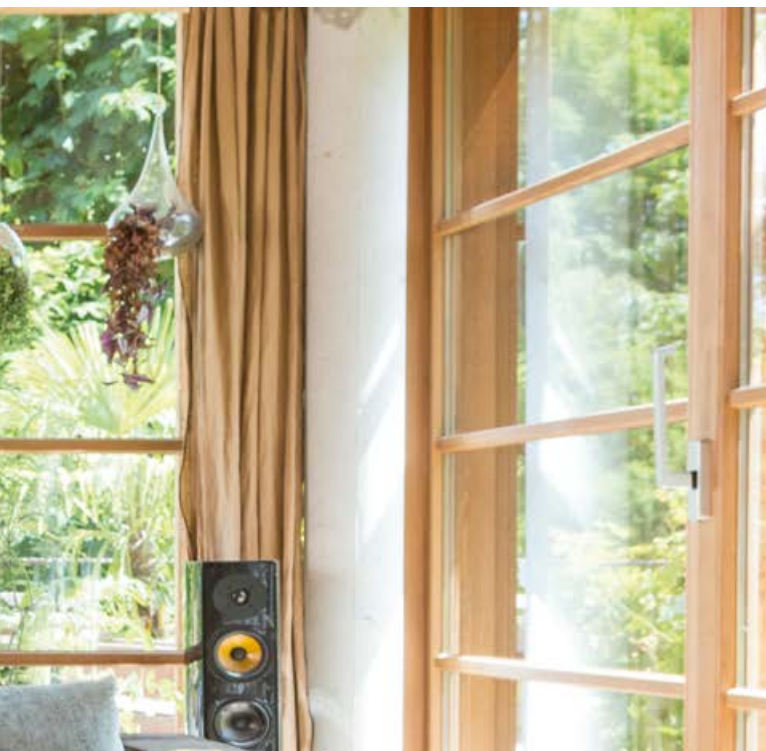

**1-Walden Blond**

2 m: Code: 1373 1985 - EAN: 3475710369490  
4 m: Code: 1393 1985 - EAN: 3475710369629

**2-Timber Honey**

2 m: Code: 1373 1819 - EAN: 3475710321610  
3 m: Code: 1383 1819 - EAN: 3475710337284  
4 m: Code: 1393 1819 - EAN: 3475710321511

**3-Walden Brown**

2 m: Code: 1373 1984 - EAN: 3475710369483  
4 m: Code: 1393 1984 - EAN: 3475710369612

**4-Macchiato Naturel**

2 m: Code: 1373 2003 - EAN: 3475710371660  
4 m: Code: 1393 2003 - EAN: 3475710371639

**5-Castle Blond**

2 m: Code: 1373 1802 - EAN: 3475710369940  
4 m: Code: 1393 1802 - EAN: 3475710329739

**6-Noma Ceruse**

2 m: Code: 1373 0678 - EAN: 3475710321573  
3 m: Code: 1383 0678 - EAN: 3475710331282  
4 m: Code: 1393 0678 - EAN: 3475710321474





#### 1-Noma Kola

2 m: Code: 1373 1451 - EAN: 3475710321023

3 m: Code: 1383 1451 - EAN: 3475710337147

4 m: Code: 1393 1451 - EAN: 3475710318139

#### 2-Walden White

2 m: Code: 1373 1983 - EAN: 3475710369476

4 m: Code: 1393 1983 - EAN: 3475710369605

#### 3-Castle Clear

2 m: Code: 1373 1918 - EAN: 3475710373220

4 m: Code: 1393 1918 - EAN: 3475710372629

#### 4-Timber Clear

2 m: Code: 1373 0720 - EAN: 3475710329784

3 m: Code: 1383 0720 - EAN: 3475710331152

4 m: Code: 1393 0720 - EAN: 3475710329760

#### 5-Noma Nature

2 m: Code: 1373 1778 - EAN: 3475710321030

3 m: Code: 1383 1778 - EAN: 3475710337154

4 m: Code: 1393 1778 - EAN: 3475710318146

1373 - Timber Clear



1



2



3





# WOODSTOCK HQR

GFT Backing Rolls  
HQR







1995 - Diamond Blue

# HQR

## GEOMETRIC

### 1-Diamond Cream

2 m: Code: 1373 1994 - EAN: 3475710369575

4 m: Code: 1393 1994 - EAN: 3475710369704

### 2-Diamond Blue

2 m: Code: 1373 1995 - EAN: 3475710369582

4 m: Code: 1393 1995 - EAN: 3475710369711

### 3-Diamond Bric

2 m: Code: 1373 1993 - EAN: 3475710369568

4 m: Code: 1393 1993 - EAN: 3475710369698

### 4-Damasco Taupe

2 m: Code: 1373 2000 - EAN: 3475710369889

4 m: Code: 1393 2000 - EAN: 3475710369926

### 5-Damasco Perle

2 m: Code: 1373 1999 - EAN: 3475710369872

4 m: Code: 1393 1999 - EAN: 3475710369919

### 6-Damasco Blanc

2 m: Code: 1373 1997 - EAN: 3475710369858

4 m: Code: 1393 1997 - EAN: 3475710369896



# HOR

GRAPHIC



*Modena Grey + Elegant Clear*





**1-Karonga Grigio**

2 m: Code: 1259 1769 - EAN: 3475710320613

4 m: Code: 1759 1769 - EAN: 3475710317750

**2-Modena Grey**

2 m: Code: 1373 2001 - EAN: 3475710371448

4 m: Code: 1393 2001 - EAN: 3475710371530

**3-Harlem Blue**

2 m: Code: 1373 1789 - EAN: 3475710320897

4 m: Code: 1393 1789 - EAN: 3475710318559

**4-Karonga Moka**

2 m: Code: 1259 1658 - EAN: 3475710320736

4 m: Code: 1759 1658 - EAN: 3475710317705

**5-Modena Naturel**

2 m: Code: 1373 1991 - EAN: 3475710369506

4 m: Code: 1393 1991 - EAN: 3475710369636

**6-Karonga Crema**

2 m: Code: 1259 1657 - EAN: 3475710320729

3 m: Code: 1256 1657 - EAN: 3475710339004

4 m: Code: 1759 1657 - EAN: 3475710317699



1



2



3



4



5



6

# HQR

## ROCK FACTORY



1990 - Medley Brown





**1-Damasco Dark**  
2 m: Code: 1373 1998 - EAN: 3475710369865  
4 m: Code: 1393 1998 - EAN: 3475710369902



**2-Brooklyn Dark**  
2 m: Code: 1373 1784 - EAN: 3475710320804  
3 m: Code: 1383 1784 - EAN: 3475710337123  
4 m: Code: 1393 1784 - EAN: 3475710318504



**3-Harlem Dark**  
2 m: Code: 1373 1787 - EAN: 3475710320927  
4 m: Code: 1393 1787 - EAN: 3475710318535




**4-Walden Silver Grey**  
2 m: Code: 1373 1937 - EAN: 3475710354595  
4 m: Code: 1393 1937 - EAN: 3475710354571



**5-Medley Brown**  
2 m: Code: 1373 1990 - EAN: 3475710369599  
4 m: Code: 1393 1990 - EAN: 3475710369728



**6-Brooklyn Brown**  
2 m: Code: 1373 1786 - EAN: 3475710320798  
4 m: Code: 1393 1786 - EAN: 3475710318528

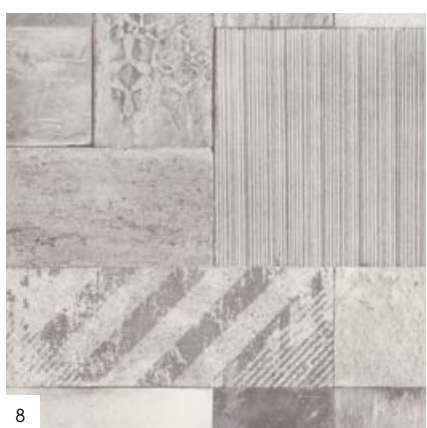

**7-Harlem Light Grey**  
2 m: Code: 1373 1788 - EAN: 3475710320934  
4 m: Code: 1393 1788 - EAN: 3475710318542



**8-Medley Pearl**  
2 m: Code: 1373 1982 - EAN: 3475710374500  
4 m: Code: 1393 1982 - EAN: 3475710369261



**9-Harlem Clear**  
2 m: Code: 1373 1808 - EAN: 3475710320910  
3 m: Code: 1383 1808 - EAN: 3475710337185  
4 m: Code: 1393 1808 - EAN: 3475710320088



**10-Brooklyn Beige**  
2 m: Code: 1373 1785 - EAN: 3475710320781  
3 m: Code: 1383 1785 - EAN: 3475710337130  
4 m: Code: 1393 1785 - EAN: 3475710318511



# HOR

TIMELESS  
ELEGANCE



1818 - Timber Dark Grey



**1-Timber Dark Grey**

2 m: Code: 1373 1818 - EAN: 3475710321603

4 m: Code: 1393 1818 - EAN: 3475710321504

**2-Elegant Brown**

2 m: Code: 1373 1988 - EAN: 3475710369537

4 m: Code: 1393 1988 - EAN: 3475710369667

**3-Noma Cafe**

2 m: Code: 1373 0679 - EAN: 3475710321009

4 m: Code: 1393 0679 - EAN: 3475710318115

**4-Elegant Grey**

2 m: Code: 1373 2005 - EAN: 3475710369964

4 m: Code: 1393 2005 - EAN: 3475710369957

**5-Noma Pecan**

2 m: Code: 1373 1442 - EAN: 3475710321047

3 m: Code: 1383 1442 - EAN: 3475710337796

4 m: Code: 1393 1442 - EAN: 3475710318122

**6-Macchiato Brown**

2 m: Code: 1373 2004 - EAN: 3475710371677

4 m: Code: 1393 2004 - EAN: 3475710371646







1992 - Macchiato Clear



1



2



3





# TIMELESS ELEGANCE HQR



6

### 1-Timber White

2 m: Code: 1373 1820 - EAN: 3475710321627  
4 m: Code: 1393 1820 - EAN: 3475710321528



4

### 2-Elegant White

2 m: Code: 1373 1986 - EAN: 3475710369513  
4 m: Code: 1393 1986 - EAN: 3475710369643



5

### 3-Macchiato Clear

2 m: Code: 1373 1992 - EAN: 3475710369551  
4 m: Code: 1393 1992 - EAN: 3475710369681

### 4-Elegant Clear

2 m: Code: 1373 1989 - EAN: 3475710369544  
4 m: Code: 1393 1989 - EAN: 3475710369674

### 5-Lodge Milk

2 m: Code: 1373 1439 - EAN: 3475710320996  
3 m: Code: 1383 1439 - EAN: 3475710337192  
4 m: Code: 1393 1439 - EAN: 3475710318221

### 6-Macchiato Pearl


2 m: Code: 1373 2002 - EAN: 3475710371653  
4 m: Code: 1393 2002 - EAN: 3475710371622

# HQR

## TECHNICAL CHARACTERISTICS

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	3.10
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	0.50
Weight / Mass per unit area	EN ISO 23997 (EN 430)	g/sqm	2300
Width of sheet	EN ISO 24381 (EN 426)	m	2 / 3 / 4
Length of sheet	EN ISO 24341 (EN 426)	ml	± 25
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 26986
European classification	EN ISO 10874 (EN 685)	class	32/41
Sound insulation	EN ISO 717/2	dB	16
Room impact noise	NF S 31074	class	A
Fire rating - Classification	EN 13501-1	class	C <sub>f</sub> -s1
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
PERFORMANCES			
Wear group	EN 660-2	group	T
Dimensional stability after exposure to heat	EN ISO 23999 (EN 434)	%	0.05
Residual indentation (average value measured)	EN ISO 24343-2	mm	0.35
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105-B02	degree	> 6
Surface treatment	-	-	PU HQR
Guarantee residential use		year	15
Guarantee commercial use		year	5
ENVIRONMENT			
TVOC rate 28 days	EN ISO 16000-6	µg/m <sup>3</sup>	< 100
French norm	-	-	A+
CE MARKING			
		EN 14041    	
<b>Areas of use:</b> domestic use & semi-commercial  		  	
		<b>HEALTH</b> <ul style="list-style-type: none"> <li>• Formaldehyde-free</li> <li>• Lead-free, no heavy metals</li> <li>• Solvent-free</li> <li>• No harmful plasticizer</li> <li>• Low VOC emission</li> <li>• No glue</li> <li>• GFT backing: &gt; 95% recycled fibres</li> </ul>	<b>ENVIRONMENT</b> <ul style="list-style-type: none"> <li>• 100% recyclable</li> <li>• ISO 14001</li> <li>• Soapy water cleaning</li> </ul>
			<b>Laying video</b> 



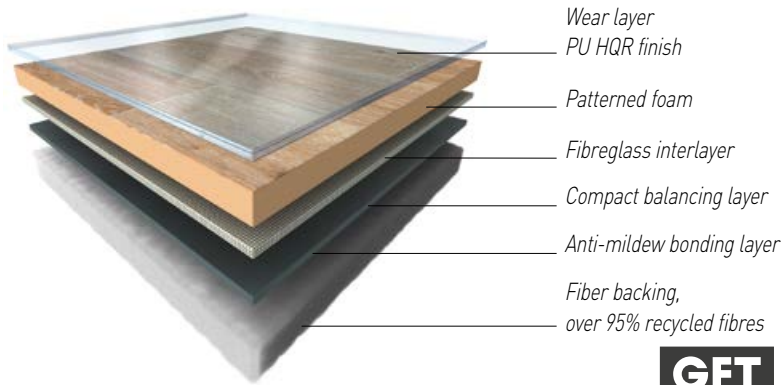

## LAYING

Gerflor floor coverings are high quality products developed to last. No warranty can be claimed unless the product has been laid according to the following specifications:

The subfloor must be smooth, hard, dry and clean.

Unroll the floor covering 24 hours before it is due to be installed.

The floor covering should not be laid in rooms where the temperature is below 15°C.

Although HQR is resistant to subfloor moisture we recommend that the floor construction should contain a Damp Proof Membrane.

Can be installed on underfloor heating (up to 28°C).

Cold-weld the joints for perfect water-tightness.

**Thanks to its special patented composition, HQR can be laid directly on most existing subfloors using loose laying.**

### SUBFLOOR PREPARATION:

**On wooden floorboards and on ceramic tiles:** HQR can be laid directly without any subfloor preparation. No levelling compound (finishing) needs to be applied even if there are open joints:

- up to 5 mm wide and a maximum depth of 1 mm in existing tiling
- up to 3 mm wide in wood flooring.

**On textile carpeting (felt or needle punch):** HQR can be installed directly over the existing carpeting as it has excellent resistance to indentation.

**On concrete:** HQR can be installed loose-laid or semi-permanently without any special surface preparation. Use double-sided tape along the edges of the room. A rough concrete surface should be treated with a smoothing compound beforehand.

### INSTALLATION:

**Loose laying:** Laying without glue recommended below and up to 35 sqm. Use double sided tape or hook & loop strips around the edges and along the joints for a perfect and invisible fit.

**Permanent laying:** Laying with glue mandatory above 35 sqm. Use a single stick acrylic glue (approximately 250g/sqm) and a finely notched trowel and cold weld the joints.

## CLEANING & CARE

**Initial cleaning:** Before commencing a regular maintenance programme, initial cleaning of the floor will be necessary to remove dirt accumulated during laying and other building works. Remove debris, sweep floor and vacuum to remove loose dirt. Wash floor with damp mop and using cold water and neutral detergent. Replace the water and solution if necessary. Remove stubborn marks with a non-abrasive pad.

**Maintenance:** Remove loose dirt with a broom or vacuum cleaner. Wash floor with damp mop and used cold water.

**Cleaning:** Frequency of periodic maintenance will depend on the amount of traffic and on the type of laying. Wash floor with damp mop using cold water and neutral detergent.

**Discoloration:** Discolouration can occur in any resilient floor covering if it comes into contact with pigment-containing substances such as bituminous materials, mastic, asphalt, oil, shoes with black rubber soles, or rubber rollers may cause discoloration.

# HQR

EXCLUSIVE COLLECTION



## HIGH SEDUCTION HIGH TRAFFIC

ORIGINAL DESIGNS

PERFECT RESISTANCE

LOOSELAY

