



# MASTER TL5 High Efficiency Eco



## MASTER TL5 HE Eco 13=14W/830 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HE Eco lamp offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

### Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Color rendering index (CRI)	
Cap-Base	G5		82
Features	na [Not Applicable]	Operating and Electrical	
Flux measurement reference	Sphere	Power Consumption	12.5 W
		Lamp Current (Nom)	0.170 A
Light Technical		Controls and Dimming	
Color Code	830 [CCT of 3000K]	Dimmable	Yes
Luminous Flux	1,150 lm	Mechanical and Housing	
Color Designation	Warm White (WW)	Bulb Shape	T5
Chromaticity Coordinate X (Nom)	0.44	Approval and Application	
Chromaticity Coordinate Y (Nom)	0.403	Energy Efficiency Class	F
Correlated Color Temperature (Nom)	3000 K		
Luminous Efficacy (rated) (Nom)	92 lm/W		

# MASTER TL5 High Efficiency Eco


Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	13 kWh
EPREL Registration Number	423462

## Product Data

Order product name	MASTER TL5 HE Eco 13=14W/830 UNP/40
Full product name	MASTER TL5 HE Eco 13=14W/830 UNP/40
Full product code	872790088081600


Order code	927989883031
Material Nr. (12NC)	927989883031
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500881281
Numerator - Packs per outer box	40
EAN/UPC - Case	8727900880816

## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE Eco 13=14W/830 UNP/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm



## Photometric data

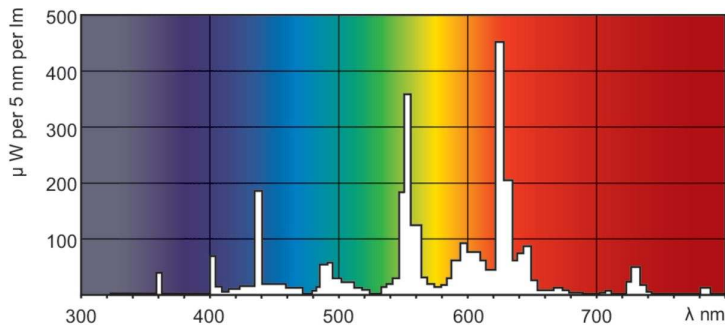

Spectral Power Distribution Colour - MASTER TL5 HE Eco 13=14W/830 UNP/40


# MASTER TL5 High Efficiency Eco

## Lifetime

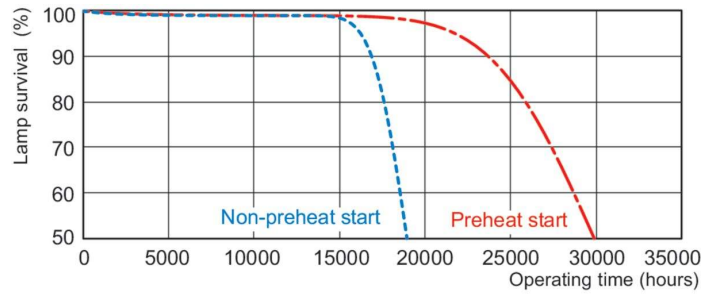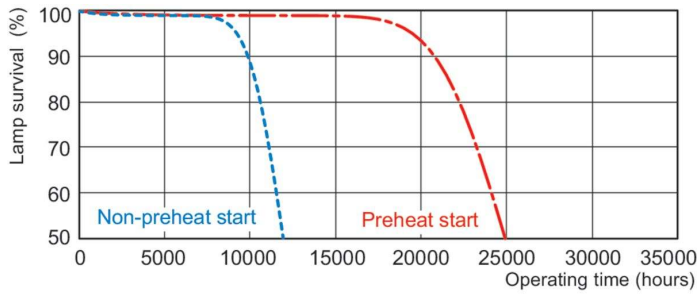

Life Expectancy Diagram - MASTER TL5 HE Eco 13=14W/830 UNP/40

Life Expectancy Diagram - MASTER TL5 HE Eco 13=14W/830 UNP/40

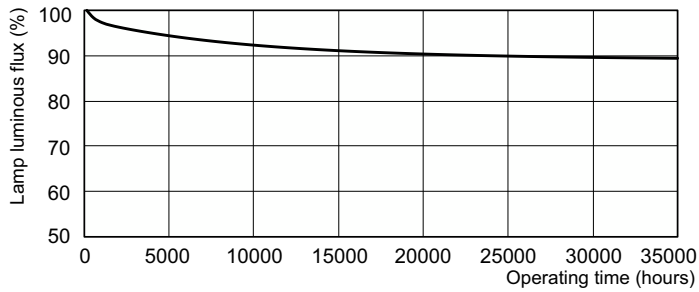

Lumen Maintenance Diagram - MASTER TL5 HE Eco 13=14W/830 UNP/40

