


### Overview

### HP ProDesk 400 G2.5 Small Form Factor Business PC

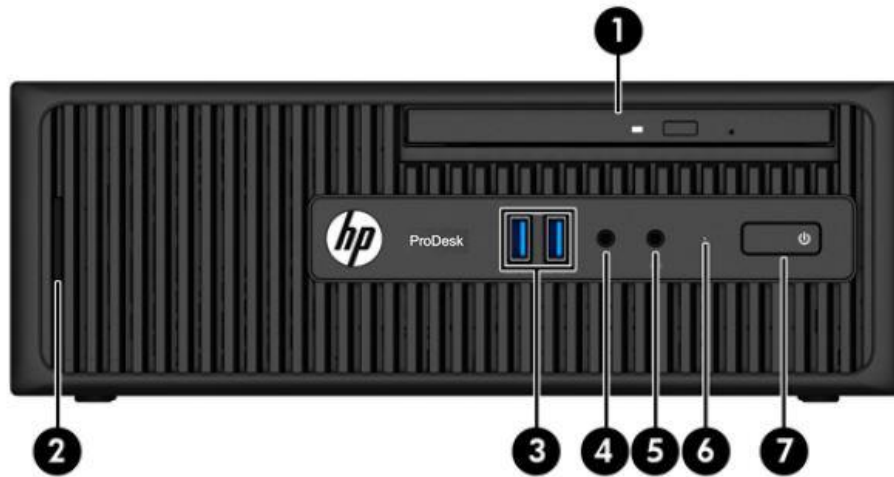

Drive configuration may vary by model. Some models have a bezel blank covering the optical drive bay.

1. Slim Optical Drive (optional)
2. SD Card Reader (optional)
3. (2) USB 3.0 Ports (blue)
4. 3.5mm Microphone Jack
5. 3.5mm Headphone Output
6. Hard Drive Activity Light
7. Dual-State Power Button

NOTE: The Power On Light is normally white when the power is on. If it is flashing red, there is a problem with the computer and it is displaying a diagnostic code. Refer to the Maintenance and Service Guide to interpret the code

#### **Not Shown (internal)**


##### **Slots**

- (1) PCI 3.0 Express x16 Graphics Connector
- (1) PCI Express 2.0 x1 Accessory Connector

##### **Bays**

- (1) 9.5mm slimline ODD bay
- (1) Media Card Reader Bay (SD)
- (1) 3.5" internal bay supports both 3.5" HD/SSD internal bay or 2.5 HD/SSD internal bay (does not support a 2<sup>nd</sup> HDD)

### Overview

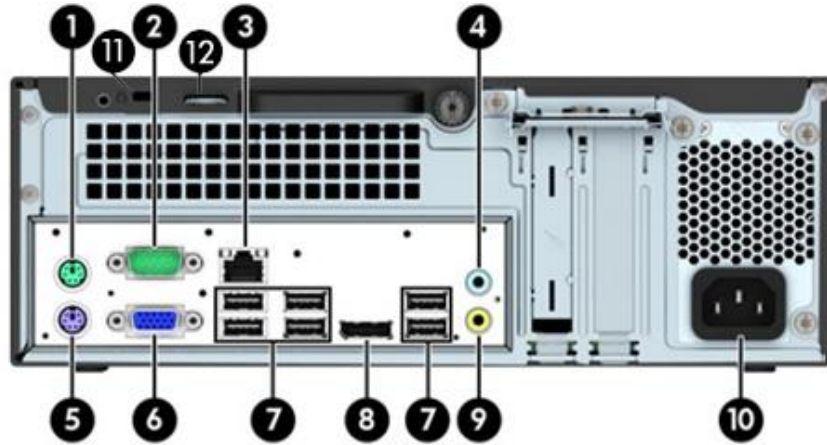

- |    |                                  |     |  |
|----|----------------------------------|-----|--|
| 1. | PS/2 Mouse Connector (green)     | 7.  | (6) USB 2.0 Ports (black)                            |
| 2. | RS-232 Serial Connector          | 8.  | DisplayPort Monitor Connector                        |
| 3. | RJ-45 Network Connector          | 9.  | Line-Out Audio Connector for powered devices (green) |
| 4. | Line-In Audio Connector (blue)   | 10. | Power Cord Connector                                 |
| 5. | PS/2 Keyboard Connector (purple) | 11. | Lock Slot  |
| 6. | VGA Monitor Connector            | 12. | Loop Link Opening                                    |

### Overview

### AT A GLANCE

- Expandable, upgradable chassis and system board
- Intel® H81 Express chipset supporting Intel 4th generation Core processors, featuring integrated Intel HD Graphics
- Processor support up to 65W
- HP developed and engineered UEFI BIOS supporting security, manageability and software image stability
- Realtek RTL8111HSH-CG GbE integrated network connection
- Up to 16GB DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Multi-independent monitor support
- Discrete graphics option available
- Standard and high efficiency energy saving power supply options
- ENERGY STAR® certified models certified EPEAT® Gold

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Standard Features and Configurable Components

#### OPERATING SYSTEMS

##### Preinstalled When Purchased

Windows 7 Professional (32-bit) <sup>1</sup>

Windows 7 Professional (64-bit) <sup>1</sup>

Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8.1 Pro) <sup>2</sup>

Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8.1 Pro) <sup>2</sup>

Windows 8.1 (64-bit) <sup>1</sup>

Windows 8.1 Pro (64-bit) <sup>1</sup>

Ubuntu Linux 14.04 (64-bit) <sup>3</sup>

FreeDOS

##### Web-only Support

Windows 7 Enterprise 32<sup>1</sup>

Windows 7 Enterprise 64<sup>1</sup>

Windows 8.1 Enterprise 64<sup>3</sup>

<sup>1</sup> Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com> for details.

<sup>2</sup> This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

<sup>4</sup> Not all features are supported in Ubuntu.

#### PROCESSORS\*

##### Intel® 4th Generation Core™ i7 Processors

###### Intel® Core™ i7-4790S Processor

Up to 4.0 GHz Max. Turbo Frequency (3.2 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

###### Intel® Core™ i7-4770S Processor

Up to 3.9 GHz Max. Turbo Frequency (3.1 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

##### Intel® 4th Generation Core™ i5 Processors

###### Intel® Core™ i5-4690S Processor

Up to 3.9 GHz Max. Turbo Frequency (3.2 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

###### Intel® Core™ i5-4670S Processor

Up to 3.8 GHz Max. Turbo Frequency (3.1 GHz base frequency)

6 MB cache, 4 cores, 4 threads

### Standard Features and Configurable Components

Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i5-4590S Processor

Up to 3.7 GHz Max. Turbo Frequency (3.0 GHz base frequency)  
6 MB cache, 4 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i5-4570S Processor

Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)  
6 MB cache, 4 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i5-4430S Processor

Up to 3.2 GHz Max. Turbo Frequency (2.7 GHz base frequency)  
6 MB cache, 4 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

### **Intel® 4th Generation Core™ i3 Processors**

#### Intel® Core™ i3-4370 Processor

Up to 3.8 GHz Base Frequency  
4 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4360 Processor

Up to 3.7 GHz Base Frequency  
4 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4350 Processor

Up to 3.6 GHz Base Frequency  
4 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4340 Processor

Up to 3.6 GHz Max. Turbo Frequency (3.6 GHz base frequency)  
4 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4330 Processor

Up to 3.5 GHz Max. Turbo Frequency (3.5 GHz base frequency)  
4 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4600  
Supports DDR3 memory up to 1600 MT/s data rate

### Standard Features and Configurable Components

#### Intel® Core™ i3-4170 Processor

Up to 3.7 GHz Base Frequency  
3 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4400  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4160 Processor

Up to 3.6 GHz Base Frequency  
3 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4400  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4150 Processor

Up to 3.5 GHz Base Frequency  
3 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4400  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Core™ i3-4130 Processor

Up to 3.4 GHz Max. Turbo Frequency (3.4 GHz base frequency)  
3 MB cache, 2 cores, 4 threads  
Intel HD Graphics 4400  
Supports DDR3 memory up to 1600 MT/s data rate

#### **Intel® Pentium® Processors**

##### Intel® Pentium® G3470 Processor

Up to 3.6 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

##### Intel® Pentium® G3460 Processor

Up to 3.5 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

##### Intel® Pentium® G3450 Processor

Up to 3.4 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

##### Intel® Pentium® G3440 Processor

Up to 3.3 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

### Standard Features and Configurable Components

#### Intel® Pentium® G3430 Processor

Up to 3.3 GHz Max. Turbo Frequency (3.3 GHz base frequency)  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Pentium® G3420 Processor

Up to 3.2 GHz Max. Turbo Frequency (3.2 GHz base frequency)  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

#### Intel® Pentium® G3250 Processor

Up to 3.2 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

#### Intel® Pentium® G3260 Processor

Up to 3.3 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

#### Intel® Pentium® G3240 Processor

Up to 3.1 GHz Base Frequency  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

#### Intel® Pentium® G3220 Processor

Up to 3.0 GHz Max. Turbo Frequency (3.0 GHz base frequency)  
3 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1600 MT/s data rate

#### **Intel® Celeron™ Processors**

##### Intel® Celeron™ G1850 Processor

2.9 GHz base frequency  
2 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

##### Intel® Celeron™ G1840 Processor

2.8 GHz base frequency  
2 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

### Standard Features and Configurable Components

#### Intel® Celeron™ G1830 Processor

2.8 GHz base frequency  
2 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

#### Intel® Celeron™ G1820 Processor

2.7 GHz base frequency  
2 MB cache, 2 cores, 2 threads  
Intel HD Graphics  
Supports DDR3 memory up to 1333 MT/s data rate

\*Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

### CHIPSET

Intel® 8 Series (H81 Express) Chipset

### GRAPHICS

#### **Integrated**

Intel HD Graphics on all models (integrated on processor)\*

#### **Discrete (optional)**

NVIDIA® NVS™ 310 1GB x16

\*HD content required to view HD images.

### ADAPTERS AND CABLES

HP DisplayPort to DisplayPort Cable

HP DisplayPort to DVI-D Adapter

HP DisplayPort To HDMI 1.4 Adapter

HP DisplayPort to VGA Adapter

HP Serial Port Adapter

HP DisplayPort Cable

### STORAGE\*

#### **SATA Hard Disk Drives**

2 TB, 7200 RPM, SATA 6.0 Gb/s, SMART IV, 3.5"

1 TB, 7200 RPM, SATA 6.0 Gb/s, SMART IV, 3.5"

500 GB, 7200 RPM, SATA 6.0 Gb/s, SMART IV, 3.5"

#### **Hybrid Drives**

1 TB SATA 6G 2.5" (8 GB cache) SSHD Drive

500 GB SATA 6G 2.5" (8GB cache) SSHD Drive



### Standard Features and Configurable Components

#### Solid State Drives

- 120 GB SATA 2.5 Non-SED SSD
- 128 GB SATA 2.5 3D Non-SED SSD
- 256 GB SATA 2.5 3D Non-SED SSD

#### Self-encrypting Drives

- 500 GB 2.5" FIPS 140-2 Self-Encrypting (SED)

#### Self-encrypting Solid State Drive

- 256 GB SATA 2.5" Opal2 Self-Encrypting (SED) Solid State Drive SSD
- 180 GB SATA 2.5" Opal2 Self-Encrypting (SED) Solid State Drive (Pro 2500)
- 128 GB SATA 2.5" Opal2 Self-Encrypting (SED) Solid State Drive
- 120 GB SATA 2.5" Opal2 Self-Encrypting (SED) Solid State Drive (Pro 2500)

\*For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1) of system disk is reserved for the system recovery software.

#### Optical Disc Drive

- HP 9.5mm Desktop G2 Slim DVD-ROM Drive
- HP 9.5mm Desktop G2 Slim SATA BDXL Blu-Ray Writer
- HP 9.5mm Desktop G2 Slim SuperMulti DVD Writer Drive

#### Media Card Reader\*

- SD Media Card Reader (optional)
- \*Card sold separately

## MEMORY

Form Factor	Type	Maximum	# of Slots
Small Form Factor	DDR3L-1600 (Transfer rates up to 1600 MT/s)	16 GB	2 UDIMM

#### Both slots are customer accessible / upgradeable.

- 2,048 MB (2048 MB x 1)
- 4,096 MB (4096 MB x 1)
- 8,192 MB (4096 MB x 2)
- 8,192 MB (8192 MB x 1)
- 16,384 MB (8192 MB x 2)

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system. Memory modules support data transfer rates up to 1600 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

## NETWORKING/COMMUNICATIONS

#### Ethernet (RJ-45)

### Standard Features and Configurable Components

Realtek RTL8111HSH-CG GbE Ethernet Controller (standard)  
Intel Ethernet I210-T1 PCIe x1 Gb Network Interface Card (optional)

#### Wireless\*

Intel® N 7265 802.11ac PCIe Bluetooth™ (optional)  
Intel® N 7265 802.11ac PCIe No Bluetooth™ (optional)  
Broadcom 802.11n PCIe Bluetooth™ NIC (optional)  
Broadcom 802.11n PCIe Bluetooth™ NIC (optional) – Indonesia only version  
Broadcom 802.11n PCIe No Bluetooth™ NIC (optional)

\* Wireless access point and Internet service required and not included. Availability of public wireless access points limited.

### AUDIO/MULTIMEDIA

HD audio with Realtek ALC221VB  
Microphone and headphone front ports (3.5mm)  
Line-out and Line-In rear Ports (3.5mm)  
Internal mono speaker (standard)

### KEYBOARDS AND POINTING DEVICES

#### Keyboards

HP USB Conference Keyboard  
HP USB PS/2 Washable Keyboard  
HP USB Smart Card (CCID) Keyboard  
HP USB Keyboard  
HP USB Grey Keyboard  
HP USB Grey Smart Card (CCID) Keyboard  
HP PS/2 Keyboard  
HP USB Value Keyboard

#### Mice

HP PS/2 Mouse  
HP USB 1000dpi Laser Mouse  
HP USB Mouse

#### Combo

HP Wireless Keyboard and Mouse  
HP USB Keyboard and Optical Mouse

### HP BIOSphere

#### Key features of the HP BIOS include:

- Deployment and manageability - HP BIOS provides several technologies that help integrate the HP ProDesk 400 G2.5 SFF Business PC into the enterprise, such as PXE, and F10 Setup support for 12 languages.
- Support UEFI specification 2.3.1
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.

### Standard Features and Configurable Components

- Thermal Controlled Fans – Automatic or manual controlled fan speeds for cooling and acoustic performance
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery (Emergency Boot Block Recovery). In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS F10 setup and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.
- Serviceability - HP BIOS provides diagnostic and detailed service information.

#### Additional HP BIOS Features:

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Pro models use ACPI to provide power conservation features.
- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.
- Master Boot Record Security - Helps to prevent changes and/or infections to the Master Boot Record caused by viruses or malicious code.
- HP BIOS Protection – prevents unauthorized updates or changes to the BIOS due to malware, viruses, or malicious BIOS updates. Based on NIST SP800-147 policy guidelines.

\*BIOS Absolute Persistence module is shipped turned off, and will be activated when customers purchase and activate a subscription. Service may be limited. Check with Absolute for availability outside the U.S. The optional subscription service of Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. If Data Delete is utilized, the Recovery Guarantee payment is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either create a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

### SECURITY

#### SFF

Trusted Platform Module, SLB9660TT1.2FW4.40 (TPM) 1.2 (Common Criteria EAL4+ certified)	X
SATA port disablement (via BIOS)	X
DriveLock	N/A
RAID configurations	N/A
Intel® Identify Protection Technology (IPT)*	N/A
Serial, parallel, USB enable/disable (via BIOS)	X
Optional USB Port Disable at factory (user configurable via BIOS)	X
Removable media write/boot control	X
Power-On password (via BIOS)	X
Administrator password (via BIOS)	X
HP Chassis (1 bay) Security Kit	N/A
Solenoid Hood Lock / Sensor	N/A

### Standard Features and Configurable Components

Support for chassis padlocks and cable lock devices

X

\*Models configured with Intel Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module.

### ENVIRONMENTAL & REGULATORY

ENERGY STAR® certified models available

EPEAT® registered where applicable/supported. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

TAA compliant models available

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

### PORTS

#### I/O Ports – Standard

USB 2.0	6 (rear)
USB 3.0	2 (front)
Serial (RS-232)	1
PS/2	1 keyboard (purple) 1 mouse (green)
Video	1 VGA 1-DisplayPort 1.2

**NOTE:** When configured with an Intel Celeron, Pentium® or 4th generation Intel Core i3 CPU only two of the available leo output ports are active

Audio	Front: 1 headphone; 1 mic Rear: 1 line in; 1 line out 3.5mm diameter
-------	--

RJ-45 Network Interface	1
-------------------------	---

#### I/O Ports – Optional

Parallel Port via PCIe Card (see I/O options below)

### BAYS

**(3 total – 2 external, 1 internal)**

External, SD reader	1
External, Slimline ODD	1
3.5" internal bay that supports 2.5" device w/o bracket	1

### SERVICE AND SUPPORT

On-site Warranty <sup>1</sup>: One-year (1-1-1) or three-years (3-3-3) limited warranty (depending on country) delivers on-site, next business day <sup>2</sup> service for parts and labor and includes free telephone support <sup>3</sup> 24 x 7. One-year and three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing a Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: [www.hp.com/go/cpc](http://www.hp.com/go/cpc)

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

### Standard Features and Configurable Components

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured and third-party HP qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

### Technical Specifications – Operating Systems and Software

## SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

### BIOS

Preboot Authentication  
HP DriveLock  
Secure Erase  
Hybrid Boot (Windows 8.1 only)  
Measured Boot (Windows 8.1 only)  
Secure Boot (Windows 8.1 only)  
Absolute Persistence Module<sup>1</sup>

### Multimedia

Cyberlink Power DVD, BD  
Cyberlink Power2Go (Secure Burn)  
Cyberlink YouCam BE (Windows 7 only)

### Communication

Intel® Wireless Display (WiDi) Software for Windows <sup>2</sup>  
Native Miracast Support <sup>3</sup>

### HP Value Add Software

HP ePrint Driver <sup>4</sup>  
HP Recovery Disc Creator (Windows 7 only)  
HP Recovery Manager  
HP Support Assistant

### 3<sup>rd</sup> Party

Foxit PhantomPDF Express for HP (available in US only – optional)

### Microsoft Products

Buy Office  
Bing Search  
Skype

### Manageability

HP Driver Packs <sup>5</sup>  
HP SoftPaq Download Manager (SDM)  
HP System Software Manager (SSM) <sup>5</sup>  
HP BIOS Config Utility (BCU) <sup>5</sup>  
HP Client Catalog <sup>5</sup>  
HP CIK for Microsoft SCCM <sup>5</sup>  
LANDESK Management<sup>6</sup>

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

### Technical Specifications – Operating Systems and Software

#### Client Security Software

HP Drive Encryption <sup>7</sup>  
HP Client Security Manager

#### Standard

TPM 1.2  
Security lock slot

**NOTE:** The Absolute Persistence agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

#### Footnotes:

<sup>1</sup>Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging from one to five years. Service is limited, check with Absolute for availability outside the U.S.

<sup>2</sup>Integrated Intel® Wi-Di Display is available on select configurations only and requires a separate projector, TV or monitor with an integrated or external Wi-Di receiver. For more information on Intel® Wi-Di Display visit [www.intel.com/go/wirelessdisplay](http://www.intel.com/go/wirelessdisplay)

<sup>3</sup>Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>

<sup>4</sup>Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see [www.hp.com/go/businessmobileprinting](http://www.hp.com/go/businessmobileprinting)).

<sup>5</sup> Not preinstalled, however available on manageability website.

<sup>6</sup> Subscription required.

<sup>7</sup> Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

### Technical Specifications - Graphics

<b>Intel HD Graphics</b>		
<b>VGA Controller</b>	Integrated	
<b>DisplayPort</b>	Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 2 displays (including VGA or wireless displays controlled by the integrated graphics)	
<b>Bus Type</b>	N/A	
<b>RAMDAC</b>	N/A	
<b>Memory</b>	Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depends on the amount of system memory installed, BIOS settings, operating system, and system load.	
<b>Maximum Graphics Memory</b>	Microsoft Windows 7	Windows 8.1
	Up to 1.7GB	Up to 1.8GB
	Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.	
<b>Maximum Color Depth</b>	32 bits/pixel	
<b>Graphics/Video API Support</b>	<p>4<sup>th</sup> Generation Core processors:</p> <ul style="list-style-type: none"> <li>• The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support.</li> <li>• Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience               <ul style="list-style-type: none"> <li>○ Encode/transcode HD content</li> <li>○ Playback of high definition content including Blu-ray Disc</li> <li>○ Superior image quality with sharper, more colorful images</li> </ul> </li> <li>• DirectX Video Acceleration (DXVA) support for accelerating video processing               <ul style="list-style-type: none"> <li>○ Full AVC/VC1/MPEG2 HW Decode</li> </ul> </li> <li>• DirectX 11.2</li> <li>• OpenGL 4.3</li> <li>• Open CL 1.2</li> </ul>	

#### Supported Display Resolutions and Refresh Rates

**Note:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

<b>Resolution</b>	<b>Refresh Rates</b>
800x600	60 Hz
1024x768	60 Hz
1152x864	60 Hz
1280x600	60 Hz
1280x720	60 Hz
1280x800	60 Hz
1280x960	60 Hz
1280x1024	60 Hz
1360x768	60 Hz
1366x768	60 Hz
1400x1050	60 Hz
1440x900	60 Hz



### Technical Specifications - Graphics

1600x900	60 Hz
1600x1200	60 Hz
1680x1050	60 Hz
1920x1080	60 Hz
1920x1200	60 Hz
1920x1440*	60 Hz
2560x1440*	60 Hz
2560x1600*	60 Hz
3840x2160*	60Hz

\* Only supported on displays connected to the external DisplayPort connector.

### NVIDIA® NVS™ 310 Graphics Card

<b>Introduction</b>	<p>The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.</p> <p>The NVIDIA® NVS™ 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.</p>	
<b>Performance and Features</b>	<p>The NVIDIA® NVS™ 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.</p> <p>DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.</p> <p>For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.</p>	
<b>Form Factor</b>	Low Profile: 2.713 × 6.15 in	
<b>Graphics Controller</b>	NVIDIA® NVS™ 310	
<b>Memory Clock</b>	875MHz	
<b>Memory Size</b>	512 MB DDR3	
<b>Memory Bandwidth</b>	14 GB/s	
<b>Max. Power</b>	19.5W	
<b>Display Max. Resolution</b>	Up to 2560 × 1600 (digital display) per display	
<b>Display Output</b>	Up to 2 displays in the following configurations	
	DisplayPort output:	<ul style="list-style-type: none"> <li>• Drives two DisplayPort enabled digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card</li> <li>• Supports 2 monitors up to resolution of 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort Multi-Stream topology technology.</li> </ul>

### Technical Specifications - Graphics

	DVI-D output:	<ul style="list-style-type: none"> <li>• Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors</li> <li>• Drives two digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors</li> </ul>
	HDMI output:	<ul style="list-style-type: none"> <li>• NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors</li> </ul>
	VGA display output:	<ul style="list-style-type: none"> <li>• Drives two analog display at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors</li> </ul>

#### Supported Display Resolutions and Refresh Rates

**Note:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection			
	DisplayPort to VGA	DisplayPort to DVI-D	DisplayPort to HDMI	DisplayPort
640 x 480	85	60	60	60
800 x 600	85	60	60	60
1024 x 768	85	60	60	60
1280 x 720	85	60	60	60
1280 x 1024	85	60	60	60
1440 x 900	75	60	60	60
1600 x 1200	60	60	60	60
1680 x 1050	60	60	60	60
1920 x 1080	60-R	60-R	60	60
1920 x 1200	60-R	60-R		60
1920 x 1440				60
2048 x 1536				60
2560 x 1600				60

### Technical Specifications – Hard Disk and Solid State Storage

#### HARD DISK AND SOLID STATE STORAGE

##### Introduction

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP ProDesk 400 G2.5 Series Business PC supports the latest SATA 6.0Gb/s specification.

##### SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

##### Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

**Note:** GB = 1 billion bytes. Actual available capacity is less.

<b>2TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive</b>		
<b>Unformatted Capacity</b>	2 TB	
<b>Rotational Speed</b>	7,200 rpm	
<b>Interface</b>	SATA 6 Gb/s	
<b>Cache, Multi-segmented (MB)</b>	64 MB	
<b>Seek Time (average)</b>	Read	<8.5 ms

### Technical Specifications – Hard Disk and Solid State Storage

	Write	<9.5 ms
<b>Height</b>	1.028 in/26.11 mm	
<b>Width</b>	4.0 in/101.6 mm	
<b>Depth</b>	5.787 in/146.99 mm	
<b>Weight</b>	1.38 lb/626 g	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

#### 1TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

<b>Capacity</b>	1,000,204,886,016 bytes	
<b>Rotational Speed</b>	7,200 rpm	
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)	
<b>Buffer Size</b>	32 MB	
<b>Logical Blocks</b>	1,953,525,168	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
<b>Height</b> (nominal)	1 in/2.54 cm	
<b>Width</b> (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

#### 500GB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

<b>Capacity</b>	500,107,862,016 bytes	
<b>Rotational Speed</b>	7,200 rpm	
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)	
<b>Buffer Size</b>	16 MB	
<b>Logical Blocks</b>	976,773,168	

### Technical Specifications – Hard Disk and Solid State Storage

<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b>	2.0 ms
	<b>Average:</b>	11 ms
	<b>Full-Stroke:</b>	21 ms
<b>Height</b> (nominal)	1 in/2.54 cm	
<b>Width</b> (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### 1TB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)

<b>Formatted Capacity</b>	1 TB	
<b>Spindle Speed</b>	5,400 rpm +/- 0.2%	
<b>Drive Type</b>	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
<b>Interface</b>	Serial ATA (SATA)	
<b>Cache Buffer</b>	64 MB	
<b>NAND Flash Commercial Multilevel Cell (cMLC)</b>	8 GB	
<b>Number of Sectors</b>	976,773,168	
<b>Seek Time</b> (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
<b>Height</b>	0.374 +/- .008 in (9.5 +/- 0.2 mm)	
<b>Width</b>	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
<b>Length</b>	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
<b>Weight</b>	0.254 lb/115 g (max)	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### 500 GB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)

### Technical Specifications – Hard Disk and Solid State Storage

<b>Formatted Capacity</b>	500 GB	
<b>Spindle Speed</b>	5,400 rpm +/- 0.2%	
<b>Drive Type</b>	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
<b>Interface</b>	Serial ATA (SATA)	
<b>Cache Buffer</b>	64 MB	
<b>NAND Flash Commercial Multilevel Cell (cMLC)</b>	8 GB	
<b>Number of Sectors</b>	976,773,168	
<b>Seek Time</b> (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
<b>Height</b>	0.268 +/- .008 in (6.8 +/- 0.2 mm)	
<b>Width</b>	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
<b>Length</b>	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
<b>Weight</b>	0.209 lb/95 g (max)	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### 256GB SATA 2.5” 3D Non-SED Solid State Drive

<b>Unformatted Capacity</b>	256 GB 500,118,192 (User Addressable Sectors)
<b>Architecture</b>	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Fully complies with ATA/ATAPI-7 Standard (Partially Complies with ATA/ATAPI-8) Power Saving Modes: DIPM (Partial / Slumber mode) Support NCQ : Up to 32 depth Synchronous Signal Recovery
<b>Interface</b>	Serial ATA (6.0 Gb/s)
<b>Form Factor</b>	2.5 inch
<b>Height</b>	6.80 mm ± 0.20

### Technical Specifications – Hard Disk and Solid State Storage

<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.20 mm ± 0.25	
<b>Weight</b>	Up to 54 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 540 MB/s
	Sustained Sequential Write:	Up to 280 MB/s
<b>Power</b>	Power consumption:	Active: Typical 250mW; Idle: Typical 50mW
<b>Mean Time Between Failure (MTBF)</b>	1,500,000 hours	
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 128GB SATA 2.5" 3D Non-SED Solid State Drive

<b>Unformatted Capacity</b>	128 GB 250,069,680 (User Addressable Sectors)
<b>Architecture</b>	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Fully complies with ATA/ATAPI-7 Standard (Partially Complies with ATA/ATAPI-8) Power Saving Modes: DIPM (Partial / Slumber mode) Support NCQ : Up to 32 depth Synchronous Signal Recovery
<b>Interface</b>	Serial ATA (6.0 Gb/s)
<b>Form Factor</b>	2.5 inch
<b>Height</b>	6.80 mm ± 0.20
<b>Width</b>	69.85 mm ± 0.25
<b>Length</b>	100.20 mm ± 0.25
<b>Weight</b>	Up to 54 g

### Technical Specifications – Hard Disk and Solid State Storage

<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 530 MB/s
	Sustained Sequential Write:	Up to 140 MB/s
<b>Power</b>	Power consumption:	Active: Typical 250mW; Idle: Typical 50mW
<b>Mean Time Between Failure (MTBF)</b>	1,500,000 hours	
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 256GB SATA 2.5” 3D Non-SED Solid State Drive

<b>Unformatted Capacity</b>	256 GB 500,118,192 (User Addressable Sectors)	
<b>Architecture</b>	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Fully complies with ATA/ATAPI-7 Standard (Partially Complies with ATA/ATAPI-8) Power Saving Modes: DIPM (Partial / Slumber mode) Support NCQ : Up to 32 depth Synchronous Signal Recovery	
<b>Interface</b>	Serial ATA (6.0 Gb/s)	
<b>Form Factor</b>	2.5 inch	
<b>Height</b>	6.80 mm ± 0.20	
<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.20 mm ± 0.25	
<b>Weight</b>	Up to 54 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 540 MB/s
	Sustained Sequential Write:	Up to 280 MB/s



### Technical Specifications – Hard Disk and Solid State Storage

<b>Power</b>	Power consumption:	Active: Typical 250mW; Idle: Typical 50mW
<b>Mean Time Between Failure (MTBF)</b>	1,500,000 hours	
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 120 GB SATA 2.5 Non-SED SSD

<b>Unformatted Capacity</b>	120 GB	
<b>Architecture</b>	Multi-Level Cell (MLC) NAND	
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)	
<b>Form Factor</b>	2.5 inch	
<b>Height</b>	Low profile, 7mm height	
<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.45 mm max	
<b>Weight</b>	Up to 78 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 540 MB/s
	Sustained Sequential Write:	Up to 480 MB/s
<b>Power</b>	Power consumption:	Average: Read <3.7W; Write 3.7W; Standby <55mW
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 500GB 2.5" FIPS 140-2 SED Solid State Drive

### Technical Specifications – Hard Disk and Solid State Storage

<b>Formatted Capacity</b>	500 GB	
<b>Architecture</b>	Self-Encrypting (SED) Solid State Drive with SATA interface.	
<b>Interface</b>	Serial ATA (6.0 Gb/s)	
<b>Form Factor</b>	2.5 inch	
<b>Height</b>	6.80 mm ± 0.20	
<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.35 mm ± 0.25/0.20	
<b>Weight (typical)</b>	<95 g (0.209 lb)	
<b>Bandwidth Performance</b>	Sustained data transfer rate OD	100 MB/s max
	I/O data-transfer rate	600 MB/s max
<b>Power</b>	Power consumption:	Spinup (max): 1.00A Idle, active: 0.70W Sleep 0.18W
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	41° to 131° F (5° to 55° C)
	Relative Humidity:	5% to 95%
	Shock:	Maximum 400 G/2 ms

### 256GB SATA 2.5" Opal2 SED Solid State Drive

<b>Unformatted Capacity</b>	256 GB 500,118,192 (User Addressable Sectors)
<b>Architecture</b>	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Trusted Computing Group(TCG) OPAL compliant encrypted solid state drive
<b>Interface</b>	Serial ATA (6.0 Gb/s)
<b>Form Factor</b>	2.5 inch
<b>Height</b>	6.80 mm ± 0.20

### Technical Specifications – Hard Disk and Solid State Storage

<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.20 mm ± 0.25	
<b>Weight</b>	Up to 73 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 520 MB/s
	Sustained Sequential Write:	Up to 460 MB/s
<b>Power</b>	Power consumption:	Active: 3.891W; Idle: 0.085W
<b>Mean Time Between Failure (MTBF)</b>	1,500,000 hours	
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 180GB SATA 2.5" Opal2 SED Solid State Drive (Pro 2500)

<b>Formatted Capacity</b>	180 GB 351,651,888 (Total Logical Sectors)
<b>Architecture</b>	ATA 8 Compliant and SATA 3.0 compliant Supports Mode 2 Multiword DMA Supports Drive Failure Prediction Supports SMART Offline Read Scan Supports Mode 4 PIO Supports Mode 5 UDMA Supports HP Drive Protection System ATA 8 ACS-2 Data / TRIM Support Support DEVSLP feature Supports TRIM Command per ATA8 / ACS 2 Supports FIPS-197 features Support TCG Storage Architecture Core Specification 2.0
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)
<b>Form Factor</b>	2.5 inch
<b>Height</b>	Low profile, 7mm height
<b>Width</b>	69.85 mm ± 0.25

### Technical Specifications – Hard Disk and Solid State Storage

<b>Length</b>	100.45 mm max	
<b>Weight</b>	Up to 78 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 540 MB/s
	Sustained Sequential Write:	Up to 490 MB/s
<b>Power</b>	Power consumption:	Average: Read <3.7W; Write 3.7W; Standby <55mW
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 128GB SATA 2.5” Opal2 SED Solid State Drive

<b>Unformatted Capacity</b>	128 GB 250,069,680 (User Addressable Sectors)	
<b>Architecture</b>	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Trusted Computing Group(TCG) OPAL compliant encrypted solid state drive	
<b>Interface</b>	Serial ATA (6.0 Gb/s)	
<b>Form Factor</b>	2.5 inch	
<b>Height</b>	6.80 mm ± 0.20	
<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.20 mm ± 0.25	
<b>Weight</b>	Up to 73 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 520 MB/s
	Sustained Sequential Write:	Up to 340 MB/s
<b>Power</b>	Power consumption:	Active: 0.78A / 3.891W; Idle: 0.005A / 0.026W

### Technical Specifications – Hard Disk and Solid State Storage

<b>Mean Time Between Failure (MTBF)</b>	1,500,000 hours	
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### 120GB SATA 2.5” Opal2 SED Solid State Drive (Pro 2500)

<b>Unformatted Capacity</b>	120 GB	
	234,441,648 (Total Logical Sectors)	
<b>Architecture</b>	ATA 8 Compliant and SATA 3.0 compliant Supports Mode 2 Multiword DMA Supports Drive Failure Prediction Supports SMART Offline Read Scan Supports Mode 4 PIO Supports Mode 5 UDMA Supports HP Drive Protection System ATA 8 ACS-2 Data / TRIM Support Support DEVSLP feature Supports TRIM Command per ATA8 / ACS 2 Supports FIPS-197 features Support TCG Storage Architecture Core Specification 2.0	
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)	
<b>Form Factor</b>	2.5 inch	
<b>Height</b>	Low profile, 7mm height	
<b>Width</b>	69.85 mm ± 0.25	
<b>Length</b>	100.45 mm max	
<b>Weight</b>	Up to 78 g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 540 MB/s
	Sustained Sequential Write:	Up to 480 MB/s
<b>Power</b>	Power consumption:	Average: Read <3.7W; Write 3.7W; Standby <55mW
	Operating Temperature:	32° to 158° F (0° to 70° C)

### Technical Specifications – Hard Disk and Solid State Storage

<b>Environmental</b> (all conditions, non-condensing)	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

### Technical Specifications - Removable Storage

<b>HP 9.5mm Desktop G2 Slim SuperMulti DVD Writer Drive</b>		
<b>Height</b>	9.5 mm height	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA/ATAPI	
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard	
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel	
<b>Weight (max)</b>	0.31 lb (140 g)	
<b>Write speeds</b>	DVD-RAM	Up to 5X
	DVD-R DL	Up to 6X
	DVD+R	Up to 8X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 6X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
<b>Read speeds</b>	CD-RW	Up to 10X
	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 8X
	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
<b>Access time</b> (typical reads, including settling)	CD-RW	Up to 24X
	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
	Stop Time	6 seconds (typical)
<b>Power</b>	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions</b> (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%

### Technical Specifications - Removable Storage

	Maximum Wet Bulb Temperature	84° F (29° C)
--	------------------------------	---------------

<b>HP 9.5mm Desktop G2 Slim SATA BDXL Blu-Ray Writer</b>			
<b>Height</b>	9.5mm height		
<b>Orientation</b>	Either horizontal or vertical		
<b>Interface type</b>	SATA/ATAPI		
<b>Disc recording capacity</b>	Up to 128 GB QL, 100 GB TL, 50 GB DL or 25 GB standard SL		
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel		
<b>Weight (max)</b>	Up to 0.29 lb (132g) without bezel		
		<b>Triple-layer</b>	<b>Quadruple-layer</b>
<b>Write speeds</b>	BD-R	Up to 4X	Up to 4X
	BD-RE	Up to 2X	Not supported
		<b>Single-layer</b>	<b>Double-layer</b>
	BD-R	Up to 6X	Up to 6X
	BD-RE	Up to 2X	Up to 2X
	DVD-R	Up to 8X	Up to 6X
	DVD-RW	Up to 6X	Not supported
	DVD+R	Up to 8X	Up to 6X
	DVD+RW	Up to 8X	Not supported
	DVD-RAM	Up to 5X	
	CD-R	Up to 24X	
	CD-RW	Up to 10X	
	(This should be for read speeds)	<b>Triple-layer</b>	<b>Quadruple-layer</b>
	BD-R	Up to 6X	Up to 6X
	BD-RE	Up to 4X	Not supported
		<b>Single-layer</b>	<b>Double-layer</b>
BD-ROM	Up to 6X	Up to 6X	
BD-R	Up to 6X	Up to 6X	
<b>Read speeds</b>	BD-RE	Up to 6X	Up to 6X
	DVD-ROM	Up to 8X	Up to 8X
	DVD-R	Up to 8X	Up to 8X
	DVD-RW	Up to 8X	



### Technical Specifications - Removable Storage

	DVD+R	Up to 8X	Up to 8X
	DVD+RW	Up to 8X	
	BDMV (AACs Compliant Disc)	Up to 6X/2X (Read/Play)	
	DVD-RAM	Up to 5X	
	DVD-Video (CSS Compliant Disc)	Up to 8X/4X (Read/Play)	
	CD-R/RW/ROM	Up to 24X	
	CD-DA(DAE)	Up to 24X/10X (Read/Play)	
<b>Access time</b> (typical reads, including settling)	Random	BD-ROM: 205 ms (typical), DVD-ROM: 185 ms (typical), CD-ROM: 165 ms (typical)	
	Full Stroke	BD-ROM: 350 ms (typical), DVD-ROM: 345 ms (typical), CD-ROM: 340 ms (typical)	
<b>Power</b>	Source	Slimline SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p	
	DC Current	5 VDC -1200 mA typical, 2000 mA maximum	
<b>Environmental conditions</b> (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Relative Humidity	10% to 80%	
	Maximum Wet Bulb Temperature	84° F (29° C)	

### HP 9.5mm Desktop G2 Slim DVD-ROM Drive

<b>Height</b>	9.5mm		
<b>Orientation</b>	Either horizontal or vertical		
<b>Interface type</b>	SATA/ATAPI		
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel		
<b>Weight (max)</b>	Up to 0.31 lb (140g) without bezel		
<b>Read speeds</b>	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X	
	DVD-ROM	Up to 8X	
	CD-ROM, CD-R	Up to 24X	
	CD-RW	Up to 24X	
<b>Access time</b> (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)	
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)	
<b>Power</b>	Source	Slimline SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p	

### Technical Specifications - Removable Storage

	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
<b>Environmental</b> (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature (operating)	84° F (29° C)

### Technical Specifications – Memory

#### SYSTEM MEMORY SUPPORT

The HP ProDesk 400 G2.5 Business PC supports the 4<sup>th</sup> generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the 4<sup>th</sup> generation Intel® Core™ processor includes an Integrated Memory Controller (IMC). The IMC supports DDR3/DDR3L protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3/DDR3L unbuffered dual in-line memory modules (UDIMM) or DDR3/DDR3L unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 1600 MT/s; actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3/DDR3L system memory I/O voltage of 1.5V
- Theoretical maximum memory bandwidth of:
  - 21.3 GB/s in dual-channel mode assuming 1333 MT/s
  - 25.6 GB/s in dual-channel mode assuming 1600 MT/s

#### PLATFORM MEMORY SUPPORT

- The Small Form Factor (SFF) platform supports up to two (2) industry-standard DDR3-SDRAM DIMMs.

**CAUTION:** You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

### Technical Specifications – Networking/Communication

<b>Realtek RTL8111HSH-CG GbE</b>		
<b>10/100/1000 NIC</b>	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
	<b>Power Management</b>	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling
	<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
	<b>Interface</b>	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ
	<b>NIC Device Driver Name</b>	PCIe GbE Ethernet Family Controller

### Broadcom BCM943228Z 802.11n 2x2 DualBand Combo PCIe x1 Card

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
<b>Interoperability</b>	Wi-Fi certified
<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"> <li>2.402 – 2.482 GHz</li> </ul> Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
	802.11a/n <ul style="list-style-type: none"> <li>4.9 - 4.95 GHz (Japan)</li> <li>5.15 - 5.25 GHz</li> <li>5.25 - 5.35 GHz</li> </ul>

### Technical Specifications – Networking/Communication

	<ul style="list-style-type: none"> <li>5.47 - 5.725 GHz</li> </ul> <p>5.825 - 5.850 GHz Note: Indonesia no support this band)</p>
<b>Antenna Structure</b>	2 transmit; 2 receive (2x2)
<b>Data Rates</b>	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>AES-CCMP: 128 bit in hardware</li> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>WAPI</li> </ul>
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between band Access Points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>802.11b : +16dBm minimum</li> <li>802.11g : +14dBm minimum</li> <li>802.11a : +14dBm minimum</li> <li>802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>802.11n HT40(2.4GHz) : +13dBm minimum</li> <li>802.11n HT20(5GHz) : +12dBm minimum</li> <li>802.11n HT40(5GHz) : +12dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications

### Technical Specifications – Networking/Communication

<b>Form Factor</b>	PCI-Express M.2 MiniCard		
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm		
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g		
<b>Operating Voltage</b>	3.3v +/- 9%		
<b>Temperature</b>	Operating	14° to 158° F (-10° to 70° C)	
	Non-operating	-40° to 176° F (-40° to 80° C)	
<b>Humidity</b>	Operating	10% to 90% (non-condensing)	
	Non-operating	5% to 95% (non-condensing)	
<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)	
	Non-operating	0 to 50,000 ft (15,240 m)	
<b>LED Activity</b>	LED Amber - Radio OFF; LED White - Radio ON		
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. In Power Save Polling mode and on battery power.</li> <li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li> </ol>		
<b>HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology</b>			
<b>Bluetooth Specification</b>	4.0+EDR Compliant		
<b>Frequency Band</b>	2402 to 2480 MHz		
<b>Number of Available Channels</b>	79 (1 MHz) available channels		
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps		
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels		
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric		
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.		
<b>Receiver Sensitivity</b>	<b>Modulation</b>	<b>0.01% BER</b>	<b>0.001% BER</b>
	GFSK	-80 dBm	-70 dBm
	$\pi/4$ -DQPSK	-80 dBm	-70 dBm
	8DPSK	-80 dBm	-70 dBm
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW		
<b>Range</b>	Up to 33 ft (10 m)		
<b>Electrical Interface</b>	USB 2.0 compliant		
<b>Bluetooth Software Supported Link Topology</b>	Microsoft Windows Bluetooth Software		
<b>Electrical Interface Bluetooth Software Supported Security</b>	Point to Point, Multipoint Pico Nets up to 7 slaves		
	Full support of Bluetooth Security Provisions		
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support		

### Technical Specifications – Networking/Communication

	<b>Power Management Certifications</b>	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	<b>Security</b>	All necessary regulatory approvals for supported countries, including:
	<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
	<b>Bluetooth Profiles Supported</b>	
	<b>Power Management Certifications</b>	ETS 300 328, ETS 300 826
	<b>Certifications</b>	Low Voltage Directive IEC950
	<b>Certifications</b>	UL, CSA, and CE Mark
	<b>Bluetooth Profiles Supported</b>	<ul style="list-style-type: none"> <li>Serial Port Profile (SPP)<sup>1</sup></li> <li>Service Discovery Application Profile (SDAP)</li> <li>Dial-Up Networking (DUN)<sup>1,2</sup></li> <li>Generic Object Exchange Profile (GOEP)<sup>1,2</sup></li> <li>Object Push Profile (OPP)<sup>1,2</sup></li> <li>File Transfer Profile (FTP)</li> <li>Synchronization Profile (SYNC)</li> <li>Hard Copy Cable Replacement (HCRP)<sup>1,2</sup></li> <li>Personal Area Networking Profile (PAN)<sup>1,2</sup></li> <li>Human Interface Device Profile (HID)<sup>1,2</sup></li> <li>FAX Profile (FAX)</li> <li>Basic Imaging Profile (BIP)<sup>2</sup></li> <li>Headset Profile (HSP)</li> <li>Hands Free Profile (HFP)</li> <li>Advanced Audio Distribution Profile (A2DP)</li> </ul>

### Intel 7265 802.11ac 2x2 DualBand Combo PCIe x1 Card

	<b>Wireless LAN Standards</b>	<ul style="list-style-type: none"> <li>IEEE 802.11 a</li> <li>IEEE 802.11 b</li> <li>IEEE 802.11 g</li> <li>IEEE 802.11 n</li> <li>IEEE 802.11 ac</li> </ul>
	<b>Interoperability</b>	Wi-Fi certified
	<b>Frequency Band</b>	<p>802.11b/g/n</p> <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> <p>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>802.11a/n</p> <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)</li> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul> <p>Note: Indonesia no support this band)</p>
	<b>Data Rates</b>	<ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>• 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>

### Technical Specifications – Networking/Communication

<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b : +16dBm minimum</li> <li>• 802.11g : +14dBm minimum</li> <li>• 802.11a : +14dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT20(5GHz) : +12dBm minimum</li> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> <li>• 802.11ac 80MHz(5GHz) : +11dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%



### Technical Specifications – Networking/Communication

	<b>Temperature</b>	Operating Non-operating	14° to 158° F (–10° to 70° C) –40° to 176° F (–40° to 80° C)												
	<b>Humidity</b>	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)												
	<b>Altitude</b>	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)												
	<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON													
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> </ol>														
	<b>HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology</b>														
	<b>Bluetooth Specification</b>	4.0+EDR Compliant													
	<b>Frequency Band</b>	2402 to 2480 MHz													
	<b>Number of Available Channels</b>	79 (1 MHz) available channels													
	<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric													
	<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.													
	<b>Receiver Sensitivity</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>π/4-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	π/4-DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm	
Modulation	0.01% BER	0.001% BER													
GFSK	-80 dBm	-70 dBm													
π/4-DQPSK	-80 dBm	-70 dBm													
8DPSK	-80 dBm	-70 dBm													
	<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW													
	<b>Range</b>	Up to 33 ft (10 m)													
	<b>Electrical Interface</b>	USB 2.0 compliant													
	<b>Bluetooth Software Supported Link Topology</b>	Microsoft Windows Bluetooth Software													
	<b>Electrical Interface Bluetooth Software Supported Security</b>	Point to Point, Multipoint Pico Nets up to 7 slaves Full support of Bluetooth Security Provisions													
	<b>Power Management Power Management Certifications</b>	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff													
	<b>Security</b>	All necessary regulatory approvals for supported countries, including:													
	<b>Certifications Bluetooth Profiles Supported</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249													
	<b>Power Management Certifications</b>	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950													
	<b>Certifications Bluetooth Profiles Supported</b>	UL, CSA, and CE Mark Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup> File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>													

### Technical Specifications – Networking/Communication

		Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2</sup> FAX Profile (FAX) Basic Imaging Profile (BIP) <sup>2</sup> Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
--	--	--

### High Definition Audio

<b>Type</b>	Integrated
<b>HD Stereo Codec</b>	Realtek 2-channel ALC221 codec
<b>Audio I/O Ports</b>	Front microphone-In
	Rear Line-In
	Rear Line-Out
	Front Headphone-Out Front Microphone
	All ports are 3.5mm
<b>Internal Speaker Amplifier</b>	1.5W amplifier for the internal speaker only. External speakers must be powered externally.
<b>Multi-streaming Capable</b>	Playback multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
<b>Sampling</b>	8 kHz - 192 kHz
<b>Wavetable Syntheses</b>	Yes – Uses OS soft wavetable
<b>Analog Audio</b>	Yes
<b># of Channels on Line-Out</b>	Stereo (Left & Right channels)
<b>Internal Mono Speaker</b>	Yes
<b>External Speaker Jack</b>	Yes

### Technical Specifications – Input/Output Devices

#### HP USB Conferencing Keyboard

<b>System Requirements</b> (conferencing functions will not work unless requirements are met)	<ul style="list-style-type: none"> <li>• Available USB port</li> <li>• Windows 7 and Windows 8.x</li> <li>• Server: Microsoft Lync Server 2010 or 2013</li> <li>• Client: Microsoft Lync 2013 version 15.0.46xxx or newer</li> </ul> <b>Notes:</b> <ul style="list-style-type: none"> <li>• Limited support for Microsoft Lync 2010, Microsoft Lync 2013 Basic and Microsoft Lync Metro Mode.</li> <li>• Screen brightness functions supported in selected HP systems and displays.</li> </ul>	
<b>Physical Characteristics</b>	Keys	Keys 110 (US) Layout, 111 (EU) Layout – depending upon country
<b>Electrical</b>	Connectivity	USB cable
<b>Feature Summary</b>	Full-size ultra-quiet keyboard with numerical pad and 12 function keys One-touch simplicity for Microsoft Lync calls with dedicated keys and LED light indicators	
<b>Illuminated keys</b>	Incoming Call – Blinks Green Call in progress – Green Microphone Mute – Orange Audio Mute – Orange Screen Sharing – Orange Stop Webcam – Orange	
<b>Other Call control keys</b>	End/Decline Call Volume up and down rocker key	
<b>Microsoft Lync/Outlook</b>	Fn+F12 – Lync Calendar will open. If Lync is not available will bring Outlook Calendar Fn+F11 – Lync Contact will open. If Lync is not available will bring Outlook Contact list	
<b>Function Keys</b>	Fn+F10 – System Settings Fn+F9 – Devices Fn+F8 – Search Fn+F7 – Blank Fn+F6 – Up Brightness Adjustment Fn+F5 – Down Brightness Adjustment Fn+F4 – Display Options Fn+F3 – File Explorer Fn+F2 – System Lock Fn+F1 – System Sleep	
<b>Approvals</b>	FCC; CE; ACA(C-tick); EAC; UL, CE Mark	
<b>Kit Contents</b>	HP Conferencing Keyboard and documentation	

#### HP USB Smart Card (CCID) Keyboard

### Technical Specifications – Input/Output Devices

<b>Key Benefits:</b>	<ul style="list-style-type: none"> <li>• Protects against unauthorized access with smart card technology</li> <li>• Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software</li> <li>• Combination of username and password or pin with a smart card or security token</li> <li>• Secures online transactions using digital signatures and certificates</li> <li>• Conforms to industry standards for ease of setup and use</li> <li>• Delivers long product life and quiet operation with high-impact materials and lubricated keys</li> <li>• Spill drain feature</li> </ul>	
<b>Physical Characteristics</b>	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Form factor	USB basic smart card keyboard
	Colors	Carbonite/Silver
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
	Weight	2 lb (0.9 kg) minimum
<b>Electrical</b>	Operating voltage	+ 5VDC ± 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
<b>Mechanical</b>	Languages	30+ available
	Keycaps	Low profile design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant

### Technical Specifications – Input/Output Devices

<b>Environmental</b>	Acoustics	50-dBA maximum sound pressure level	
	Operating temperature	32° to 104° F (0° to 40° C)	
	Non-operating temperature	50° to 122° F (10° to 50° C)	
	Operating humidity	15% to 90% (non-condensing at ambient)	
	Non-operating humidity	60% (non-condensing at ambient)	
	Operating shock	N/A	
	Non-operating shock	65 inch 2.9 ms, six surface; 30g 266 inch/second; 50g 266 inch/second six surface	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	Starting at 10 Hz, vary the frequency of vibration from 10 to 500 Hz and back to 10 Hz at a Logarithmic sweep rate of 0.5 octave per minute.	
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	29.93 in (76 cm) on concrete, 16-drop sequence	
<b>SmartCard Function</b>	Support	All ISO 7816 smart cards (FIPS 201)	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	Chipset	Identiv Cloud2190	
	Standard APIs supported	PC/SC, EMV2000, SET	
	Power	USB Port	
		Short circuit detection (protects smart card and reader)	
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
		Supports 3-V and 5-V cards	
	Power consumption	100-mA maximum draw	
	Communication	From card	9600 bps to 330,000 bps
From computer		12 Mbps (USB transfer speed)	
Landing mechanism	Contact device	Friction contact	

### Technical Specifications – Input/Output Devices

	Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	CCID protocol
	Reader performance interface	USB connection
	Electro-magnetic standards	Europe
USA		USAFCC part 15
<b>Approvals</b>	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, FIPS, EAC	
<b>Ergonomic Compliance</b>	ISO 9241-4, TUVGS	
<b>Kit Contents</b>	Keyboard, I/O Security and Documentation CD, warranty card	

### HP USB PS/2 Washable Keyboard

<b>Physical Characteristics</b>	Keys	104 (US) Layout, 105 (EU) layout – depending upon country
	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)
	Weight	1.7 lb (0.77 kg) minimum
<b>Electrical</b>	Operating voltage	+ 5VDC ±5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
<b>Mechanical</b>	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft (2.2 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
<b>Environmental</b>	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	4° to 149° F (-20° to 65° C)
	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	

### Technical Specifications – Input/Output Devices

	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
<b>Operating system support</b>	Windows® 7, Windows Vista, Windows XP Professional	
<b>Approvals</b>	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	

### HP PS/2 Mouse

<b>Dimensions</b> (H x L x W)	1.54 x 2.43 x 4.60 in (3.70 x 6.18 x 11.68 cm)	
<b>Weight</b>	3.24 oz (92g; +10g/- 5 g)	
<b>Environmental</b>	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-40° to 149°F (-40° to 65° C)
	Operating humidity	90% (non condensing at ambient)
	Non-operating humidity	60% (non condensing at ambient)
	Operating shock	N/A
	Non-operating shock	65 inch 2.9 ms, six surface; 30g 266 inch/second; 50g 266 inch/second six surface
	Operating vibration	2 g peak acceleration
	Non-operating vibration	Starting at 10 Hz, vary the frequency of vibration from 10 to 500 Hz and back to 10 Hz at a Logarithmic sweep rate of 0.5 octave per minute.
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
<b>Electrical</b>	Operating voltage	5 VDC ± 10%
	Power consumption	50mA
	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant

### Technical Specifications – Input/Output Devices

<b>Mechanical</b>	Resolution	500 DPI
	Tracking speed	28 in/s (71.12 cm/s) maximum
	Acceleration	±15%
	Switch actuation	60±20 gf
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	250 km
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
<b>Scroll wheel</b>	Width	6 mm
	Diameter	22.5 ± 0.2 mm
	Maximum rotation force	14-30 gf-cm
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions
<b>Regulatory Approvals</b>	UL/cUL, FCC, CE Mark, TUV/GS, VCCI, KCC, BSMI, C-Tick	

### HP USB Mouse

<b>Dimensions</b> (H x L x W)	1.54 x 4.6 x 2.43 in (4.05 x 11.68 x 6.18 cm)
<b>Weight</b>	3.24 oz (92g; +10g/- 5 g)
<b>Cable length</b>	70.9 in (180 cm)
<b>System requirements</b>	Available USB port

### HP USB 1000dpi Laser Mouse



### Technical Specifications – Input/Output Devices

<b>Dimensions</b> (H x L x W)	2.43 x 1.59 x 4.6 in ( 61.8 x 40.48 x 116.8 mm)	
<b>Weight</b>	3.24 oz (92g)	
<b>Cable length</b>	70.9 in (180 cm)	
<b>System requirements</b>	Available USB port	
<b>Environmental</b>	Operating Temperature	32° to 104° F (0° to 40° C)
	Non-operating Temperature	-40° to 149° F (-40° to 65° C)
	Operating Humidity	90% (non-condensing at ambient)
<b>Mechanical</b>	Resolution	800dpi
	Tracking Speed	71 cm/sec
	Cable Length	70.9 in (180 cm)

### HP USB PS/2 Washable Mouse

<b>Dimensions</b> (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)	
<b>Weight</b>	4.44 oz (126 g)	
<b>Environmental</b>	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% non-condensing
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration

### Technical Specifications – Input/Output Devices

	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
<b>Electrical</b>	Operating voltage	5 VDC $\pm$ 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector or USB
	ESD	CE level 2 8 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
<b>Mechanical</b>	Resolution	1000 $\pm$ 20% DPI
	Tracking speed	14 in/s ( 35.56 cm/s) maximum
	Acceleration	2 g
	Switch actuation	70 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	8.8 ft total 70 cm+ 2m extension
	Cable length	Mechanically compliant
	Microsoft PC99 - 2001	1000 $\pm$ 20% DPI
<b>Scroll wheel</b>	Width	6 mm
	Diameter	1 in (25.4 mm)
	Maximum rotation force	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	3 million operations

### Technical Specifications – Input/Output Devices

	Mechanical life	Minimum 200,000 revolutions
<b>Regulatory Approvals</b>	FCC, CE Mark, ICES-003-B, IP66/NEMA4X	

#### HP Parallel Port PCIe x1 Card

<b>Dimensions</b> (H x L x W)	0.22 x 4.76 x 3.11 in (18 x 121 x 79 mm) with bracket	
<b>Bus</b>	PCI Express Spec. 2.0, Single-Lane (x1)	
<b>IRQ &amp; IO</b>	Assigned by system	
<b>Parallel Communication</b>	Interface	IEEE 1284
	Number of ports	1 port
	FIFO	16 byte hardware
	Mode	SPP/ECP/EPP/BPP
	Speed	Maximum 1.8 MBps
	PCB connector	DB25 Female
<b>Driver Support</b>	Microsoft client	XP/ Vista/ 7 / 8 (x86/x64)
	Microsoft server	2000/2003/2008/2008R2 (x86/x64)
	Microsoft embedded	XP Embedded/POS Ready 2009/Embedded System 2009
	Linux	Linux 2.4x/2.6x/3,x
	DOS	DOS
<b>Regulatory Approvals</b>	Hardware	CE EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, VCCI Class B, FCC Part 15 Class B, BSMI: CNS13438, C-Tick; CISPR22 AS/NZS, RoHS
	Software	Microsoft WHQL Windows Microsoft Client: XP/Vista/7/8 (x86/x64) Microsoft Server™ 2000/2003/2008 (x86/x64)
<b>Environmental</b>	Operating Temperature	32° to 140° F (0° to 60° C)
	Operating Humidity	5% to 95% RH

### Technical Specifications – Input/Output Devices

	Storage Temperature	-4° to 185° F (-20° to 85° C)
--	---------------------	-------------------------------

### Technical Specifications – Power

#### UNIT ENVIRONMENT AND OPERATING CONDITIONS

##### General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

\*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

#### POWER SUPPLY

High Efficiency* 80 PLUS Bronze	180W active PFC  82/85/82% efficient at 20/50/100% load (115V)  82/85/82% efficient at 20/50/100% load (230V)
Operating Voltage Range	90 - 264 VAC
Rated Voltage Range	100 - 240 VAC
Rated Line Frequency	50/60 Hz
Operating Line Frequency	47 – 63 Hz
Rated Input Current	3.6A
Current Leakage without Ground (NFPA 99)	< 300 µA @ 120V
Current Leakage with Ground (NFPA 99)	< 100 µA @ 120V
Power Supply Fan	50mm Fan
Power cord length	6.0 ft. (1.83 m)
External Power Adapter	
Dimensions	N/A
Total Cord Length	N/A

\*High efficiency power supply is a requirement for ENERGY STAR® certification in conjunction with a select range of processors and modules



### Technical Specifications – Weights & Dimensions

#### **WEIGHTS & DIMENSIONS**

(configured with 2TB HDD, Wi-Fi card, graphics card)

<b>Chassis (W x H x D)</b>	270 x 95 x 317.85 mm 10.63 x 3.74 x 12.51 in
<b>System Volume</b>	7.68 L 7.31 L (not including bezel)
<b>System Weight*</b>	4.5 kg 9.92 lb
<b>Max Supported Weight (desktop orientation)</b>	4.4 kg
<b>Tower Stand (H x W x D)</b>	27.29 x 151.75 x 190 mm 1.15x 5.97 x 7.48 in
<b>Packaged (H x W x D)</b>	440 x 210 x 520 mm 17.32 x 8.27 x 20.47 in
<b>Shipping Weight</b>	7.07 kg (15.58lb) SEA 10-units per layer 4-layer max. 40-units per pallet
<b>Palletization Profile</b>	AIR 10-units per layer 2-layer max. 20-units per pallet

### Technical Specifications – Weights & Dimensions

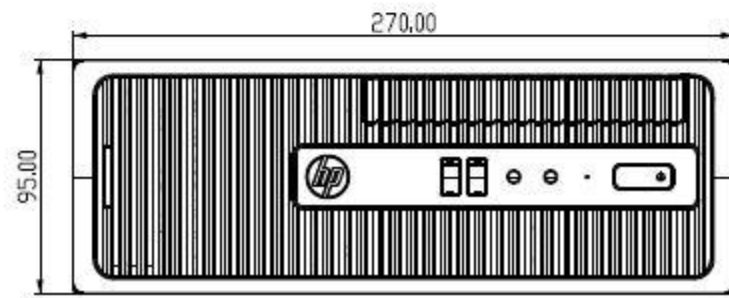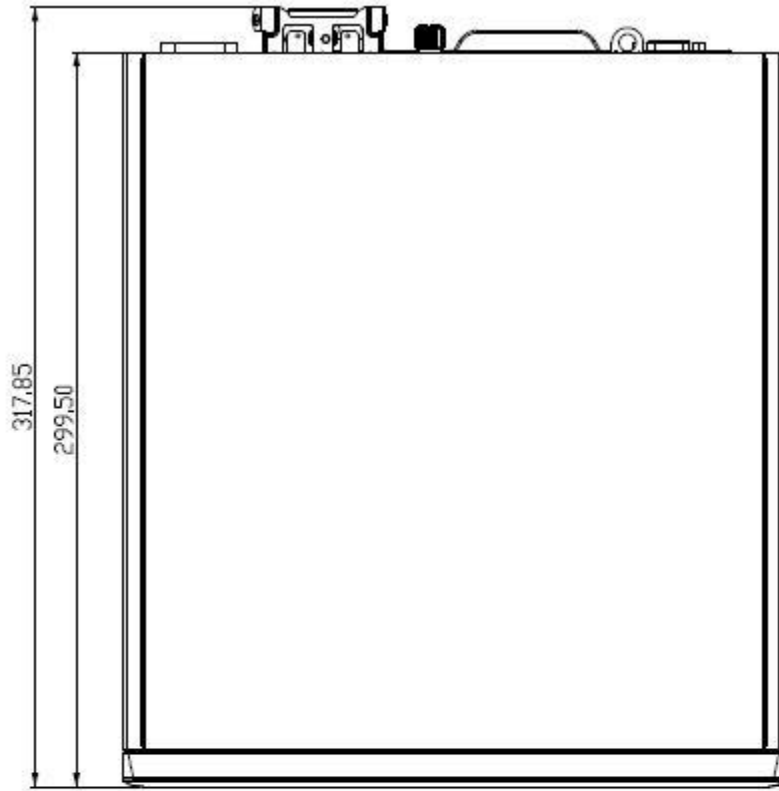

### Technical Specifications – Miscellaneous Features

#### MANAGEMENT FEATURES

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

#### SERVICEABILITY FEATURES

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
  - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
    - 2 - processor thermal protection activated
    - 3 - processor not installed
    - 4 - power supply failure
    - 5 -- memory error
    - 6 - video error
    - 7 - PCA failure (ROM detected failure prior to video)
    - 8 - invalid ROM, boot block recovery mode
    - 9 - system not fetching code
    - 10 - system hang while loading an option ROM
- HP PC Hardware Diagnostics UEFI:
  - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from <http://hp.com/go/techcenter/pcdiags>
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- CD & Diskette Removal
- Tool icon for easy Identification

#### ADDITIONAL FEATURES

#### Description

##### Drive Lock

Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.

##### Drive Protection System

DPS Access through F10 Setup during Boot



### Technical Specifications – Miscellaneous Features

	<p>A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user</p> <p>Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced</p> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures</p>
<b>SMART Technology (Self-Monitoring, Analysis and Reporting Technology)</b>	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
<b>SMART I - Drive Failure Prediction</b>	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
<b>SMART II - Off-Line Data Collection</b>	By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure
<b>SMART III - Off-Line Read Scanning with Defect Reallocation</b>	IOEDC: I/O Error Detection Circuitry Detects errors in Read/Write buffers on HDD cache RAM
<b>SMART IV - End-to-End CRC for hard drives</b>	Interface in F10 setup provides confirmation of SMART IV support.

### Environmental Data

<b>Eco-Label Certifications &amp; declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>• IT ECO declaration</li> <li>• US ENERGY STAR®</li> <li>• EPEAT &lt;Gold&gt; registered in the United States. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status in your country.</li> </ul>		
<b>System Configuration</b>	<p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Ultra-slim Desktop model is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>		
<b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation (Short idle)	24.15 W	23.89 W	24.25 W
Normal Operation (Long idle)	23.77 W	23.69 W	23.99 W
Sleep	2.20 W	2.33 W	2.18 W
Off	1.01 W	1.15 W	1 W
	<p>Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>		
<b>Heat Dissipation*</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation (Short idle)	83 BTU/hr	82 BTU/hr	83 BTU/hr
Normal Operation (Long idle)	81 BTU/hr	81 BTU/hr	82 BTU/hr
Sleep	8 BTU/hr	8 BTU/hr	7 BTU/hr
Off	3 BTU/hr	4 BTU/hr	3 BTU/hr
	<p>*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p>		
<b>Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)</b>	<b>Sound Power (L<sub>WAd</sub>, bels)</b>		<b>Sound Pressure (L<sub>pAm</sub>, decibels)</b>
Typically Configured – Idle	3.6		25
Fixed Disk – Random writes	3.7		26
<b>Longevity and Upgrading</b>	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p>		
	<ul style="list-style-type: none"> <li>• 8 USB ports</li> <li>• 2 memory slots</li> <li>• 1 PCI 3.0 Express x16 half-length slot</li> <li>• 1 PCI 2.0 Express x1 half-length slot</li> <li>• 1 3.5" internal bay supporting hard drives (HDD/SSD/SED/SSHD)</li> <li>• 1 external slim optical drive disc</li> <li>• 1 external SD reader</li> </ul> <p>&lt;edit list of features as required&gt;</p>		

### Environmental Data

	Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.		
<b>Batteries</b>	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:            Mercury greater the 1ppm by weight            Cadmium greater than 20ppm by weight</p> <p>Battery size: CR2032 (coin cell)            Battery type: Lithium</p>		
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.</li> <li>• This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>• This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>• This product is in compliance with the IEEE 1680 (EPEAT) standard at the &lt;Gold&gt; level, see <a href="http://www.epeat.net">www.epeat.net</a></li> <li>• Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.</li> <li>• This product contains 14.1% post-consumer recycled plastic (by wt.)</li> <li>• This product is 91.2% recycle-able when properly disposed of at end of life.</li> </ul>		
<b>Packaging Materials</b>	<b>External:</b>	PAPER/Corrugated	1060 g
	<b>Internal:</b>	PLASTIC/EPE (Expanded Polyethylene)	168.8 g
		PLASTIC/Polyethylene low density	5 g
	The EPE foam packaging material is made from 65% recycled content.		
	The corrugated paper packaging materials contains at least 52.5% recycled content.		
<b>Material Usage</b>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a>):</p> <ul style="list-style-type: none"> <li>• Asbestos</li> <li>• Certain Azo Colorants</li> <li>• Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>• Cadmium</li> <li>• Chlorinated Hydrocarbons</li> <li>• Chlorinated Paraffins</li> <li>• Formaldehyde</li> <li>• Halogenated Diphenyl Methanes</li> <li>• Lead carbonates and sulfates</li> <li>• Lead and Lead compounds</li> <li>• Mercuric Oxide Batteries</li> <li>• Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>• Ozone Depleting Substances</li> <li>• Polybrominated Biphenyls (PBBs)</li> <li>• Polybrominated Biphenyl Ethers (PBBEs)</li> <li>• Polybrominated Biphenyl Oxides (PBBOs)</li> <li>• Polychlorinated Biphenyl (PCB)</li> </ul>		

### Environmental Data

	<ul style="list-style-type: none"> <li>• Polychlorinated Terphenyls (PCT)</li> <li>• Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li> <li>• Radioactive Substances</li> <li>• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul>
<b>Packaging Usage</b>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>• Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>• Design packaging materials for ease of disassembly.</li> <li>• Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>• Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>• Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
<b>End-of-life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/recyclers">http://www.hp.com/go/recyclers</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
<b>Hewlett-Packard Corporate Environmental Information</b>	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report  <a href="http://www.hp.com/hpinfo/globalcitizenship/qcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/qcreport/index.html</a></p> <p>Eco-label certifications  <a href="http://www8.hp.com/us/en/hp-information/environment/ecolabels.html">http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</a></p> <p>ISO 14001 certificates:  <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf</a>          and  <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</a></p>

After-Market Options (availability may vary by region)

### Business Monitors

	Part Number
HP ProDisplay P202	K7X27AA
HP ProDisplay P202m	K7X28AA
HP ProDisplay P222va	K7X30AA
HP ProDisplay P232	K7X31AA
HP ProDisplay P242va	K7X32AA
HP EliteDisplay E201	C9V73AA
HP EliteDisplay E221	C9V76AA
HP EliteDisplay E231	C9V75AA
HP EliteDisplay E190i	E4U30AA
HP EliteDisplay E241i	FOW81AA
HP EliteDisplay E271i	D7Z72AA
HP EliteDisplay E221c	D9E49AA
HP EliteDisplay S230tm	E4S03AA
HP L2206tm	B0L55AA

### Communication Devices

	Part Number
Intel Ethernet I210 – T1 Gbe NIC	E0X95AA
Intel 7260 802.11 a/b/g/n PCIe x1 WLAN Card	F2P07AA
Broadcom BCM943228Z 802.11n 2x2 DualBand PCIe x1 Card	TBD

### Graphics Solutions

	Part Number
NVIDIA® NVS™ 310 Graphics (PCIe x16)	A7U59AA

### Graphics Cables

	Part Number
HP DisplayPort To DVI-D Adapter	FH973AA
HP DisplayPort to VGA Adapter	AS615AA
HP DisplayPort Cable Kit	VN567AA
HP DisplayPort To HDMI 1.4 Adapter	K2K92AA
HP DisplayPort To Dual Link DVI-D Adapter	NR078AA
HP USB Graphics Adapter	NL571AA
Dual Output USB Graphics Adapter	C5U89AA

### Data Storage Drives and Accessories

	Part Number
HP 500GB SATA 6.0Gb/s Hard Drive	QK554AA
HP 1TB 7200rpm SATA 6.0Gb/s Hard Drive	QK555AA
HP 128 GB SATA 3.0Gb/s Solid State Drive	QV063AA
HP 128 GB SED Opal 2 Solid State Drive Desktop	G1K24AA
HP 256 GB SATA 3D Non-SED Solid State Drive Desktop	TBD

### Input Devices

	Part Number
HP USB Mouse	QY777AA

### After-Market Options (availability may vary by region)

HP USB Grey Mouse (EMEA only)	K7W54AA
HP USB 1000dpi Laser Mouse	QY778AA
HP PS/2 Mouse	QY775AA
HP USB and PS/2 Washable Mouse	BM866AA
HP Mouse Pad	AT485AA
HP Conferencing Keyboard	K8P74AA
HP Wireless Keyboard and Mouse	QY449AA
HP USB Keyboard	QY776AA
HP PS/2 Standard Keyboard	DT527AA
HP USB Grey Standard Keyboard	DT529AA
HP USB Smart Card (CCID) Keyboard	BV813AA
HP USB Washable Keyboard	VF097AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	BU207AA
HP USB Antimicrobial Keyboard and Mouse (China Only)	K7X25AA

### I/O Cards and Adapters

	Part Number
HP PCIe x1 Parallel Port Card	N1M40AA
HP Serial Port Adapter	PA716A

### System Memory

	Part Number
HP 2GB DDR3L-1600 DIMM	N1M45AA
HP 4GB DDR3L-1600 DIMM	N1M46AA
HP 8GB DDR3L-1600 DIMM	N1M47AA

### Multimedia Devices

	Part Number
HP Desktop G2 9.5mm Slim DVD-ROM Drive	N1M41AA
HP Desktop G2 9.5mm Slim SuperMulti DVD Writer Drive	N1M42AA
HP Desktop G2 9.5mm Slim BDXL Blu-Ray Writer Drive	N1M43AA
HP USB Business Speakers	D9J19AA
HP Business Headset	QK550AA

### Security Devices

	Part Number
HP Business PC Security Lock Kit	PV606AA
HP UltraSlim Cable Lock	H4D73AA

### Stands and Accessories

	Part Number
HP EliteDesk/ProDesk G2 (10 kit) Bezel Support Kit	N1M44AA
HP 2x2 SFF Stand	TBD

### LANDesk Software (E-Delivery)

Contact your HP representative for available options.

### After-Market Options (availability may vary by region)

© Copyright 2015 Hewlett-Packard Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are U.S. registered trademarks of the Microsoft group of companies. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of its proprietor used by Hewlett-Packard Company under license. NVIDIA, GeForce, GRID, Kepler and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries.

### Change Log

#### SUMMARY OF CHANGES

Date of change:	Version History:		Description of change: