


# VoIPBox<sup>PRI</sup>

VoIP gateway for up to 6 PRI interfaces

The VoIPBox PRI is a fully-featured VoIP gateway designed for corporate customers and small carriers.

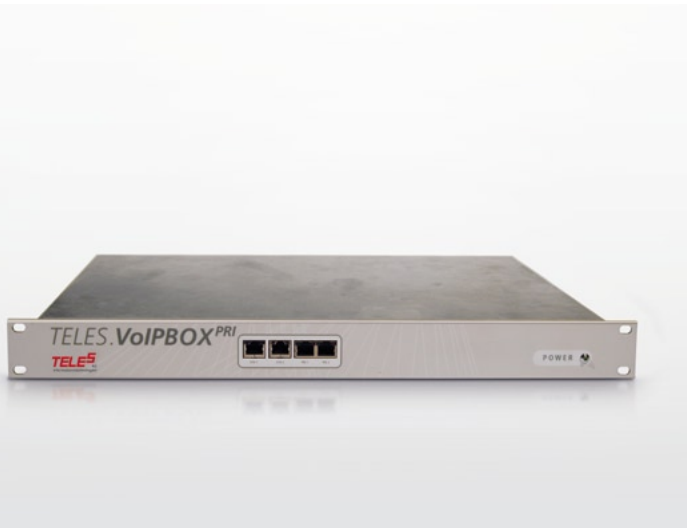

- 16/30/60/120/180 channel ISDN PRI VoIP gateway
- Toll-grade voice compression
- High precision clock supporting DECT telephony and T.38 fax-transmission
- Integrated SIP server for remote survivability and emergency break-out
- Outstanding Least Cost Routing (LCR)
- QoS and traffic shaping support
- Supports auto-provisioning and centralized system management
- PSTN backup (lifeline support)

#### Cost effective migration to VoIP

Maintain your current PBX infrastructure. The VoIPBox PRI installs between the PBX and PSTN and connects your current PBX – as is – to the Internet. Plus, VoIPBox PRI's premium set of features ensures complete compatibility with your current telephone equipment and total interoperability with all third-party VoIP equipment. Your infrastructure backbone remains and so does the investment represented by the company's contact information.

#### LCR savings and secure back-up

Save money on every call. VoIPBox PRI's LCR (Least Cost Routing) features automatically identify the least expensive route to each destination, whether that is over a standard fixed-line network or over the Internet. Plus, VoIPBox PRI's IntraStar technology provides transparent fallback to the PSTN if there is packet loss or a bottleneck on the IP network.

#### Sustain dependent VoIP networks

Protect your telephone access. If your office is disconnected from its VoIP network server, VoIPBox PRI can route both inter-office calls and PSTN calls. IP phones continue to function thereby protecting your productivity.

#### Guaranteed voice and fax quality

Ensure superior voice and fax quality. Hereby high precision clock generation offers boundless usage of DECT telephony and other sensible terminal equipment. In addition to all the standard VoIP features – like echo cancellation and silence suppression – VoIPBox PRI's premium feature set includes the best available DSPs, traffic shaping, and multi-level fallback. Voice speech compression codecs reduce bandwidth need and RTP multiplexing enables even further bandwidth reduction.

#### Simple installation and sophisticated management

In only minutes, install the VoIPBox PRI and make your first phone-calls. Just connect the cables and the power and physical installation is complete. Then, use the VoIPBox PRI's Quickstart tool or the integrated Web-based GUI to complete initial configuration.

To fine-tune the routing configuration, use the our GATE Manager. Finally, you can use the NMS for remote provisioning of bulk installation; the VoIPBox PRI can automatically receive updated routing files from the NMS.

## CAPABILITIES

<b>Scalability</b>	16, 23, 30, 46, 60, 120, or 180 concurrent calls Up to 6 PRI
<b>VoIP codecs</b>	G.711, G.723, G.726, G.728, G.729, GSM
<b>Fax support</b>	T.38, fallback to G.711
<b>Echo cancellation</b>	G.168 – 2002, 128 ms tail length
<b>ISDN data call</b>	Clear channel (RFC 4040)
<b>DTMF</b>	RFC 2833, SIP/H.323 info, inband
<b>VoIP quality</b>	Configurable ToS, Diffserv, VLAN Silence suppression, VAD, CNG, G.729B QoS alternative routing based on ASR, fraction lost, jitter, and roundtrip delay. Traffic shaping Dynamic PSTN fallback (IntraStar patent)
<b>Call routing</b>	Time-dependent routing Multilevel alternative routing 5000 routing entries ENUM support Database managed routing Support for multiple gatekeepers, H.225 (v4) Support for multiple registrars Overlap/en-bloc conversion RFC 3578 Digit manipulation Black/white list
<b>Advanced</b>	Integrated SIP registrar and location server AOC generation (AOC-D, AOC-E) Integrated callback/two-stage-dialing server Integrated DSL router (PPPoE) RTP multiplex bandwidth reduction STUN support Symmetric RTP (COMEDIA) Radius support

## PROTOCOLS

<b>ISDN</b>	DSS1 (Q.931, national variants), Q.SIG-BC, NI2, CAS/R2 E1/T1, TE/NT, CRC4/Double Frame
<b>VoIP</b>	SIP (RFC 3261) H.323 (v4) MGCP, IUA

## SYSTEM MANAGEMENT

Remote access via IP or ISDN data call with NMS or GATE Manager HTML configuration interface SNMP (alarm management) CDR generation
--

## CONNECTION SPECIFICATIONS

<b>ISDN</b>	1/2/4/6 × E1/T1, 120 ohm balanced, RJ-45
<b>Ethernet</b>	2 × Ethernet 10/100 Base-T RJ-45

## PHYSICAL PARAMETERS

<b>Size (W × H × D)</b>	483 mm × 44 mm × 305 mm (1U)
<b>Material</b>	Sheet steel
<b>Mounting</b>	19" Rack
<b>Power supply</b>	100–240 VAC, 45 W

## ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	+5°C to +40°C
<b>Humidity</b>	5 % to 80 % (non-condensing)

## CERTIFICATES

EMC, Safety, CE, FCC

## AVAILABLE CONFIGURATIONS

	No. of VoIP channels E1 / T1	No. of PRI
VoIPBox PRI-30	30/23	1
VoIPBox PRI-30 5ppm	30/23	1
VoIPBox PRI-60	60/46	2
VoIPBox PRI-60 5ppm	60/46	2
VoIPBox PRI-120	120/92	4
VoIPBox PRI-180	180/138	6
VoIPBox PRI-16 LCR	16/16	2
VoIPBox PRI-16 LCR 5ppm	16/16	2
VoIPBox LCR-30 LCR	30/23	2
VoIPBox LCR-30 LCR 5ppm	30/23	2
VoIPBox LCR-60	60/46	6

VoIPBox PRI-16 to VoIPBox PRI-180 are designed for PRI – VoIP conversion. VoIPBox LCR also connects the PBX and the public line.



Find out more: [www.teles.com](http://www.teles.com)



TELES AG | HEADQUARTERS

Ernst-Reuter-Platz 8

10587 Berlin

GERMANY

Phone +49 30 399 28 - 066

Fax +49 30 399 28 - 051

E-mail [sales@teles.com](mailto:sales@teles.com)